



DNS (v1.0): an open-source ray-tracing tool for space geodetic techniques

Florian Zus¹, Kyriakos Balidakis^{1,2}, Ali Hasan Dogan³, Rohith Thundathil^{1,4}, Galina Dick¹, and Jens Wickert^{1,4}

¹GFZ German Research Centre for Geosciences, Telegrafenberg, 14473 Potsdam, Germany

²Federal Agency for Cartography and Geodesy (BKG), 60598 Frankfurt am Main, Germany

³Department of Geomatics Engineering, Gaziosmanpasa University, 60150, Tokat, Türkiye

⁴Technische Universität Berlin, 10623 Berlin, Germany

Correspondence: Florian Zus (zusflo@gfz.de)

Received: 11 December 2024 – Discussion started: 27 March 2025

Revised: 5 June 2025 – Accepted: 5 June 2025 – Published: 13 August 2025

Abstract. We have developed an open-source ray-tracing tool for space geodetic techniques. The software uses the geometric optics approximation to calculate the signal travel time delay induced by the atmosphere between two given points. The software called DNS (“Direct Numerical Simulation of signal travel time delay”) is written in Fortran and uses OpenMP to speed up computation. The input to the ray-tracing tool is 3D pressure, temperature and humidity fields. The Earth’s magnetic field and electron density field are optional. For the neutral atmosphere (troposphere) the software accepts the NetCDF files from the atmospheric reanalysis ERA5 and the mesoscale model WRF. For the ionosphere the software accepts electron density fields derived from IRI and NeQuick. We review the current status of the software and test its performance. For example, the one-to-one comparison with the open-source software RADIATE shows the high speed and precision of our ray-tracing tool. We also show how our tool can be used to study higher-order ionospheric effects (L-band frequencies). The two outstanding features of the ray-tracing tool compared to previous model developments, i.e. the ability to handle both the troposphere and the ionosphere and do so efficiently, make it perfectly suited for geoscientific applications.

1 Introduction

Atmospheric signal propagation effects are one of the largest error sources in the data analysis of space geodetic techniques (Very Long Baseline Interferometry (VLBI), Satellite

Laser Ranging (SLR), Global Navigation Satellite Systems (GNSS), and Doppler Orbitography and Radio-positioning Integrated by Satellite (DORIS)). These effects are caused by the neutral atmosphere, hereinafter simply called the troposphere, and the ionosphere. Inaccuracies in signal propagation modelling map into errors in positioning, navigation and timing (e.g. Rothacher et al., 1998); Earth rotation parameter determination (e.g. Nilsson et al., 2017); terrestrial and celestial reference frames establishment and maintenance (e.g. MacMillan and Ma, 1997); and atmospheric and climate monitoring (e.g. Bock et al., 2019). In the space geodetic data analysis the signal propagation effects for the troposphere and ionosphere are treated separately. However, the models for both effects are based on the same key algorithm: ray tracing. This is the algorithm that determines the (bent) signal path between the transmitter and the receiver and therefore allows the accurate calculation of the tropospheric and ionospheric delay.

In the analysis of space geodetic data the tropospheric delay is typically not calculated for each measurement, but a parameterized version of the tropospheric delay is developed beforehand. This closed-form expression of the tropospheric delay is plugged into the observation equation, and some tropospheric parameters are estimated (adjusted) together with the geodetic parameters such as coordinates and clocks (Zus et al., 2021). The quality of the geodetic parameter estimates depends on the quality of the tropospheric delay, which depends on the accuracy of the underlying model for the troposphere and the ray-tracing algorithm. The most advanced approaches utilize data from numerical weather mod-

els (NWMs) as an input for optical (Hully and Pavlis, 2007; Boisits et al., 2020; Drożdżewski and Sosnica, 2024) and microwave frequencies (Boehm et al., 2006; Landskron and Böhm, 2018a, b). Several ray-tracing algorithms have been developed starting from the 1960s. In the early days the ray-tracing algorithms were based on simplifying assumptions, i.e. the assumption of a spherically layered troposphere. In this case a single pressure, temperature and humidity profile is utilized to calculate the tropospheric delays. Later, ray-tracing algorithms were developed to cope with the 3D pressure, temperature and humidity fields. Nafisi et al. (2012b) present a summary of the most commonly used algorithms. Setting up a ray-tracing system is not a trivial task, and at the time of writing very few resources are publicly available, namely the software package RADIATE (Hofmeister and Böhm, 2017) and the software package SPD (Petrov, 2015). Utilizing NWM data and not the data from a climatology means that ray tracing must be performed on a routine basis, and thus a ray-tracing algorithm that is both accurate and fast is beneficial.

With regards to the ionospheric delay the treatment in the analysis of space geodetic data is somewhat different. The reason is that the ionosphere is a dispersive medium; therefore measurements taken with different frequencies and the appropriate combination of these measurements allow one to remove signal propagation effects caused by the ionosphere to a large extent. The remaining signal propagation effects caused by the ionosphere, the so-called higher-order ionospheric effects, can be neglected in many applications. However, in precise applications they must be taken into account (Petrie et al., 2011). These higher-order ionospheric effects are caused by ray-path bending effects, among others. Hence a ray-tracing algorithm is required too. Typically, the higher-order ionospheric effects are calculated using idealized electron density fields. For example, Hoque and Jakowski (2008) utilized idealized electron density profiles at predefined ionospheric pierce points. They also derived a parameterization for the higher-order ionospheric effects. Kashcheyev et al. (2012) argued that this oversimplifies the task, and hence they utilized realistic electron density fields derived from NeQuick2 (Nava et al., 2008). This means that there is no need to define some idealized electron density profile at some predefined ionospheric pierce point. Instead the electron density field is utilized as is. The price they paid was computational complexity; therefore they were forced to analyse a limited geographical area and time period. They did not provide a parameterization for the higher-order ionospheric effects.

In this work we present the open-source ray-tracing tool DNS (“Direct Numerical Simulation of signal travel time delay”). We demonstrate the two outstanding features of this tool compared to previous model developments: it can handle both the troposphere and the ionosphere, and it does so with high speed and precision. This makes the tool perfectly suited for geoscientific applications. In Sect. 2 we introduce

the method and data. In essence, we introduce the tropospheric delay, the ionospheric delay, the input data that can be utilized in the ray-tracing tool and technical details of the implementation. In Sect. 3 we perform numerical experiments. At first, we provide the one-to-one comparisons for the calculated tropospheric delays before we provide an application example, namely the comparison with GNSS tropospheric estimates. In a similar fashion, we provide comparisons for the calculated ionospheric delays before we provide an application example; namely we study the impact of higher-order ionospheric corrections in precise point positioning. The conclusion is given in Sect. 4.

2 Data and methods

2.1 Tropospheric delay

The tropospheric delay T between two points P and Q is calculated according to

$$T = \int_P^Q n \, ds - g, \quad (1)$$

where n stands for the index of refraction, s denotes the arc length of the ray path and g denotes the geometric distance between the two points. The index of refraction is related to the refractivity N through

$$n = 1 + 10^{-6}N. \quad (2)$$

The refractivity is a function of the pressure, temperature and humidity. For microwave frequencies we take the formula by Thayer (1974), and for optical frequencies we take the formula by Mendes and Pavlis (2004). The ray path follows from Fermat’s principle. In essence, the variation of the integral must vanish:

$$\delta \int_P^Q n \, ds = 0. \quad (3)$$

We ignore out-of-plane bending, which means that we assume that the ray path remains in the plane, which is defined by the point P , the centre of the osculating sphere determined for point P (we approximate the Earth as a sphere) and the point Q . Let $[x, z(x)]$ denote the ray path; then from variational calculus it follows that the ray path between the two points is obtained by solving the following differential equation (Zus et al., 2014):

$$\frac{d^2z}{dx^2} - \frac{1}{n} \left[\frac{\partial n}{\partial z} - \frac{\partial n}{\partial x} \frac{dz}{dx} \right] \cdot \left[1 + \left(\frac{dz}{dx} \right)^2 \right] = 0. \quad (4)$$

Given the position of point P and Q , the two-point boundary value problem (BVP) is solved by a finite-difference scheme (Zus et al., 2014). The point P can be any point close to Earth’s surface (ground-based station), and the point Q can

be any point between a low Earth orbit (LEO) and high Earth orbit (HEO) satellite. The point P is provided by the user as an input. The point Q is by default a medium Earth orbit (MEO) satellite. We also allow for a special case in which the point Q is an extragalactic radio source (quasar), as is the case for VLBI. For details the reader is referred to Zus et al. (2014).

It is convenient to express the tropospheric delay as a function of the elevation angle e and azimuth angle a in the local horizon system of the ground-based station:

$$T = T(e, a). \quad (5)$$

For any ground-based station we calculate 120 tropospheric delays and write them to disk (“SLA” file). The spacing in azimuth is chosen to be 30° , and the elevation angles are chosen to be 3, 5, 7, 10, 15, 20, 30, 50, 70 and 90° . The specific set of elevation and azimuth angles is typically utilized for the parameterization of tropospheric delays (e.g. Dogan et al., 2024). It is up to the user to change the default selection of elevation and azimuth angles. The output files also contain the slant hydrostatic delay (SHD) and the slant wet delay (SWD) calculated through

$$\text{SHD} = 10^{-6} \int_P^Q N_h \, ds + \int_P^Q ds - g \quad (6)$$

$$\text{SWD} = 10^{-6} \int_P^Q N_w \, ds,$$

where N_h denotes the hydrostatic refractivity, and N_w denotes the wet refractivity. In the zenith direction the SHD and SWD are called zenith hydrostatic delay (ZHD) and zenith wet delay (ZWD) respectively. The separation into the hydrostatic and wet delay is useful for those interested in the parameterization of tropospheric delays, i.e. the derivation of mapping functions (e.g. Dogan et al., 2024). In addition, we calculate the difference between the ZHD from the numerical integration and the ZHD from the empirical formula depending on the pressure at the station and write it to disk (“ZHD” file). For microwave frequencies we take the formula by Davis et al. (1985), and for optical frequencies we take the formula by Mendes and Pavlis (2004). This file is utilized for diagnostic purposes. The ZHD differences should be on a millimetre level (e.g. Fan et al., 2023). Larger ZHD differences point to a problem in the underlying weather model field, the way refractivity is interpolated (extrapolated) or the numerical integration.

2.2 Ionospheric delay

Regarding signal propagation in the ionosphere, we must distinguish between the phase and group velocity. We are only going to analyse the phase velocity. Simple modifications allow the user to analyse the group velocity. Hence, the ionospheric delay I_i between the two points P and Q is calculated

according to

$$I_i = \int_P^Q n \, ds - \int_P^Q n_i \, ds_i. \quad (7)$$

Here n_i stands for the refractive index experienced by the phase of the signal, s_i denotes the arc length of the ray path and the index i refers to the carrier frequency of the signal. The refractive index experienced by the phase of the signal is given by

$$n_i = 1 + 10^{-6} N - \frac{q}{f_i^2} E - \frac{p}{f_i^3} E B \cos(\phi), \quad (8)$$

where N stands again for the refractivity of the neutral atmosphere, f_i denotes the carrier frequency of the signal, E denotes the electron density, ϕ denotes the angle between the Earth’s magnetic field vector \mathbf{B} and the ray-tangent vector, and q and p denote constants (Hoque and Jakowski, 2008). The variation of the integral must vanish:

$$\delta \int_P^Q n_i \, ds_i = 0. \quad (9)$$

We neglect out-of-plane bending. From variational calculus, it follows that the ray path $[x, z(x)]$ between the two points is obtained by solving the following differential equation (Zus et al., 2017a):

$$\frac{d^2 z}{dx^2} - \frac{1}{\eta_i} \left[\frac{\partial \eta_i}{\partial z} - \frac{\partial \eta_i}{\partial x} \frac{dz}{dx} \right] \cdot \left[1 + \left(\frac{dz}{dx} \right)^2 \right] - \frac{p}{\eta_i f_i^3} \left[\frac{\partial (E \cdot B_x)}{\partial z} - \frac{\partial (E \cdot B_z)}{\partial x} \right] \cdot \left[1 + \left(\frac{dz}{dx} \right)^2 \right]^{\frac{3}{2}} = 0, \quad (10)$$

where

$$\eta_i = 1 + 10^{-6} N - \frac{q}{f_i^2} E, \quad (11)$$

and B_x and B_z denote the x and z coordinate of the projection of Earth’s magnetic field vector \mathbf{B} into the plane of constant azimuth. The curvature term due to Earth’s magnetic field is small and can be neglected. Therefore, the ray path between the two points is obtained by solving the following differential equation (Zus et al., 2017):

$$\frac{d^2 z}{dx^2} - \frac{1}{\eta_i} \left[\frac{\partial \eta_i}{\partial z} - \frac{\partial \eta_i}{\partial x} \frac{dz}{dx} \right] \cdot \left[1 + \left(\frac{dz}{dx} \right)^2 \right] = 0. \quad (12)$$

The two-point BVP is efficiently solved by a finite-difference scheme (Zus et al., 2017).

With the definition of the tropospheric delay T and the definition of the ionospheric delay I_i , the optical path length O_i that enters the so-called observation equation can be written in the familiar form

$$O_i = g + T - I_i. \quad (13)$$

In the analysis of space geodetic data, the effect of the ionosphere is mitigated by the dual-frequency linear combination. The residual

$$\Delta I = \frac{f_1^2}{(f_1^2 - f_2^2)} I_1 - \frac{f_2^2}{(f_1^2 - f_2^2)} I_2 \quad (14)$$

is called higher-order ionospheric correction. It is convenient to express the higher-order ionospheric correction as a function of the elevation and azimuth angle in the local horizon system of the ground-based station:

$$\Delta I = \Delta I(e, a). \quad (15)$$

For any ground-based station we calculate by default 120 higher-order ionospheric corrections. The spacing in azimuth is chosen to be 30° , and the elevation angles are chosen to be 3, 5, 7, 10, 15, 20, 30, 50, 70 and 90° . By default, the higher-order ionospheric corrections are computed for the GPS L-band frequencies L1 and L2. It is up to the user to change the default selection of frequencies. We write the calculated higher-order ionospheric corrections to disk (“HOC” file). In addition, we perform a polynomial expansion (we make use of Zernike polynomials) and write the coefficients of the polynomial expansion to disk (“HOI” file). This allows quick access to higher-order ionospheric correction for any elevation and azimuth angle. For diagnostic purposes we calculate the vertical total electron content (VTEC) at each ground-based station and write it to disk (“TEC” file). The VTEC is obtained by numerical integration of the electron density in zenith direction.

We note that higher-order ionospheric corrections are not sensitive to the refractivity of the neutral atmosphere. Therefore as long as one is only interested in higher-order ionospheric corrections, there is no need to know the state of the neutral atmosphere. Specifically, $N = 0$ implies $ds = dg$ (no ray-path bending caused by the neutral atmosphere), and the higher-order ionospheric corrections can be written as

$$\Delta I = \alpha + \beta + \gamma, \quad (16)$$

where the three terms read as

$$\begin{aligned} \alpha &= \frac{p}{f_1^2 - f_2^2} \\ &\quad \times \left(\frac{1}{f_1} \int_P^Q EB \cos(\phi) ds_1 - \frac{1}{f_2} \int_P^Q EB \cos(\phi) ds_2 \right) \\ \beta &= \frac{q}{f_1^2 - f_2^2} \left(\int_P^Q E ds_1 - \int_P^Q E ds_2 \right) \\ \gamma &= g - \left(\frac{f_1^2}{f_1^2 - f_2^2} \int_P^Q ds_1 - \frac{f_2^2}{f_1^2 - f_2^2} \int_P^Q ds_2 \right) \end{aligned} \quad (17)$$

and agree with those provided by Kashcheyev et al. (2012). The third term γ is caused by the ray-path bending, the second term β is due to the fact that the ray-path bending is different for different carrier frequencies and the first term α is

caused by the Earth’s magnetic field. Hereinafter we will call the sum of the second and third term ionospheric ray-path bending corrections.

2.3 Data from numerical (space) weather models

The input to the ray-tracing tool are 3D pressure, temperature and humidity fields. Earth’s magnetic field and electron density field are optional. With regards to the troposphere, the following options are possible:

1. *Data from the atmospheric reanalysis ERA5.* The NetCDF files are available from the European Centre of Medium-Range Weather Forecasts (ECMWF) (<https://www.ecmwf.int/en/forecasts/dataset/ecmwf-reanalysis-v5/>, last access: 10 August 2025). The weather model fields (pressure level data) are available with a horizontal resolution of $0.25^\circ \times 0.25^\circ$ on 37 pressure levels.
2. *Data from the operational analysis of the ECMWF.* The ascii files are available from the VieVS ray tracer (https://vmf.geo.tuwien.ac.at/GRIB_TXT/, last access: 10 August 2025). The weather model fields are available with a horizontal resolution of $1^\circ \times 1^\circ$ on 25 pressure levels.
3. *The output (NetCDF files) from the Weather Research and Forecasting (WRF) model* (<https://www2.mmm.ucar.edu/wrf/users/>, last access: 10 August 2025). The WRF model is a state-of-the-art mesoscale numerical weather prediction system designed for both atmospheric research and operational forecasting. The user must configure the weather model and therefore specifies the horizontal and vertical resolution. Currently the ray-tracing tool requires data on the cylindrical equidistant map projection.
4. *Data from the benchmark comparison campaign* (<https://vmf.geo.tuwien.ac.at/BMC/>, last access: 10 August 2025) (Nafisi et al., 2012b). The ascii files are provided with the software. The weather model fields are available for a station in Germany (Wetzell) and a station in Japan (Tsukuba) with a horizontal resolution of $0.1^\circ \times 0.1^\circ$ on 25 pressure levels.

With regards to the ionosphere, the following options are possible:

1. *Data derived from the IRI-2016* (<https://irimodel.org>, last access: 10 August 2025) (Bilitza, 2001). We extract electron density profiles (ranging from 80–2000 km) and assemble the electron density profiles to a 3D electron density field with a horizontal resolution of $2^\circ \times 2^\circ$. We store the electron density fields, and we make them available upon request.

2. *Data derived from the NeQuick2* (<https://t-ict4d.ictp.it/nequick2>, last access: 10 August 2025) (Nava et al., 2008). We extract electron density profiles (ranging from 80–10 000 km) and assemble the electron density profiles to a 3D electron density field with a horizontal resolution of $2^\circ \times 2^\circ$.
3. *Data from the coupled Whole Atmosphere Model–Ionosphere Plasmasphere Electrodynamics (WAM-IPE) Forecast System (WFS)*. The NetCDF files are available from the NOAA Space Weather Prediction Center (<https://www.swpc.noaa.gov/products/wam-ipe>, last access: 10 August 2025). The WAM-IPE provides a specification of ionosphere conditions with forecasts 2 d in advance in response to solar, geomagnetic and lower atmospheric forcing (Chou et al., 2023). It is different from IRI and NeQuick2 in that it is not an empirical model (climatology) but a space weather model.
4. *Data from the Global Total Electron Content (GloTEC) model*. The NetCDF files are available from the NOAA Space Weather Prediction Center (<https://services.swpc.noaa.gov/products/glotec/>, last access: 10 August 2025). The GloTEC is a data-assimilative model (Chou et al., 2023). Therefore, model results at the locations where observations are ingested are most trustworthy. Where there are no observations, the model tends to relax towards the background (IRI).

The magnetic field is derived from IGRF-13 (<https://www.ngdc.noaa.gov/IAGA/vmod/igrf.html>, last access: 10 August 2025) (Alken et al., 2021). In essence, for each grid point of the electron density field, the components of the magnetic field vector are computed and stored.

2.4 Running the ray-tracing tool

The software is written in Fortran and publicly available (Zus, 2025a). After installation and compilation, the user must type the following in the command line of a Unix system to run the ray-tracing tool: `./prog yyyy-ddd-hh-mm station nwm frequency source ionosphere` where *yyyy* denotes the four-digit year, *ddd* denotes the three-digit day of year, *hh* denotes the two-digit hour, *mm* denotes the two-digit minute, *station* denotes the list of stations, *nwm* denotes the numerical weather model, *frequency* denotes frequency (optical/microwave), *source* is the signal source (satellite/quasar) and *ionosphere* indicates if the ionosphere is switched on/off.

The numerical (space) weather model data and the file for the station coordinates must be available in the *input* directory, and the solution is written in the *output* directory.

3 Experiments

3.1 Benchmark comparison campaign

We validate the ray-tracing tool using data from the benchmark comparison campaign (Nafisi et al., 2012b). The participants of the campaign computed tropospheric delays for an elevation angle of 5° (every degree in azimuth) for one station in Germany (Wetzell) and one station in Japan (Tsukuba). We restrict the comparison to those participants utilizing the same weather model: KARAT (Hobiger et al., 2008), UNB (Urquhart et al., 2012) and VIENNA (Nafisi et al., 2012a).

Figure 1 shows the tropospheric delay as a function of the azimuth angle (elevation angle of 5°) for the station in Germany (Wetzell) as an example. Good agreement (differences on a centimetre level) is found among all the solutions. The differences are related to the transformation of the geopotential height to the geometric height and different interpolation approaches for the refractivity (Nafisi et al., 2012b). The approach utilized in our ray-tracing tool is similar to the approach utilized by UNB, and this explains the excellent agreement (differences on a millimetre level) for these two solutions. For new users of the ray-tracing tool, we recommend running these cases first to check functionality. The possibility of running the two cases from the benchmark comparison campaign is also interesting for the further development of the software as one can make changes to the code (e.g. optimization) and obtain quick feedback on the applicability of changes. However, the comparisons are restricted to two cases. The comparison for dozens of stations locations and a long time period is subject to the next section. This will shed light on both accuracy and speed.

3.2 Comparison against RADIATE

We perform a one-to-one comparison of DNS with the open-source software RADIATE (Landskron, 2018). We calculated tropospheric delays for the same stations, the same set of elevation and azimuth angles, and the same NWM input data (ascii files are available from the VieVS ray-tracer https://vmf.geo.tuwien.ac.at/GRIB_TXT/, last access: 10 August 2025), the same space geodetic technique (VLBI) and settings (e.g. Earth's radius of curvature and refractivity constants). We utilized the same PC (Intel(R) Core(TM) i7-9700 CPU @ 3.00 GHz) and the same compiler (GNU Fortran compiler). Unlike RADIATE, our ray-tracing tool utilizes OpenMP to speed up computation (the data throughput scales linearly with the number of cores). However, in the following comparisons, for fairness, a single core was utilized.

At first, we consider 2592 grid point coordinates with global coverage and a single epoch (15 February 2024, 12:00 UTC). Figure 2 shows the differences in the tropospheric delays as a function of the elevation angle. In the

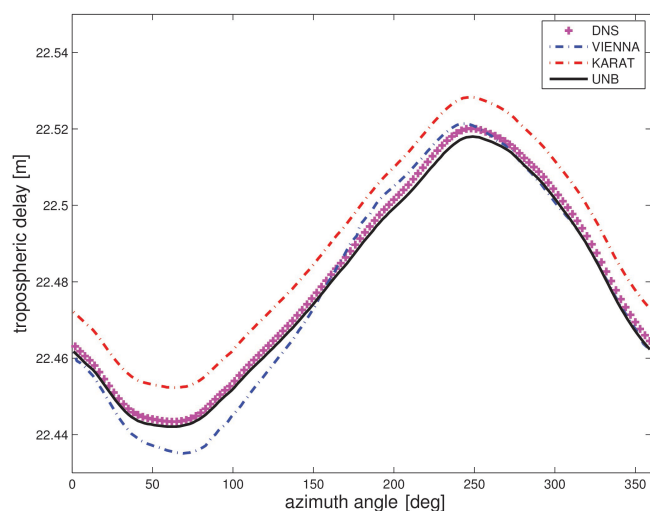


Figure 1. Tropospheric delays as a function of the azimuth angle (elevation angle of 5°) for the station Wettzell in Germany (1 January 2008, 00:00 UTC). Different colours show different solutions: DNS (ray-tracing tool), KARAT (Hobiger et al., 2008), UNB (Urquhart et al., 2012) and VIENNA (Nafisi et al., 2012a).

zenith direction, the differences can reach the millimetre level, and at the elevation angle 3° the differences can reach the centimetre level. The mean and standard deviation as a function of the elevation angle indicate that the differences are random and not systematic for all elevation angles. Specifically, the standard deviation in the zenith is 0.5 mm, and at the elevation angle of 3° it is 5.0 mm. The differences roughly scale with the elevation angle, i.e. $1/\sin(e)$. Therefore Fig. 3 shows the relative differences in the tropospheric delays as a function of elevation angle. The relative differences are mainly below 0.1 % for all elevation angles. These differences can be regarded small compared to the uncertainty in tropospheric delays caused by the uncertainty of the underlying refractivity field (also see discussion below). We hypothesize that the differences in the tropospheric delays are mainly caused by the way the undulation is applied and the way the interpolation (extrapolation) of refractivity is done. For example, RADIATE utilizes its own geoid height grid data file (“global_undulations_dint_lat1.000_dint_lon1.000.txt”), whereas DNS utilizes the NIMA/GSFC WGS-84 15' geoid height grid data file (“ww15mgh.grd”). In addition, before the ray tracing starts in RADIATE, the vertical resolution (height level resolution) from the weather model field is increased by interpolation, and above the highest weather model level, extrapolation using a standard atmosphere is carried out. In our ray-tracing tool the weather model field is used as is, and above the highest weather model level, the pressure, temperature and humidity are extrapolated. Specifically, we neglect the humidity, assume a constant temperature and calculate pressure from the

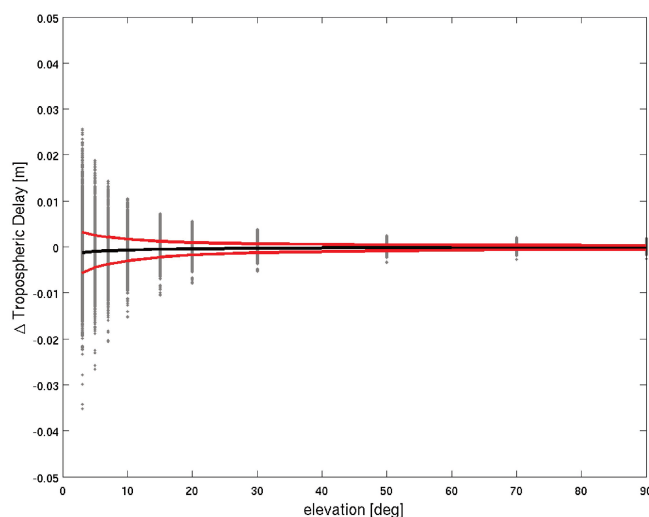


Figure 2. Differences of tropospheric delays between RADIATE and DNS as a function of the elevation angle (15 February 2024, 12:00 UTC). We consider 2592 globally distributed grid point coordinates and compute 120 tropospheric delays per grid point. The black line shows the mean deviation, and the red lines show the 1σ deviation around the mean deviation.

hydrostatic equation. We support our hypothesis in that we performed another comparison where we utilize the geoid height grid data file from RADIATE in our ray-tracing tool and altered the extrapolation of refractivity in the RADIATE software accordingly. The respective altered routine is provided with our ray-tracing tool (“module_profilewise_refrHD_ECMWFmin.f90_fzus”). Specifically, the standard deviation in the zenith is reduced from 0.5 to 0.2 mm, and at the elevation angle of 3° the standard deviation is reduced from 5.0 to 2.0 mm. We conclude that the quality of tropospheric delays from DNS is the same as provided by RADIATE. The advantage of DNS over RADIATE is the speed. For the same task, i.e. the computation of 120 times 2592 tropospheric delays, DNS turns out to be about 10 times faster than RADIATE (same PC, same compiler and a single core).

In order to explain the high speed of the ray-tracing tool, it is necessary to dive into details of the underlying numerical algorithm. Two features allow the rapid and precise computation of the tropospheric delays. At first, the numerical solution of the differential equation is found, utilizing an implicit finite-difference scheme. Second, the numerical quadrature is found, utilizing a higher-order Newton's code formula (Simpson's rule). The combination of these two features allows us to use a low number of supporting points without losing the precision of the computed tropospheric delays (Zus et al., 2014). On the other hand, the solution by RADIATE is based on the piecewise application of Snell's law (Hofmeister and Böhm, 2017). In other words, the numerical solution of the differential equation is found, utiliz-

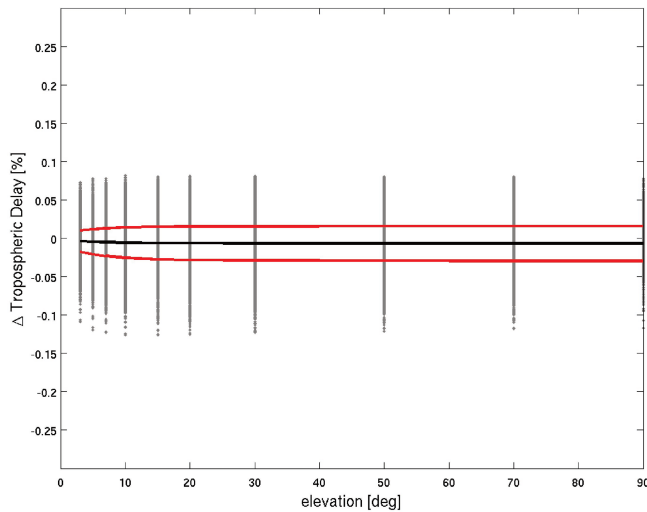


Figure 3. Relative differences of tropospheric delays between RADIATE and DNS as a function of the elevation angle (15 February 2024, 12:00 UTC). We consider 2592 globally distributed grid point coordinates and compute 120 tropospheric delays per grid point. The black line shows the mean deviation, and the red lines show the 1σ deviation around the mean deviation.

ing an explicit finite-difference scheme, and the numerical quadrature is found, utilizing a low-order Newton's code formula (Trapezoidal rule). Therefore, a large number of supporting points must be utilized to obtain high precision of the computed tropospheric delays.

3.3 Application example: comparison with GNSS tropospheric estimates

The raw measurements at a single GNSS station allow the estimation of the zenith total delay (ZTD) and tropospheric gradient. The ZTD contains information on the integrated water vapour (IWV) at the station, and, roughly spoken, the tropospheric gradient contains information on the horizontal IWV gradient at the station. This is why both GNSS tropospheric estimates are considered valuable in data assimilation for numerical weather prediction (Thundathil et al., 2024). Prior to data assimilation, the comparison of GNSS and NWM tropospheric estimates is useful to better understand the information content and to estimate random and systematic deviations. The ray-tracing tool is well suited for this purpose. We are going to demonstrate this here utilizing a number of IGS core stations. For the time period 2018–2020 we compute every 6 h tropospheric delays with DNS and RADIATE. Based on the set of 120 tropospheric delays per station and epoch (the spacing in azimuth is 30° , and the elevation angles are 3, 5, 7, 10, 15, 20, 30, 50, 70 and 90°), we calculate the ZTD, the north gradient component (G_n) and the east gradient component (G_e) as follows:

$$\text{ZTD} = T(90^\circ, 0^\circ) \quad (18)$$

$$G_n = \frac{\sum_{j=1}^{j=120} m_g(e_j) \sin(e_j)^2 \cos(a_j) T(e_j, a_j)}{\sum_{j=1}^{j=k} m_g(e_j)^2 \sin(e_j)^2 \cos(a_j)^2}$$

$$G_e = \frac{\sum_{j=1}^{j=120} m_g(e_j) \sin(e_j)^2 \sin(a_j) T(e_j, a_j)}{\sum_{j=1}^{j=k} m_g(e_j)^2 \sin(e_j)^2 \sin(a_j)^2},$$

where m_g denotes the gradient mapping function and the indices j indicate the specific azimuth and elevation angle. The formula for the north and east gradient component is the result of a weighted least-squares adjustment. The idea behind this weighted least-squares adjustment is to mimic the way tropospheric gradients are estimated in the GNSS data analysis (Zus et al., 2021). When we separate the tropospheric delay into the hydrostatic and wet delay, we can separate the tropospheric gradient into two contributions, which we call the hydrostatic and wet gradient component respectively.

As an example we select the station Wettzell (Germany). The standard deviation of ZTDs and gradient components considering the difference of DNS and RADIATE, both utilizing ECMWF's operational analysis (IFS), is 0.6 and 0.01 mm respectively. We find no systematic deviation for the gradient components but a small systematic deviation of 0.1 mm for the zenith delays. Figure 4 shows the scatter of band-pass-filtered atmospheric delay coefficient differences between DNS and RADIATE. Across the frequency spectrum, the differences in the wet component are insignificant. The differences in the hydrostatic component are larger than in the wet component. We attribute this to the different way of extrapolating the refractivity above the model top (see discussion in the previous section).

Next we calculate ZTDs and gradient components utilizing the atmospheric reanalysis ERA5. This is possible with DNS but not with RADIATE. The standard deviation between IFS and ERA5 for the ZTD is 5.8 mm, and for the gradient components it is between 0.2 and 0.3 mm. There is a systematic deviation of 1.6 mm in the zenith delays. Figure 5 shows the scatter of band-pass-filtered atmospheric delay coefficient differences between IFS and ERA5 for the station Wettzell (Germany). The differences induced by the different NWM for all parameters and frequency bands are about an order of magnitude larger compared to the differences induced by employing the same NWM with different ray-tracing codes. As expected, the level of disagreement increases with increasing frequency.

Finally, we compare the ZTDs and gradient components we calculated from ray tracing (DNS and RADIATE) through NWM fields (IFS and ERA5) employing DNS and RADIATE to GNSS tropospheric estimates. The GNSS tropospheric estimates are taken from the contribution of TU Graz (Strasser et al., 2019) to the IGS Repro3 campaign. Figure 6 illustrates the scatter of the band-pass-filtered differ-

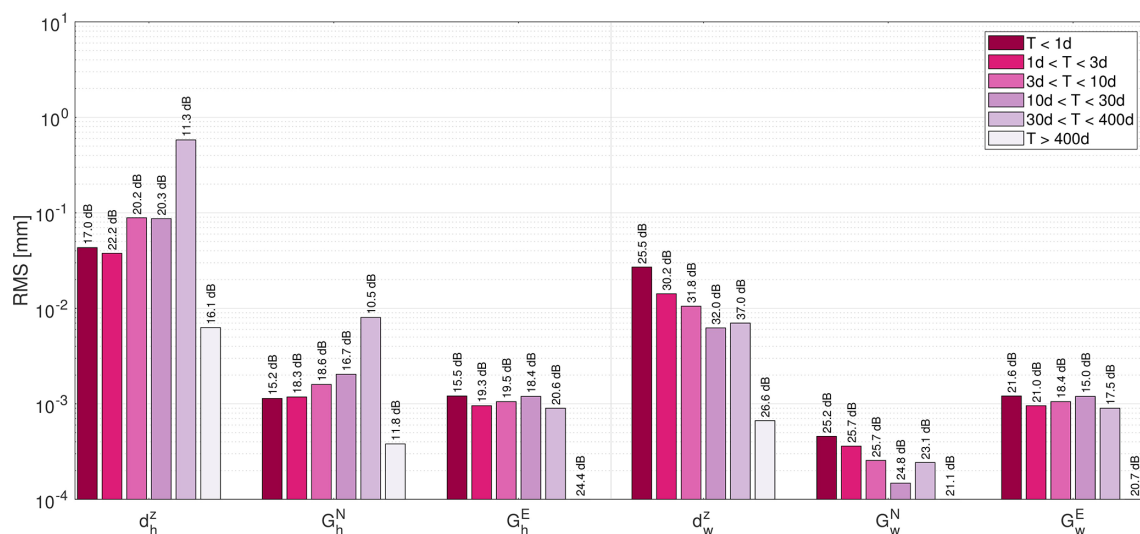


Figure 4. Root mean square of band-pass-filtered atmospheric delay coefficient differences between DNS and RADIATE employing IFS for the station Wettzell (Germany).

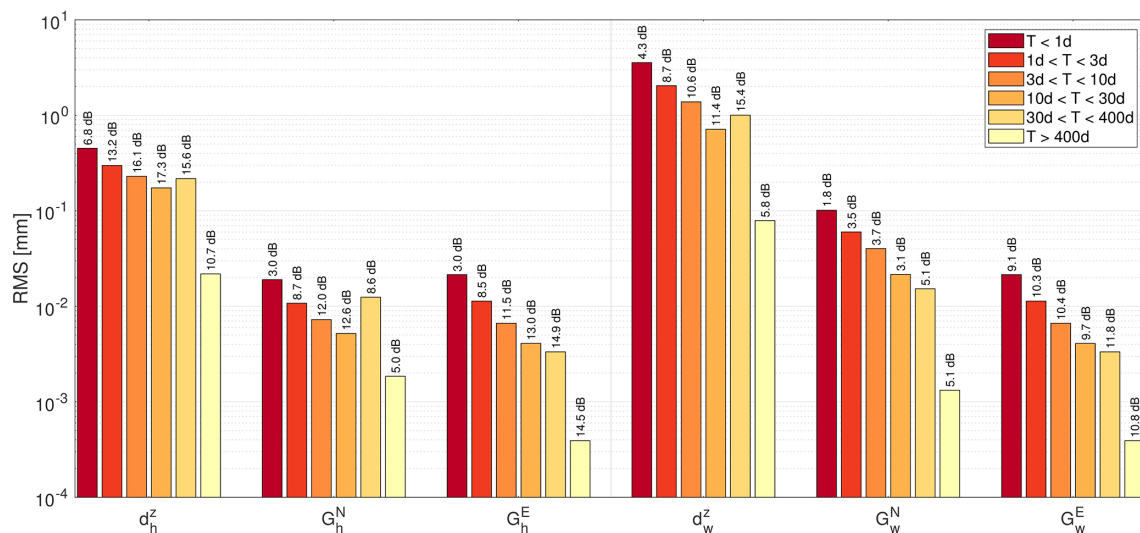


Figure 5. Root mean square of band-pass-filtered atmospheric delay coefficient differences between IFS and ERA5 employing DNS for the station Wettzell (Germany).

ences between the ZTDs and gradients from ray tracing and GNSS processing. As expected, there is a tendency for better agreement between NWM-derived and GNSS-derived quantities with decreasing frequency. For the selected station, the results do not suggest a significantly better match between any of the three scenarios to the GNSS data. We note that the GNSS-NWM discrepancies are about 1 order of magnitude larger compared to the IFS-ERA5 discrepancies and about 2 orders of magnitude larger compared to the DNS-RADIATE differences.

3.4 Comparison of ionospheric ray-path bending corrections

In the absence of another open-source ray-tracing tool capable of calculating ionospheric ray-path bending corrections in a realistic electron density field, a one-to-one comparison is not possible. Therefore we make use of empirical formulae published in the literature. For example, under the assumption of a spherical layered ionosphere where the electron density profile is given by a single-layer Chapman profile, Hoque et al. (2008) derived empirical formulas depending on the corresponding maximum ionization ($NmF2$), the height of the maximum ionization (h_mF2) and the ionospheric scale

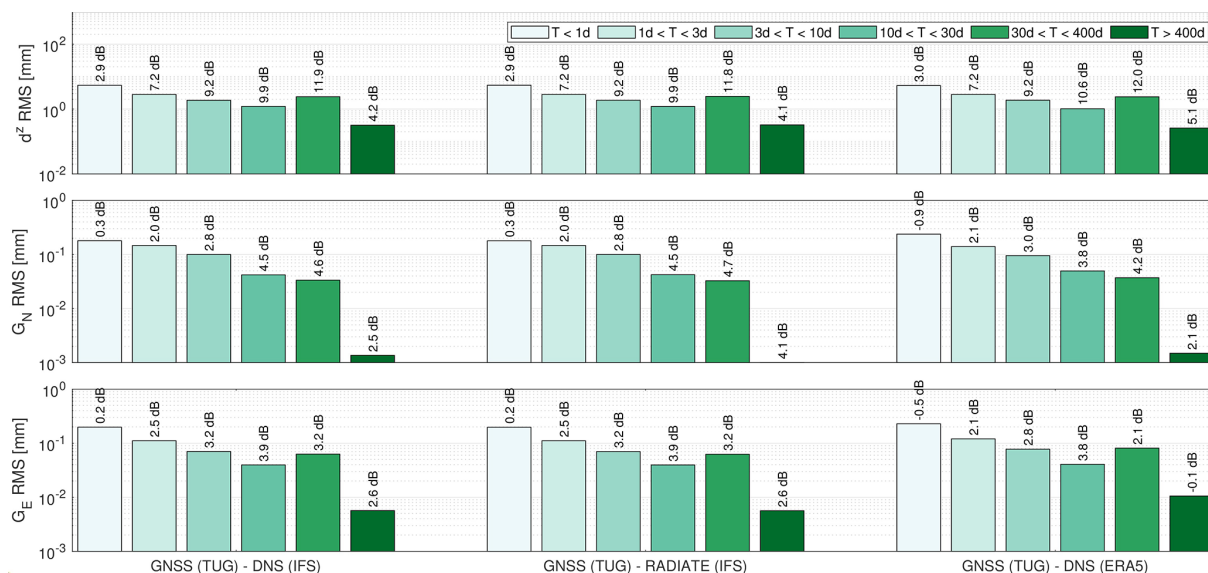


Figure 6. Root mean square of band-pass-filtered atmospheric delay coefficient differences between different solutions. GNSS (TUG) stands for the GNSS solution provided by TU Graz, DNS and RADIATE indicate the ray-tracing tool, and IFS and ERA5 stand for the two different weather models. All solutions are obtained for the station Wettzell (Germany).

height (HF). Later Hoque and Jakowski (2012) proposed new and simplified approaches for ionospheric ray-path bending corrections, and those are the ones we are going to utilize here. In essence, in our ray-tracing tool we will utilize a single-layer Chapman profile with $NmF2 = 4.96 \times 10^{12} \text{ m}^{-3}$, $hmF2 = 400 \text{ km}$ and $HF = 70 \text{ km}$. This specific single-layer Chapman profile was utilized as an example by Hoque et al. (2008). The VTEC is 143 TECU. Figure 7 shows the ionospheric ray-path bending corrections as a function of the elevation angle from our ray-tracing tool and the empirical formula. The ionospheric ray-path bending corrections range from 0 mm in the zenith to about 20 mm at an elevation angle of 3° . The agreement between the two solutions is reasonable. The differences are attributed to the inaccuracy of the empirical formula. We show this in that we added another independent numerical solution. This numerical solution is based on an implementation in MATLAB (it works for single Chapman profiles only) where the ray path is computed, utilizing the ready-to-use `bvp4c` routine (Shampine et al., 2004). The `bvp4c` routine is a sophisticated (fourth-order) collocation method to solve BVPs. Indeed, the solution obtained from the `bvp4c` routine, which we regard as the most accurate solution, is in excellent agreement (differences are on a sub-millimetre level) with the solution from our ray-tracing tool.

3.5 Comparison with NeQuick 2 VTEC

We consider the same 2592 grid point coordinates with global coverage (see Sect. 3.2) and a single epoch (15 March 2015, 12:00 UTC), which is regarded as representative of a period of high solar activity. The underlying elec-

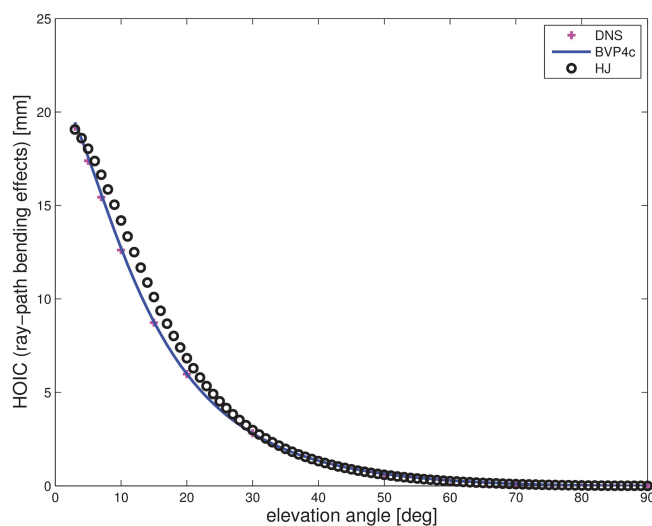


Figure 7. Ionospheric ray-path bending effect as a function of the elevation angle. The underlying electron density profile equals a single-layer Chapman profile where the maximum ionization $NmF2 = 4.96 \times 10^{12} \text{ m}^{-3}$, the height of the maximum ionization $hmF2 = 400 \text{ km}$ and the ionospheric scale height $HF = 70 \text{ km}$ (VTEC $\sim 143 \text{ TECU}$). Different colours indicate different solutions: DNS (ray-tracing tool), HJ (Hoque et al., 2012) and BVP4c (MATLAB, Shampine et al., 2004).

tron density field comes from NeQuick2. The VTEC map is shown in Fig. 8. We can see the typical VTEC enhancement around the geomagnetic equator at noon. We verified that the VTEC calculated with the ray-tracing tool and the VTEC calculated with the source code of NeQuick2 model

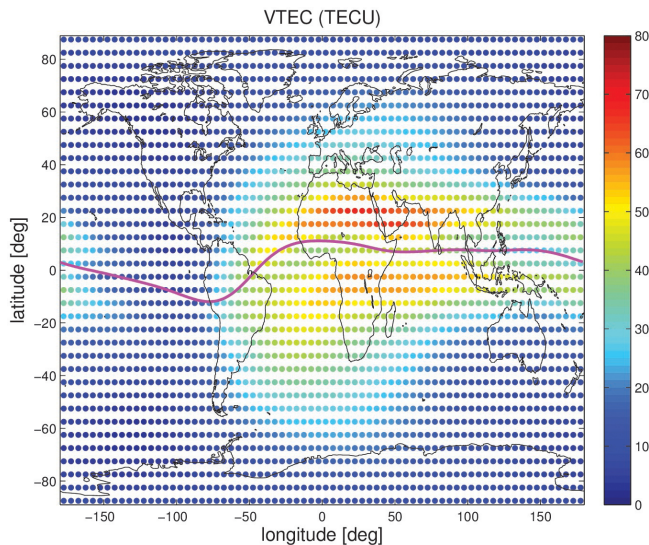


Figure 8. The VTEC map calculated with the ray-tracing tool for one epoch (15 March 2015, 12:00 UTC) utilizing the electron density field derived from NeQuick. The purple line indicates the geomagnetic equator.

(<https://t-ict4d.ictp.it/nequick2/source-code>, last access: 10 August 2025) yield differences well below 1 TECU for any grid point (not shown). The differences can be explained by the fact that the ray-tracing tool requires interpolation of electron density in the gridded electron density field (prior to the ray tracing we extract electron density profiles and assemble the electron density profiles to a 3D electron density field), whereas the source code of the NeQuick2 model calculates the electron density for some point directly.

Next, for the same 2592 grid point coordinates with global coverage and the time period 1990–2019 (three solar cycles), we compute all 1 h higher-order ionospheric corrections. In order to save computer time and disk space, each month consists of 1 d only (15th day of each month). We run the empirical model of the ionosphere with monthly mean values; therefore the day-to-day variability is small. For demonstration purposes, it is sufficient to select 1 d per month. To start with, we calculate the global mean VTEC and plot it as a function of the year in Fig. 9. The time evolution of the two global mean VTEC values follows the solar cycle: large (small) during high (low) solar activity. How the higher-order ionospheric corrections, which are available for grid point coordinates with global coverage, can be utilized will be demonstrated in the next section.

3.6 Application example: impact of higher-order ionospheric corrections in precise point positioning

Kashcheyev et al. (2012) implemented a numerical homing-in ray-tracing algorithm to rigorously calculate satellite to station ray trajectories. The homing-in technique consists of

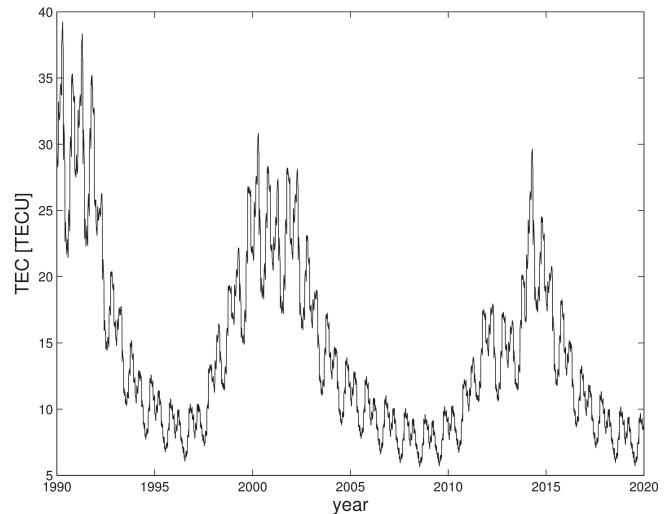


Figure 9. Global mean VTEC as a function of the year. Each month consists of 1 d only (15th day of each month), and each day consists of 24 epochs (1 h resolution).

the selection of the initial pulse (elevation angle and azimuth) at the satellite in a way the ray arrives exactly at the station. They implemented this by means of a dichotomizing search to adjust the initial azimuth and elevation angle. Using the homing-in ray-tracing algorithm for the two frequencies and the same satellite and station coordinates, exact ray trajectories and residual range errors were determined. The numerical simulations performed showed that higher-order ionospheric residual range errors may reach several centimetres (up to 5 cm) at low and middle latitudes. Kashcheyev et al. (2012) argued that due to the computational complexity they investigated only two meridian cross-sections, and they suggested to take further steps to analyse the space distribution of the corrections over the whole globe. The efficiency of our ray-tracing tool allows us to analyse the space distribution of the corrections over the whole globe (and several solar cycles). The key is that the differential equation is solved utilizing an implicit finite-difference scheme (satellite and station coordinates are automatically part of the solution). However, in the following we will not analyse the higher-order ionospheric corrections themselves. We go one step further, which is probably more interesting, and show how higher-order ionospheric corrections leak (map) into the estimated parameters in the analysis of space geodetic data. We simulate Precise Point Positioning (PPP) with the GNSS. Zus et al. (2017b) performed a similar exercise, but instead of a short time period (1 month), in the following we explore the time period 1990–2019 (three solar cycles). We utilize the linearized observation equation where carrier-phase ambiguities are ignored (Zus et al., 2017b):

$$\Delta I(e, a) = -\mathbf{u}(e, a) \cdot \Delta \mathbf{r} + c \cdot \Delta t + m_w(e) \cdot \Delta \text{ZTD} + m_g(e) \cdot [\cos(a) \cdot \Delta G_n + \sin(a) \cdot \Delta G_e]. \quad (19)$$

Here \mathbf{u} denotes the tangent-unit vector of the station-satellite link, $\Delta \mathbf{r}$ denotes the coordinate residual vector, Δt denotes the clock residual, c denotes the vacuum speed of light and m_w denotes the wet mapping function. The higher-order ionospheric corrections are determined for a realistic observation geometry with a cut-off elevation angle of 7° . We stack the linearized observation equations and by least-squares adjustment obtain the coordinate residual on a daily basis and the clock and tropospheric parameter residuals epoch wise. The standard elevation-angle-dependent down weighting is applied (the corrections are down-weighted utilizing $1/\sin(e)$) in the least-square fit. For details, the reader is referred to Zus et al. (2017b). We calculated ionospheric corrections for grid point coordinates with global coverage and stored the coefficient of the polynomial expansion. Hence, they can be evaluated at any station location and for any azimuth and elevation angle. We computed parameters residuals for more than 780 globally distributed stations. The impact of higher-order corrections depends on the station location (mainly the modified dip latitude) and time. In particular, the parameter residuals for stations around the geomagnetic equator ($\pm 40^\circ$ around the geomagnetic equator) during high solar activity are affected. The most significant effects are the systematic ones, and they can be summarized as follows. The stations appear to move southwards by up to 5 mm, and this is consistent with Kedar et al. (2003). The tropospheric north gradient components are systematically affected by up to 0.7 mm, and this is consistent with Zus et al. (2017b). The zenith delays are systematically affected by up to 3 mm, and this is consistent with Petrie et al. (2010). As an example we chose one station in China (Wuhan) and plot the time series for the coordinate and clock residual and the tropospheric parameters residuals in Figs. 10 and 11 respectively.

The time series shows that the impact mainly depends on the year. The dependency from the year stems from the solar activity. Roughly spoken, the impact in the parameter residuals follows the global mean VTEC (see Fig. 9). The high-frequency variation in the clock and tropospheric residuals is due to the strong diurnal cycle: high (low) impact around noon (midnight). The parameters that are estimated epoch wise (on an hourly basis), i.e. the zenith delay, the gradient components and the station clock, show a strong diurnal cycle. Roughly speaking, the impact follows the local time. The station coordinate residuals do not show high-frequency variations as they are estimated on a daily basis (one estimate per day). For this particular station in China (Wuhan), the impact in the x coordinate reaches 0.2 mm, in the y coordinate it reaches about 5 mm and in the up component it reaches 0.5 mm. The station clock is “effective” in absorbing the higher-order ionospheric correction as the impact in the clock residual reaches almost 3 mm. The impact in the east gradient component reaches 0.15 mm, in the north gradient component it reaches about 0.7 mm and in the zenith delay it reaches 2 mm. The time series shows the known significant

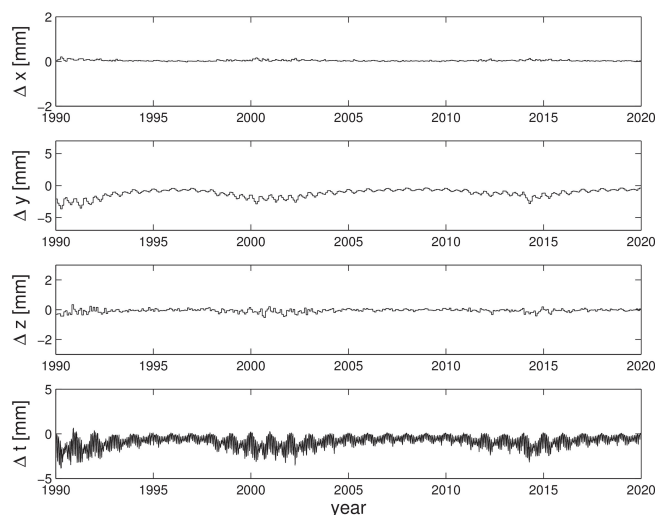


Figure 10. Impact of higher-order ionospheric corrections on the estimated station coordinate and clock (expressed in millimetres) in PPP for one station in China (Wuhan) (year 1990–2019). Each month consists of 1 d only (15th day of each month). Each day consists of 24 epochs (1 h resolution).

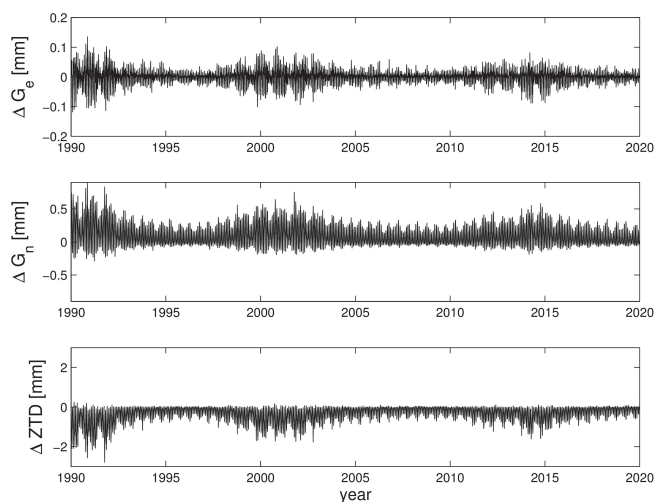


Figure 11. Impact of higher-order ionospheric corrections on estimated zenith delays and tropospheric gradient components in PPP for one station in China (Wuhan) (year 1990–2019). Each month consists of 1 d only (15th day of each month). Each day consists of 24 epochs (1 h resolution).

systematic impact on the estimated station latitude and the estimated north gradient component. In addition, the time series reveals the significant systematic effect on the estimated zenith delay. It is important to note that this significant systematic effect on the estimated zenith delay is mainly caused by the ray-path bending effects (β and γ terms) and not by the higher-order term in the ionospheric refractive index formula (α term). Therefore, we recommend the use of higher-order ionospheric corrections derived from ray tracing. The

limiting factor is the accuracy of the underlying electron density field. The empirical models running with monthly mean solar indices are likely to underestimate the effect. For this reason, and because we are also interested in real-time applications, we started to experiment with space weather model data (WAM-IPE and GloTEC) in the ray-tracing tool.

4 Conclusions

We present the open-source ray-tracing tool DNS that calculates atmospheric delay corrections for microwave and optical space geodetic observing systems. The atmospheric delay corrections are calculated between a ground station (a point close to the Earth's surface) and a satellite. In fact, the tool not only works for links between ground stations and satellites (or quasars) but also for links between LEO- and MEO satellites. This will broaden the use of the ray-tracing tool.

Comparing tropospheric delays from DNS with tropospheric delays from the popular RADIATE package, we find negligible differences when the refractivity fields and interpolation algorithms used are consistent: differences in zenith wet delays and gradients are typically less than 0.1 and 0.001 mm, respectively, across the frequency spectrum. Compared to changing the background model used to construct the refractivity fields from IFS to ERA5, the differences between DNS and RADIATE are at least an order of magnitude smaller. The advantages of DNS over RADIATE boil down to performance and flexibility. Even using a single core, DNS is multiple times (an order of magnitude) faster than RADIATE.

The ray-tracing tool allows the study of signal propagation in the ionosphere. By comparing the VTEC output of the open-source ray-tracing tool with the VTEC output of the NeQuick2 model source code, we conclude that the two approaches are interchangeable in this respect. If it is just a matter of calculating VTEC, then the logical choice is still the NeQuick2 model source code because it provides this solution quickly. However, the ray-tracing tool also allows the “quick” calculation of higher-order ionospheric corrections. We compare the calculated higher-order corrections with those from empirical formulas and find good agreement. As an application example, we show the impact of higher-order ionospheric corrections on the estimated parameters in the analysis of space geodetic data. Such a simulation covering almost three solar cycles is not available yet. The efficient ray-tracing tool makes this possible.

In conclusion, the ray-tracing tool is expected to be useful for research and operational applications. We hope to stimulate and support further studies, such as the derivation of tropospheric (ionospheric) mapping functions from high-resolution numerical (space) weather models. DNS allows parallelization, which allows it to exploit the parallel architecture of modern PCs and high-performance comput-

ing clusters. This feature of the software will support such studies.

Code and data availability. The source code of DNS and data from the benchmark comparison campaign are available at Zus (2025a) (<https://doi.org/10.5281/zenodo.15044588>). The source code of RADIATE is available at Zus (2025c) (<https://doi.org/10.5281/zenodo.15180888>). The numerical (space) weather model dataset for the ray-tracing tool is available at Zus (2025b) (<https://doi.org/10.5281/zenodo.15187660>).

Author contributions. The original draft of the study was written by FZ and KB. FZ, KB, AHD and RT conducted the formal analysis and experiments. JW and GD reviewed and edited the paper.

Competing interests. The contact author has declared that none of the authors has any competing interests.

Disclaimer. Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. While Copernicus Publications makes every effort to include appropriate place names, the final responsibility lies with the authors.

Acknowledgements. We acknowledge GNSS data provided by six of the analysis centres that contributed to IGS repro3: the Center for Orbit Determination in Europe (COD), the European Space Agency/ESOC (ESA), GeoForschungsZentrum (GFZ), the Space Geodesy team of the CNES (GRG), the Jet Propulsion Laboratory (JPL) and Technische Universität Graz (TUG).

Financial support. The article processing charges for this open-access publication were covered by the GFZ Helmholtz Centre for Geosciences.

Review statement. This paper was edited by Tatiana Egorova and reviewed by two anonymous referees.

References

- Alken, P., Thébaud, E., Beggan, C. D., Amit, H., Aubert, J., Baerenzung, J., Bondar, T. N., Brown, W. J., Califf, S., Chambodut, A., Chulliat, A., Cox, G. A., Finlay, C. C., Fournier, A., Gillet, N., Grayver, A., Hammer, M. D., Holschneider, M., Huder, L., Hulot, G., Jager, T., Kloss, C., Korte, M., Kuang, W., Kuvshinov, A., Langlais, B., Léger, J.-M., Lesur, V., Livermore, P. W., Lowes, F. J., Macmillan, S., Magnes, W., Manda, M., Marsal, S., Matzka, J., Metman, M. C., Minami, T., Morschhauser, A., Mound, J. E., Nair, M., Nakano, S., Olsen, N., Pavón-Carrasco,

- F. J., Petrov, V. G., Ropp, G., Rother, M., Sabaka, T. J., Sanchez, S., Saturnino, D., Schnepf, N. R., Shen, X., Stolle, C., Tangborn, A., Tøffner-Clausen, L., Toh, H., Torta, J. M., Varner, J., Vervelidou, F., Vigneron, P., Wardinski, I., Wicht, J., Woods, A., Yang, Y., Zeren, Z., and Zhou, B.: International Geomagnetic Reference Field: the thirteenth generation, *Earth Planets Space*, 73, 49, <https://doi.org/10.1186/s40623-020-01288-x>, 2021.
- Bilitza, D.: International Reference Ionosphere 2000, *Radio Sci.*, 36, 261–275, <https://doi.org/10.1029/2000RS002432>, 2001.
- Bock, O., Pacione, R., Ahmed, F., Araszkiewicz, A., Baldysz, Z., Balidakis, K., Barroso, C., Bastin, S., Beirle, S., Berckmans, J., Böhm, J., Bogusz, J., Bos, M., Brockmann, E., Cadetdu, M., Chimani, B., Douša, J., Elgered, G., Eliaš, M., Fernandes, R., Figurski, M., Fionda, E., Gruszczynska, M., Guerova, G., Guizarro, J., Hackman, C., Heinkelmann, R., Jones, J., Kazanci, S. Z., Klos, A., Landskron, D., Martins, J. P., Mattioli, V., Mircheva, B., Nahmani, S., Nilsson, R. T., Ning, T., Nykiel, G., Parracho, A., Pottiaux, E., Ramos, A., Rebischung, P., Sá, A., Dorigo, W., Schuh, H., Stankunavicius, G., Stepniak, K., Valentim, H., Van Malderen, R., Viterbo, P., Willis, P., and Xaver, A.: Use of GNSS Tropospheric Products for Climate Monitoring (Working Group 3), Springer International Publishing, 267–402, ISBN 9783030139018, https://doi.org/10.1007/978-3-030-13901-8_5, 2019.
- Boehm, J., Werl, B., and Schuh, H.: Troposphere mapping functions for GPS and VLBI from European centre for medium-range weather forecasts operational analysis data, *J. Geophys. Res.*, 111, B02406, <https://doi.org/10.1029/2005JB003629>, 2006.
- Boisits, J., Landskron, D., and Böhm, J.: VMF3o: the Vienna Mapping Functions for optical frequencies, *J. Geodesy*, 94, 57, <https://doi.org/10.1007/s00190-020-01385-5>, 2020.
- Chou, M.-Y., Yue, J., Wang, J., Huba, J. D., El Alaoui, M., Kuznetsova, M. M., Rastätter, L., Shim, J. S., Fang, T.-W., Meng, X., Fuller-Rowell, D., John, M., and Retterer, J. M.: Validation of ionospheric modeled TEC in the equatorial ionosphere during the 2013 March and 2021 November geomagnetic storms, *Space Weather*, 21, e2023SW003480, <https://doi.org/10.1029/2023SW003480>, 2023.
- Davis, J. L., Herring, T. A., Shapiro, I. I., Rogers, A. E., and Elgered, G.: Geodesy by radio interferometry: Effects of atmospheric modeling errors on estimates of baseline length, *Radio Sci.*, 20, 1593–1607, 1985.
- Dogan, A. H., Zus, F., Dick, G., Wickert, J., Schuh, H., Durdag, U. M., and Erdogan, B.: Improving the wet mapping function by numerical weather models, *Adv. Space Res.*, 73, 404–413, <https://doi.org/10.1016/j.asr.2023.07.060>, 2024.
- Drożdżewski, M. and Sońnica, K.: Troposphere delay modeling in SLR based on PMF, VMF3o, and meteorological data, *Prog. Earth. Planet. Sci.*, 11, 12, <https://doi.org/10.1186/s40645-024-00613-2>, 2024.
- Fan, H., Li, S., Sun, Z., Xiao, G., Li, X., and Liu, X.: Analysis of systematic biases in tropospheric hydrostatic delay models and construction of a correction model, *Geosci. Model Dev.*, 16, 1345–1358, <https://doi.org/10.5194/gmd-16-1345-2023>, 2023.
- Hobiger, T., Ichikawa, R., Koyama, Y., and Kondo, T.: Fast and accurate ray-tracing algorithms for real-time space geodetic applications using numerical weather models, *J. Geophys. Res.*, 113, D20302, <https://doi.org/10.1029/2008JD010503>, 2008.
- Hofmeister, A. and Böhm, J.: Application of ray-traced tropospheric slant delays to geodetic VLBI analysis, *J. Geodesy*, 91, 945–964, <https://doi.org/10.1007/s00190-017-1000-7>, 2017.
- Hoque, M. M. and Jakowski, N.: Estimate of higher order ionospheric errors in GNSS positioning, *Radio Sci.*, 43, RS5008, <https://doi.org/10.1029/2007RS003817>, 2008.
- Hoque, M. M. and Jakowski, N.: New Correction Approaches for Mitigating Ionospheric Higher Order Effects in GNSS Applications, Proceedings of the 25th International Technical Meeting of the Satellite Division of The Institute of Navigation (ION GNSS 2012), Nashville, TN, 3444–3453, 2012.
- Hulley, G. C. and Pavlis, E. C.: A ray-tracing technique for improving Satellite Laser Ranging atmospheric delay corrections, including the effects of horizontal refractivity gradients, *J. Geophys. Res.*, 112, B06417, <https://doi.org/10.1029/2006JB004834>, 2007.
- Kashcheyev, A., Nava, B., and Radicella, S. M.: Estimation of higher-order ionospheric errors in GNSS positioning using a realistic 3-D electron density model, *Radio Sci.*, 47, RS4008, <https://doi.org/10.1029/2011RS004976>, 2012.
- Kedar, S., Hajj, G. A., Wilson, B. D., and Heflin, M. B.: The effect of the second order GPS ionospheric correction on receiver positions, *Geophys. Res. Lett.*, 30, 1829, <https://doi.org/10.1029/2003GL017639>, 2003.
- Landskron, D.: VieVS Ray-tracer RADIATE, <https://github.com/TUW-VieVS/RADIATE> (last access: 10 August 2025), 2018.
- Landskron, D. and Böhm, J.: Refined discrete and empirical horizontal gradients in VLBI analysis, *J. Geodesy*, 92, 1387–1399, 2018a.
- Landskron, D. and Böhm, J.: VMF3/GPT3: Refined discrete and empirical troposphere mapping functions, *J. Geodesy*, 92, 349–360, 2018b.
- MacMillan, D. S. and Ma, C.: Atmospheric gradients and the VLBI terrestrial and celestial reference frames, *Geophys. Res. Lett.*, 24, 453–456, <https://doi.org/10.1029/97gl00143>, 1997.
- Mendes, V. B. and Pavlis, E. C.: High-accuracy zenith delay prediction at optical wavelengths, *Geophys. Res. Lett.*, 31, L14602, <https://doi.org/10.1029/2004GL020308>, 2004.
- Nafisi, V., Madzak, M., Boehm, J., Ardalán, A. A., and Schuh, H.: Ray-traced tropospheric delays in VLBI analysis, *Radio Sci.*, 47, RS2020, <https://doi.org/10.1029/2011RS004918>, 2012a.
- Nafisi, V., Urquhart, L., Santos, M. S., Nievinski, F. G., Böhm, J., Wijaya, D. D., Schuh, H., Ardalán, A. A., Hobiger, T., Ichikawa, R., Zus, F., Wickert, J., and Gegout, P.: Comparison of ray-tracing packages for troposphere delays, *IEEE T. Geosci. Remote*, 50, 469–481, 2012b.
- Nava, B., Coisson, P., and Radicella, S. M.: A new version of the NeQuick ionosphere electron density model, *J. Atmos. Sol.-Terr. Phys.*, 70, 1856–1862, <https://doi.org/10.1016/j.jastp.2008.01.015>, 2008.
- Nilsson, T., Soja, B., Balidakis, K., Karbon, M., Heinkelmann, R., Deng, Z., and Schuh, H.: Improving the modeling of the atmospheric delay in the data analysis of the Intensive VLBI sessions and the impact on the UT1 estimates, *J. Geodesy*, 91, 857–866, <https://doi.org/10.1007/s00190-016-0985-7>, 2017.
- Petrie, E. J., King, M. A., Moore, P., and Lavalée, D. A.: A first look at the effects of ionospheric signal bending on a globally processed GPS network, *J. Geodesy*, 84, 491–499, <https://doi.org/10.1007/s00190-010-0386-2>, 2010.

- Petrie, E. J., Hernández-Pajares, M., Spalla, P., Moore, P., and King, M. A.: A Review of Higher Order Ionospheric Refraction Effects on Dual Frequency GPS, *Surv. Geophys.*, 32, 197–253, <https://doi.org/10.1007/s10712-010-9105-z>, 2011.
- Petrov, L.: Modeling of propagation in the neutral atmosphere for radio astronomy data analysis: a paradigm shift, *Proceedings of Science*, 230, <https://doi.org/10.22323/1.230.0035>, 2015.
- Rothacher, M., Springer, T. A., Schaer, S., and Beutler, G.: *Processing Strategies for Regional GPS Networks*, Springer Berlin Heidelberg, 93–100, ISBN 9783662037140, https://doi.org/10.1007/978-3-662-03714-0_14, 1998.
- Shampine, L. F., Reichelt, M. W., and Kierzenka, J.: *Solving Boundary Value Problems for Ordinary Differential Equations in MATLAB with bvp4c*, MATLAB File Exchange, 2004.
- Strasser, S., Mayer-Gürr, T., and Zehentner, N.: Processing of GNSS constellations and ground station networks using the raw observation approach, *J. Geodesy*, 93, 1045–1057, <https://doi.org/10.1007/s00190-018-1223-2>, 2019.
- Thayer, G. D.: An improved equation for the radio refractive index of air, *Radio Sci.*, 9, 803–807, 1974.
- Thundathil, R., Zus, F., Dick, G., and Wickert, J.: Assimilation of GNSS tropospheric gradients into the Weather Research and Forecasting (WRF) model version 4.4.1, *Geosci. Model Dev.*, 17, 3599–3616, <https://doi.org/10.5194/gmd-17-3599-2024>, 2024.
- Urquhart, L., Nievinski, F. G., and Santos, M.: Ray-traced slant factors for mitigating the tropospheric delay at the observation level, *J. Geodesy*, 86, 149–160, <https://doi.org/10.1007/s00190-011-0503-x>, 2012.
- Zus, F.: DNS(v1.0): An open source ray-tracing tool for space geodetic techniques, Zenodo [code], <https://doi.org/10.5281/zenodo.15044588>, 2025a.
- Zus, F.: Numerical(Space-)Weather Model dataset for the ray-tracing tool DNS, Zenodo [data set], <https://doi.org/10.5281/zenodo.15187660>, 2025b.
- Zus, F.: RADIATE ray-tracing code, Zenodo [code], <https://doi.org/10.5281/zenodo.15180888>, 2025c.
- Zus, F., Dick, G., Dousa, J., Heise, S., and Wickert, J.: The rapid and precise computation of GPS slant total delays and mapping factors utilizing a numerical weather model, *Radio Sci.*, 49, 207–216, <https://doi.org/10.1002/2013RS005280>, 2014.
- Zus, F., Deng, Z., Heise, S., and Wickert, J.: Ionospheric mapping functions based on electron density fields, *GPS Solut.*, 21, 873–885, <https://doi.org/10.1007/s10291-016-0574-5>, 2017a.
- Zus, F., Deng, Z., and Wickert, J.: The impact of higher-order ionospheric effects on estimated tropospheric parameters in Precise Point Positioning, *Radio Sci.*, 52, 963–971, <https://doi.org/10.1002/2017RS006254>, 2017b.
- Zus, F., Balidakis, K., Dick, G., Wilgan, K., and Wickert, J.: Impact of Tropospheric Mismodelling in GNSS Precise Point Positioning: A Simulation Study Utilizing Ray-Traced Tropospheric Delays from a High-Resolution NWM, *Remote Sens.-Basel*, 13, 3944, <https://doi.org/10.3390/rs13193944>, 2021.