



A dynamic informed deep-learning method for future estimation of laboratory stick–slip

Enjiang Yue^{1,2}, Mengjiao Qin³, Linshu Hu^{1,2}, Riel Bryan¹, Sensen Wu^{1,2}, and Zhenhong Du^{1,2}

¹School of Earth Sciences, Zhejiang University, Hangzhou 310058, China

²Zhejiang Provincial Key Laboratory of Geographic Information Science, Hangzhou 310058, China

³School of Safety Science and Emergency Management, Wuhan University of Technology, Wuhan 430081, China

Correspondence: Zhenhong Du (duzhenhong@zju.edu.cn)

Received: 11 March 2024 – Discussion started: 22 March 2024

Revised: 9 April 2025 – Accepted: 3 June 2025 – Published: 24 September 2025

Abstract. Fault activity modelling is vital for earthquake monitoring, risk management, and early warning. Studies on laboratory earthquakes are instrumental for modelling natural fault ruptures and enhancing our understanding of natural earthquake dynamics. Recently, machine learning methods have proven effective in predicting instantaneous fault stress in laboratory settings and fault activities on Earth. However, these methods have struggled to obtain steady future predictions because of the lack of understanding of the complex dynamics of highly non-linear laboratory fault slip systems. To address this, we introduce the Hankel–Koopman autoencoder (HKAE), a novel method inspired by dynamic system theories. The HKAE performs dynamic modelling of laboratory fault systems and provides a continuous estimation of the future state of the system. It has been used in experiments with different slip behaviours and has the ability to predict shear stress variation during a slip cycle and slip activity during long-term seismic cycles. The HKAE outperforms traditional statistical methods while achieving results comparable to cutting-edge deep-learning methods across multiple prediction scales. This is particularly evident in its accurate prediction of the stress release phase and precise estimation of the slip interval. More importantly, through dynamic theory and operator analysis in latent space, the HKAE provides insights into the stability of laboratory slip systems rather than full end-to-end black-box predictions. The ability of the HKAE to decompose, model, and reveal complex temporal dynamics highlights its potential in the monitoring of sparsely observed geophysical systems with cyclic characteristics, such as natural faults.

1 Introduction

Modelling fault activity is crucial for understanding patterns of seismic activity, monitoring and predicting earthquakes, and estimating seismic hazards. Laboratory earthquake studies have contributed to modelling natural fault ruptures and enhancing our understanding of natural earthquakes (Johnson et al., 2021). These studies indicate a similar mechanism between slow and fast slip (Hulbert et al., 2019) and aid in extracting physical property changes in faults from dense earthquake records (Rouet-Leduc et al., 2019). Machine learning has proven effective in extracting information about the rupture behaviour of laboratory earthquakes from acoustic emission signals for instantaneous prediction. Rouet-Leduc et al. (2017) reported that the random forest method can be used to accurately predict the time to failure via acoustic emissions. Subsequently, stress variation, which is a crucial physical feature of faults, has been identified and evaluated from acoustic emissions via XGBoost, enabling further analysis of the acoustic signals (Rouet-Leduc et al., 2018). Lubbers et al. (2018) reported that the event catalogue, which is more available for natural earthquakes, can also be used to predict the transient fault mechanism during laboratory earthquakes. Active-source seismic data are also valid data sources for predicting instantaneous fault behaviour (Shokouhi et al., 2021). Jaspersen et al. (2019) and Karimpouli et al. (2023) discussed prediction methods, such as traditional machine learning methods, neural networks, and explainable machine learning methods. An assessment of the transferability across diverse experiments and simulations was conducted, highlighting the critical role of applying laboratory

methods to in-field models (Wang et al., 2021; Borate et al., 2023).

While most studies have focused on instantaneous predictions, several have explored future predictions. The state-of-the-art sequence modelling architecture, namely, the transformer, has shown promise in extracting information for predicting friction in the future from continuous acoustic emission signals (Wang et al., 2022). The model's attention score reveals that the closer the fault is to the rupture moment, on the basis of the friction data, the stronger the stress drop in seismic records. Laurenti et al. (2022) reported that laboratory fault zone stress can be autoregressively inferred. Additionally, spatial dimensions have been introduced for autoregressively predicting surface velocity fields during laboratory fault slips (Mastella et al., 2022). Although these studies underscore the potential for inferring the future behaviour of fault slips, they face challenges in modelling stability and predicting future behaviour owing to the complex dynamics of laboratory fault slip systems. Gualandi et al. (2023) proposed that earthquake cycles in laboratory experiments can be characterized as systems with average dimensions similar to those of natural earthquakes. The Lyapunov exponent analysis reveals the predictability within a certain period, albeit with deterministic and stochastic chaotic behaviours, which are challenging to model via machine learning methods designed from traditional statistical knowledge.

Physics-informed machine learning methods constitute a framework for geoscientific applications (Degen et al., 2023), such as glacier modelling (Riel et al., 2021), ocean modelling (Hammoud et al., 2022), and solid-Earth modelling (Okazaki et al., 2022). These methods introduce prior domain knowledge, which is the key factor in geoscientific analysis, while leveraging the benefits of machine learning. Recent advancements in dynamic theory, on the basis of the Koopman theory (Koopman, 1931), have shown efficacy in integrating dynamic insights within a data-driven framework, yielding results that are more aligned with dynamic situations (Karniadakis et al., 2021). Various methods based on the Koopman theory have been acknowledged as powerful for modelling and deciphering complex non-linear dynamic systems (Brunton et al., 2022), such as fluid mechanics (Brunton et al., 2020), and have found applications in geophysical fields, including climate (Li et al., 2020; Froyland et al., 2021), ocean variability (Franzke et al., 2022), and electromagnetic fields (Brunton et al., 2017; Lintner et al., 2023).

Given the complicated dynamics of laboratory fault slip systems, we propose a deep-learning method that involves the Koopman theory. Instead of defining the problem as a statistical time series forecast task, we take the shear stress time series as one of the observations in a laboratory slip system and infer changes in the future state of the system through methods inspired by dynamic system theories. Generally, we reconstruct the phase space of the system via delayed embedding theory and linearize its complex dynamics via the Koopman theory to perform future inference and further dy-

namic analysis. Laboratory fault systems with different slip behaviours under different prediction horizons are adapted to evaluate the effectiveness of Hankel–Koopman autoencoder (HKAE) modelling.

2 Materials, methods, and models

2.1 Laboratory stick–slip data

Our study incorporates two categories of data: data drawn from laboratory experiments carried out with biaxial shear equipment and data derived via numerical simulations. The experimental data from the biaxial shear equipment were obtained from Chris Marone's laboratory (Laurenti et al., 2022). Different shear materials are situated between the two plates to which positive pressure and shear force are exerted from each side, and the equipment is used to record the mechanistic changes (Table S1 in the Supplement) in the system during the shear process (Fig. 1a and b). This results in time series data recorded at a temporal sampling rate of 0.001 s. Here, we focus mainly on the variation in shear stress because of its direct indication of the onset of fault slip in the laboratory. Experiments 4581 (Exp. 4581) and 5198 (Exp. 5198) demonstrate cyclic slow- and fast-slip behaviour, respectively, whereas Experiment 4679 (Exp. 4679) involves a switch between two types of slip behaviours (Fig. 1c). We derive numerical simulation data from the model (Fig. 1d) in the work by Gualandi et al. (2023). This model is based on the rate–state friction law (Dieterich, 1979), and we set the initial normal stress to $\tau_{n0} = 17.003$ MPa and the initial state vector to $[x_0, y_0, z_0, u_0] = [0.05, 0.0, 0.0, 0.0]$ to generate fast–slow switching slips as examples in the simulation.

2.2 Dynamic system theories

2.2.1 Koopman theory

Laboratory earthquakes can be conceptualized as being governed by a dynamic system, and shear stress can be regarded as a measurement within this system and is described by Eq. (1):

$$s_{t+1} = F(s_t), \quad (1)$$

where s_t is the state of the laboratory slip system and where F represents the governing function of the system. The shear stress x_t can be viewed as an observation of the laboratory slip system state s_t .

Koopman theory is a mathematical theoretical framework. All finite-dimensional non-linear systems can evolve in an alternative space through the mapping function g and the infinite-dimensional Koopman operator K (Koopman, 1931; Brunton et al., 2022). The Koopman operator in the transformed space can be used directly to perform the linear evolution of the system state, as shown in Eqs. (2) and (3) and

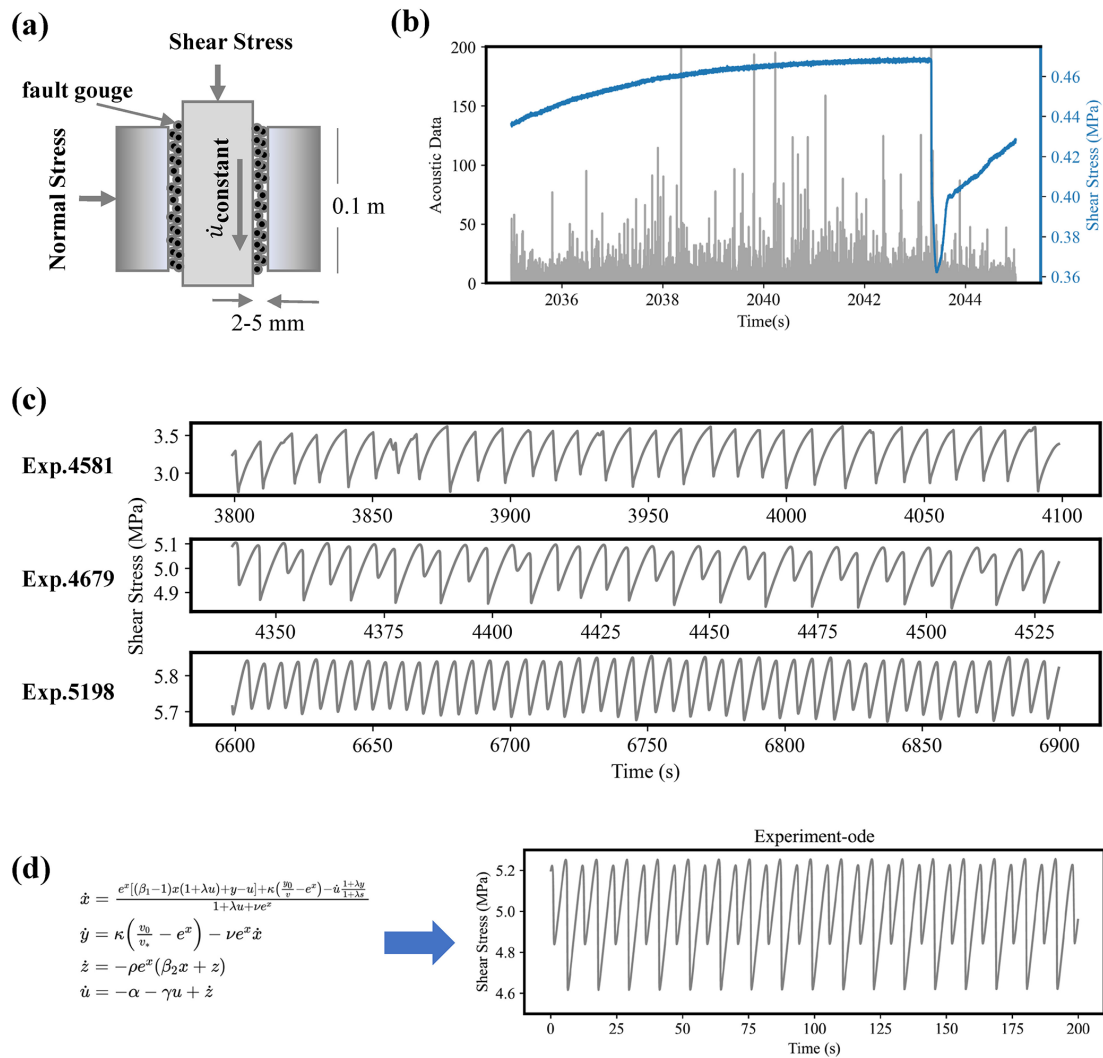


Figure 1. (a) Laboratory fault slip experimental settings and (b) recorded data. Acoustic emission data are recorded in grey, and shear stress time series are recorded in blue. (c) Three modelling experiments with different slip behaviours. (d) Simulated shear stress, where $[x, y, z, u] = \left[\ln\left(\frac{v}{v_*}\right), \frac{\tau_1 - \tau_0}{a\sigma_{n0}}, \frac{1}{\lambda\beta\sigma_{n0}}, (\phi - \phi_0), -\frac{1}{\lambda} \frac{p}{\sigma_{n0}} \right]$ represents the system state.

Fig. 2.

$$Kg(x_t) = g(F(x_t)) = g(x_{t+1}) \quad (2)$$

$$x_{t+1} = g^{-1}Kg(x_t) \quad (3)$$

Owing to the linear properties of the Koopman operator, linear methods, such as spectral decomposition, can be employed in the operator for enhanced analysis, prediction, and control. The dimension of the learned approximate Koopman operator indicates the dynamic modes needed to describe the dynamic process, which can be decomposed as follows:

$$K = V\Lambda V^{-1}, \quad (4)$$

where $V = [v_1, v_2, \dots, v_k]$ are the eigenvectors of K and $\Lambda = [\lambda_1, \lambda_2, \dots, \lambda_k]$ are the eigenvalues of K . Each eigenvalue describes the strength and oscillatory properties of its

corresponding dynamic component:

$$b_j^k = b_0^k e^{\frac{j}{\Delta t} \log \lambda_i}. \quad (5)$$

Here, $b^k = [b_1^k, b_2^k, b_N^k]$ represents the temporal evolution of the k th dynamic mode, and j represents the time step.

Provided that we know the current state, we can infer the system's future behaviour incrementally via the mapping function g and the linear operator K , and the dynamic characteristic can be explored through the eigen-decomposition of K , for example, to explore the main components driving the evolution of dynamic systems (Brunton et al., 2021) and the pattern of its growth (Schmid et al., 2010).

The most important advantage of the Koopman theory is that it linearizes the dynamics from complex laboratory slip systems and then supports the analysis of system behaviour

via linear analysis tools (e.g. singular value decomposition), which offers insights from the perspective of dynamic systems rather than simply statistical inference.

2.2.2 Delay embedding theory

For analysing dynamic systems via the Koopman theory, it would be useful to have direct system states or observables that carry information about the main changes in the system. However, in the real world, we often obtain state quantities with a limited signal-to-noise ratio or observations that do not carry all the information about the changes in the system, i.e. partial observations. Inferring the state change of a laboratory slip system from shear stress can be viewed as inferring the future evolution of the system from very limited observations (Arbabi et al., 2017). Here, we introduce delay embedding theory to reconstruct the system behaviour. Delay embedding theory supposes that topological reconstruction of attractors from the original high-dimensional system, also known as phase space reconstruction, can be performed using only the observed univariate long time series (Takens, 1981). We define \mathbf{h} as the embedded variable, taking $H = [\mathbf{h}_1, \mathbf{h}_2, \dots, \mathbf{h}_i]$ as the input. The embedding process is described in Eq. (6) with the parameters, the embedded dimension d , and the delay time τ . The delay time τ is usually 1 in most situations (Brunton et al., 2017).

$$\mathbf{H} = \begin{bmatrix} x_1 & x_2 & \dots & x_i \\ x_{1+\tau} & x_{2+\tau} & \dots & x_{i+\tau} \\ \vdots & \vdots & \ddots & \vdots \\ x_{1+(d-1)\tau} & x_{2+(d-1)\tau} & \dots & x_{i+(d-1)\tau} \end{bmatrix} \quad (6)$$

$$= \begin{bmatrix} x_1 & x_2 & \dots & x_i \\ x_2 & x_3 & \dots & x_{i+\tau} \\ \vdots & \vdots & \ddots & \vdots \\ x_d & x_{d+1} & \dots & x_{i+(d-1)} \end{bmatrix} = [\mathbf{h}_1, \mathbf{h}_2, \dots, \mathbf{h}_i]$$

Here, we aim to utilize historical shear stress observations to ascertain the evolution of future states or to discern the relationship between historical shear stress $(x_{t-K}, x_{t-K+1}, \dots, x_t)$ and future states $(x_{t+1}, \dots, x_{t+L-1}, x_{t+L})$. On the basis of delay embedding, the relationship between $[\mathbf{h}_1, \mathbf{h}_2, \dots, \mathbf{h}_i]$ and $[\mathbf{h}_{i+1}, \mathbf{h}_{i+2}, \dots, \mathbf{h}_{i+L}]$ can be deconstructed to determine the mapping function g and operator K .

Figure 3 shows the process of delayed embedding. To verify the retention of the original system's topological relations in the phase space following delayed embedding, we often resort to singular value decomposition to identify the system's three primary components and use the corresponding singular vectors to open the space to represent the evolution of the system. Taking the Lorenz system as an example (Lorenz, 1963), Fig. 3a represents the tensor space using the state variables of the original system. The observations yield only a single scalar series, as depicted in Fig. 3c. Figure 3b

shows the first three singular vectors that result from delayed embedding, which is diffeomorphic with the system represented by Fig. 3a. That is, they are considered to represent the same dynamic system behaviour. This approach has been shown to be effective in enhancing the feature dimensions from the data, and it has also been shown to be important in governing equation extraction (Bakarji et al., 2023) and modelling with dynamic mode decomposition (DMD) (Avila and Mezic, 2020). In summary, we utilize delay embedding theory to reconstruct a laboratory slip system represented by a single shear stress variable, thereby supporting subsequent Koopman mode decomposition and prediction.

2.3 Architecture of the HKAE

Here, we propose the HKAE, which synthesizes the inductive bias of dynamic system theories and the non-linear fitting ability of deep learning. This model encompasses three key modules (Fig. 4):

1. For the delay embedding module, by employing delay embedding theory, the shear stress time series $(x_{t-d}, x_{t-d+1}, \dots, x_t)$ are reconstructed in phase space to obtain their Hankel matrix $H = [\mathbf{h}_1, \mathbf{h}_2, \dots, \mathbf{h}_i]$ in this module.
2. For the mapping learning module, the powerful non-linear fitting capabilities of deep learning have been demonstrated to effectively learn the mapping, thereby approximating an optimal Koopman operator (Takeishi et al., 2017; Lusch et al., 2018; Azencot et al., 2020). Here, we utilize an encoder-decoder backbone incorporating a three-layer multilayer perceptron (MLP) to learn the mapping between the phase space and Koopman invariant subspaces.
3. For the Koopman evolution module, in this module, the Koopman operator is represented as a layer of neurons consisting solely of weights and devoid of bias. Following the encoding process, the system is mapped into Koopman invariant subspaces, where the Koopman operator is applied to facilitate system evolution. Multistep prediction is achieved through the iterative application of the same set of operators corresponding to the predefined prediction steps. The decoded evolution results remain in phase space. A re-embedding process is subsequently applied to derive the predicted shear stress, which is implemented by selecting the final value of each evolved result.

The loss of this model includes two parts, namely, reconstruction and evolution loss, as shown in Eqs. (7)–(9). The reconstruction loss is set to minimize the loss that occurred during the mapping process, whereas the evolution loss is set to minimize the loss of linear evolution achieved by the

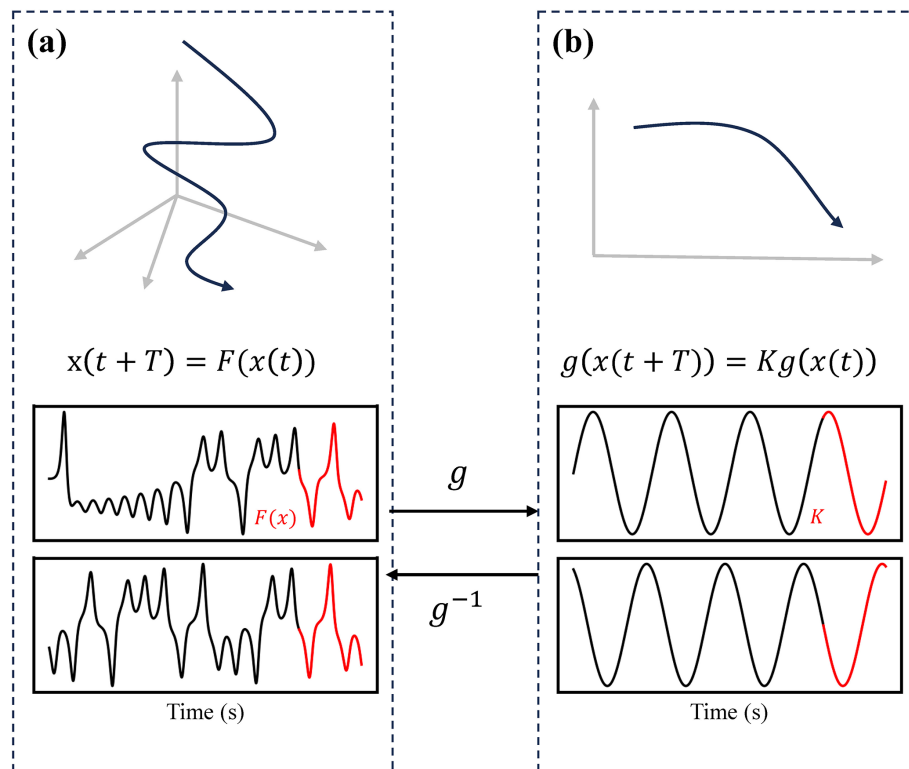


Figure 2. Conceptual illustration of the transformation between the non-linear trajectory of the high-dimensional state, with F (a) and a linear operator K representing dynamics (b), taking the Lorenz63 system as an example. Lorenz63 system observations are used to represent the transformation (Lorenz, 1963).

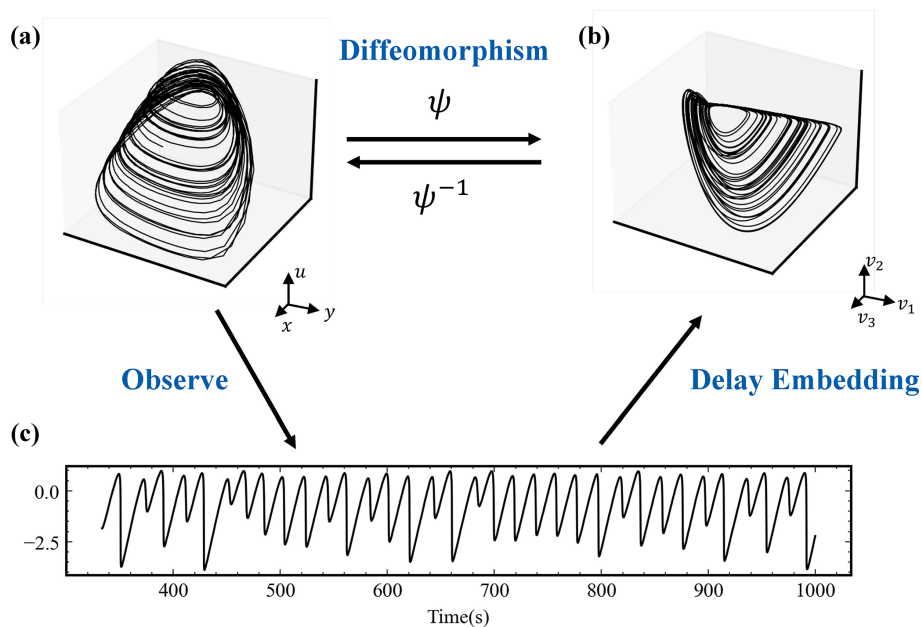


Figure 3. Conceptual process of delay embedding theory. (a) Representation of laboratory system behaviour using the original state $[u, x, y]$. (b) Representation of laboratory slip system behaviour via singular vectors $[v_1, v_2, v_3]$ from the singular value decomposition (SVD) result of delay embedded observations x . (c) Single observation of the laboratory slip system and shear stress used in this system. The data are simulated on the basis of the Gualandi et al. (2023) model.

Koopman operator.

$$\varepsilon_{\text{reconstruct}} = \frac{1}{2L} \sum_{i=1}^L \|h_i - \hat{h}_i\|_2^2 \quad (7)$$

$$\varepsilon_{\text{evolution}} = \frac{1}{2KL} \sum_{j=1}^K \sum_{i=1}^L \|h_{i+j} - \tilde{h}_{i+j}\|_2^2 \quad (8)$$

$$\text{Loss} = \varepsilon_{\text{reconstruct}} + \lambda \varepsilon_{\text{evolution}} \quad (9)$$

2.4 Time series prediction models from a statistical perspective

2.4.1 Long short-term memory (LSTM)

LSTM is a widely used deep-learning model for sequence modelling that addresses the challenge of vanishing and exploding gradients in long-sequence data (Hochreiter and Schmidhuber, 1997). It has become a powerful tool in temporal modelling in the Earth sciences (Feng et al., 2022). The core of the LSTM is the LSTM cell. An LSTM cell consists of a cell state and a set of gates (input, forget, and output gates). The input gate determines the new input information to add to the cell state, whereas the forget gate chooses the information to drop in the cell state. The output gate controls how the cell state is mapped to the output. The structure of an LSTM cell is shown in Fig. 5a.

2.4.2 Temporal convolutional network (TCN)

A TCN is a sequence modelling method inspired by convolutional operations that are widely used in image processing (Bai et al., 2018). It has been regarded as a state-of-the-art model in laboratory fault slip modelling (Laurenti et al., 2022). The core of the TCN is a series of sequence convolution and pooling blocks. In general, the features of the input sequence are extracted through dilated convolution with a sliding window. The pooling layer is adapted for dimensional reduction. The weight norm and dropout are used to improve the robustness of the model. The structures of the TCN model and TCN block are shown in Fig. 5b.

2.4.3 MLP

In addition to the two-sequence modelling method, we also test the simple MLP model. Here, we take the historical sequence as the input feature and predict the sequence as the output, as shown in Fig. 5. In this way, the MLP is equivalent to performing a 1×1 convolution directly in the time dimension, which is equivalent to a TCN model with the dilation set to 1.

2.5 Experimental settings and evaluation

In our experiments, we utilized three datasets with distinct slip features and one numerical simulation result to assess

the robustness of our model. Numerical simulation data are primarily used to illustrate the dynamic modelling process (Fig. 7) because of their relatively simple system trajectories.

We employed a unified time sampling rate of 0.1 s. Percentages of 50 %, 10 %, and 40 % were applied to each dataset for training, validation, and testing, respectively. The sliding window method was employed to generate data sequences for model training and inference. For the input dataset $[x_1, x_2, \dots, x_N]$, we sample the historical K steps to predict the future L steps. The prediction of the sliding window can be presented as follows:

$$(x_i, \dots, x_{i+K}) \rightarrow (\tilde{x}_{i+K+1}, \dots, \tilde{x}_{i+K+L}), \quad (10)$$

where $i = (1, \dots, N - K - L + 1)$ represents the number of times the window slides.

The hyperparameters of the HKAE model were divided into three main categories corresponding to the three model modules. The first set comprises the embedding dimension and delay time in the delay embedding module. For the delay time, we took a value of 1, on the one hand, to construct the Hankel matrix to satisfy the prediction requirements, and on the other hand, Brunton et al. (2017) reported that, in practice, most of the systems have a delay time of 1. With a delay time setting of 1, the embedding dimensions in our model architecture are numerically equal to the number of steps in which the historical information is used. Given the experimental setup in Laurenti's work (2022), we suggest that sufficient historical information is needed to predict future changes. To evaluate both intra- and inter-cycle scenarios of slip, we constructed an experimental setup using 10 s of historical data to predict 3 s in the future and 20 s of historical data to predict 10 s in the future (Fig. S1 in the Supplement), corresponding to embedded dimensions of 200 and 100. Considering that the slip system experiences an instantaneous increase in system dimension during the sliding process, we retain a higher embedding dimension setting (Gualandi et al., 2023). For comparison, we used consistent parameter settings across different slip data.

The number of MLP layers in the mapping learning module was set to 3 on the basis of previous work and results. Finally, the dimension of the Koopman operator module was set to 10 on the basis of the data and performance. We adopted a batch size of 64, L2 loss as the loss function, and Adam as the optimization algorithm. Weight decay and gradient clip skills were adopted to improve performance. Given the single-step evolutionary nature of the Koopman operator, to keep it robust for future leading predictions by learning the dynamics, we used a multistep trick for error estimation during model training (Eq. 8).

For the comparative models, LSTM and MLP obey similar settings in Laurenti's work. The detailed key parameter settings are listed in Table 1. To achieve multistep prediction, we add a fully connected layer as a decoder in our LSTM, TCN, and MLP models to map the extracted features to the

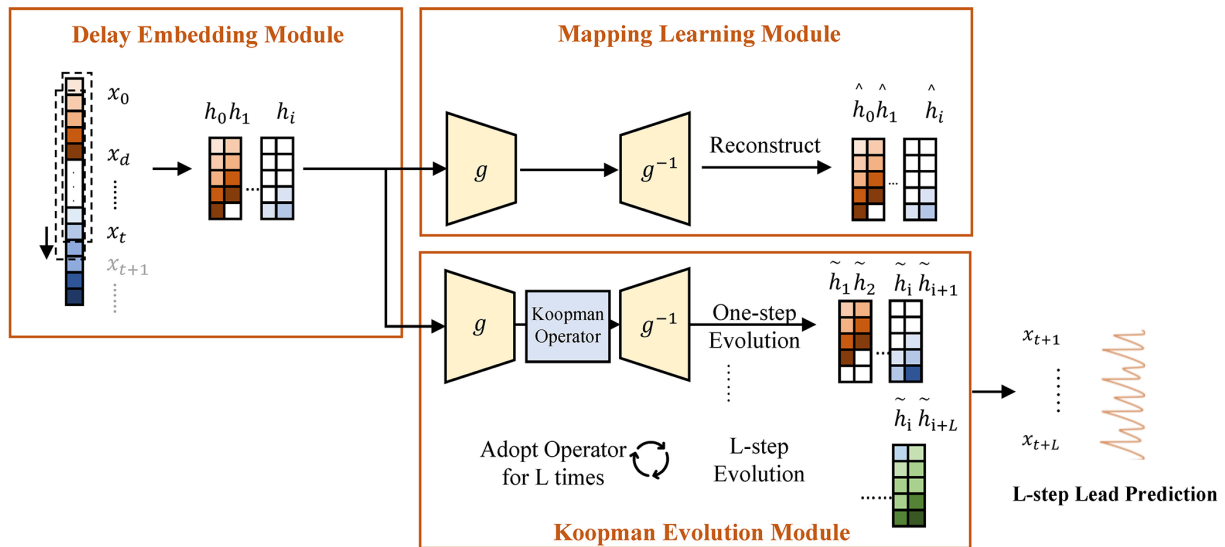


Figure 4. Architecture of the HKAE.

prediction window. Temporal bundling (TB) is adopted to reduce the rate of error propagation by reducing the number of model calls (Brandstetter et al., 2023).

We evaluated the prediction results via the R^2 and root mean square error (RMSE) metrics. As Eq. (13) shows, the predictions are conducted in a certain time window, and the window keeps sliding to the end of this lead situation. Then, the lead time increases to adapt to a new round of sliding predictions. In this study, we calculated the difference between the predicted results and the ground truth corresponding to each case of leading prediction steps.

For leading prediction steps $j = (1, \dots, L)$, we generate a forecast window $i = (1, \dots, N - K - L + 1)$ and compute R_j^2 and RMSE_j as follows:

$$R_j^2 = 1 - \frac{\sum_{i=0}^{N-K-L+1} (\tilde{x}_i^j - x_i^j)^2}{\sum_{i=0}^{N-K-L+1} (\bar{x}^j - x_i^j)^2}, \quad (11)$$

$$\text{RMSE}_j = \sqrt{\frac{1}{N-K-L+1} \sum_{i=0}^{N-K-L+1} (\tilde{x}_i^j - x_i^j)^2}, \quad (12)$$

where j is the leading prediction step in the i th forecast window. R_j^2 and RMSE_j represent R^2 and RMSE, respectively, for j th leading predictions. \tilde{x} , \bar{x} , and x are the prediction, mean, and ground truth of x , respectively.

To assess the efficacy of temporal dynamics modelling, we utilized mean-period statistics that are commonly employed in the analysis of laboratory earthquake systems (Mele Veedu et al., 2020). We pick the shear stress peaks and compute the interval of peaks ΔT as the period of shear stress variation for the predictions and ground truth. The R^2 metric is used to test whether the period of stress variation of the predictions fits well. The slip interval ΔT is computed via the algorithm

from Gualandi et al. (2023) according to the timing of the shear stress peaks. The peaks are found via the *find_peak* function from *scipy*.

$$\Delta T_i = \Delta t \cdot (t_{i+1}^{\text{cen}} - t_i^{\text{cen}}), \quad (13)$$

$$t_i^{\text{cen}} = t_i^{\text{top}} + \arg\min \left(\left| x(t_i^{\text{top}}), \dots, x(t_{i+1}^{\text{bot}}) \right| \right), \quad (14)$$

where t_i^{cen} represents the central moment of slip behaviour derived from $x(t_i^{\text{top}})$, which are the maximum peaks of the shear stress series, and where $x(t_{i+1}^{\text{bot}})$ represents the minimum peaks of the shear stress series.

Then, we compute the $R_{\text{slip}_j}^2$ (or R^2 of the event period) for the modelled slip intervals for different leading steps:

$$R_{\text{slip}_j}^2 = 1 - \frac{\sum_{i=0}^{N_{\text{slip}}} (\widetilde{\Delta T}_i^j - \Delta T_i^j)^2}{\sum_{i=0}^{N_{\text{slip}}} (\overline{\Delta T}^j - \Delta T_i^j)^2}, \quad (15)$$


where j is the leading prediction step and where i is the number of slips in the j th predictions. ΔT , $\overline{\Delta T}$, and ΔT are the prediction, mean, and ground truth of ΔT , respectively. Figure 6 illustrates the computation and statistics of the slip intervals from three shear experiments.

3 Results


3.1 Evaluation of the dynamic modelling process

We conduct multistep prediction experiments for three types of shear stress recorded in laboratory seismic experiments, and each type exhibits different rupture characteristics: fast rupture (Exp. 4581), alternating fast and slow rupture (Exp. 4679), and slow slip (Exp. 5198). These patterns essentially cover the types of behaviour of the laboratory slip system

(a) Long Short-Term Memory (LSTM) Architecture

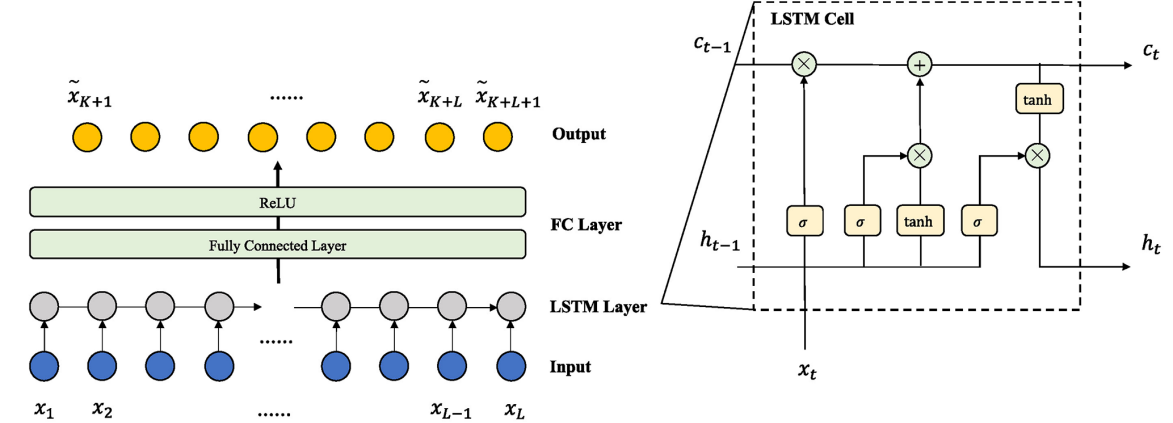

(b) Temporal Convolutional Network (TCN) Architecture

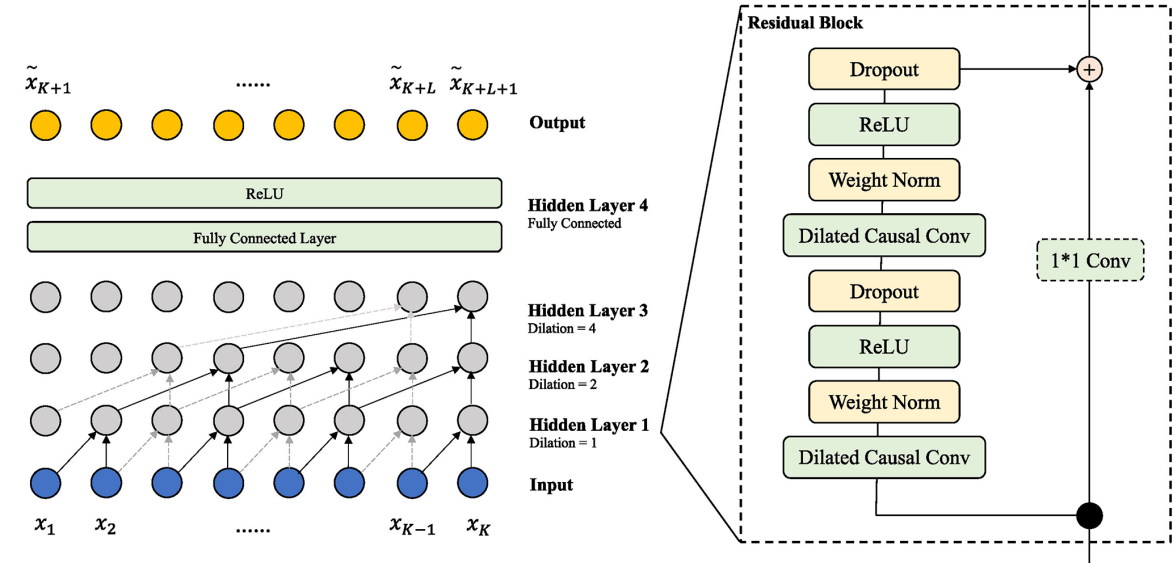

(c) Multi-layer Perceptron (MLP) Architecture

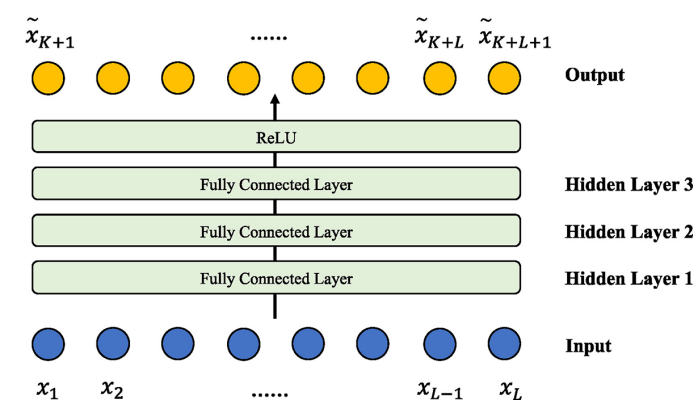
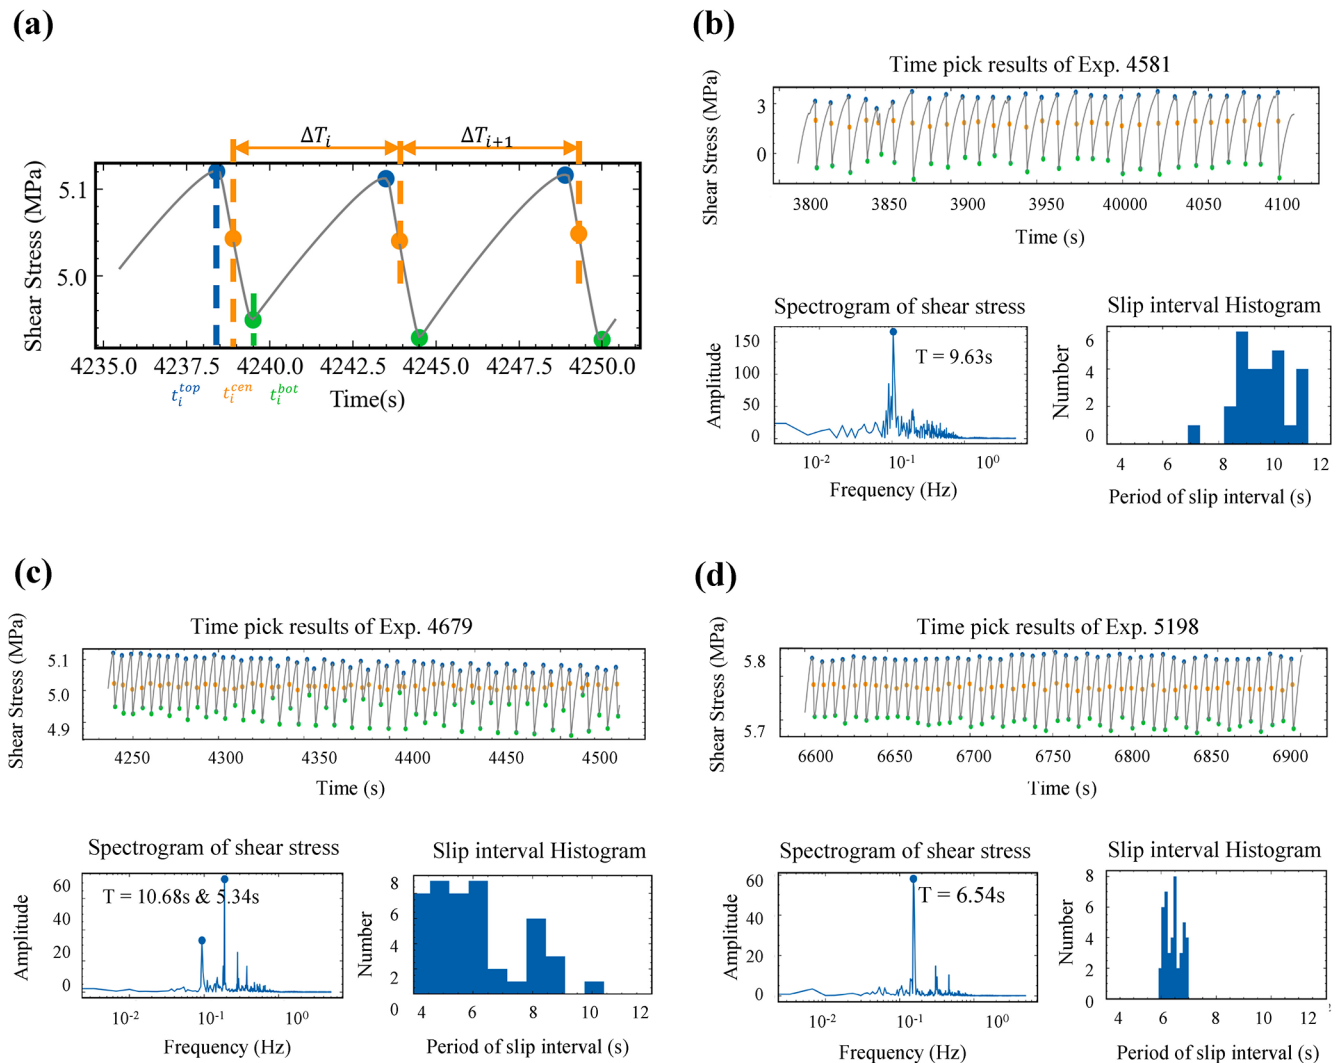


Figure 5. Architecture of comparative deep-learning models.

Table 1. Key parameters adopted in the experiments for different models.

LSTM	TCN	MLP	HKAE
Input_size: 1	Input_size: 1	Input_size: K	Embedded dimension: K
Num_layer: 3	Num_channel: [64, 256]	Hidden_size: [64, 256]	Delay time: 1
Hidden_size: 128	Kernel_size: 3	Output_size: L	Bottleneck: 10
Output_size: L	Drop_out: 0.1		Hidden_size: $16 * a$, $a = 5$
	Output_size: L		

**Figure 6.** (a) Calculation of the slip interval ΔT . (b–d) Slip intervals histogram and spectrogram of three experiments.

and correspond to real-world seismic activity and slow-slip events. Unlike other statistical or deep-learning methods, the HKAE is not a completely black-box approach. Thus, we can further check the status of the data during the modelling procedure to evaluate the effectiveness of HKAE modelling. We employ singular value decomposition (SVD) to illustrate the trajectory of the system and eigen-decomposition (ED) to interpret the approximated operator.

First, we adopt SVD for the result after delay embedding, utilizing three dominant right singular vector modes as coordinates to represent the reconstructed phase space (Fig. 7b). The phase space describes the possible state of a dynamic system, and the reconstructed results reveal the distinct dynamic behaviours of the slip system under different slip characteristics (Berman et al., 1996). Using numerical simulation data as an example, it is evident that the system evolves along

a “two-cycle-like” stable trajectory. Each cycle represents a slip process with varying intensities of stress drop, and the system alternates between these two states. The trajectories of Exps. 4581 and 5198 do not exhibit concentrated traces but rather more complex behaviours, which is indicative of the quasi-periodic behaviours of slow and fast slip (Gualandi et al., 2023). For Exp. 4679, the trajectory displays a more significantly disordered pattern but cycles around two main traces, illustrating the bifurcation process during the stability transition (Veedu et al., 2020). The structure of the attractors is preserved following non-linear mapping by the HKAE (Fig. 7c), indicating that the system dynamics are retained after mapping from the observed space to the Koopman subspace.

We apply ED to the learned Koopman operator (Eq. 4) and obtain the decomposed complex eigenvalue (Table 2), which represents eigendynamic modes characterized by distinct amplitudes and periods. The results are in general agreement with the dominant period obtained from frequency spectral analysis of different slip experimental stresses (Fig. 6b–d). We illustrate these modes within a unit circle, which represents the attraction set. As Fig. 7d shows, not all modes are near the unit circle. This may be caused by a single observation dimension or by a metastable stick-slip system in which the data do not exactly follow the attractor trajectory during the experiment (Jasperson et al., 2021). The dynamic modes represented by the eigenvalues are limited by a narrow threshold (0.01) of the distance to the unit circle. Eigenvalues that exceed the threshold are considered unstable if they are large, stable if they are small, and neutral if they are within the threshold (Avila et al., 2020).

All three experiments decompose and obtain stable modes (red points, which represent modes close to the unit circle). Modes with approximately 10 and 6 s for the cyclic fast slip occur in Exp. 4581, and those for slow slip occur in Exp. 5198. The dual modes of approximately 6 and 10 s for the bifurcations of slips in Exp. 4679 are also modelled successfully. There are modes with amplitudes close to 1 and zero frequency in Exps. 4581 and 5198, but the amplitude of the zero-frequency (also infinite period) mode in Exp. 4679 is much lower, which means that the static component is a small percentage of the shear stress variation compared with the other two experiments. This may indicate that when a laboratory earthquake system is in a state of alternating fast-and-slow slip, the dynamics of the system strongly vary over time, and our execution of the short-time Fourier transform (STFT) for the stress observations in Exp. 4679 should confirm this conclusion (Fig. S2 in the Supplement).

3.2 Evaluation of the intra-cycle prediction settings

We test two different experimental settings to validate the modelling and prediction capabilities pertaining to slip behaviour. The first focuses on the stress variation. Employing the historical 100 steps (spanning 10 s, which encompasses a

complete slip cycle of stress increase and release), we predict the subsequent 30 steps of shear stress (spanning 3 s, which is long enough to include a process of stress increase or decrease).

Figure 8 shows that the evaluation metrics vary with the leading prediction steps for the experimental data. Generally, the classical autoregressive moving average (ARIMA) method yields competitive results during the initial 1–5 leads but severely degrades the accuracy. The next lowest performer is the TCN, which has temporal convolutional capability, followed by the MLP, the LSTM with a relatively simple structure, and the HKAE. This result is also in line with the current knowledge in the field of time series prediction. That is, complex models are not necessarily more suitable for time series prediction tasks (Zeng et al., 2023).

For Exp. 4679, with alternating fast and slow slips, and Exp. 4581, with predominantly fast ruptures, the traditional deep-learning methods appear to have poorer statistical metrics than the HKAE does after a certain number of steps ahead. The R^2 of the HKAE maintains a steady trend, which benefits from the dynamic modelling ability of the HKAE. According to the results of slip interval modelling, in the two experiments with more slip characteristics, the HKAE also shows robust results with increasing leading predictions. The slow slip represented by Exp. 5198, with its relatively gentle stress changes and more significant cyclic characteristics, is not too difficult from the perspective of time series prediction, so methods other than ARIMA obtain good metrics. In addition, the TCN and LSTM methods outperform the HKAE in terms of scores, and after analysing the results, we infer that this difference is related to the complexity of the slow-slip system. With an embedding time of 1, we set the input length uniformly to 10 s, leading to a large embedding dimension of the HKAE, but empirically, the system dimension of the slow-slip system is low (Gualandi et al., 2020, 2023). When we use a low embedding dimension, the modelling effect of the HKAE significantly improves (as shown in Fig. S3 in the Supplement).

In addition to evaluating the metrics for multistep lead prediction, we validate the predicted shear stress accuracy in the range of predicted 3 s. Figure 9 shows the final and future lead predictions for the test set on the basis of the three experiments. We compare the final lead predictions to demonstrate the prediction stability. For each experiment, we select two sections where the shear stress indicates typical increase or decrease behaviour during slip. We choose LSTM, which performs consistently in different experiments, for comparison with the HKAE method. In terms of the individual lead prediction examples (right panels in Fig. 9), the HKAE and LSTM have similar prediction scores, but the HKAE outputs more accurate predictions during the stress release phase. In addition, the HKAE models the rate of stress change better. These findings suggest that the HKAE models the dynamics of laboratory rupture activity better. We validate several prediction examples for more difficult-to-predict fast-slip ex-

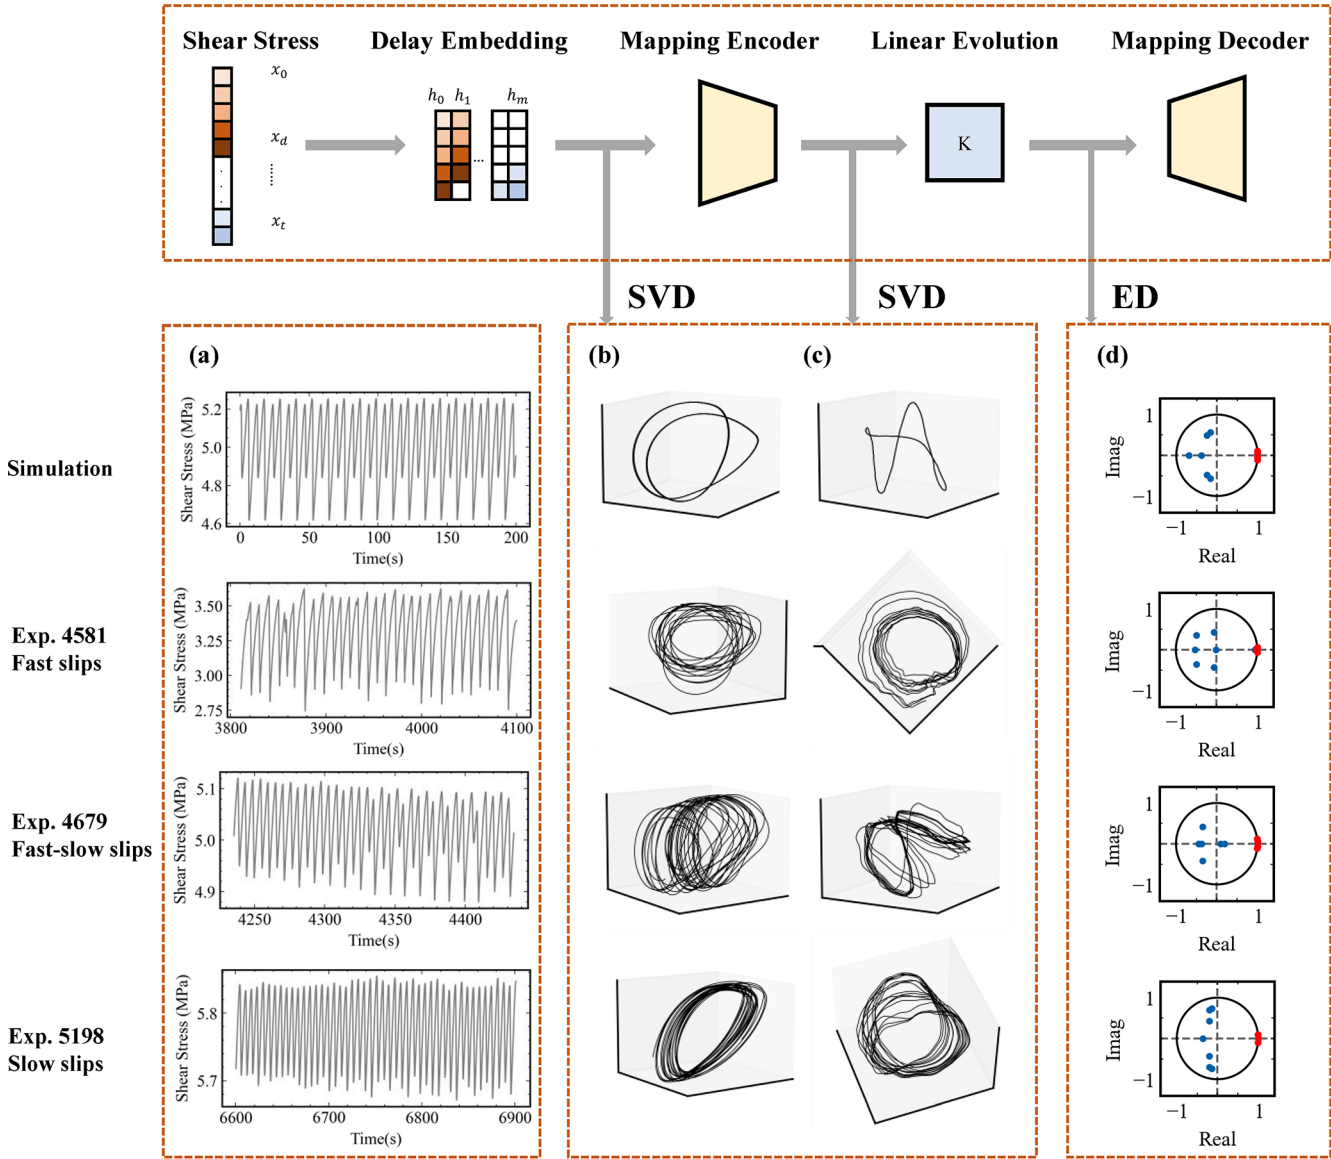


Figure 7. Dynamic modelling steps and interpretation with the HKAE. The rows represent the different modelled experimental data. The columns represent the dynamic modelling of the data through the different steps of the model. **(a)** Shear stress time series from the numerical simulation and three laboratory experiments. **(b–c)** Attractor structure after delay embedding and the HKAE using the coordinates expanded by the first three right singular vector modes. The black line illustrates the evolution of the system under three-dimensional projections. **(d)** Eigen-decomposition of the learned Koopman operator, described by the real and imaginary parts of the complex eigenvalue. In **(d)**, the values are directly converted to amplitude and period formats.

Table 2. Learned Koopman operator eigenmodes. Only the eigenvalue with positive periods is shown because of the conjugation.

Eigenvalue no.	Exp. 4581		Exp. 4679		Exp. 5198	
	Period(s)	Amplitude	Period(s)	Amplitude	Period(s)	Amplitude
1	9.548719	1.001883	9.970778	0.999401	6.388905	0.994914
2	0.294214	−0.071703	5.378387	0.993912	0.349487	−0.13397
3	0.239758	−0.500562	0.258224	−0.34971	0.329522	−0.20161
4	Inf	0.967017	Inf	0.091451	0.276048	−0.195414
5	Inf	0.94443	Inf	0.193768	Inf	1.00072

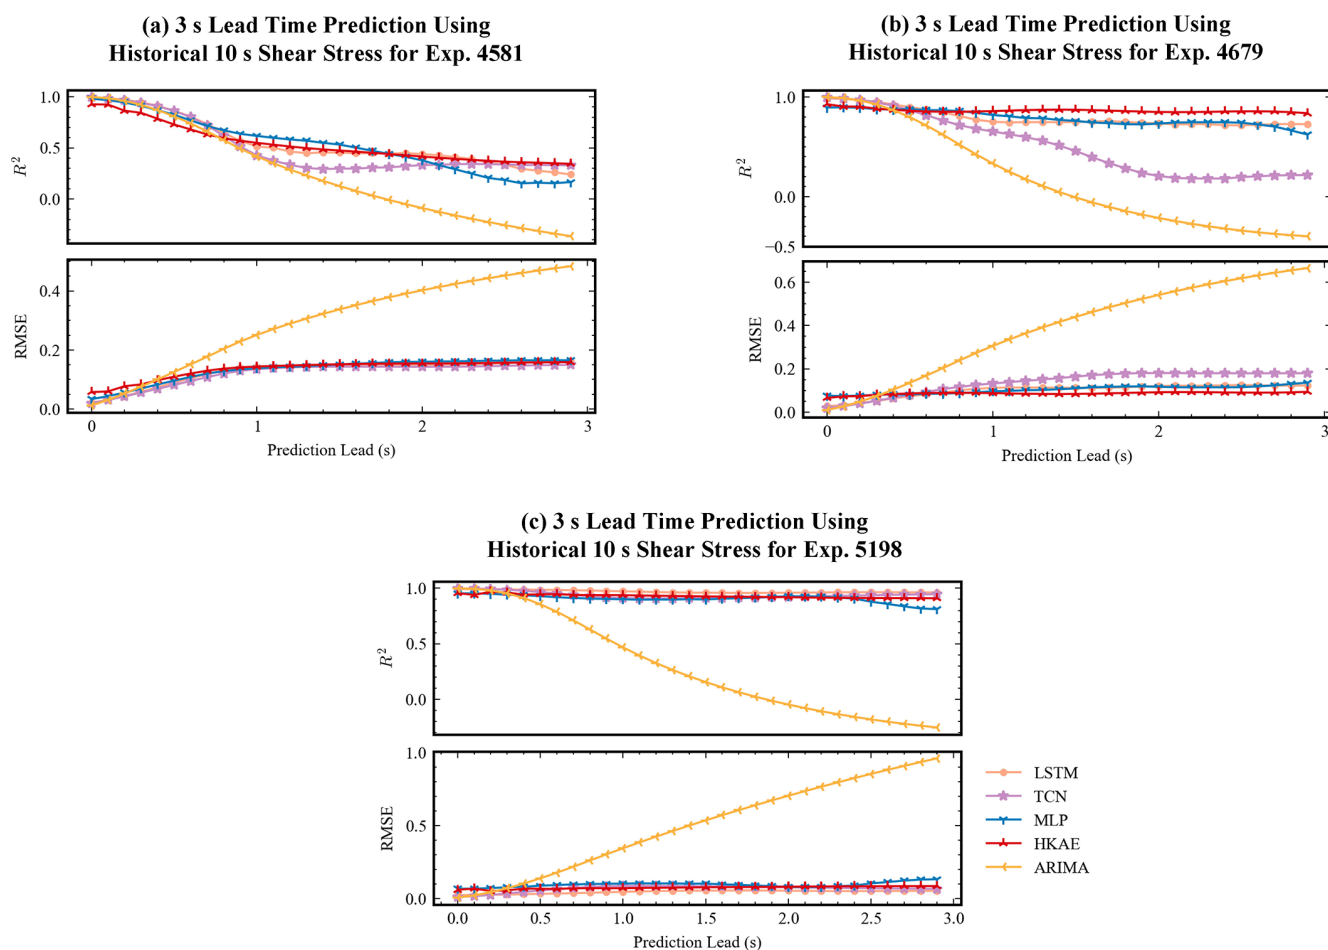


Figure 8. General evaluation for 3 s lead prediction using historical 10 s shear stress, with R^2 and RMSE used as evaluation metrics (a–c) for Exp. 4581, Exp. 4679, and Exp. 5198, respectively.

periments and find that the HKAE indeed models the stress release phase better (Fig. S4 in the Supplement). Since the stress release phase accounts for a relatively small portion of the stress change, this feature of the HKAE is masked when assessing the model performance through a sliding time window evaluation.

With respect to the timing of the slip beginning, the predictions in Exp. 4581 are less accurate; there is a notable mismatch in the slip cycle and an “early release” of stresses (Fig. 9a and b). This discrepancy may be attributed to the absence of creep information (Laurenti et al., 2022), as the rapid stress rupture in Exp. 4581 occurred immediately at rupture onset, in contrast to the other two experiments, where accelerated stress attenuation preceded a rapid stress drop. The HKAE estimates the stress change rate in Exp. 4581 more accurately, whereas LSTM tends to predict a lower stress release rate (corresponding to a longer stress release time). Despite successfully modelling the rate of stress release, the HKAE tends to prematurely estimate the rupture onset. For Exp. 4679, both the HKAE and LSTM stress rates

are more accurate than those for Exp. 4581. The HKAE is more accurate in estimating stress release and recovery timing, but its numerical prediction results in the initial steps are weaker than those of LSTM. Therefore, the evaluation scores are relatively low in the first few lead scores (0–0.5 s leads in Fig. 8b). In addition, although the overall trend is accurately predicted using the HKAE, the numerical results are generally high. We infer that this is a manifestation of universal operator driven modelling. We did not detrend the data, and Exp. 4679 has stronger time-varying dynamic components than the other two experiments do (Fig. S2). The HKAE uses a global operator estimation strategy, and the presence of time-variant dynamics or multiple invariant subspaces in the theoretical linear evolving space could challenge the single universal operator’s capacity to depict evolution accurately (Lan and Mezić, 2013). For Exp. 5198, the HKAE and LSTM yield similar predictions.

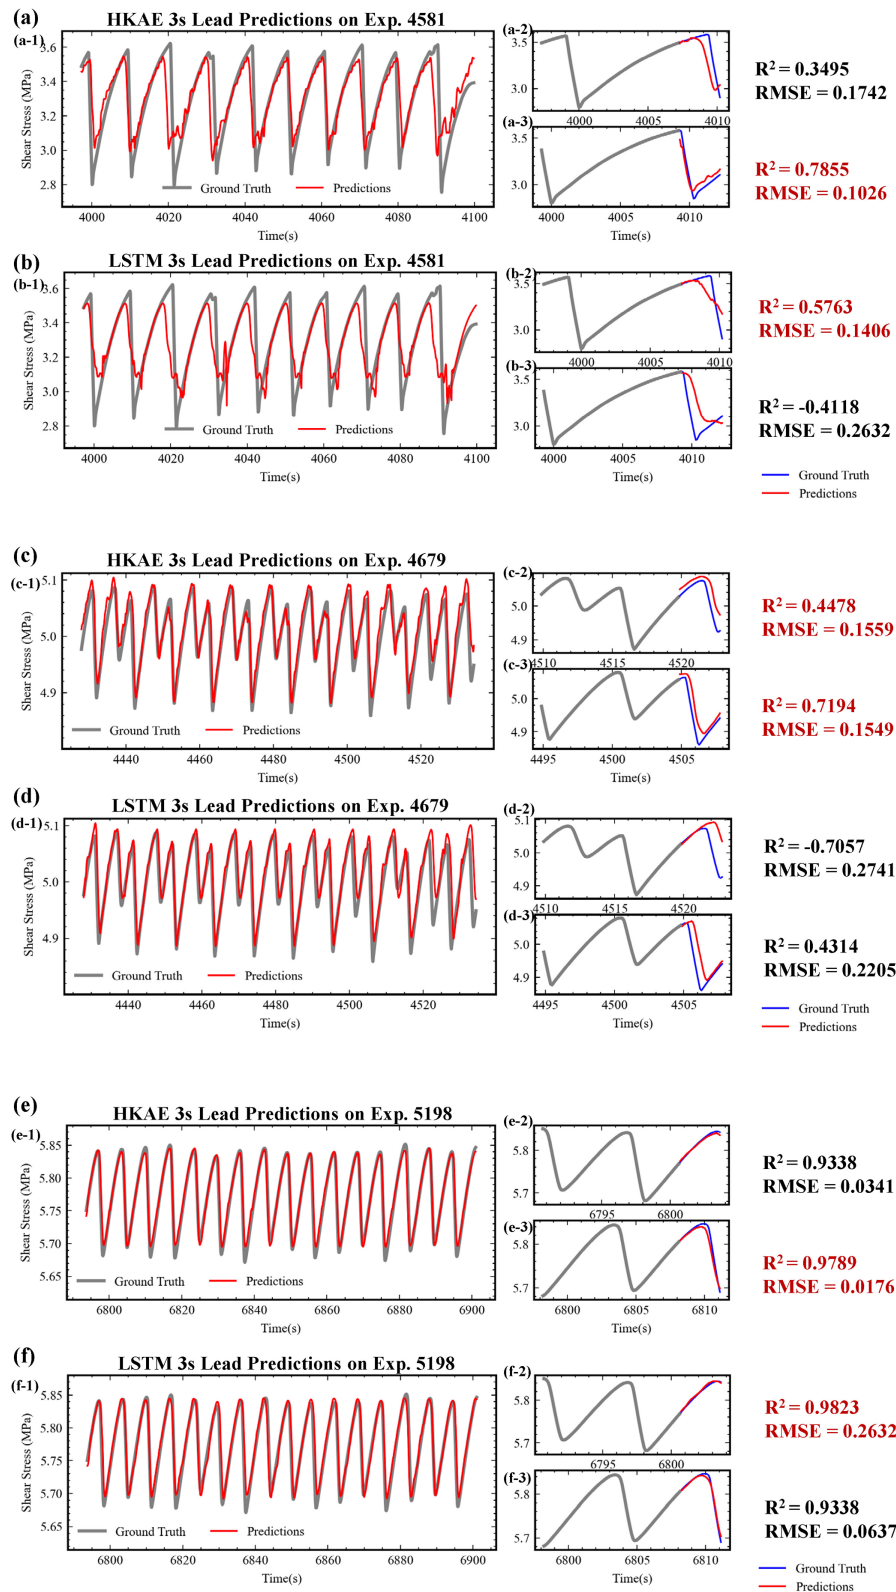


Figure 9. 3 s leading prediction details during different phases of stress variation for different laboratory datasets. Panels (a), (c), and (e) show the HKAE results, whereas panels (b), (d), and (f) show the LSTM results. The left panels (x-1) present the total 3 s leading predictions for the test set. The right panels (x-2, x-3) illustrate the predictions in the 3 s horizon, with R^2 and RMSE used as evaluation metrics. Predictions with higher metrics are highlighted in red.

3.3 Evaluation of the intercycle prediction settings

We then extend the input to 20 s and the prediction horizon to 10 s to test the ability of the model to model the seismic cycle. This setting is the same as that used by Laurenti et al. (2022) to test the modelling ability of slip events. Furthermore, to assess the modelling of the event cycle more intuitively, we introduce a new evaluation metric in this experiment, namely, to assess the predictive effect of the predicted results with respect to the moment of occurrence of the event.

Figure 10a-1 and b-1 illustrate the metrics variation with the prediction leads arising. Compared with the “10–3 s” experimental settings (Fig. 8b), when the results are predicted for the next 10 s, the slip interval scores of the HKAE predictions are higher than those of the other methods (Fig. 10a-1 and b-1), which reflects the fact that the HKAE has a more robust ability to capture slip system dynamics. Unlike the decrease in accuracy with an increasing number of leading steps that are evident in stress value predictions, the metrics for slip intervals do not demonstrate a steady decline. This could be attributed to the periodicity of the slip activities. Moreover, the capacity of the HKAE model to model slip behaviour more robustly indicates its ability to capture long-term trends in the data. In terms of R^2 scores, the HKAE continuously models fast-slip systems, especially for leading predictions after 4 s. The scores for the evaluation of the event cycle similarly support this conclusion. Fast-slip systems tend to have more complex dynamic system characteristics and higher instantaneous dimensions (Gualandi et al., 2023), which demonstrates the HKAE's ability to model complex dynamic system dynamics. For Exp. 4679, the HKAE does not consistently continue its dominance when it is 1–3 s ahead of the forecast in terms of R^2 and RMSE scores. However, focusing on the event cycle scores, which are more meaningful under long-term forecasts, the HKAE shows a steady advantage (Fig. 10b-1).

To further assess the ability of the prediction method to model the event cycle, we counted the predictions for the slip intervals in the prediction window in the sliding prediction experiment and assessed the goodness of fit between the predictions and the true intervals (Fig. 10a-2 and b-2). Considering the event cycle predictions over the entire prediction window, the HKAE also has an advantage over the LSTM, as demonstrated by the fact that its cycle predictions are closer to the identity line. However, the R^2 scores of slip intervals are negative in Exp. 4581, which indicates that both the HKAE and LSTM have a limited ability to capture the evolutionary features of fast-slip systems.

For the slow slip represented by Exp. 5198, we find that the HKAE has a more stable performance in event cycle modelling (Fig. S5 in the Supplement). Owing to the relatively weak performance of the starting leading window, similar to the findings of the 10–3 s experiment described above, we attribute this finding to the relatively low system dimensionality of the slow-slip system (Gualandi et al., 2020, 2023).

4 Discussion

Modelling and predicting the behaviour of fault slip is crucial for understanding natural earthquakes. The study of natural earthquakes still presents various challenges, such as indirect observations and insufficient sampling histories of shorter fault activity cycles (Velasco Herrera et al., 2022), whereas laboratory settings provide new insights in an easier, more controllable, and observable manner. Machine learning methods have been effective for accurately predicting instantaneous slip behaviour on the basis of near-term acoustic emissions (Rouet-Leduc et al., 2017; Shokouhi et al., 2021; Borate et al., 2023). However, attempts to forecast future behaviour have encountered temporal limits due to the high non-linearity of the fault slip system in the laboratory.

To address these questions, informed by dynamic system theories, we pioneered a dynamic informed method, the HKAE, to predict the future shear stress of laboratory fault slips. The HKAE model is designed on the basis of the delay embedding theory and Koopman theory and leverages the non-linear fitting capabilities of neural networks and the systematic perspective of dynamic theories. The advantages of the HKAE include (1) multiscale modelling of laboratory slip systems under limited observations and (2) evolution mode and insights into laboratory slip from a dynamic systems perspective. The rationality of the HKAE architecture design was further verified in the ablation experiments of the three modules, especially the setup of the Koopman operator module (Fig. S6 in the Supplement).

Here, we further discuss the dynamic modelling skills of the HKAE by investigating the latent space. The HKAE captures lower-complexity, more predictable dynamic components from stress observations of complex laboratory slip systems through the Koopman theory, which can be visualized directly via the encoded results (Fig. 11).

The scalar shear stress is reconstructed in high-dimensional phase space and then encoded by the HKAE for latent variables with dimensions equal to the approximated Koopman operator. Figure 11 illustrates different components. Considering the conjugate nature of the Koopman eigenvalues, we plot only the latent variables corresponding to half of the eigenvalues shown in Table 2. The latent variables corresponding to stable feature modes are more predictable. This is also evident from the results of the linear evolution, where the latent variables corresponding to stable modes (red line) match closely with the numerical values of the latent variables (gray line) after evolution. Moreover, there are always components such as residuals (red box in Fig. 11), which, from the point of view of the HKAE, are components that are still difficult to characterize with linear dynamics after further non-linear mapping. There could be many reasons for these hard-to-predict components, and we hypothesize that the most important reason is the lack of observations despite the phase space reconstruction using delayed embedding. The metastable characteristics of labo-

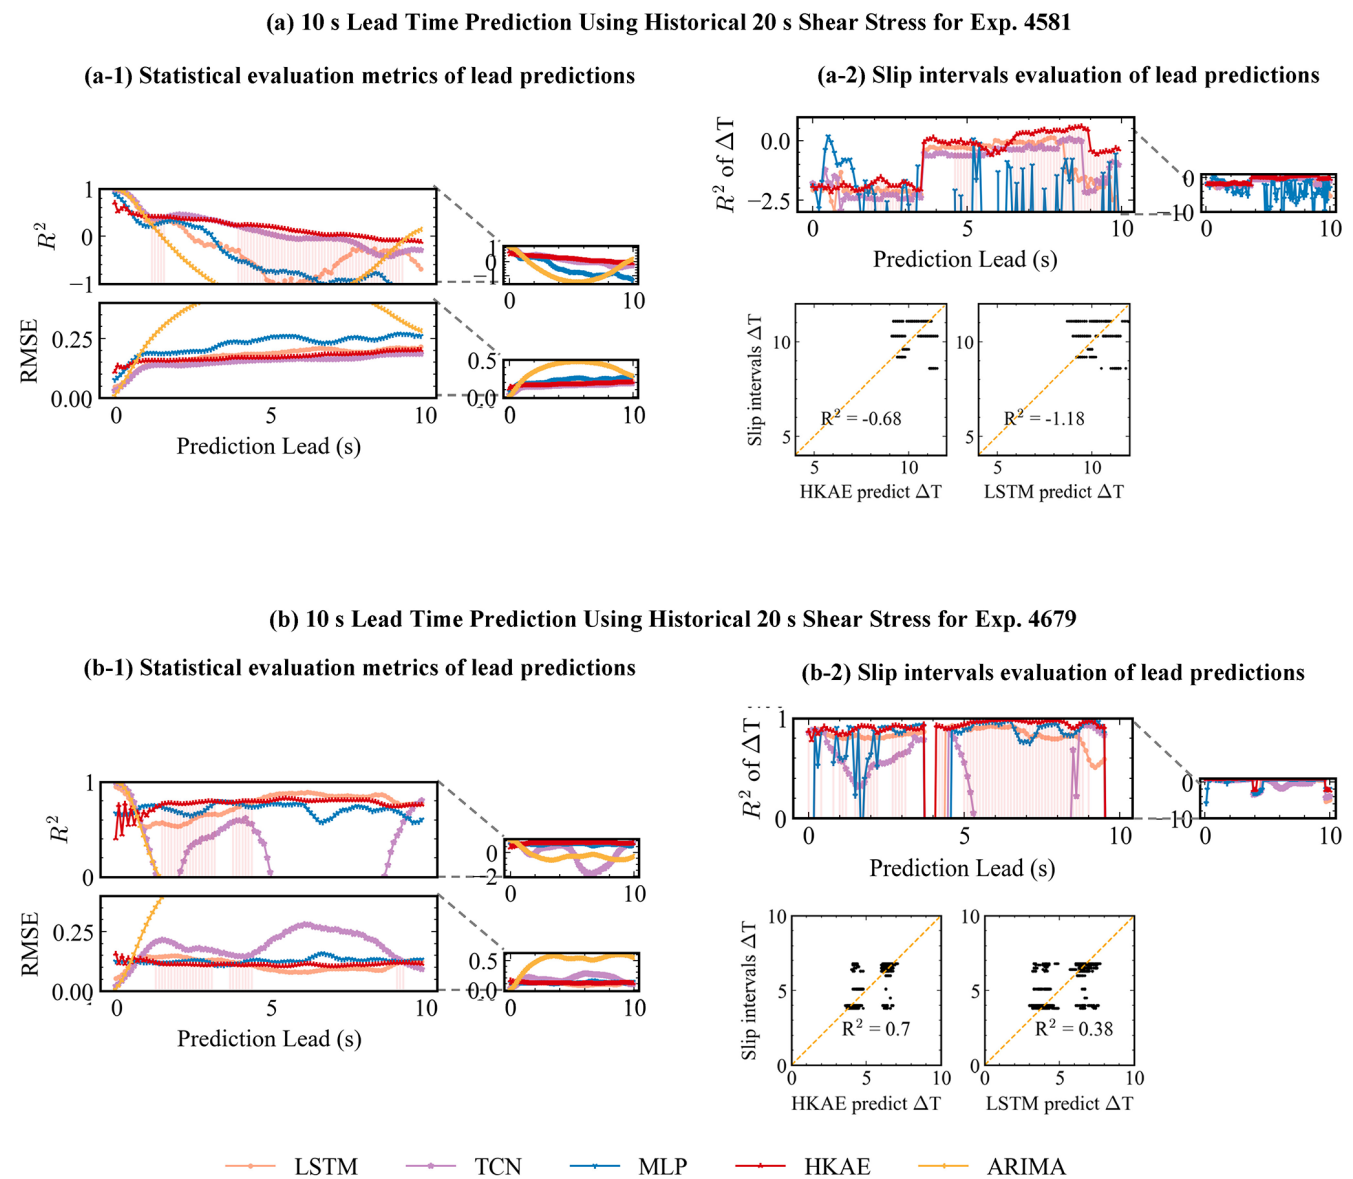


Figure 10. General evaluation for 10 s lead prediction using historical 20 s shear stress, with R^2 , RMSE and R^2 of event intervals (Eq. 18) used as evaluation metrics. **(a, b)** for Exp. 4581 and Exp. 4679, respectively. Panels **(a-1)** and **(b-1)** illustrate the statistical metrics (R^2 and RMSE) variation with prediction leads. Panels **(a-2)** and **(b-2)** show the prediction results of the sliding prediction process for the sliding intervals, which were counted and compared with the real sliding intervals (Fig. 6b–d).

ratory slip systems are also a contributor (Jaspersen et al., 2021). In addition, we find a greater percentage of hard-to-predict components in Exp. 4679, which is related to the unstable state of Exp. 4679. Additionally, the “residual-like” latent variable prediction for Exp. 4679 is more challenging. Considering the absence of stable, long-period modes in Exp. 4679 (Table 2), we suggest that, from the perspective of HKAE modelling, the alternating fast-and-slow slippage represented by Exp. 4679 represents a less stable state in the laboratory slip system than that of pure fast or slow slip. This conclusion is consistent with the understanding gener-

ated from laboratory experiments and numerical simulations, which state that rapid and slow slip alternate at the critical point of the stability transition (Mele Veedu et al., 2020). It can also be noticed that the fast-slip system (Exp. 4581) has the largest “residual-like” latent variable amplitude among the three, which is ultimately reflected in its difficulty to capture its slip cycle variations by different prediction methods when performing long-term prediction (Fig. 10a). This suggests that long-term estimation of status of the fast-slip systems remains a challenging task in the presence of limited data. In addition, we find that the dimension of delayed em-

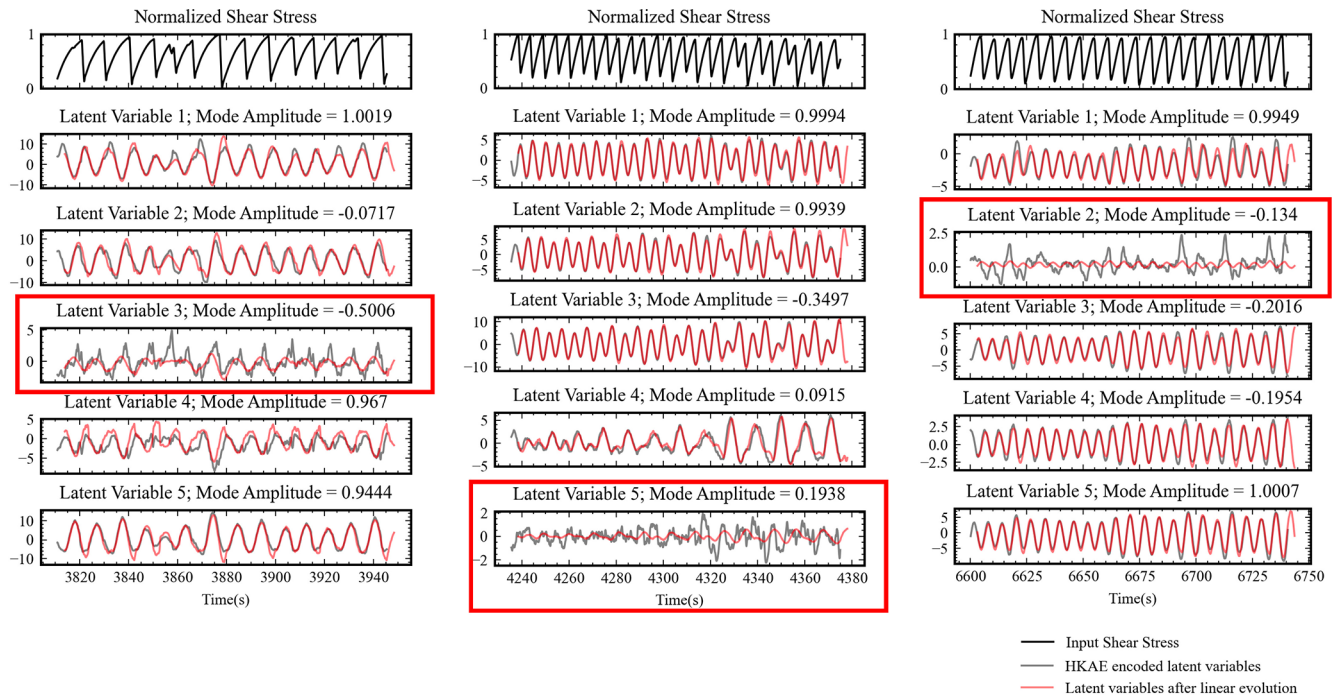


Figure 11. Visualization of linear evolution in the latent space for three experiments with different slip behaviours. Input shear stress series (black), HKAЕ-encoded latent variables (grey), and latent variables after linear evolution (red). The red box represents the components in the latent space that are still difficult to evolve linearly.

bedding affects the prediction performance and prediction preference of the HKAЕ to a larger extent. For example, in the slow-slip, low-system-dimension scenario, the overall prediction of the HKAЕ with low embedding dimension is significantly better than that with high embedding dimension. For the fast–slow alternating slip and fast-slip scenarios, the high embedding dimension tends to obtain long-term stable prediction results, while the low embedding dimension is able to obtain more accurate short-term prediction results (Fig. 3 in the Supplement). This suggests that the embedded dimension of the HKAЕ need to be adjusted according to the slip activity state in practical applications.

The mechanisms underlying the occurrence of earthquakes caused by fast-slip events, as well as slow-slip events caused by slow slip, under natural conditions are still unclear. Recently, it was reported that slow-slip events (SSEs) may exhibit a certain degree of numerical predictability (Gualandi et al., 2020; Truttmann et al., 2024). We suggest that the HKAЕ can achieve competitive modelling of seismic activity and diagnose the dynamic behaviour of regional seismic systems by incorporating dynamic system theory. Currently there are two main challenges in the application of the HKAЕ to actual tectonic conditions. One is that the stress state changes of actual tectonic earthquakes may be complex. In order to verify the modelling capability of the HKAЕ, we tested it using a typical double-shear experiment representing fast-and-slow slip with alternation. It is shown that the

stress changes are more complex under rough fault viscous slip experimental conditions (Dresen et al., 2020). Although recent studies have shown that slip time to failure (TTFs) under high roughness can be predicted using machine learning (Karimpouli et al., 2023), slip dynamical system properties under high roughness remain currently undiscussed, which may affect the future predictive performance of the HKAЕ under such more complex conditions of slip. In addition, stress is not directly accessible under tectonic seismic environmental conditions, which increases the difficulty of applying the HKAЕ under real conditions. However, recent studies have shown that time series observations, such as GNSS and seismometers, exhibit the feasibility of serving as a proxy for the state change of stress in tectonic earthquakes, and this relationship is similar to that between acoustic emission signals and stress changes in laboratory earthquakes (Johnson et al., 2025; Johnson and Johnson, 2024). The HKAЕ has advantages for data fusion due to its flexible neural network architecture implementation. Therefore, the generalizability of the model can be improved by integrating external data such as historical acoustic emissions or other measurable laboratory observations by means such as adding coding branches. From an algorithmic perspective, implementing the Hankel alternative view of the Koopman (HAVOK) framework (Brunton et al., 2017) and local dynamic modelling strategy (Liu et al., 2023) might further enhance the predictive capability of the HKAЕ.

5 Conclusion

Drawing upon the delay embedding and Koopman theories, we propose a dynamic informed machine learning method, namely, the Hankel–Koopman autoencoder (HKAE), to achieve future predictions in complex laboratory earthquake systems. This model demonstrates competitive performance in shear stress variation and slip event modelling compared with other prediction models. To our knowledge, this is the first instance of predicting laboratory slip behaviours from a dynamic systems perspective. In addition to the modelling performance, the analysis of the execution process of the HKAE can provide dynamic diagnostics for the laboratory slip system operating behind the shear stress observations, such as those of system trajectory behaviour, characteristic dynamic modes, and system stability. HKAE prediction results and dynamical system analyses show that slip behaviour, especially the long-term future prediction of fast-slip stress states, remains challenging. Furthermore, the HKAE highlights the potential for simplifying and decomposing complex geophysical systems with a data-driven approach but combining a dynamic systems perspective. It also provides a new approach for modelling, predicting, and understanding complex geophysical systems, especially those with limited observations, showing great potential in seismically monitoring and modelling the physical mechanisms of faults.

Code and data availability. The laboratory shear stress data are obtained from <https://github.com/lauralaurenti/DNN-earthquake-prediction-forecasting> (Laurenti et al., 2022, <https://doi.org/10.1016/j.epsl.2022.117825>, last access: 21 March 2024). The ODE simulation data and code are obtained from the Open Science Framework (OSF) (Mele Veedu, 2020, <https://doi.org/10.17605/OSF.IO/9DQH7>, last access: 21 March 2024) and <https://github.com/Geolandi/labquakesde> (Gualandi et al., 2023, <https://doi.org/10.1016/j.epsl.2023.117995>, last access: 21 March 2024). The code used to run and analyse the results of the experiments is available online (Yue, 2024, <https://doi.org/10.5281/zenodo.13123381>, last access: 11 September 2025).

Supplement. The supplement related to this article is available online at <https://doi.org/10.5194/gmd-18-6275-2025-supplement>.

Author contributions. EY: conceptualization, methodology, writing (original draft, review and editing), formal analysis. MQ: writing (review and editing), conceptualization, supervision. LH: methodology, writing (review and editing). BR: methodology, writing (review and editing). SW: supervision, writing (review and editing). ZD: supervision, writing (review and editing).

Competing interests. The contact author has declared that none of the authors has any competing interests.

Disclaimer. Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. While Copernicus Publications makes every effort to include appropriate place names, the final responsibility lies with the authors.

Acknowledgements. This work is supported by the Deep-time Digital Earth (DDE) Big Science Program. We thank Chris Marone for his assistance in the data acquisition, Laura Laurenti for the discussion, and three anonymous reviewers for their valuable comments.

Financial support. This research has been supported by the National Key Research and Development Program of China (grant no. 2021YFB3900900) and the National Natural Science Foundation of China (grant no. 42306213).

Review statement. This paper was edited by Mauro Cacace and reviewed by three anonymous referees.

References

- Arbabi, H. and Mezić, I.: Ergodic theory, dynamic mode decomposition, and computation of spectral properties of the Koopman operator, *SIAM J. Appl. Dyn. Syst.*, 16, 2096–2126, <https://doi.org/10.1137/17M1125236>, 2017.
- Avila, A. M. and Mezić, I.: Data-driven analysis and forecasting of highway traffic dynamics, *Nat. Commun.*, 11, 2090, <https://doi.org/10.1038/s41467-020-15582-5>, 2020.
- Azencot, O., Erichson, N. B., Lin, V., and Mahoney, M. W.: Forecasting sequential data using consistent Koopman autoencoders, <https://doi.org/10.48550/arXiv.2003.02236>, 2020.
- Bai, S., Kolter, J. Z., and Koltun, V.: An empirical evaluation of generic convolutional and recurrent networks for sequence modeling, <https://doi.org/10.48550/arXiv.1803.01271>, 2018.
- Bakarji, J., Champion, K., Kutz, J. N., and Brunton, S. L.: Discovering Governing Equations from Partial Measurements with Deep Delay Autoencoders, *Proc. Roy. Soc. A*, 479, 20230422, <https://doi.org/10.1098/rspa.2023.0422>, 2023.
- Berman, A. D., Ducker, W. A., and Israelachvili, J. N.: Origin and characterization of different stick-slip friction mechanisms, *Langmuir*, 12, 4559–4563, <https://doi.org/10.1021/la950896z>, 1996.
- Borate, P., Rivière, J., Marone, C., Mali, A., Kifer, D., and Shokouhi, P.: Using a physics-informed neural network and fault zone acoustic monitoring to predict lab earthquakes, *Nat. Commun.*, 14, 3693, <https://doi.org/10.1038/s41467-023-39377-6>, 2023.
- Brandstetter, J., Worrall, D., and Welling, M.: Message Passing Neural PDE Solvers, <https://doi.org/10.48550/arXiv.2202.03376>, 2023.

- Brunton, S. L., Brunton, B. W., Proctor, J. L., Kaiser, E., and Kutz, J. N.: Chaos as an Intermittently Forced Linear System, *Nat. Commun.*, 8, 19, <https://doi.org/10.1038/s41467-017-00030-8>, 2017.
- Brunton, S. L., Budišić, M., Kaiser, E., and Kutz, J. N.: Modern Koopman theory for dynamical systems, *SIAM Rev.*, 64, 229–340, <https://doi.org/10.1137/21m1401243>, 2022.
- Brunton, S. L., Noack, B. R., and Koumoutsakos, P.: Machine Learning for Fluid Mechanics, *Ann. Rev. Fluid Mech.*, 52, 477–508, <https://doi.org/10.1146/annurev-fluid-010719-060214>, 2020.
- Degen, D., Caviedes Voullième, D., Buitter, S., Hendricks Franssen, H.-J., Vereecken, H., González-Nicolás, A., and Wellmann, F.: Perspectives of physics-based machine learning strategies for geoscientific applications governed by partial differential equations, *Geosci. Model Dev.*, 16, 7375–7409, <https://doi.org/10.5194/gmd-16-7375-2023>, 2023.
- Dieterich, J. H.: Modeling of rock friction: 1. Experimental results and constitutive equations, *J. Geophys. Res.: Solid Earth*, 84, 2161–2168, <https://doi.org/10.1029/JB084iB05p02161>, 1979.
- Dresen, G., Kwiatek, G., Goebel, T., and Ben-Zion, Y.: Seismic and aseismic preparatory processes before large stick-slip failure, *Pure Appl. Geophys.*, 177, 5741–5760, <https://doi.org/10.1007/s00024-020-02605-x>, 2020.
- Feng, D., Liu, J., Lawson, K., and Shen, C.: Differentiable, learnable, regionalized process-based models with multiphysical outputs can approach state-of-the-art hydrologic prediction accuracy, *Water Resour. Res.*, 58, e2022WR032404, <https://doi.org/10.1029/2022WR032404>, 2022.
- Franzke, C., Gugole, F., and Juricke, S.: Systematic multiscale decomposition of ocean variability using machine learning, *Chaos: Interdiscip. J. Nonlin. Sci.*, 32, 73122, <https://doi.org/10.1063/5.0090064>, 2022.
- Froyland, G., Giannakis, D., Lintner, B. R., Pike, M., and Slawinska, J.: Spectral analysis of climate dynamics with operator-theoretic approaches, *Nat. Commun.*, 12, 6570, <https://doi.org/10.1038/s41467-021-26357-x>, 2021.
- Gualandi, A., Avouac, J.-P., Michel, S., and Faranda, D.: The predictable chaos of slow earthquakes, *Sci. Adv.*, 6, eaaz5548, <https://doi.org/10.1126/sciadv.aaz5548>, 2020.
- Gualandi, A., Faranda, D., Marone, C., Cocco, M., Mengaldo, G., and Bendick, R.: Deterministic and stochastic chaos characterize laboratory earthquakes, *Earth Planet. Sc. Lett. [data set]*, <https://doi.org/10.1016/j.epsl.2023.117995>, 2023.
- Hammoud, M. A. E. R., Titi, E. S., Hoteit, I., and Knio, O.: CDAnet: a physics-informed deep neural network for downscaling fluid flows, *JAMES*, 14, e2022MS003051, <https://doi.org/10.1029/2022MS003051>, 2022.
- Hochreiter, S. and Schmidhuber, J.: Long short-term memory, *Neural Comput.*, 9, 1735–1780, <https://doi.org/10.1162/neco.1997.9.8.1735>, 1997.
- Hulbert, C., Rouet-Leduc, B., Johnson, P. A., Ren, C. X., Rivière, J., Bolton, D. C., and Marone, C.: Similarity of fast and slow earthquakes illuminated by machine learning, *Nat. Geosci.*, 12, 69–74, <https://doi.org/10.1038/s41561-018-0272-8>, 2019.
- Jasperson, H., Bolton, D. C., Johnson, P., Guyer, R., Marone, C., and De Hoop, M. V.: Attention network forecasts time-to-failure in laboratory shear experiments, *J. Geophys. Res.: Solid Earth*, 126, e2021JB022195, <https://doi.org/10.1029/2021JB022195>, 2021.
- Johnson, C. W. and Johnson, P. A.: Seismic features predict ground motions during repeating caldera collapse sequence, *Geophys. Res. Lett.*, 51, e2024GL108288, <https://doi.org/10.1029/2024GL108288>, 2024.
- Johnson, C. W., Wang, K., and Johnson, P. A.: Automatic speech recognition predicts contemporaneous earthquake fault displacement, *Nat. Commun.*, 16, 1069, <https://doi.org/10.1038/s41467-025-55994-9>, 2025.
- Johnson, P. A., Rouet-Leduc, B., Pyrak-Nolte, L. J., Beroza, G. C., Marone, C. J., Hulbert, C., Howard, A., Singer, P., Gordeev, D., Karaflos, D., Levinson, C. J., Pfeiffer, P., Puk, K. M., and Reade, W.: Laboratory earthquake forecasting: A machine learning competition, *P. Natl. Acad. Sci. USA*, 118, e2011362118, <https://doi.org/10.1073/pnas.2011362118>, 2021.
- Karimpouli, S., Caus, D., Grover, H., Martínez-Garzón, P., Bohnhoff, M., Beroza, G., Dresen, G., Goebel, T., Weigel, T., Kwiatek, G., and Bendick, R.: Explainable machine learning for labquake prediction using catalogue-driven features, *Earth Planet. Sc. Lett.*, 622, 118383, <https://doi.org/10.1016/j.epsl.2023.118383>, 2023.
- Karniadakis, G. E., Kevrekidis, I. G., Lu, L., Perdikaris, P., Wang, S., and Yang, L.: Physics-informed machine learning, *Nat. Rev. Phys.*, 3, 422–440, <https://doi.org/10.1038/s42254-021-00314-5>, 2021.
- Koopman, B. O.: Hamiltonian systems and transformation in Hilbert space, *P. Natl. Acad. Sci. USA*, 17, 315–318, <https://doi.org/10.1073/pnas.17.5.315>, 1931.
- Lan, Y. and Mezić, I.: Linearization in the large of nonlinear systems and Koopman operator spectrum, *Physica D*, 242, 42–53, <https://doi.org/10.1016/j.physd.2012.08.017>, 2013.
- Laurenti, L., Tinti, E., Galasso, F., Franco, L., and Marone, C.: Deep learning for laboratory earthquake prediction and autoregressive forecasting of fault zone stress, *Earth Planet. Sc. Lett. [data set]*, 598, 117825, <https://doi.org/10.1016/j.epsl.2022.117825>, 2022.
- Li, L., Zuo, H., Chen, B., Guo, Y., Ma, M., and Dong, L.: Revealing the dynamical transition of anisotropy behind the HOST by Koopman analysis, *Geophys. Res. Lett.*, 47, e2020GL091123, <https://doi.org/10.1029/2020GL091123>, 2020.
- Lintner, B. R., Giannakis, D., Pike, M., and Slawinska, J.: Identification of the Madden–Julian Oscillation With Data-Driven Koopman Spectral Analysis, *Geophys. Res. Lett.*, 50, e2023GL102743, <https://doi.org/10.1029/2023GL102743>, 2023.
- Liu, Y., Li, C., Wang, J., and Long, M.: Koopa: learning non-stationary time series dynamics with Koopman predictors, in: *Advances in Neural Information Processing Systems*, 12271–12290, 2023.
- Lorenz, E. N.: The mechanics of vacillation. *Journal of Atmospheric Sciences*, 20(5): 448–465, 1963.
- Lubbers, N., Bolton, D. C., Mohd-Yusof, J., Marone, C., Barros, K., and Johnson, P. A.: Earthquake catalogue-based machine learning identification of laboratory fault states and the effects of magnitude of completeness, *Geophys. Res. Lett.*, 45, <https://doi.org/10.1029/2018gl079712>, 2018.
- Lusch, B., Kutz, J. N., and Brunton, S. L.: Deep learning for universal linear embeddings of nonlinear dynamics, *Nat. Commun.*, 9, 4950, <https://doi.org/10.1038/s41467-018-07210-0>, 2018.

- Mastella, G., Corbi, F., Bedford, J., Funicello, F., and Rosenau, M.: Forecasting surface velocity fields associated with laboratory seismic cycles using Deep Learning, *Geophys. Res. Lett.*, 49, e2022GL099632, <https://doi.org/10.1029/2022GL099632>, 2022.
- Mele Veeu, D.: Bifurcations at the stability transition of earthquake faulting, *Geophys. Res. Lett.* [data set], 47, e2020GL087985, <https://doi.org/10.17605/OSF.IO/9DQH7>, 2020.
- Okazaki, T., Ito, T., Hirahara, K., and Ueda, N.: Physics-informed deep learning approach for modeling crustal deformation, *Nat. Commun.*, 13, 7092, <https://doi.org/10.21203/rs.3.rs-1576456/v1>, 2022.
- Riel, B., Minchew, B., and Bischoff, T.: Data-driven inference of the mechanics of slip along glacier beds using physics-informed neural networks: case study on Rutford ice stream, Antarctica, *JAMES*, 13, e2021MS002621, <https://doi.org/10.1029/2021MS002621>, 2021.
- Rouet-Leduc, B., Hulbert, C., Lubbers, N., Barros, K., Humphreys, C. J., and Johnson, P. A.: Machine learning predicts laboratory earthquakes, *Geophys. Res. Lett.*, 44, 9276–9282, <https://doi.org/10.1002/2017GL074677>, 2017.
- Rouet-Leduc, B., Hulbert, C., Bolton, D. C., Ren, C. X., Riviere, J., Marone, C., Guyer, R. A., and Johnson, P. A.: Estimating Fault Friction from Seismic Signals in the Laboratory, *Geophys. Res. Lett.*, 45, 1321–1329, <https://doi.org/10.1002/2017gl076708>, 2018.
- Rouet-Leduc, B., Hulbert, C., and Johnson, P. A.: Continuous chatter of the cascadia subduction zone revealed by machine learning, *Nat. Geosci.*, 12, 75–79, <https://doi.org/10.1038/s41561-018-0274-6>, 2019.
- Schmid, P. J.: Dynamic mode decomposition of numerical and experimental data, *J. Fluid Mech.*, 656, 5–28, <https://doi.org/10.1017/S0022112010001217>, 2010.
- Shokouhi, P., Girkar, V., Rivière, J., Shreedharan, S., Marone, C., Giles, C. L., and Kifer, D.: Deep Learning Can Predict Laboratory Quakes From Active Source Seismic Data, *Geophys. Res. Lett.*, 48, e2021GL093187, <https://doi.org/10.1029/2021gl093187>, 2021.
- Takeishi, N., Kawahara, Y., and Yairi, T.: Learning Koopman invariant subspaces for dynamic mode decomposition, in: *Advances in Neural Information Processing Systems*, 2017.
- Takens, F.: Detecting strange attractors in turbulence, in: *Lecture Notes in Mathematics, Dynamical Systems and Turbulence*, Warwick 1980, 366–381, <https://doi.org/10.1007/bfb0091924>, 1981.
- Truttmann, S., Poulet, T., Wallace, L., Herwegh, M., and Veveakis, M.: Slow slip events in New Zealand: irregular, yet predictable?, *Geophys. Res. Lett.*, 51, e2023GL107741, <https://doi.org/10.1029/2023GL107741>, 2024.
- Velasco Herrera, V. M., Rossello, E. A., Orgeira, M. J., Arioni, L., Soon, W., Velasco, G., Rosique-de La Cruz, L., Zúñiga, E., and Vera, C.: Long-Term Forecasting of Strong Earthquakes in North America, South America, Japan, Southern China and Northern India With Machine Learning, *Front. Earth Sci.*, 10, 905792, <https://doi.org/10.3389/feart.2022.905792>, 2022.
- Wang, K., Johnson, C. W., Bennett, K. C., and Johnson, P. A.: Predicting fault slip via transfer learning, *Nat. Commun.*, 12, 7319, <https://doi.org/10.1038/s41467-021-27553-5>, 2021.
- Wang, K., Johnson, C. W., Bennett, K. C., and Johnson, P. A.: Predicting future laboratory fault friction through deep learning transformer models, *Geophys. Res. Lett.*, 49, e2022GL098233, <https://doi.org/10.1029/2022GL098233>, 2022.
- Yue, E.: A dynamic informed deep learning method for future estimation of laboratory stick-slip, *Zenodo* [code], <https://doi.org/10.5281/zenodo.13123381>, 2024.
- Zeng, A., Chen, M., Zhang, L., and Xu, Q.: Are Transformers Effective for Time Series Forecasting?, *Proceedings of the AAAI Conference on Artificial Intelligence*, 37, 11121–11128, <https://doi.org/10.1609/aaai.v37i9.26317>, 2023.