



**C-Coupler1:  
a Chinese community  
coupler for Earth  
System Modelling**

L. Liu et al.

# C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu<sup>1</sup>, G. Yang<sup>1,2</sup>, B. Wang<sup>1,3</sup>, C. Zhang<sup>2</sup>, R. Li<sup>2</sup>, Z. Zhang<sup>2</sup>, Y. Ji<sup>2</sup>, and L. Wang<sup>4</sup>

<sup>1</sup>Ministry of Education Key Laboratory for Earth System Modelling, Center for Earth System Science (CESS), Tsinghua University, Beijing, China

<sup>2</sup>Department of Computer Science and Technology, Tsinghua University, Beijing, China

<sup>3</sup>State Key Laboratory of Numerical Modelling for Atmospheric Sciences and Geophysical Fluid Dynamics (LASG), Institute of Atmospheric Physics, Chinese Academy of Sciences, Beijing, China

<sup>4</sup>College of Global Change and Earth System Science, Beijing Normal University, Beijing, China

Received: 9 May 2014 – Accepted: 23 May 2014 – Published: 11 June 2014

Correspondence to: L. Liu (liuli-cess@tsinghua.edu.cn), G. Yang (ygw@tsinghua.edu.cn), and B. Wang (wab@tsinghua.edu.cn)

Published by Copernicus Publications on behalf of the European Geosciences Union.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close


Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## Abstract

 Coupler is a fundamental software tool for Earth System Modelling. Targeting the requirements of 3-D coupling, high-level sharing, common model software platform and better parallel performance, we started to design and develop a community coupler (C-Coupler) from 2010 in China, and finished the first version (C-Coupler1) recently. The C-Coupler1 is a parallel 3-D coupler that achieves the same (bit-identical) result with any number of processes. Guided by the general design of the C-Coupler, the C-Coupler1 enables various component models and various coupled model versions to be integrated on the same common model software platform to achieve a higher-level sharing, where the component models and the coupler can keep the same code version in various model versions for simulation. Moreover, it provides the C-Coupler platform, a uniform runtime environment for operating various kinds of model simulations in the same manner. Now the C-Coupler1 is ready for Earth System Modelling, and it is publicly available. In China, there are more and more model groups using the C-Coupler1 for the development and application of models.

## 1 Introduction

Climate System Models (CSMs) and Earth System Models (ESMs) are fundamental tools for global climate change study. They play an important role in simulating and understanding the past, present, and future climate. They are always coupled models consisting of several separate interoperable component models to simultaneously simulate the variations of and interactions among the atmosphere, land surface, oceans, sea ice and other components of the climate system. Following the fast development of science and technology, more and more CSMs, ESMs and related component models have sprung up in the world. For example, more than 50 coupled models participated in the Coupled Model Intercomparison Project Phase 5 (CMIP5), while less than 30 coupled models in the previous CMIP3.

### C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion









C-Coupler1. Section 6 discusses the future works for the C-Coupler development. We conclude this paper in § 7.

## 2 Brief introduction to existing couplers

In this Section, we will briefly introduce the OASIS coupler, MCT, ESMF, FMS coupler, CPL6 coupler and CPL7 coupler, which have been used for the CMIP5. More details of these couplers can be found in Valcke et al. (2012a), Redler et al. (2010), Valcke (2013a), Larson et al. (2005), Jacob et al. (2005), Hill et al. (2004), Balaji et al. (2006) and Craig et al. (2005, 2012).

### 2.1 The OASIS coupler

CERFACS started to develop the OASIS coupler in 1991. The OASIS3 (Valcke, 2013a) is a 2-D version of the OASIS coupler. It has been widely used for developing the European CSMs and ESMs. For example, it has been used in different versions of 5 European CSMs and ESMs that have participated in the CMIP5, e.g., CNRM-CM5 (Volodro et al., 2013), IPSL-CM5 (Dufresne et al., 2013), CMCC-ESM (Vichi et al., 2011), EC-Earth V2.3 (Hazelger et al., 2011) and MPI-ESM (Giorgetta et al., 2013; Jungclaus et al., 2013). The OASIS3 uses multiple executables for a coupled model, where the OASIS3 itself forms a separate executable for data interpolation tasks and each component model remains a separate executable. It provides a “namcouple” configuration file, which is an external configuration file written by users, to specify some characteristics of each coupling exchange, e.g. source component, target component, coupling frequency and data remapping algorithm. For data interpolation, the OASIS3 can use the remapping weights generated by the 2-D remapping algorithms in the Spherical Coordinate Remapping and Interpolation Package (SCRIP) library (Jones, 1999). The parallelism of the OASIS3 is limited to the number of coupling fields, because each process for the OASIS3 is responsible for a subset of the coupling fields.

# GMDD

7, 3889–3936, 2014

## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



OASIS4 is a 3-D version of the OASIS coupler, which supports both 2-D and 3-D coupling. Similar to the OASIS3, the OASIS4 also uses multiple executables for a coupled model, provides the “namcouple” configuration file, and can use the SCRIP for 2-D interpolation. As a 3-D coupler, OASIS4 supports the transfer and interpolation of 3-D fields. For 3-D interpolation, OASIS4 itself provides pure 3-D remapping algorithms, e.g., 3-D  $n$  neighbor distance-weighted average and trilinear remapping algorithms, and supports 2-D interpolation in the horizontal direction followed by a linear interpolation in the vertical. In July 2011, CERFACS stopped the development of OASIS4, and started to develop a new coupler version, the OASIS3-MCT (Valcke et al., 2012b, 2013b), which inherits the 3-D coupling function in OASIS4 and further improves the parallelism of the OASIS3.

## 2.2 The Model Coupling Toolkit

The Model Coupling Toolkit (MCT) provides the fundamental coupling functions: data transfer and data interpolation, in parallel. The MCT represents a coupling field as a 1-D array and uses sparse matrix multiplication to achieve data interpolation. Therefore, it can be used for both 2-D and 3-D coupling. For 2-D interpolation, the MCT can use the remapping weights generated by the SCRIP. However, the MCT rarely achieves 3-D interpolation due to the lack of 3-D remapping weights generated by existing remapping software. As a result, the MCT is **not user-friendly enough** in 3-D coupling and users always have to implement 3-D interpolation in the code of component models.

Different from the OASIS coupler, the MCT does not provide the “namcouple” configuration file but uses “codecouple” configuration, which means that the characteristics of coupling exchanges are specified by users in the source code of a coupled model. The MCT can be viewed as a library for model coupling. It can be directly used to couple fields between two component models where no separate executable is generated for coupling tasks, and can also be used to develop other couplers, e.g., the OASIS3-MCT, CPL6 coupler and CPL7 coupler.

GMDD

7, 3889–3936, 2014

### C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion










In the CMIP5, the CSMs and ESMs (Donner et al., 2011; Dunne et al., 2012) from the GFDL use the FMS as well as its coupler.

## 2.5 The CPL6 coupler

The CPL6 coupler is the sixth version in the coupler family developed at the National Center for Atmospheric Research (NCAR). It is a centralized coupler designed for the CCSM3, where the atmosphere model, land surface model, ocean model and sea ice model are connected to the unique coupler component and the coupling between any two component models is performed by the coupler component. Through integrating the MCT, the CPL6 coupler achieves the data transfer and data interpolation in parallel. Moreover, it provides a number of numerical algorithms to compute and merge some fluxes and state variables for component models. It uses multiple executables for a coupled model, where the coupler component forms a separate executable. Similar to the MCT, the CPL6 coupler uses “codecouple” configuration for model coupling. For data interpolation, it always uses the remapping weights generated by the SCRIP.

In the CMIP5, the CPL6 coupler as well as the model platform of CCSM3 has been widely used in Chinese coupled model versions, e.g., FGOALS-g2 (Li et al., 2013a), FGOALS-s2 (Bao et al., 2013), BNU-ESM (Ji et al., 2014), BCC-CSM, FIO-ESM, etc.

## 2.6 The CPL7 coupler

The CPL7 coupler is the latest coupler version from the NCAR. It has been used for the CMIP5 models CCSM4 and CESM1. It keeps most of characteristics in the CPL6 coupler, such as centralized coupler component, integration of the MCT and flux computation. The remarkable advancements from the CPL6 coupler to the CPL7 coupler include: (1) the CPL7 coupler does not use multiple executables but single executable for a coupled model and provides a top-level driver to achieve various processor layout and time sequencing of the component  improve the overall parallel performance

GMDD

7, 3889–3936, 2014

### C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



of the coupled model; (2) a parallel I/O library is implemented in the CPL7 coupler to improve the I/O performance.

## 2.7 Summary

Some existing couplers already support 3-D coupling, such as the OASIS coupler, MCT, CPL6 coupler and CPL7 coupler. However, these 3-D coupling functions should be further improved. The 3-D n-neighbor distance-weighted average, trilinear and linear remapping algorithms in the OASIS coupler can result in low accuracy in the interpolation on the vertical direction. The MCT, CPL6 coupler and CPL7 coupler always cannot interpolate but only transfer the 3-D coupling fields due to the lack of 3-D remapping weights. Moreover, limited by the implementation of sparse matrix multiplication for data interpolation, some higher-order remapping algorithms for the 1-D vertical direction, such as spline, cannot be used in 3-D interpolation, because these algorithms cannot be achieved purely by sparse matrix multiplication.

Almost all existing couplers use “codecouple” configuration except the OASIS coupler, where the characteristics of coupling are specified in the source code of a coupled model. Therefore, these couplers cannot achieve the requirement of sharing the same code version of coupler and component models among various coupled model versions. For example, when increasing coupling fields or component models based on a coupled model version, the code of coupler or component models has to be modified. Regarding the OASIS coupler, its “namcouple” configuration, which specifies how to transfer and interpolate each coupling field, can decrease the code modification when changing the corresponding characteristics of coupling. However, the OASIS coupler does not provide and manage the algorithms for calculating coupling fields, such as flux computation algorithms. When changing the procedures for calculating coupling fields, the code of component models always has to be modified.

There are several **model software platforms** corresponding to existing couplers which have been successfully used for model development, such as the CCSM3 platform corresponding to the CPL6 coupler, the CCSM4/CESM platform corresponding to the

### C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



CPL7 coupler, and the FMS. These platforms can configure, compile and run different kinds of model versions for simulation. For example, the CCSM4/CESM platform can run standalone component model versions, CSMs, ESMs, etc. However, to make a new standalone component model run on the CCSM4/CESM platform, users have to dramatically modify the code of the component model.

Improving parallel performance is always a focus in coupler development. A typical example is the CPL7 coupler. It concerns the parallel performance of both the coupler and the whole coupled model. Similarly, we will concern about the parallel performance of both the coupler and coupled models in the long-term development of the C-Coupler.

### 3 General design of the C-Coupler

In this section, we will briefly introduce the general design of the C-Coupler. The C-Coupler can be viewed as a family of the community coupler developed in China, and the C-Coupler1 is the first version following the general design. The future versions of the C-Coupler will also follow the general design. In the following context, we first define a general term of “*experiment model*” for the C-Coupler, and then introduce the architecture of the experiment models with the C-Coupler and the general software architecture of the C-Coupler.

#### 3.1 A general term for the C-Coupler: experiment model

An experiment model is a model version which can run on the C-Coupler platform for simulation. Generally, it can be any kind of model versions, such as single-column model, standalone component model, regional coupled model, air–sea coupled model, nested model, CSM, ESM, etc. A component model can be viewed as an element for constructing an experiment model.

## 3.2 Architecture of the experiment models with the C-Coupler

To achieve the target of integrating various models on the same common model software platform for a high-level sharing of the component models and for facilitating the construction of a new experiment model, **we have designed a new architecture** of the experiment models with the C-Coupler. Figure 1 shows an example of this architecture with a typical CSM, where “ATM”, “ICE”, “LND” and “OCN” stand for the component models in the CSM. The key ideas of this design include:

1. All experiment models share the same code of the C-Coupler. Given an experiment model, there could be a simple coupler component which manages the coupling between the component models, while the direct coupling without a coupler component is also supported to improve the parallel performance. For example, the red lines in Fig. 1 stand for the direct coupling, where no separate executable is generated for the coupling tasks, and all coupling tasks, such as the data transfer, data interpolation and flux computation, are performed through the uniform C-Coupler Application Programming Interfaces (APIs) called by the component models.
2. When a component model is shared by multiple experiment models, it keeps the same code version in all these experiment models. The code of coupling interfaces in the component model only specifies the input fields that the component model wants and the output fields that the component model can provide, but does not specify how to get the input fields and how to provide the output fields. For example, the source component models, the target component models and the flux calculation of the coupling fields are not specified in the code of the coupling interfaces.





users can select one of them in a simulation of the air–sea experiment model, or two or more of them for sensitivity experiments.

Third, the runtime software system provides a number of managers (shorted as MGR in Fig. 2), including communication manager, grid manager, parallel decomposition manager (shorted as decomposition MGR in Fig. 2), remapping manager, timer manger, data manager, restart manager, runtime process manager (shorted as process MGR in Fig. 2), etc. In detail, the communication manager is responsible for allocating and managing the communicators of each component and the whole experiment model. The grid manager manages the grids registered by the component models. The grid can be 1-D, 2-D, 3-D even 4-D. The parallel decomposition manager manages the parallel decompositions registered by the component models. The remapping manager manages the remapping algorithms used for coupling. Users can select different remapping algorithms in different simulations of the same experiment model. The timer manager provides timers for triggering the execution of internal and external algorithms. Each algorithm has a timer, and it is executed only when its timer is on. The timer manager can also provide time information for the whole experiment model through the corresponding APIs. The data manager provides uniform APIs for getting the attributes and memory space of fields. A component model can register model fields (including the memory space) as external fields to the data manager. For the internal fields, the data manager will allocate their memory space automatically. The restart manager is responsible for reading fields from the restart I/O data files in a restart run of a model simulation, and writing fields into the restart I/O data files when the timer for the restart writing is on. The runtime process manager manages the internal algorithms and the registered external algorithms, organizes these runtime algorithms into a number of runtime procedures, and executes the runtime procedures in a model simulation.

## GMDD

7, 3889–3936, 2014

### C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion









the brief description of each API in Table 1, we would like to further introduce two APIs, *c\_coupler\_execute\_procedure* and *c\_coupler\_register\_model\_algorithm*.

The API *c\_coupler\_execute\_procedure* takes the name of a runtime procedure as an input parameter, while the algorithm list of the runtime procedure is specified in the corresponding runtime configuration files. Thus, a runtime procedure can keep the same name in various experiment models, and users can make the same runtime procedure perform different works through modifying the runtime configuration files that can be viewed as a part of input of a model simulation. As a result, a component model can keep the same code version in various experiment models sharing it.

Almost all APIs are in Fortran except the *c\_coupler\_register\_model\_algorithm*. The *c\_coupler\_register\_model\_algorithm* is in C++ because most of Fortran versions do not support function pointer. The algorithm (or subroutine) of a component model registered through this API do not have parameters and return value.

## 4.1.2 The implementation of managers in the runtime software system

### The communication manager

The communication manager adaptively allocates and manages the MPI communicators for the MPI communications intra and between the components of an experiment model. It also provides some utilities for other managers in the runtime software system, such as getting the id of a process in the communicator of a component or in the global communicator.

### The grid manager

The grid manager utilizes a multi-dimensional **Common Remapping** (CoR) software (Liu et al., 2013a, b; it can be downloaded through “*svn-username=guest-password=guest co http://thucpl1.3322.org/svn/coupler/CoR1.0*”) to manage the grids with dimensions from 1-D to 4-D. In a model simulation, the grids of component

# GMDD

7, 3889–3936, 2014

## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



models are registered to the grid manager with a script of the CoR, where the grid data (such the latitude, longitude and mask corresponding to each grid cell) is always read from I/O data files. Besides the support of multiple dimensions of grids, another advantage of using the CoR for grid management is that the CoR can detect the relationship between two grids, for example, a 2-D grid is the horizontal grid of a 3-D grid with vertical levels.

## The parallel decomposition manager

Most of component models for Earth System Modelling have been parallelized using the MPI library, where the whole domain of each component model, which is always a 3-D grid with vertical levels, is decomposed into a number of sub domains for parallelization and each process of the component model is responsible for a sub domain. We call the decomposition from the whole domain into sub domains as parallel decomposition. In the C-Coupler1, each parallel decomposition managed by the parallel decomposition manager is based on a 2-D horizontal grid which has been registered to the grid manager, while the parallel decomposition on the vertical sub-grid of the 3-D grid is not supported yet. To register a parallel decomposition, each process of a component model enumerates the global index (the unique index in the whole domain) of each local cell (each cell in the sub domain of this process) in the corresponding horizontal grid. A component model can register multiple parallel decompositions on the same horizontal grid, while each parallel decomposition has a unique name which is treated as the keyword of it.

## The remapping manager

The remapping manager utilizes the CoR to achieve the data interpolation function. There are several remarkable advantages of using the CoR for interpolation. First, the CoR can help the Coupler1 to remap the field data on 1-D, 2-D and 3-D grids. Second, the CoR can generate remapping weights using its internal remapping algorithms and

## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion





## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



each external algorithm has a timer to periodically trigger its execution. There are three elements in a timer: the unit of frequency, the count of frequency and the count of delay. The unit and the count of frequency specify the period of the timer. The count of delay specifies a lag of the time during which the corresponding operation or algorithm will not be executed. The unit of frequency can be “years”, “months”, “days”, “seconds” and “steps”, where “steps” means the time step of calling the API `c_coupler_advance_timer`. For example, `timer < 10, steps, 15 >` means that the corresponding operation or algorithm will be executed at the steps with number  $10 \times N + 15$ , where  $N$  is a nonnegative integer.

Besides managing all the timers, the timer manager provides interfaces for getting the time information in a model simulation, such as the current model time during the simulation.

### The data manager

The fields managed by the data manager include the external fields which are registered by the components with APIs and the internal fields which are automatically allocated by the data manager. Besides the memory space, there are other attributes for a field, including the field name, data type, name of the corresponding parallel decomposition and name of the corresponding grid. A 2-D field and a 3-D field can share the same parallel decomposition while their corresponding grids are different, where the 2-D grid corresponding to the 2-D field is a sub grid of the 3-D grid corresponding to the 3-D field. For the scalar field which is not on a grid, the corresponding parallel decomposition and grid are marked as “NULL”.

### The restart manager

For reading/writing fields from/into the restart I/O data files, the restart manager iterates on each field managed by the data manager. For the internal fields, the restart manager can automatically detect the fields which are necessary for restarting the model

simulation. For each external field, the corresponding component can specify whether this field is necessary for restarting when registering this field with the C-Coupler API. Therefore, a component model can easily achieve the restart function through registering all fields for restart as external fields to the data manager.

## 5 The runtime process manager

The runtime process manager is responsible for running the list of runtime algorithms in each runtime procedure in a model simulation. Besides the external algorithms including the private algorithms registered by the component models and the common flux computation algorithms, there are several algorithms internally implemented in the runtime software system, e.g., the data transfer algorithm, data remapping algorithm, data I/O algorithm, etc. The data transfer algorithm is responsible for transferring a number of fields from one component to another. The fields transferred by the same data transfer algorithm can have different number of dimensions, different data types, different parallel decompositions, different grids, different frequency of transfer, etc. The data transfer algorithm packs all fields that are to be transferred at the current time step into one package to improve the communication performance.

The data remapping algorithm uses the corresponding algorithm in the CoR as a kernel for implementation. It can remap several fields at the same time for better parallel performance. The multiple fields in a data remapping algorithm share the same parallel decomposition, the same grid and the same timer, while the data types can be different.

The data I/O algorithm currently utilizes the serial I/O to read/write multiple fields which are managed by the data manager from/into the data I/O files. The multiple fields in a data I/O algorithm share the same timer, while can have different parallel decompositions, different grids and different data types. The fields of a data I/O algorithm are specified in the corresponding runtime configuration file. For the future version of the C-Coupler, we will further improve the I/O performance with parallel I/O for higher-resolution models.

## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion











## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



approach. At each time of “configure” of a model simulation, a package of the corresponding experimental setup is automatically generated and stored. This package can be used to reproduce the existing model simulation or develop new model simulations. After creating a model simulation, users can modify the experimental setup, such as the namelist, parallel settings, hardware platform, compiling options, output settings, start and stop time, etc. After the modification of the experiment setup, users should “configure” the model simulation, and then users can “compile” and “run case”. For various experiment models on various hardware platforms, users can use the same operations for various model simulations. For more information about the C-Coupler platform, please read its users’ guide (Liu et al., 2014).

## 5 Evaluation

To evaluate the C-Coupler1, we used the C-Coupler1 to construct several experiment models, including the FGOALS-gc, GAMIL2-sole, GAMIL2-CLM3, MASNUM-sole, POM-sole, MASNUM-POM and MOM4p1-sole. The FGOALS-gc is a CSM version based on the CSM FGOALS-g2 (Li et al., 2013a), where the original CPL6 coupler in the FGOALS-g2 is replaced by the C-Coupler1. The GAMIL2-sole is a standalone component model version of the atmosphere model GAMIL2 (Li et al., 2013b), the atmosphere component in the FGOALS-g2, which participated in the Atmosphere Model Intercomparison Project (AMIP) in the CMIP5. The GAMIL2-CLM3 is a coupled model version consisting of the GAMIL2 and the land surface model CLM3 (Oleson et al., 2004). The MASNUM-sole is a standalone component model version of the wave model MASNUM (Yang et al., 2005). The POM-sole is a standalone component model version based on a parallel version of the ocean model POM (Wang et al., 2010). The MASNUM-POM is a coupled model version consisting of the MASNUM and POM. The MOM4p1-sole is a standalone component model version of the ocean model MOM4p1 (Griffies et al., 2010).

In the following context of this section, we will evaluate the C-Coupler1 in several aspects, including the coupler component, direct coupling, 3-D coupling, code sharing, parallel performance and the work amount for integrating a standalone component model version onto the C-Coupler platform.

## 5.1 Coupler component

To construct the FGOALS-gc, we use the C-Coupler1 to develop a coupler component according to the CPL6 coupler. All flux computation algorithms in the CPL6 coupler are integrated into the C-Coupler1 as external algorithms. These algorithms can be treated as public algorithms that can be shared by other experiment models. Figure 4 shows the main driver of the coupler component in the FGOALS-gc. It is very simple with a few lines of code, most of which call the C-Coupler APIs, while the main driver of the CPL6 coupler has about 1000 lines of code. Figure 5 shows a part of the runtime configuration file of the algorithm list for the coupler component, where each line corresponds to a runtime algorithm. In sum, the runtime configuration file clearly lists out 91 runtime algorithms. Figure 6 shows the runtime configuration file of the runtime procedures for the coupler component, where each line corresponds to a runtime procedure and specifies the start index and end index of the runtime algorithms in the algorithm list in Fig. 5.

Our tests show that the FGOALS-gc achieves the same (bit-identical) simulation result with the FGOALS-g2. This result demonstrates that the C-Coupler1 can be used to construct a coupler component for a complicated coupled model, such as CSMs, without changing the simulation result of the existing coupled models. The FGOALS-g2 and FGOALS-gc can be downloaded through “*svn-username=guest-password=guest co http://thucpl1.3322.org/svn/coupler/CCPL\_CPL6\_consistency\_checking.*”

### C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## 5.2 Direct coupling

When constructing the experiment models GAMIL2-CLM3 and MASNUM-POM, we did not build a coupler component but used the direct coupling where no separate executable is generated for coupling. For the GAMIL2-CLM3, as the GAMIL2 and CLM3 share the same horizontal grid, there is only data transfer between them. For the MASNUM-POM, as the grid of the MASNUM is different from the grid of the POM, there are both data transfer and data interpolation between these two component models.

## 5.3 Parallel 3-D coupling

In the MASNUM-POM, there is only one coupling field, the wave-induced mixing coefficient (Qiao et al., 2004), a 3-D field from the MASNUM to POM. As the horizontal grids and vertical grids in these two component models are different, 3-D interpolation is required during coupling. In detail, we use the CoR to generate the remapping weights for the 3-D interpolation. The corresponding 3-D remapping algorithm is generated through cascading two remapping algorithms: a bilinear remapping algorithm for the horizontal grids and a 1-D spline remapping algorithm for the vertical grids. For the 1-D vertical interpolation, the MASNUM and POM have different kinds of vertical grids: a  $z$  grid for the MASNUM and a  $\sigma$  grid for the POM.

As aforementioned in Sect. 5.2, the MASNUM-POM uses direct coupling without a coupler component. As the resolution of the MASNUM is lower than the resolution of the POM, we put the calculation of the 3-D interpolation in the runtime procedure of the POM, in order for better parallel performance. Therefore, the 3-D interpolation shares the same processes with the POM. When the POM runs with multiple processes, the 3-D interpolation is computed in parallel. Our evaluation shows that the 3-D interpolation keeps the same (bit-identical) result with different numbers of processes.

GMDD

7, 3889–3936, 2014

### C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close



Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## 5.4 Code sharing

The experiment models FGOALS-gc, GAMIL2-CLM3 and GAMIL2-sole share the same atmosphere model GAMIL2. In the FGOALS-gc, the surface fields required by the GAMIL2 are gin from other component models, e.g., the land surface model CLM3, the ocean model LICOM2 (Liu et al., 2012) and an improved version of the sea ice model CICE4 (Liu, 2010), and computed by the coupler component with the C-Coupler1. In the GAMIL2-CLM3, the surface fields required by the GAMIL2 are gin from the CLM3 and the I/O data files which contain ocean fields and sea ice fields, and computed by the flux algorithms intra the GAMIL2. The GAMIL2-sole is similar to the GAMIL2-CLM3, while the difference is that the GAMIL2-sole directly calls a land surface package to simulate the surface fields from the land. Therefore, in these three experiment models, the GAMIL2 has different procedures for the surface fields.

However, we make the GAMIL2 share the same code version in these three experiment models. All algorithms for computing the input surface fields in the GAMIL2 have been registered to the C-Coupler1 as the private external algorithms. In different experiment models, the same runtime procedures of the GAMIL2 have different lists of runtime algorithms. As a result, all these experiment models keep the same (bit-identical) simulation result with the original model versions without the C-Coupler1.

The MASNUM-POM and MASNUM-sole share the same wave model MASNUM, and the MASNUM-POM and POM-sole share the same ocean model POM. Similarly, we respectively make the MASNUM and POM share the same code in these experiment models that keep the same (bit-identical) simulation result with the original model versions without the C-Coupler1.

## 5.5 Parallel performance

To evaluate the parallel performance of the C-Coupler1, we use a high-performance computer named Tansuo100 in Tsinghua University in China. It consists of more than 700 computing nodes, each of which consists of two Intel Xeon 5670 6-core CPUs

GMDD

7, 3889–3936, 2014

**C-Coupler1:  
a Chinese community  
coupler for Earth  
System Modelling**

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion





sharing 32GB main memory. All computing nodes are connected by a high-speed Infiniband network with peak communication bandwidth  $5 \text{ GB s}^{-1}$ . We use the Intel C/C++/Fortran compiler of version 11.1 and Intel MPI library of version 4.0 for the compilation of the experiment models, where the optimization level is O2 ~ O3.

In this evaluation, we focus on the internal algorithms implemented in the runtime software system. We only evaluate the parallel performance of the data transfer algorithm and the data remapping algorithm, without the consideration of the serial data I/O algorithm.

### 5.5.1 Parallel performance of the data transfer algorithm

We evaluate the parallel performance of the data transfer algorithm based on the MASNUM-POM, where the 3-D field, the wave-induced mixing coefficient, is directly transferred from the MASNUM to the POM. For the horizontal grid, both the MASNUM and POM have about 400 000 grid cells. For the vertical grid, the MASNUM has 18 vertical levels while the POM has 30 vertical levels. Table 2 shows the performance of the data transfer, when increasing the number of processes for the MASNUM and POM gradually from 1 to 48. In all test cases in Table 2, we force the MASNUM and POM to not share the same computing nodes. In other words, the data transfer from the MASNUM and POM must go through the infiniband network.

Generally, the time for the data transfer gets smaller when increasing the number of processes for the MASNUM or POM, as shown in Table 2. However, when increasing the processes number from 1 to 48 for each component model, the data transfer algorithm only achieves about 7-fold performance speedup. This relatively low speedup is because, when the number of processes for component models gets bigger, the data size for each MPI communication gets smaller so as that the communication bandwidth achieved in each MPI communication gets smaller.

## GMDD

7, 3889–3936, 2014

### C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## 5.5.2 Parallel performance of the data remapping algorithm

Similarly, we evaluate the parallel performance of the data remapping algorithm based on the MASNUM-POM, where the 3-D field, the wave-induced mixing coefficient, is interpolated from the 3-D grid of MASNUM to the 3-D grid of POM on the processes for POM. Table 3 shows the time for the data interpolation, when gradually increasing the number of processes from 1 to 48. From Table 3, we can find that, the data remapping algorithm achieves good scaling performance.

## 5.6 Integration of a standalone component model version

We use the ocean model MOM4p1 to evaluate the work amount for integrating a standalone component model version onto the C-Coupler platform. To make the standalone version of the MOM4p1 run on the C-Coupler platform, we wrote 5 simple configuration files and only added less than 10 lines of source code to the main driver of the MOM4p1. When further coupling the MOM4p1 with other component models on the C-Coupler platform, about two code files for linking the parallel decomposition and coupling fields to the C-Coupler APIs need to be added.

## 6 Discussion of future developments

Now, the C-Coupler is ready for model development with its first version C-Coupler1. As the C-Coupler is a community coupler, we welcome more and more scientists and engineers to use it and contribute to it in various aspects, such as providing component models, coupled models, flux algorithms, model simulations, bug reports, etc. We wish more and more model groups will use the C-Coupler for model development. **Any new requirement about the C-Coupler from scientists, engineers and model groups is possible to be considered into the future plan for the C-Coupler development.** In China, there are more and more users of the C-Coupler, and more and more component models and coupled models integrated on the same C-Coupler model platform.



## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



platform. In order to unify more kinds of models onto the same model platform, the future versions of the C-Coupler will provide more functions to support one-way even two-way model nesting, interactive coupled ensemble (Kirtman and Shukla, 2002), etc. In addition, we will consider how to make the C-Coupler able to integrate various assimilation systems and diagnostic systems onto the same model platform.

5. More remapping algorithms. Recently, we merged the development of the CoR and C-Coupler together. The available 2-D remapping algorithms in the CoR are of low order currently. In future, we will develop more 2-D remapping algorithms with higher order, to provide more selections for model coupling and scientific researches. Moreover, we will consider developing some pure 3-D remapping algorithms in the CoR, such as the 3-D n-neighbor distance-weighted average and trilinear remapping algorithms used in the OASIS coupler, and compare them with the “2-D + 1-D” approach.

## 7 Conclusion

The C-Coupler1 is a parallel 3-D coupler, which achieves good parallel performance and bit-identical simulation result with different numbers of processes. Guided by the general design of the C-Coupler, the C-Coupler1 enables the same code of runtime software system and component models to be shared by multiple experiment models, and enables multiple experiment models to work on the same model platform. It can be used to construct a coupler component with a few lines of code for constructing a complex coupled model like CSM, and can also be used as direct coupling for better parallel performance of the whole coupled model. The C-Coupler1 is ready for developing CSMs and ESMs. In China, there are more and more models using the C-Coupler for development. Now we start to develop a uniform model platform which will integrate

various component models, experiment models and model simulations together. We believe that the C-Coupler will help advance Earth System Modelling.

*Acknowledgements.* This work is supported in part by the Natural Science Foundation of China (no. 41275098) and the National Grand Fundamental Research 973 Program of China (no. 2013CB956603).

## References

- Armstrong, C. W., Ford, R. W., and Riley, G. D.: Coupling integrated Earth System Model components with BFG2, *Concurr. Comp.-Pract. E*, 21, 767–791, doi:10.1002/cpe.1348, 2009.
- Balaji, V., Anderson, J., Held, I., Winton, M., Durachta, J., Malyshev, S., and Stouffer, R. J.: The Exchange Grid: a mechanism for data exchange between Earth System components on independent grids, in: *Proceedings of the 2005 International Conference on Parallel Computational Fluid Dynamics*, College Park, MD, USA, Elsevier, 2006.
- Bao, Q., Lin, P., Zhou, T., Liu, Y., Yu, Y., Wu, G., He, B., He, J., Li, L., Li, J., Li, Y., Liu, H., Qiao, F., Song, Z., Wang, B., Wang, J., Wang, P., Wang, X., Wang, Z., Wu, B., Wu, T., Xu, Y., Yu, H., Zhao, W., Zheng, W., and Zhou, L.: The Flexible Global Ocean–Atmosphere–Land System Model, spectral version 2: FGOALS-s2, *Adv. Atmos. Sci.*, 30, 561–576, 2013.
- Collins, W. D., Bitz, C. M., Blackmon, M. L., Bonan, G. B., Bretherton, C. S., Carton, J. A., Chang, P., Doney, S. C., Hack, J. J., Henderson, T. B., Kiehl, J. T., Large, W. G., McKenna, D. S., Santer, B. D., and Smith, R. D.: The Community Climate System Model Version 3 (CCSM3), *J. Climate*, 19, 2122–2143, 2006.
- Craig, A. P., Jacob, R. L., Kauffman, B., Bettge, T., Larson, J. W., Ong, E. T., Ding, C. H. Q., and He, Y.: CPL6: the new extensible, high performance parallel coupler for the Community Climate System Model. *Int. J. High Perform. C.*, 19, 309–327, 2005.
- Craig, A. P., Vertenstein, M., and Jacob, R.: A new flexible coupler for Earth System Modelling developed for CCSM4 and CESM1, *Int. J. High Perform. C.*, 26, 31–42, doi:10.1177/1094342011428141, 2012.
- Donner, L. J., Wyman, B. L., Hemler, R. S., Horowitz, L. W., Ming, Y., Zhao, M., Golaz, J. C., Ginoux, P., Lin, S. J., Schwarzkopf, M. D., Austin, J., Alaka, G., Cooke, W. F., Delworth, T. L., Freidenreich, S. M., Gordon, C. T., Griffies, S. M., Held, I. M., Hurlin, W. J., Klein, S. A., Knutson, T. R., Langenhorst, A. R., Lee, H.-C., Lin, Y., Magi, B. I., Malyshev, S. L., Milly, P. C. D.,

## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Naik, V., Nath, M. J., Pincus, R., Ploshay, J. J., Ramaswamy, V., Seman, C. J., Shevliakova, E., Sirutis, J. J., Stern, W. F., Stouffer, R. J., Wilson, R. J., Winton, M., Wittenberg, A. T., and Zeng, F.: The dynamical core, physical parameterizations, and basic simulation characteristics of the atmospheric component AM3 of the GFDL Global Coupled Model CM3, *J. Climate*, 24, 3484–3519, 2011.

Dufresne, J.-L., Foujols, M.-A., Denvil, S., Caubel, A., Marti, O., Aumont, O., Balkanski, Y., Bekki, S., Bellenger, H., Benshila, R., Bony, S., Bopp, L., Braconnot, P., Brockmann, P., Cadule, P., Cheruy, F., Codron, F., Cozic, A., Cugnet, D., de Noblet, N., Duvel, J.-P., Eth'e, C., Fairhead, L., Fichefet, T., Flavoni, S., Friedlingstein, P., Grandpeix, J.-Y., Guez, L., Guilyardi, E., Hauglustaine, D., Hourdin, F., Idelkadi, A., Ghattas, J., Jousseaume, S., Kageyama, M., Krinner, G., Labetoulle, S., Lahellec, A., Lefebvre, M.-P., Lefevre, F., Levy, C., Li, Z. X., Lloyd, J., Lott, F., Madec, G., Mancip, M., Marchand, M., Masson, S., Meurdesoif, Y., Mignot, J., Musat, I., Parouty, S., Polcher, J., Rio, C., Schulz, M., Swingedouw, D., Szopa, S., Talandier, C., Terray, P., and Viovy, N.: Climate change projections using the IPSL-CM5 Earth System Model: from CMIP3 to CMIP5, *Clim. Dynam.*, 40, 2123–2165, 2013.

Dunne, J. P., John, J. G., Adcroft, A. J., Griffies, S. M., Hallberg, R. W., Shevliakova, E. N., Stouffer, R. J., Cooke, W., Dunne, K. A., Harrison, M. J., Krasting, J. P., Levy, H., Malyshev, S. L., Milly, P. C. D., Phillipps, P. J., Sentman, L. T., Samuels, B. L., Spelman, M. J., Winton, M., Wittenberg, A. T., and Zadeh, N.: GFDL's ESM2 global coupled climate-carbon Earth System Models, Part I: Physical formulation and baseline simulation characteristics, *J. Climate*, 25, 6646–6665, doi:10.1175/JCLI-D-11-00560.1, 2012.

Ford, R. W., Riley, G. D., Bane, M. K., Armstrong, C. W., and Freeman, T. L.: GCF: a general coupling framework, *Concurr. Comp.-Pract. E*, 18, 163–181, 2006.

Gent, P. R., Danabasoglu, G., Donner, L. J., Holland, M. M., Hunke, E. C., Jayne, S. R., Lawrence, D. M., Neale, R. B., Rasch, P. J., Vertenstein, M., Worley, P. H., Yang, Z.-L., and Zhang, M.: The Community Climate System Model version 4, *J. Climate*, 24, 4973–4991, 2011.

Giorgetta, M. A., Jungclaus, J. H., Reick, C. H., Legutke, S., Bader, J., Böttinger, M., Brovkin, V., Crueger, T., Esch, M., Fieg, K., Glushak, K., Gayler, V., Haak, H., Hollweg, H.-D., Ilyina, T., Kinne, S., Kornblueh, L., Matei, D., Mauritsen, T., Mikolajewicz, U., Mikolajewicz, U., Mueller, W., Notz, D., Pithan, F., Raddatz, T., Rast, S., Redler, R., Roeckner, E., Schmidt, H., Schnur, R., Segschneider, J., Six, K. D., Stockhause, M., Timmreck, C., Wegner, J., Widmann, H., Wieners, K.-H., Claussen, M., Marotzke, J., and Stevens, B.: Climate and carbon

## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- cycle changes from 1850 to 2100 in MPI-ESM simulations for the Coupled Model Intercomparison Project phase 5, *J. Adv. Model. Earth Syst.*, 5, 572–597, 2013.
- Griffies, S. M., Schmidt, M., and Herzfeld, M.: Elements of MOM4p1, GFDL Ocean Group Technical Report 6, Geophysical Fluid Dynamics Laboratory, Princeton, 2010.
- 5 Hazeleger, W., Wang, X., Severijns, C., Stefanescu, S., Bintanja, R., Sterl, A., Wyser, K., Semmler, T., Yang, S., van den Hurk, B., van Noije, T., van der Linden, E., and van der Wiel, K.: EC-Earth V2.2: description and validation of a new seamless earth system prediction model, *Clim. Dynam.*, 39, 2611–2629, doi:10.1007/s00382-011-1228-5, 2011.
- Hill, C., DeLuca, C., Balaji, V., Suarez, M., and da Silva, A.: Architecture of the Earth System Modelling Framework, *Comput. Sci. Eng.*, 6, 18–28, 2004.
- 10 Hurrell, J. W., Holland, M. M., Gent, P. R., Ghan, S., Kay, J. E., Kushner, P. J., Lamarque, J.-F., Large, W. G., Lawrence, D., Lindsay, K., Lipscomb, W. H., Long, M. C., Mahowald, N., Marsh, D. R., Neale, R. B., Rasch, P., Vavrus, S., Vertenstein, M., Bader, D., Collins, W. D., Hack, J. J., Kiehl, J., and Marshall, S.: The Community Earth System Model: a framework for collaborative research, *B. Am. Meteorol. Soc.*, 94, 1339–1360, 2013.
- 15 Jacob, R., Larson, J., and Ong, E.:  $M \times N$  Communication and Parallel Interpolation in Community Climate System Model version 3 using the Model Coupling Toolkit, *Int. J. High Perform. C.*, 19, 293–307, 2005.
- Ji, D., Wang, L., Feng, J., Wu, Q., Cheng, H., Zhang, Q., Yang, J., Dong, W., Dai, Y., Gong, D., Zhang, R.-H., Wang, X., Liu, J., Moore, J. C., Chen, D., and Zhou, M.: Description and basic evaluation of BNU-ESM version 1, *Geosci. Model Dev. Discuss.*, 7, 1601–1647, doi:10.5194/gmdd-7-1601-2014, 2014.
- 20 Jones, P.: First and second-order conservative remapping schemes for grids in spherical coordinates, *Mon. Weather Rev.*, 127, 2204–2210, 1999.
- 25 Jungclaus, J. H., Fischer, N., Haak, H., Lohmann, K., Marotzke, J., Matei, D., Mikolajewicz, U., Notz, D., and von Storch, J. S.: Characteristics of the ocean simulations in MPIOM, the ocean component of the MPI-Earth System Model, *J. Adv. Model. Earth Syst.*, 5, 422–446, 2013.
- Kirtman, B. P. and Shukla, J.: Interactive coupled ensemble: a new coupling strategy for CGCMs, *Geophys. Res. Lett.*, 29, 5-1–5-4, 2002.
- 30 Larson, J., Jacob, R., and Ong, E.: The Model Coupling Toolkit: a new Fortran90 Toolkit for building multiphysics parallel coupled models, *Int. J. High Perform. C.*, 19, 277–292, 2005.
- Li, L. J., Lin, P. F., Yu, Y. Q., Wang, B., Zhou, T. J., Liu, L., Liu, J. P., Bao, Q., Xu, S. M., Huang, W. Y., Xia, K., Pu, Y., Dong, L., Shen, S., Liu, Y. M., Hu, N., Liu, M. M., Sun, W. Q.,



## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Shi, X. J., Zheng, W. P., Wu, B., Song, M.-R., Liu, H. L., Zhang, X. H., Wu, G. X., Xue, W., Huang, X. M., Yang, G. W., Song, Z. Y., and Qiao, F. L.: The Flexible Global Ocean–Atmosphere–Land System Model: grid-point version 2: FGOALS-g2, *Adv. Atmos. Sci.*, 30, 543–560, 2013a.

Li, L. J., Wang, B., Dong, L., Liu, L., Shen, S., Hu, N., Sun, W., Wang, Y., Huang, W., Shi, X., Pu, Y., G. and Yang.: Evaluation of Grid-point Atmospheric Model of IAP LASG version 2 (GAMIL2), *Adv. Atmos. Sci.*, 30, 855–867, doi:10.1007/s00376-013-2157-5, 2013b.

Liu, H. L., Lin, P. F., Yu, Y. Q., and Zhang, X. H.: The baseline evaluation of LASG/IAP Climate system Ocean Model (LICOM) version 2.0, *Acta Meteorol. Sin.*, 26, 318–329, 2012.

Liu, J.: Sensitivity of sea ice and ocean simulations to sea ice salinity in a coupled global climate model, *Sci. China Ser. D*, 53, 911–916, 2010.

Liu, L., Yang, G., and Wang, B.: CoR: a multi-dimensional common remapping software for Earth System Models, in: The Second Workshop on Coupling Technologies for Earth System Models (CW2013), available at: <https://wiki.cc.gatech.edu/CW2013/index.php/Program> (last access: 8 May 2014), 2013a.

Liu, L., Yang, G., and Wang, B.: Common Multi-dimensional Remapping Software CoR (**C**ommon **R**emap) V1.0 User Reference Manual, available at: [http://www.cess.tsinghua.edu.cn/publish/ess/7687/20120515135108504806682/Common%20%20Multi-dimensional%20Remapping%20Software%20CoR%20\(Common%20Remap\)%20V1.0.pdf](http://www.cess.tsinghua.edu.cn/publish/ess/7687/20120515135108504806682/Common%20%20Multi-dimensional%20Remapping%20Software%20CoR%20(Common%20Remap)%20V1.0.pdf) (last access: 8 May 2014), 2013b.

Liu, L., Li, R., Zhang, C., Yang, G., and Wang, B.: Community coupler C-Coupler1 User's Guide, available at: <http://www.cess.tsinghua.edu.cn/publish/ess/7687/20120515135108504806682/Community%20Coupler%20C-Coupler1%20User%20Guide.pdf> (last access: 8 May 2014), 2014.

Oleson, K. W., Dai, Y., Bonan, G. B., Bosilovich, M., Dickinson, R., Dirmeyer, P., Hoffman, F., Houser, P., Levis, S., Niu, G.-Y., Thornton, P., Vertenstein, Yang, Z., and Zeng, X.: Technical Description of the Community Land Model (CLM), NTIS #PB2004-105836, 2004.

Qiao, F., Yuan, Y., Yang, Y., Zheng, Q., Xia, C., and Ma, J.: Wave-induced mixing in the upper ocean: distribution and application in a global ocean circulation model, *Geophys. Res. Lett.*, 31, L11303, doi:10.1029/2004GL019824, 2004.

Redler, R., Valcke, S., and Ritzdorf, H.: OASIS4 – a coupling software for next generation Earth System Modelling, *Geosci. Model Dev.*, 3, 87–104, doi:10.5194/gmd-3-87-2010, 2010.

## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Valcke, S.: The OASIS3 coupler: a European climate modelling community software, *Geosci. Model Dev.*, 6, 373–388, doi:10.5194/gmd-6-373-2013, 2013a.

Valcke, S.: OASIS3-MCT, a coupler for climate modelling, in: The Second Workshop on Coupling Technologies for Earth System Models (CW2013), available at: <https://wiki.cc.gatech.edu/CW2013/index.php/Program> (last access: 8 May 2014), 2013b.

Valcke, S., Balaji, V., Craig, A., DeLuca, C., Dunlap, R., Ford, R. W., Jacob, R., Larson, J., O’Kuinghttons, R., Riley, G. D., and Vertenstein, M.: Coupling technologies for Earth System Modelling, *Geosci. Model Dev.*, 5, 1589–1596, doi:10.5194/gmd-5-1589-2012, 2012a.

Valcke, S., Craig, T., and Coquart, L.: OASIS3-MCT User Guide, OASIS3-MCT 1.0, CERFACS Technical Report, TR/CMGC/12/49, Toulouse, France, available at: [http://pantar.cerfacs.fr/globc/publication/technicalreport/2012/oasis3mct\\_UserGuide.pdf](http://pantar.cerfacs.fr/globc/publication/technicalreport/2012/oasis3mct_UserGuide.pdf) (last access: 8 May 2014), 46 pp., 2012b.

Vichi, M., Manzini, E., Fogli, P. G., Alessandri, A., Patara, L., Scoccimarro, E., Masina, S., and Navarra, A.: Global and regional ocean carbon uptake and climate change: sensitivity to a substantial mitigation scenario, *Clim. Dynam.*, 37, 1929–1947, doi:10.1007/s00382-011-1079-0, 2011.

Voldoire, A., Sanchez-Gomez, E., Salas y M’elia, D., Decharme, B., Cassou, C., S’en’esi, S., Valcke, S., Beau, I., Alias, A., Chevallier, M., D’equ’e, M., Deshayes, J., Douville, H., Fernandez, E., Madec, G., Maisonnave, E., Moine, M.-P., Planton, S., Saint-Martin, D., Szopa, S., Tyteca, S., Alkama, R., Belamari, S., Braun, A., Coquart, L., and Chauvin, F.: The CNRM-CM5.1 global climate model: description and basic evaluation, *Clim. Dynam.*, 40, 2091–2121, 2013.

Wang, G., Qiao, F., and Xia, C.: Parallelization of a coupled wave-circulation model and its application, *Ocean Dynam.*, 60, 331–339, 2010.

Yang, Y., Qiao, F., Zhao, W., Y. Teng and Yuan, Y.: MASNUM ocean wave numerical model in spherical coordinates and its application, *Acta Oceanol. Sin.*, 27, 1–7, 2005.

## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**Table 1.** The APIs provided by the C-Coupler1.

Classification	API	Brief description
Main driver	c_coupler_initialize	This API initializes the runtime software system. A component model can obtain its MPI communicator with this interface.
	c_coupler_finalize	This API finalizes the Runtime software system.
	c_coupler_execute_procedure	This API invokes the runtime software system to run the corresponding runtime procedure which consists of a list of runtime algorithms specified by the corresponding runtime configuration files. The corresponding runtime procedure could be empty without any runtime algorithms. A component model can have multiple different runtime procedures.
Registration	c_coupler_register_model_data	This API registers a field of component model to enable the runtime software system to access the memory space of this field.
	c_coupler_withdraw_model_data	This API withdraws a field of component model from the runtime software system which has been registered before.
	c_coupler_register_decomposition	This API registers a parallel decomposition to the runtime software system. A component model can register multiple different parallel decompositions, even on the same horizontal grid.
	c_coupler_register_model_algorithm	This API registers an algorithm (also known as a subroutine) of a component model as an external algorithm of the runtime software system.
Restart function	c_coupler_do_restart_read	This API reads in the data value of fields in a restart run of model simulation.
	c_coupler_do_restart_write	This API writes out the data value of fields for restart run.

**Table 1.** Continued.

Classification	API	Brief description
Time information	<code>c_coupler_get_current_calendar_time</code>	This API gets the calendar time of the current step.
	<code>c_coupler_get_nstep</code>	This API gets the number of the current step from the start of the model simulation.
	<code>c_coupler_get_num_total_step</code>	This API gets the number of total steps of the model simulation.
	<code>c_coupler_get_step_size</code>	This API gets the number of seconds of the time step.
	<code>c_coupler_is_first_restart_step</code>	This API checks whether the current step is the first step of a restart run.
	<code>c_coupler_is_first_step</code>	This API checks whether the current step is the first step of an initial run, which also means whether the number of the current step is 0.
	<code>c_coupler_advance_timer</code>	This API advances the time of simulation.
	<code>c_coupler_check_coupled_run_finished</code>	This API checks whether the model simulation ends.
	<code>c_coupler_check_coupled_run_restart_time</code>	This API checks whether the current step is time for writing fields into I/O data files for restart run.
	<code>c_coupler_get_current_num_days_in_year</code>	This API gets the number of days elapsed since the first day of the current year.
	<code>c_coupler_get_current_year</code>	This API gets the year of the current step.
	<code>c_coupler_get_current_date</code>	This API gets the date of the current step.
	<code>c_coupler_get_current_second</code>	This API gets the second of the current step.
	<code>c_coupler_get_start_time</code>	This API gets the start time of the model simulation
	<code>c_coupler_get_stop_time</code>	This API gets the end time of the model simulation.
	<code>c_coupler_get_previous_time</code>	This API gets the time of the previous step.
	<code>c_coupler_get_current_time</code>	This API gets the time of the current step.
	<code>c_coupler_get_num_elapsed_days_from_start</code>	This API gets the number of days elapsed since the start time of the model simulation.
	<code>c_coupler_is_end_current_day</code>	This API checks whether the current step is the last step of the current day.
	<code>c_coupler_is_end_current_month</code>	This API checks whether the current step is the last step of the current month.

**C-Coupler1:  
a Chinese community  
coupler for Earth  
System Modelling**

L. Liu et al.

Title Page

Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	





## GMDD

7, 3889–3936, 2014

### C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.


[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)




[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


**Table 3.** The time (seconds) for interpolating the 3-D field wave-induced mixing coefficient on the POM when increasing the number of processes. Each process takes a physical CPU core. When the number of processes does not exceed 12, only one computing node is used.

Number of processes	1	2	6	12	24	48
Time	3.08	1.59	0.58	0.37	0.17	0.09

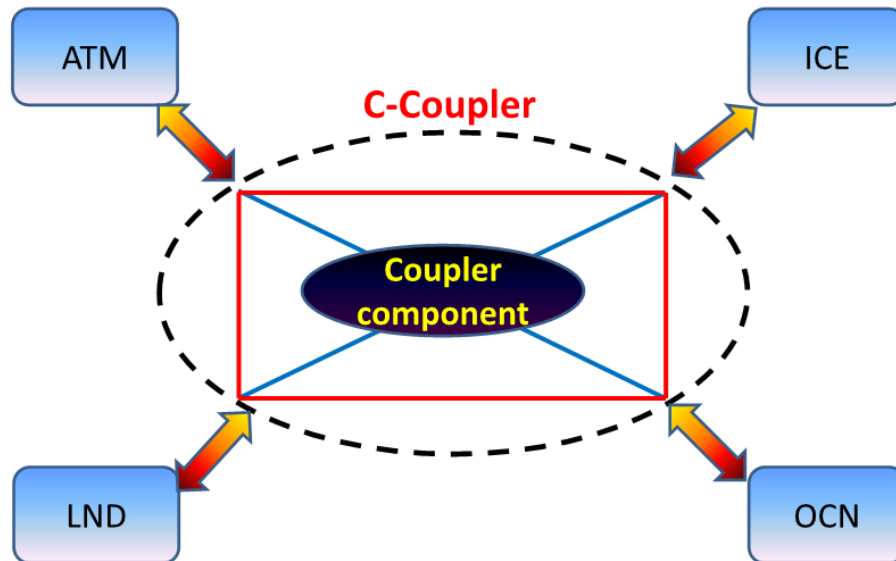

**Figure 1.** The architecture of the models with the C-Coupler.

**C-Coupler1:  
a Chinese community  
coupler for Earth  
System Modelling**


L. Liu et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

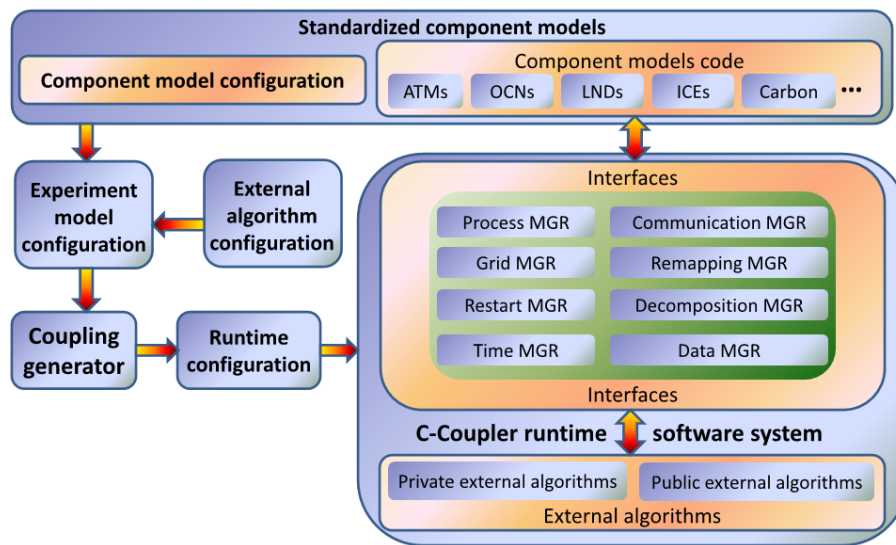

**Figure 2.** The general software architecture of the C-Coupler.


Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	





## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

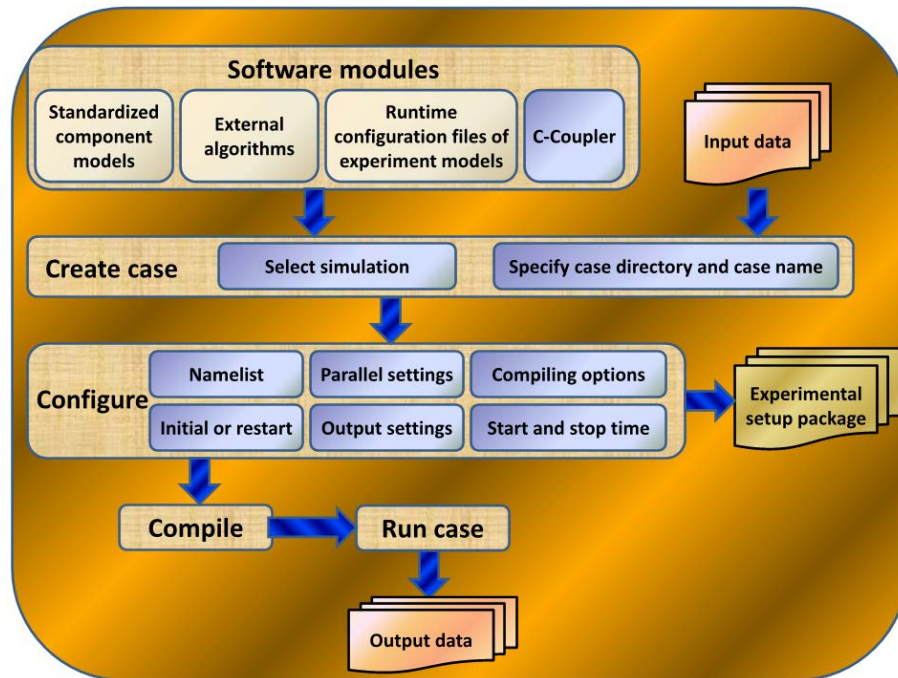

**Figure 3.** The general software architecture of the C-Coupler platform.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



```

program cpl

  use cpl_read_namelist_mod
  use c_coupler_interface_mod

  implicit none
  integer comm

  call c_coupler_initialize(comm)

  call parse_cpl_nml

  call c_coupler_execute_procedure("calc_frac", "initialize")
  call c_coupler_execute_procedure("sendalb_to_atm", "initialize")
  call c_coupler_execute_procedure("check_stage", "initialize")
  call c_coupler_do_restart_read
  if (c_coupler_is_first_restart_step()) call c_coupler_advance_timer

  do while (.not. c_coupler_check_coupled_run_finished())
    call c_coupler_execute_procedure("kernel_stage", "kernel")
    call c_coupler_do_restart_write()
    call c_coupler_advance_timer()
  enddo

  call c_coupler_finalize()

stop
end program cpl

```

**Figure 4.** The code of the main driver of the coupler component in the FGOALS-gc. The C-Coupler APIs are marked in blue.

# GMDD

7, 3889–3936, 2014

## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



transfer	runtime_transfer_cpl_a2c_areac_recv.cfg
transfer	runtime_transfer_cpl_o2c_areac_recv.cfg
transfer	runtime_transfer_cpl_i2c_areac_recv.cfg
normal	frac_init_step1.cfg
remap	frac_init_remap.cfg
normal	frac_init_step2.cfg
transfer	runtime_transfer_cpl_c2lg_2D_send.cfg
transfer	runtime_transfer_cpl_r2c_areac_recv.cfg
normal	areafact_init.cfg
transfer	runtime_transfer_cpl_i2c_2D_recv.cfg
transfer	runtime_transfer_cpl_l2c_2D_recv.cfg
transfer	runtime_transfer_cpl_o2c_scalar_recv.cfg
transfer	runtime_transfer_cpl_o2c_2D_recv.cfg
transfer	runtime_transfer_cpl_a2c_2D_recv.cfg
normal	areafact_o2c.cfg
normal	areafact_i2c.cfg
normal	areafact_a2c.cfg
normal	areafact_l2c.cfg
normal	areafact_r2c.cfg
remap	runtime_remap_Xr2c.cfg

**Figure 5.** Part of the runtime configuration file of the algorithm list for the coupler component in the FGOALS-gc. The first column specifies the type of each runtime algorithm. *Transfer* specifies the data transfer algorithms, *remap* specifies the data interpolation algorithms, and *normal* specifies the external algorithms. The second column specifies the configuration file of each runtime algorithm.

**C-Coupler1:  
a Chinese community  
coupler for Earth  
System Modelling**

L. Liu et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



calc_frac	0	6
sendalb_to_atm	7	39
check_stage	40	44
kernel_stage	45	90

**Figure 6.** The runtime configuration file of the runtime procedures for the coupler component in the FGOALS-gc.

# GMDD

7, 3889–3936, 2014

## C-Coupler1: a Chinese community coupler for Earth System Modelling

L. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

