



This discussion paper is/has been under review for the journal Geoscientific Model Development (GMD). Please refer to the corresponding final paper in GMD if available.

Influence of grid aspect ratio on planetary boundary layer turbulence in large-eddy simulations

S. Nishizawa, H. Yashiro, Y. Sato, Y. Miyamoto, and H. Tomita

RIKEN Advanced Institute for Computational Science, Kobe, Japan

Received: 18 May 2015 – Accepted: 13 July 2015 – Published: 4 August 2015

Correspondence to: S. Nishizawa (s-nishizawa@riken.jp)

Published by Copernicus Publications on behalf of the European Geosciences Union.

GMDD

8, 6021–6094, 2015

**Grid aspect ratio in
the meteorological
LES**

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

We examine the influence of the grid aspect ratio of horizontal to vertical grid spacing on turbulence in the planetary boundary layer (PBL) in a large-eddy simulation (LES). In order to distinguish them as much as possible from other artificial effects caused by numerical schemes, we used a fully compressible meteorological LES model with a fully explicit scheme of temporal integration. The influences are investigated with a series of sensitivity tests with parameter sweeps of spatial resolution and grid aspect ratio. We confirmed that the mixing length of the eddy viscosity and diffusion due to sub-grid scale turbulence plays an essential role in reproducing the theoretical $-5/3$ slope of the energy spectrum. If we define the filter length in LES modeling based on consideration of the numerical scheme, and introduce a corrective factor for the grid aspect ratio into the mixing length, the theoretical slope of the energy spectrum can be obtained; otherwise, spurious energy piling appears at high wavenumbers. We also found that the grid aspect ratio has influence on the turbulent statistics, especially the skewness of the vertical velocity near the top of the PBL, which becomes spuriously large with large aspect ratio, even if a reasonable spectrum is obtained.

1 Introduction

In meteorological simulations, the grid aspect ratio of the horizontal to vertical grid spacing is generally much larger than in other fluid dynamics fields. The use of such large aspect ratios has been validated based on the phenomena studied in this field. So far, most of the phenomena of interest are considerably affected by the rotation of the earth and vertical stratification; both lead to differences between the horizontal and vertical scales of atmospheric phenomena. Further, since it is natural to treat the atmospheric motions separately in the horizontal and vertical directions in order to understand the atmospheric dynamics, a large aspect ratio is used for grids in meteorological simulations.

GMDD

8, 6021–6094, 2015

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Atmospheric phenomena have a wide range in terms of both time and space. One of the initial targets of the studies involving meteorological numerical simulations was the planetary wave. In this case, the horizontal scale, at $O(1000)$ – $O(10\,000)$ km, is much larger than the vertical, and is dominated by the effect of rotation. The vertical scale is mainly determined by atmospheric thickness, characterized by the depth of the troposphere, i.e., a scale of $O(10)$ km, and the motion is essentially two-dimensional (barotropic). The synoptic scale phenomena are also important targets, with smaller horizontal scale than planetary-scale phenomena. They have the same vertical scale of $O(10)$ km as planetary-scale phenomena, but have a vertical (baroclinic) structure. To express the vertical structure of such phenomena, several vertical layers in a numerical simulation are configured according to the degree of vertical structure desired. A grid aspect ratio of $O(100)$ is typically used for these phenomena.

If we turn our attention to mesoscale phenomena, whose horizontal scales are $O(10)$ – $O(100)$ km, a more detailed expression of vertical structure is required. Since moist convection plays an important role in the vertical motion of such phenomena, hydrostatic balance, which is a good approximation for planetary and synoptic-scale phenomena, is no longer satisfied. The spatial scale of their vertical motion is roughly $O(1)$ km. Therefore, the grid aspect ratio in this case should be reasonably determined with $O(10)$ – $O(100)$. In the beginning of the 1970s, one of the most significant paradigm changes in meteorological numerical studies was the appearance of non-hydrostatic models (e.g., Klemp and Wilhelmson, 1978). Cumulus convection is explicitly represented in these models (e.g., Skamarock et al., 2008; Hodur, 1997; Tripoli, 1982; Xue et al., 2000; Black, 1994; Saito et al., 2006; Tsuboki and Sakakibara, 2002). Recently, global convection system-resolving models, such as NICAM (Tomita and Satoh, 2004; Satoh et al., 2014), have been developed to investigate the interactions between synoptic-scale phenomena, cloud clusters, and individual cumulus clouds. To resolve vertical motion precisely, the number of vertical layers in such models is larger than in general circulation models (GCMs), but the grid aspect ratio is still large. For example, it is five in Miyamoto et al. (2013, 2015).

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



In the atmosphere, there are many smaller scale variabilities than associated with cumulus clouds. For example, the spatial scale of the dominant motion in the unstable planetary boundary layer (PBL) is smaller than 1 km. Clearly, turbulence in the PBL is an important issue for all meteorological models, because heat and mass transport by turbulence in both the horizontal and vertical directions strongly affect the atmospheric mass and energy balances. In particular, vertical transport is important for atmospheric variability over the PBL. Its effect is parameterized as turbulence models in GCMs and cloud-resolving or permitting models (e.g., Mellor and Yamada, 1982; Nakanishi and Niino, 2004). At this scale, the effects of rotation and stratification are smaller compared with those of advection. Thus, we may say that such variability is essentially isotropic and three-dimensional. This means that an isotropic grid, whose grid aspect ratio is unity, would be preferred to reproduce these small variabilities.

Large eddy simulation (LES) is a vital tool to represent such small scale variabilities explicitly. LES is designed to resolve turbulence at scales down to the inertial sub-range by parameterizing sub-grid scale (SGS) turbulence based on the theory of energy cascades. With the rapid development of computers, LES has recently started being used for meteorological simulations (e.g., Deardorff, 1980; Moeng and Wynggard, 1988; Sullivan et al., 1994; vanZanten et al., 2011). The theory of LES is based on dynamics of three-dimensional isotropic turbulence. In terms of phenomenology and methodology, an isotropic grid would be the most suitable for LES. Nevertheless, the grid used in meteorological LESs usually has a large aspect ratio, mainly because of limitations of computational resources. The effect of the grid aspect ratio has not been discussed explicitly in most previous studies. The purpose of this study is to examine the influences of the grid aspect ratio on the turbulent aspects of the PBL from a meteorological viewpoint when LES is applied. To do so, we performed a series of PBL experiments by systematic parameter sweeps of aspect ratio and grid spacing.

We present an overview of the model used in this study in Sect. 2, focusing on the modeling related to this study. Since the detailed descriptions of the model are important for the traceability of the experiment and reliability of the model, we present

them in the appendices. The configuration of the numerical experiments are shown in Sect. 3. The influences of the grid aspect ratio on turbulence are discussed in Sect. 4. Section 5 gives the summary and concluding remarks.

2 Model description

The model used in this study is SCALE-LES (<http://scale.aics.riken.jp/>), which was developed as a meteorological large eddy simulation model. In this section, we focus on describing the essential parts of the model for the purposes of this study; the model dynamics and turbulence schemes are described in Sects. 2.1 and 2.2, respectively. In the latter, we consider in particular the relationship between the numerical filter and spatial filter in LES.

Detailed descriptions of the model, including the discretization method, which are not directly related to the topic of this study, are given in the appendices as follows: the governing equations are in Appendix A1, the temporal integration scheme is in Appendix A2, the spatial discretization is in Appendix A3, the numerical filter is in Appendix A4, and other physical processes are in Appendix A5. We also describe the consideration of numerical stability in determining discretization schemes in Appendix B, and the validity of the dynamical core in Appendix C. Symbols used in this paper are summarized in Table 1.

2.1 Dynamics

Since the purpose of this study is to clarify the impact of the grid aspect ratio on the turbulent aspects, the influences of the approximations to the governing equations should be reduced as much as possible. For this reason, we employ the set of fully compressible non-hydrostatic equations as the governing equations. The three-dimensional momentum (ρu , ρv , and ρw , for the x , y , and z directions, respectively), total density (ρ), mass-weighted potential temperature ($\rho\theta$), and mass concentration

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



of tracers ($\rho q_x; x \in \{v, l, s\}$) are used as the prognostic variables. See Appendix A1 for the detailed formulation of the governing equations.

The central difference schemes are used for spatial discretization; the second-order scheme is applied to the pressure gradient terms in the momentum equations and divergence terms of mass flux in the continuity equation, while the fourth-order scheme is applied to the advection terms in the momentum and thermodynamics equations. The reason the advection terms are discretized by the high-order scheme is based on the accuracy of the eddy viscosity and the diffusion terms representing effect of SGS turbulence. The coefficients of the viscosity and diffusion terms are proportional to the square of the grid spacing, so that the magnitude of the terms would be comparable to the truncation error of the advection terms, in terms of order of accuracy, if the second-order scheme is employed. The even-order schemes require the explicit numerical filter for numerical stability. However, they have the advantage that it is easier to evaluate the effect of the numerical diffusivity using the explicit numerical filter than that introduced implicitly by an odd-order scheme. See Appendices A3 and A4 for details of the discretization and a discussion of the numerical filter, respectively.

A fully explicit scheme, i.e., HE-VE (horizontally explicit and vertically explicit) scheme, is used for temporal integration in this study. This scheme generally has less implicit numerical diffusion than implicit schemes such as HI-VI (horizontally implicit and vertically implicit) and HE-VI (horizontally explicit and vertically implicit) schemes. To focus on the influences of the grid aspect ratio, an explicit scheme is more suitable than implicit schemes. Additionally, we do not use a time-split scheme to avoid numerical damping of the time-splitting. See Appendix A2 for a detailed description of the temporal scheme used in this study.

In order to validate the dynamical core of this model, we performed a density current experiment (Straka et al., 1993) as a standard test case. The detailed results are described in Appendix C; we posit that the dynamical core of the model shows reasonable performance, and is reliable enough for the investigations performed in this study.

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



As well as validating the dynamical core, Sato et al. (2014) validated this model from the viewpoint of moist physical processes.

2.2 Sub-grid model

2.2.1 Overview of LES modeling

The model for effect of SGS turbulence used in this model is a Smagorinsky–Lilly-type model (Smagorinsky, 1963; Lilly, 1962). In the governing equations shown in Appendix A1, the effect of the SGS turbulence can be written as $\frac{\partial \rho \tau_{ij}}{\partial x_j}$ in the momentum equations, and $\frac{\partial \rho \tau_i^*}{\partial x_i}$ in the thermodynamics and tracer equations. In this subsection, the subscripts imply summation over the set $\{1, 2, 3\}$. The τ_{ij} and τ_i^* are parameterized as

$$\tau_{ij} = -2\nu_{\text{SGS}} \left(S_{ij} - \frac{1}{3} S_{kk} \delta_{ij} \right) + \frac{2}{3} \text{TKE}_{\text{SGS}} \delta_{ij}, \quad (1)$$

$$\tau_i^* = -\nu_{\text{SGS}}^* \frac{\partial \phi}{\partial x_i}, \quad (2)$$

where ν_{SGS} and ν_{SGS}^* are the coefficients of the SGS eddy viscosity and diffusion, respectively, δ_{ij} is the Kronecker delta, and ϕ represents scalar quantities such as θ and q_x . S is the strain tensor given by

$$S_{ij} = \frac{1}{2} \left(\frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right). \quad (3)$$

TKE_{SGS} is the turbulence kinetic energy (TKE) of the SGS turbulence.

The role of the sub-grid model is to parameterize the effect of SGS turbulence based on the energy cascade theory of three-dimensional isotropic turbulence. The eddy viscosity and diffusion model is employed as a sub-grid model to represent the effect. For



the determination of the amount of the energy cascade, the mixing length of the eddy viscosity and diffusion is the most important factor. The coefficient of the SGS eddy viscosity, ν_{SGS} in Eq. (1), is proportional to the square of the mixing length (L_{mix}) in Prandtl's mixing length theory;

$$\nu_{\text{SGS}} = L_{\text{mix}}^2 |S|. \quad (4)$$

The mixing length depends on what type of spatial filter we employ on the variables in the equations, and the length scale of the spatial filter is the essential factor for the mixing length. The spatial filtering is inevitable in the discretization of the equations. The spatial filter in a numerical model is implicitly determined by the grid spacing and discretization schemes. The artificial length characterizing the spatial filter owing to discretization is defined as the filter length. Besides the filter length, the shape of the grid should be also considered in the mixing length determination. Its effect can be represented by the grid aspect ratio. Scotti et al. (1993) proposed an equation for the effect of the grid aspect ratio on the mixing length. Using the filter length Δ and grid aspect ratio a , the mixing length can be represented as

$$L_{\text{mix}} = C_s f(a) \Delta F_S, \quad (5)$$

where $f(a)$ is a function of the grid aspect ratio, and represents the effect of the grid aspect ratio on the mixing length. C_s is the Smagorinsky constant, and F_S represents the effect of static stability.

The effect of the static stability on the mixing length is introduced in this model according to Brown et al. (1994). They extended the Lilly model to improve the performance of the simulation by considering the dependency of the Prandtl number, $\text{Pr} = \nu_{\text{SGS}} / \nu_{\text{SGS}}^*$. For the unstable condition ($\text{Ri} < 0$),

$$\nu_{\text{SGS}} = (C_s f(a) \Delta)^2 |S| \sqrt{1 - c\text{Ri}}, \quad (6)$$

$$\text{Pr} = \text{Pr}_N \sqrt{\frac{1 - c\text{Ri}}{1 - b\text{Ri}}}, \quad (7)$$

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



where Ri is the local (pointwise) gradient Richardson number, defined as

$$Ri = \frac{N^2}{|S|^2}. \quad (8)$$

Pr_N is the Prandtl number in neutral conditions; $Pr_N = 0.7$. The constants c and b are 16 and 40, respectively, following Brown et al. (1994). They are empirically given to fit surface-layer observations. For the weakly stable condition, where Ri is smaller than the critical Richardson number $Ri_c (= 0.25)$, i.e., $0 \leq Ri < Ri_c$,

$$v_{SGS} = (C_s f(a) \Delta)^2 |S| \left(1 - \frac{Ri}{Ri_c}\right)^4, \quad (9)$$

$$Pr = Pr_N \left\{1 - (1 - Pr_N) \frac{Ri}{Ri_c}\right\}^{-1}. \quad (10)$$

For the strongly stable condition ($Ri \geq Ri_c$),

$$v_{SGS} = 0, \quad (11)$$

$$Pr = 1. \quad (12)$$

The TKE_{SGS} in Eq. (1) is

$$TKE_{SGS} = \frac{1}{2} \tau_{ij} = \left(\frac{v_{SGS}}{C_k \Delta}\right)^2, \quad (13)$$

where C_k is an SGS constant and assumed to be 0.1, following Deardorff (1980) and Moeng and Wynggard (1988).

2.2.2 Problems of filter length and grid aspect ratio

There are two ambiguous factors in the configuration for determining the mixing length in recent meteorological LES models. One problem is the configuration of the filter

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



length in Eq. (5) in the models. The value of Δ is usually set as the grid spacing for simplicity, not by considering the numerical filter inherited by an individual model scheme. The other problem is that the effect of the grid aspect ratio on the mixing length is not considered in determining the mixing length; correspondingly, $f(a) = 1$ in Eq. (5).

Such rough treatment of the filter length and no consideration of the grid aspect ratio lead incorrect turbulent properties. A usual remedy to such effects is a posteriori tuning of the Smagorinsky constant, C_s in Eq. (5), so as to reproduce realistic results (e.g., Deardorff, 1971). However, this constant should not, in principle, be determined empirically, but should be derived from the theory. Here, we should note that each theory is based on its own basic concepts. Although this means that different theoretical concepts lead to different values for the constants, we should keep in mind that a certain constant is uniquely determined by a particular model on theoretical basis. The Smagorinsky constant is derived by integration of the kinetic energy filtered out by the spatial filter. If the cutoff filter is employed as the spatial filter, the integration can be performed in the cubic B in Fourier space:

$$B = \{|k_x| < \pi/\Delta x, |k_y| < \pi/\Delta y, |k_z| < \pi/\Delta z\}, \quad (14)$$

where k_i is the wavenumber in the i -direction. Lilly (1967) obtained the constant ($C_s = 0.16$) by integrating in the sphere inscribed in the cubic B , while Scotti et al. (1993) obtained it more precisely by integrating in the entire cubic. In this study, we follow Scotti et al. (1993), and use $C_s = 0.13$.

Let us return to the first problem, i.e., the determination of the spatial filter length Δ . Most models in previous studies assume that the filter length is determined as the geometric mean of the grid spacings in the three directions (e.g., Deardorff, 1980):

$$\Delta = (\Delta x \Delta y \Delta z)^{1/3}. \quad (15)$$

It is generally difficult to strictly define the spatial filter in a model because the filtering effect implicitly introduced by discretization is very complicated. This difficulty is especially significant if we apply the implicit method of time integration. On the other hand,

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



the effect of the explicitly introduced numerical filter can be more easily estimated than that of an implicitly introduced filter. In our model, we introduce hyperviscosity and diffusion explicitly as the numerical filter (see Appendix A4). The explicit numerical filter is thought to be the dominant spatial filter because we employ the explicit temporal integration method and even-order spatial difference scheme. This type of filter removes the two-grid scale noise selectively. In other words, the two-grid scale variability is filtered out from the resolved variability. Consequently, we can say that in our model, the two-grid scale is preferred as the filter length rather than the grid spacing defined in Eq. (15):

$$\Delta = 2(\Delta x \Delta y \Delta z)^{1/3}. \quad (16)$$

In the next section, we investigate the validity of this configuration using simulation results.

The second problem is the treatment of the grid aspect ratio in LES in actual grid systems. In the equilibrium condition with the universal Kolmogorov spectrum, the energy flux cascaded into the SGS variability is equal to the SGS dissipation. Since the dissipation does not depend on the artificial grid configuration but on the physical configuration, energy cascaded to the SGS turbulence should not depend on grid configuration, including the grid aspect ratio. The energy cascade flux, which is equal to the dissipation, can be written as a function of the strain tensor S_{ij} defined in Eq. (3) and the mixing length in Eq. (5) in Smagorinsky-type models. S_{ij} depends on the grid configuration, including aspect ratio. The mixing length should be thus dependent on the aspect ratio to cancel out the dependency of S_{ij} on the aspect ratio, otherwise the energy cascade flux and dissipation should be dependent on the grid configuration. Scotti et al. (1993) derived an approximate function of the $f(a)$ in Eq. (5), considering the grid aspect ratio theoretically by integrating the energy in the cubic B defined in

Eq. (14);

$$f(a) = 1.736a^{1/3} \left\{ 4P_1(b_1)a^{1/3} + 0.222P_2(b_1)a^{-5/3} + 0.077P_3(b_1)a^{-11/3} - 3b_1 + 4P_1(b_2) + 0.222P_2(b_2) + 0.077P_3(b_2) - 3b_2 \right\}^{-3/4}, \quad (17)$$

where $b_1 = \arctan(1/a)$, $b_2 = \arctan(a) = \pi/2 - b_1$, and

$$P_1(z) = 2.5P_2(z) - 1.5(\cos(z))^{2/3} \sin(z), \quad (18)$$

$$P_2(z) = 0.98z + 0.073z^2 - 0.418z^3 + 0.120z^4, \quad (19)$$

$$P_3(z) = 0.976z + 0.188z^2 + 1.169z^3 + 0.755z^4 - 0.151z^5. \quad (20)$$

Note that they considered two grid aspect ratios, while here we consider only one for simplicity, i.e., $\Delta x = \Delta y > \Delta z$. Note that $f(a)$ is a monotonic function for a , for instance, $f(2) = 1.036$, $f(5) = 1.231$, $f(10) = 1.469$, and $f(20) = 1.790$. Roughly speaking, there can exist larger scale (or lower wavenumber) variability in filtered out variabilities for a larger grid aspect ratio. This implies larger turbulence kinetic energy for larger aspect ratios, and larger TKE results in a larger mixing length. In our study, the effect of the grid aspect ratio on the mixing length is introduced in Eq. (17) by following Scotti et al. (1993).

3 Numerical experiments

We performed three PBL experiments to examine the influences of the grid aspect ratio and filter length on simulated turbulence, which are summarized in Table 2. In the control experiment, the filter length is double the grid spacing, as in Eq. (16), and the mixing length in the sub-grid model is modified by the grid aspect ratio, as in Eq. (17). The second experiment is a small filter length experiment in which the filter length is set as in Eq. (15). The last is a fixed mixing length experiment, in which the mixing length

in the SGS model is not modified by the grid aspect ratio, that is, $f(a) = 1$. In the most current meteorological simulations, the configuration of the filter length follows Eq. (15) and $f(a) = 1$ in Eq. (5).

In the three experiments above, a systematic parameter sweep of resolution and grid aspect ratios was conducted. The spatial resolution of each run performed in the control experiment is shown in Table 3. The parameter set in the small filter length experiment is the same as the control experiment, except for the 5mAR10 and 5mAR20 runs, while in the fixed mixing length experiment it is the same as the control, except for the 10mAR3 run.

In all the runs, the domain size is 9.6 km \times 9.6 km in the horizontal direction, and 3 km in the vertical. The domain size is large enough to contain convective cells in the PBL. The lateral boundary conditions are double periodic. The vertical grid is stretched above 2 km. In the stretching layer, the vertical velocity is damped by Rayleigh damping with an e-folding time of 10 s to reduce the effect of the reflection of waves at the top boundary.

For the initial condition, we follow Ito et al. (2010); the potential temperature is 299 K at the surface, with a vertical gradient of -4 K km^{-1} and a random small perturbation of 0.1 K. A constant horizontal velocity of 5 m s^{-1} is set in the x direction in the entire domain.

The temporal integration is done for four hours for each run. In order to focus on our purpose, we simplify the setting of the bottom boundary condition so that a constant heat flux of 200 W m^{-2} is added to the lowest layer through the integration, although Ito et al. (2010) added a heat flux with a sinusoidal temporal change to represent diurnal change. With a background flow of 5 m s^{-1} and a ground heat flux of 200 W m^{-2} , we expect the cellular convection to develop according to Ito et al. (2010). In this study, we consider dry conditions without moist and radiation processes.

Different temporal intervals are used for the dynamical and physical processes. In this study, the physical processes are only the surface flux for the momentum and the eddy viscosity and diffusion for SGS turbulence. The intervals for the dynamical

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



good agreement with one another, except near the filter length scale, at which variabilities are damped numerically. The largest energy appears at a scale of about 2 km; the external forcing seems to mainly inject energy at this scale. This corresponds to the spatial structure of convective cells, as shown in Fig. 3a. The cells have well-known hexagonal or quadrangular structure with strong upward convection in the narrow cell boundary, and relatively weak downward convection in the entire cell region.

On the other hand, the spectrum of horizontal kinetic energy $u^2 + v^2/2$ does not clearly indicate the power law as shown in Fig. 2. Horizontal vortexes (i.e., convections) are strongly constrained by the PBL top and bottom boundaries. The horizontal velocity related to convection is dominant near the top and bottom of the convection, while it is relatively small near the middle of the convection. As a result, the horizontal kinetic energy of large scale motion tends to be smaller around the middle of the PBL. On the other hand, the vertical velocity is dominant in the middle of the convection, and the energy spectrum of vertical kinetic energy is mostly logarithmically linear, as shown in Fig. 2. This difference between vertical and horizontal velocity is more significant for larger scale motion. This is almost opposite for horizontal and vertical velocities near the PBL top and bottom boundaries; the spectrum of the horizontal velocity at the lowest layer shows a slope of almost $-3/5$, while that of the vertical velocity does not. These differences, due to the existence of the PBL top and bottom boundaries, cause anisotropy and static stability (Yakhot et al., 1989; Horiuti, 1993).

In most LES models, the filter length for the sub-grid model is set to be equal to the grid spacing itself. In our model, the filter length is set to be twice the grid spacing, as described in Sect. 2. In order to examine the influence of the filter length, we performed the small filter length experiment, in which we use a conventional filter length, i.e., as in Eq. (15). Figure 1b shows the energy spectrum in this experiment (only runs with $\Delta z = 10$ m are shown). The spectra show a spurious energy profile, in which energy piles up at the higher wavenumbers. The slopes of the spectra become gentler than $-5/3$ because of the spurious energy. The spurious energy piling is considered to be a result of the lack of energy cascade because of SGS variability, caused by the use

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



of a small mixing length. We found that the situation is more significant for larger grid aspect ratios and coarser horizontal resolution, as shown Fig. 1b, although the effect of the grid aspect ratio represented by Eq. (17) is taken into account in this experiment, as well as in the control experiment.

In order to estimate the degree of the energy piling quantitatively, we introduce an index denoted by SEP:

$$\text{SEP} \equiv \max \left(\frac{E(k)}{Ak^{-5/3}} \right), \quad (21)$$

where $E(k)$ is the energy spectrum in each run, and the fitting coefficient A is calculated with a spectrum ranging from $1/1000$ to $1/100 \text{ m}^{-1}$ using the highest resolution run with a grid aspect ratio of unity (10mAR1 run) in the control experiment as a reference solution. Thus, SEP indicates the maximum ratio of the energy spectrum in each run to the fitting slope of $-5/3$ power in the reference run. Figure 4 shows the dependency of the SEP index on the grid aspect ratio. Since the energy spectrum is not perfectly logarithmically linear with the $-3/5$ slope, the index is not one, even in the 10mAR1 run. The index in the control experiment is smaller than 1.2 for all the runs; it does not depend on the grid aspect ratio. On the other hand, the indices in the small filter length experiment are larger than those in the control experiment. They are larger than 1.2 for all the runs, except when the grid aspect ratio is unity. This shows that, in this model, twice the grid spacing is more suitable as the filter length rather than the grid spacing itself, and suggests that the filter length should be chosen according to the numerical schemes used in a model. In addition, the dependency on the grid aspect ratio can clearly be seen. These results suggest that an appropriate filter length is necessary, especially in the case of a large grid aspect ratio.

Next, we consider the influence of $f(a)$ in the mixing length, as in Eq. (5), on the spectrum. The mixing length is modified by the grid aspect ratio in the control experiment according to Scotti et al. (1993), as described in Sect. 2. In the fixed mixing length experiment, we fixed $f(a)$ in Eq. (5) equal to one in order to ignore the effect of the grid

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



aspect ratio. Figure 1c shows the spectra of the runs in the fixed mixing length experiment; only runs with larger grid aspect ratios are shown. The spectra for the large aspect ratio, especially greater than ten, show the spurious energy pile, as in the case of the small filter length experiment. The SEP index is greater than 1.3 in these cases, as shown in Fig. 4. This means that the effect of the grid aspect ratio should be taken into account in modeling the mixing length for the SGS turbulence model. The mixing length should be enlarged according to the effect of the grid aspect ratio from that of the isotropic grid case, otherwise artificial energy piles at higher wavenumbers.

4.2 Turbulence statistics

In this subsection, we show the influence of the grid configuration of the runs on the turbulence statistics in the PBL. Figure 5 shows the dependency of the vertical profiles of several turbulence statistics on the spatial resolution and grid aspect ratio in the control experiment: the horizontal mean potential temperature, the vertical heat flux, the variance of the vertical velocity, and the skewness of the vertical velocity. These values are averaged over the last half hour ($t = 3.5\text{--}4$ h). In the calculation of these values, the horizontal mean is defined as the mass weighted average, $\overline{\frac{\rho\Phi}{\rho}}$, where the overline represents the mathematical horizontal average. These profiles are calculated from the resolved variability, except for the heat flux.

Figure 5a gives the vertical profile of the potential temperature for all the runs. The potential temperature is almost uniform, and the atmosphere is well mixed in the PBL below 1.2 km height; the difference is about 0.05 K. On the other hand, the profile in the surface layer indicates some difference according to the resolution and grid aspect ratio. Here, we define the surface layer as the layer that keeps the potential temperature gradient less than $-10^{-3} \text{ K m}^{-1}$.¹ In the 10mAR1 run, this steep potential temperature gradient is reproduced in the unstable surface layer below 75 m depth. Figure 6a shows

¹The discussion in this paragraph is qualitatively robust regardless of the magnitude of the threshold.

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



the dependency of the depth of the surface layer on the horizontal resolution. We found that the depth becomes larger for coarser horizontal resolution, even if the vertical resolution is higher. Typically, in the 5mAR20 run, the depth of the surface layer is about 140 m. This tendency can be reasonably understood by larger eddy diffusion due to greater mixing length.

Figure 5b shows the profile of the vertical heat flux, which is here defined as the sum of the resolved flux, $\overline{\rho w' \theta' / \rho}$, and the SGS flux. Note that the prime represents deviation from the horizontal mean. We define the top boundary of the PBL as the height of minimum heat flux. In all the runs, the PBL height of 1.25 km and the heat flux profile are almost the same. The flux profile indicates a linear distribution in the z direction, and this means that the heating rate is constant in the PBL. Its slope is about 0.18 W m^{-3} , corresponding to a heating rate of about 0.6 K h^{-1} . This value is consistent with the sensible heat flux from the bottom boundary (200 W m^{-2}) divided by the depth of the region where the heat flux is positive (about 1.1 km). We can conclude that the total vertical heat flux is reasonably reproduced regardless of grid configuration.

The variance of the vertical velocity is shown in Fig. 5c. The variance is the largest around 500 m height in all the runs. Results from the highest and lowest resolution runs (10mAR1 and 30mAR5) are about 1.75 and $1.4 \text{ m}^2 \text{ s}^{-2}$, respectively. Figure 6b shows how the grid configuration affects the variance of vertical velocity. It is found that the variance of the vertical velocity mainly depends on the horizontal resolution; as the horizontal grid spacing decreases, the variance of the vertical velocity increases, and their correlation is about -0.98 . On the other hand, significant dependency of the variance of the vertical velocity on the vertical resolution and grid aspect ratio is not seen; their correlations are -0.21 and -0.56 , respectively.

Theoretically, the variance of vertical velocity should converge to a certain value with grid refinement for the following reason. The variance is approximately equal to the

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



sum of squares of each wavenumber component as

$$\text{Var}_w \approx \sum_{k=1}^{k_{\max}} |\hat{w}(k)|^2, \quad (22)$$

where k_{\max} and $\hat{w}(k)$ are the maximum horizontal wavenumber and amplitude of the vertical velocity of wavenumber k , respectively. Note that here we ignore the density variability for simplicity. Under the condition that the energy spectrum $|\hat{w}|^2$ has an exponential decay of $k^{-5/3}$, the accumulated energy, which is equal to half of the variance, can be obtained analytically as

$$\int_{k_0}^{k_{\max}} Ak^{-5/3} dk = B - \frac{3}{2} Ak_{\max}^{-2/3}, \quad (23)$$

where A and B are constants. Nevertheless, as shown in Fig. 6b, the variance has not yet converged in the range of resolutions. The convergence point is still a debatable issue at higher resolutions.

The profile of skewness shows an almost linear slope in the PBL except near the surface, as shown in Fig. 5d. The skewness has a similar value around 500 m height for all the runs, while it shows variety around the top and bottom of the PBL. Positive skewness implies stronger upward motion compared to downward motion. Around the top boundary, the hexagonal or quadrangular cell structure of convection seen around the middle of the layer in Fig. 3a is no longer dominant, as Fig. 3b shows. There are strong upward plumes surrounded by compensating annular downward flow, whose horizontal scale is about 1–2 km. Most of the plumes are located above the cell vertex at lower height. Figure 6c shows the dependency of the skewness on the horizontal resolution at 1.2 km height (top of the PBL). The skewness is larger for coarser resolution. The logarithmic values of skewness and horizontal resolution have a mostly linear

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



relationship. Sullivan and Patton (2011) tried to explain the dependency of the skewness on the horizontal resolution by the SGS moment, but its effect is quantitatively not sufficient to explain the difference. We suppose that localized strong upward plumes due to the larger eddy viscosity is a possible cause of the larger skewness based on the following explanation. Coarser resolution corresponds to larger filter length and consequently, larger eddy viscosity. The larger viscosity prevents small scale motions. However, the amount of heat transferred vertically should be almost the same as in other runs, because static instability becomes strong if the vertical heat flux is smaller because motion is prevented. In fact, the horizontal mean vertical heat flux is almost identical in all the runs (Fig. 5b). Individual convective plumes in coarser resolution runs could be stronger, transferring more heat than in higher resolution runs. It is possible that such localized stronger upward plumes are the cause of the larger skewness in coarser resolution runs.

Residuals from logarithmic linear regression of the skewness in the horizontal resolution are relatively larger for coarser horizontal resolution: e.g., the 5mAR20 (cyan square) and the 30mAR5 (green circle) runs. Dependency of the skewness on the grid aspect ratio is one of the reasons for the residuals. The dependency on the aspect ratio can be seen in Fig. 6d. The skewness tends to be larger for larger aspect ratios. Positive residuals from the 5mAR20 run and negative ones from the 30mAR5 run in the regression would be due to large and small aspect ratios, respectively. Also, the skewness of the 5mAR20 run is larger than that of the 10mAR10 run (blue x symbol) at the same horizontal resolutions (100 m). Their difference could be due to the difference in aspect ratio. The skewness in the 10mAR10 run is closer to that of the 10mAR1 run (black x symbol), than that of the 5mAR20 run, even if the vertical resolution is higher in the 5mAR20 run than in the 10mAR10 run. This suggests that a large aspect ratio produces spurious large skewness in vertical velocity, that is, artificially strong upwind. The dependence on the grid aspect ratio seems somewhat complex, and the reason for the dependence is not clear. We assume that it is related to static stability. For higher grid aspect ratios, i.e., relatively higher vertical resolution or lower horizontal resolu-

GMDD

8, 6021–6094, 2015

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



tion, static stability could vary vertically rather than horizontally. In that case, a strong shallow stable layer could cover a relatively wider region horizontally, and strong static stability and small horizontal contrast might prevent vertical motion and suppress the vertical eddy viscosity and diffusion. Under this condition, only a strong parcel can go upward against the thin strong stable layer. For the same amount of vertical heat transportation independent of grid configuration, a larger grid aspect ratio might require stronger upwind, indicating larger skewness.

5 Conclusions

We conducted a series of planetary boundary layer experiments to examine the influences of the aspect ratio of horizontal to vertical grid spacing on the atmospheric turbulence in a large-eddy simulation. In order to focus on the influences, we tried to avoid artificial effects as much as possible by employing the fully compressible governing equations. A fully explicit (i.e., HE-VE) temporal integration scheme and a high-order central difference scheme for spatial differentials are adopted to reduce implicitly introduced numerical viscosity and diffusion by discretization.

In the model used in this paper, we considered the effect of spatial filter length and grid aspect ratio on the mixing length of the eddy viscosity and diffusion, which is a parameterization of the energy cascade to SGS variability. Explicit numerical hyperviscosity and diffusion is introduced to reduce the two-grid scale noise in this model. This can be considered a spatial filter in LES. As a result, the filter length in this model is double the grid spacing, while the grid spacing is used as the length in most LESs. The effect of the grid aspect ratio on the mixing length proposed by Scotti et al. (1993) was also introduced.

If we use a reasonable filter length and introduce the grid aspect ratio effect, the energy spectra of all the runs show good correspondence with the theoretical $k^{-5/3}$ slope, regardless of spatial resolution and grid aspect ratio. On the other hand, the theoretical slope in the spectrum is no longer obtained, and a spurious energy pile is found

if the spatial filter length is set to be equal to the grid spacing as in most meteorological LESs. The spurious energy piling is more significant for larger grid aspect ratios. A shorter filter length results in a shorter mixing length and consequently, a smaller energy cascade to SGS variability. Thus, an inappropriate filter length causes spurious energy.

The effect of the grid aspect ratio on the mixing length of the eddy viscosity and diffusion cannot be ignored. If the mixing length is not modified by the grid aspect ratio, spurious energy also piles at higher wavenumbers because of an insufficient energy cascade to SGS turbulence at large grid aspect ratios. In previous studies, the Smagorinsky constant was often modified as a tuning parameter to obtain the expected energy spectrum. However, the constant should be determined theoretically and should not be tuned to make the energy cascade large instead of considering filter length and grid aspect ratio.

The horizontal resolution and grid aspect ratio also influence the turbulence statistics. The vertical profiles of several turbulence statistics depend on the grid configuration as follows. The depth of the unstable surface layer is larger for coarser horizontal resolution (but not vertical resolution). The variance of the resolved vertical velocity essentially depends on the horizontal resolution, mainly because of spatial averaging by discretization. The skewness of the vertical velocity shows dependency on grid aspect ratio as well as on horizontal resolution. In particular, the skewness is sensitive to the grid configuration around the top and bottom of the PBL. It becomes larger and smaller around the top and bottom, respectively, for coarser resolution and larger grid aspect ratio. Higher resolution and smaller grid aspect ratio are required in order to obtain accurate skewness. This is important, because the spurious strong upward wind near the PBL top, which is implied by larger skewness, would have a large effect on cloud microphysical processes. For example, the reproducibility of clouds around the PBL top, such as stratocumulus, would be sensitive to grid configuration.

We conclude that the grid aspect ratio influences the parameterization of the energy cascade to SGS variability and the reproducibility of skewness of turbulence in the PBL.

GMDD

8, 6021–6094, 2015

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Although there are many meteorological LESs in which the grid aspect ratio is large, such large grid aspect ratios have led to misinterpretation in some experiments in previous studies because of spurious energy piling at higher wavenumbers and stronger vertical motion indicated by larger skewness. The aspect ratio should be taken into account properly in determining the mixing length of the eddy viscosity and diffusion as a sub-grid model for the reliability of simulations of boundary layer turbulence.

Appendix A: Model description

A1 Governing equations

In this subsection, we introduce the governing equations for the prognostic variables ($\rho, \rho u, \rho v, \rho w, \rho \theta$, and $\rho q_x s$). The gas constant and specific heat are those for total (moist) air in the thermodynamics equation and equation of state. The θ in this model is not the conventional potential temperature for dry air, but the corresponding value for total air, considering water content. These variables are spatially filtered quantities, and the Favre filter (Favre, 1983) is used for u, v, w, θ , and $q_x s$.

A1.1 Continuity equations

The continuity equations for each material can be described in flux form:

$$\frac{\partial \rho q_d}{\partial t} + \nabla \cdot (\rho q_d \mathbf{u}) = \text{DIFF} [q_d], \quad (\text{A1})$$

$$\frac{\partial \rho q_v}{\partial t} + \nabla \cdot (\rho q_v \mathbf{u}) = S_v + \text{DIFF} [q_v], \quad (\text{A2})$$

$$\frac{\partial \rho q_l}{\partial t} + \nabla \cdot (\rho q_l \mathbf{u}) + \frac{\partial \rho q_l w_l}{\partial z} = S_l + \text{DIFF} [q_l], \quad (\text{A3})$$

$$\frac{\partial \rho q_s}{\partial t} + \nabla \cdot (\rho q_s \mathbf{u}) + \frac{\partial \rho q_s w_s}{\partial z} = S_s + \text{DIFF} [q_s], \quad (\text{A4})$$

where ∇ is the gradient vector, and $\text{DIFF}[\phi]$ is the diffusion term by SGS turbulence (see Sect. 2.2). The sum of the ratios of their mass should be unity:

$$q_d + q_v + q_l + q_s = 1. \quad (\text{A5})$$

The source terms for water substances should satisfy the following relationship:

$$S_v + S_l + S_s = 0. \quad (\text{A6})$$

The sum of Eqs. (A1)–(A4) gives the continuity equation of total density:

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{u}) + \frac{\partial \rho q_l w_l}{\partial z} + \frac{\partial \rho q_s w_s}{\partial z} = 0. \quad (\text{A7})$$

For this derivation, we use the fact that the operator $\text{DIFF}[\phi]$ is a linear operator;

$$\text{DIFF}[\phi] = -\frac{\partial}{\partial x_i} \rho v_{\text{SGS}}^* \frac{\partial \phi}{\partial x_i}. \quad (\text{A8})$$

Using Eq. (A5),

$$\begin{aligned} & \text{DIFF}[q_d] + \text{DIFF}[q_v] + \text{DIFF}[q_l] + \text{DIFF}[q_s] \\ &= \text{DIFF}[q_d + q_v + q_l + q_s] = \text{DIFF}[1] = 0. \end{aligned} \quad (\text{A9})$$

A1.2 Momentum equations

The momentum equations for the gas, liquid, and solid materials are described as

$$\begin{aligned} & \frac{\partial \rho (q_d + q_v) \mathbf{u}}{\partial t} + \nabla \cdot [\rho (q_d + q_v) \mathbf{u} \otimes \mathbf{u}] \\ &= -\nabla p - [\rho (q_d + q_v) \mathbf{g} + (f_l + f_s)] \mathbf{e}_z + \mathbf{u} S_v + \text{DIFF}[(q_d + q_v) \mathbf{u}], \\ & \frac{\partial \rho q_l \mathbf{u}}{\partial t} + \nabla \cdot (\rho q_l \mathbf{u} \otimes \mathbf{u}) + \frac{\partial \rho q_l u w_l}{\partial z} \end{aligned} \quad (\text{A10})$$

$$= -(\rho q_l g - f_l) \mathbf{e}_z + \mathbf{u} S_l + \text{DIFF}[q_l \mathbf{u}], \quad (\text{A11})$$

$$\frac{\partial \rho q_s \mathbf{u}}{\partial t} + \nabla \cdot (\rho q_s \mathbf{u} \otimes \mathbf{u}) + \frac{\partial \rho q_s \mathbf{u} w_s}{\partial z}$$

$$= -(\rho q_s g - f_s) \mathbf{e}_z + \mathbf{u} S_s + \text{DIFF}[q_s \mathbf{u}], \quad (\text{A12})$$

where \otimes represents the tensor product. The pressure is derived from the equation of state as

$$\rho = \rho(q_d R_d + q_v R_v) T. \quad (\text{A13})$$

The sum of Eqs. (A10)–(A12) gives the total momentum equation as

$$\frac{\partial \rho \mathbf{u}}{\partial t} + \nabla \cdot (\rho \mathbf{u} \otimes \mathbf{u}) + \left(\frac{\partial \rho q_l w_l}{\partial z} + \frac{\partial \rho q_s w_s}{\partial z} \right) \mathbf{u}$$

$$= -\nabla p - \rho g \mathbf{e}_z + \text{DIFF}[\mathbf{u}]. \quad (\text{A14})$$

Note that the drag forces from loading do not appear in Eq. (A14), because those term are canceled out by the summation.

A1.3 Thermodynamics equations

The equations of internal energies are given as

$$\frac{\partial \rho(q_d e_d + q_v e_v)}{\partial t} + \nabla \cdot [\rho(q_d e_d + q_v e_v) \mathbf{u}]$$

$$= -\rho \nabla \cdot \mathbf{u} + Q_d + Q_v + \text{DIFF}[(q_d + q_v) T^*], \quad (\text{A15})$$

$$\frac{\partial \rho q_l e_l}{\partial t} + \nabla \cdot (\rho q_l e_l \mathbf{u}) + \frac{\partial \rho q_l e_l w_l}{\partial z} = Q_l + \text{DIFF}[q_l T^*], \quad (\text{A16})$$

$$\frac{\partial \rho q_s e_s}{\partial t} + \nabla \cdot (\rho q_s e_s \mathbf{u}) + \frac{\partial \rho q_s e_s w_s}{\partial z} = Q_s + \text{DIFF}[q_s T^*], \quad (\text{A17})$$

where e_x are the internal energies, and defined as

$$e_d = c_{vd}T, \quad (\text{A18})$$

$$e_v = c_{vv}T, \quad (\text{A19})$$

$$e_l = c_lT, \quad (\text{A20})$$

$$5 \quad e_s = c_sT. \quad (\text{A21})$$

The DIFF operator represents the mixing by SGS turbulence. The SGS eddy viscosity should be used for conserved quantities following the motion. The internal energies are not conserved quantities in the Lagrangian sense, and the diffusion term in these equations and T^* are only conceptual, and should be determined to be consistent with the diffusion term in an equation for a conserved quantity along the flow trajectory (i.e., potential temperature), which is discussed later.

The sum of Eqs. (A15)–(A17) gives the total internal energy equations:

$$\frac{\partial \rho e}{\partial t} + \nabla \cdot (\rho e \mathbf{u}) + \frac{\partial \rho q_l e_l w_l}{\partial z} + \frac{\partial \rho q_s e_s w_s}{\partial z} + \rho \nabla \cdot \mathbf{u} = Q + \text{DIFF}[T^*], \quad (\text{A22})$$

where

$$15 \quad e = q_d e_d + q_v e_v + q_l e_l + q_s e_s, \quad (\text{A23})$$

and the total diabatic heating is described as

$$Q = Q_d + Q_v + Q_l + Q_s. \quad (\text{A24})$$

Equations (A2)–(A4), (A7), (A14), and (A22), along with Eq. (A13), form the complete set of equations.

20 **A1.4 Conservation of thermodynamics in the dynamical process**

Equation (A22) is not a complete flux form, because the internal energy itself is not conserved both in the Euler sense and the Lagrangian sense. In this section, we consider the conserved quantity for the thermodynamics equation.

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The potential temperature for dry air, which is defined as

$$\theta_d = T \left(\frac{p_{00}}{p} \right)^{R_d/c_{pd}}, \quad (\text{A25})$$

is used as a conserved quantity in traditional models. Although it is conserved along a Lagrangian trajectory, it is no longer conserved when the water substances are included. We introduce a new conserved quantity following the motion in moist conditions.

Using Eqs. (A7) and (A22), without the terms for the sedimentation of water, the diabatic heating and diffusion can be written as

$$\frac{de}{dt} + p \frac{d}{dt} \left(\frac{1}{\rho} \right) = 0. \quad (\text{A26})$$

Substituting Eqs. (A13), (A18)–(A21), and (A23) into Eq. (A26),

$$\begin{aligned} \frac{dq_d c_{vd} T}{dt} + p \frac{d}{dt} \left[\frac{q_d R_d T}{\rho} \right] + \frac{dq_v c_{vv} T}{dt} + p \frac{d}{dt} \left[\frac{q_v R_v T}{\rho} \right] \\ + \frac{dq_l c_l T}{dt} + \frac{dq_s c_s T}{dt} = 0. \end{aligned} \quad (\text{A27})$$

From Eqs. (A2)–(A4) and (A7), Eq. (A27) gives the following form:

$$\begin{aligned} q_d \left[\frac{dc_{vd} T}{dt} + p \frac{d}{dt} \left[\frac{R_d T}{\rho} \right] \right] + q_v \left[\frac{dc_{vv} T}{dt} + p \frac{d}{dt} \left[\frac{R_v T}{\rho} \right] \right] \\ + q_l \frac{dc_l T}{dt} + q_s \frac{dc_s T}{dt} = 0. \end{aligned} \quad (\text{A28})$$

Dividing this equation by T ,

$$q_d c_{pd} \left[\frac{d \ln T}{dt} + \frac{R_d}{c_{pd}} \frac{d}{dt} \left[\ln \left(\frac{1}{\rho} \right) \right] \right]$$

$$\begin{aligned}
& + q_v c_{pv} \left[\frac{d \ln T}{dt} + \frac{R_v}{c_{pv}} \frac{d}{dt} \left[\ln \left(\frac{1}{p} \right) \right] \right] \\
& + q_l c_l \frac{d \ln T}{dt} + q_s c_s \frac{d \ln T}{dt} = 0,
\end{aligned} \tag{A29}$$

and

$$q_d c_{pd} \frac{d \ln \theta_d}{dt} + q_v c_{pv} \frac{d \ln \theta_v}{dt} + q_l c_l \frac{d \ln T}{dt} + q_s c_s \frac{d \ln T}{dt} = 0, \tag{A30}$$

5 where θ_v is the potential temperature for water vapor, defined as

$$\theta_v = T \left(\frac{p_{00}}{p} \right)^{R_v/c_{pv}}. \tag{A31}$$

Thus,

$$\frac{d}{dt} \left[\ln \left(\theta_d^{q_d c_{pd}} \theta_v^{q_v c_{pv}} T^{q_l c_l + q_s c_s} \right) \right] = 0. \tag{A32}$$

The quantity

$$10 \quad \Theta = \theta_d^{q_d c_{pd}} \theta_v^{q_v c_{pv}} T^{q_l c_l + q_s c_s} = T^{c_p^*} \left(\frac{p_{00}}{p} \right)^{R^*} \tag{A33}$$

is conserved along the flow trajectory, where

$$c_p^* \equiv q_d c_{pd} + q_v c_{pv} + q_l c_l + q_s c_s, \tag{A34}$$

$$R^* \equiv q_d R_d + q_v R_v. \tag{A35}$$

Here we define a new potential temperature

$$15 \quad \theta \equiv \Theta^{1/c_p^*} = T \left(\frac{p_{00}}{p} \right)^{R^*/c_p^*}. \tag{A36}$$

This θ satisfies

$$\frac{d\theta}{dt} = \frac{1}{c_p^*} \Theta^{1/c_p^*-1} \frac{d\Theta}{dt} = 0, \quad (\text{A37})$$

and θ is a conserved quantity along the flow trajectory, even in moist conditions. We employ $\rho\theta$ for the prognostic variable.

5 The pressure expression is derived diagnostically as:

$$p = p_{00} \left(\frac{\rho\theta R^*}{p_{00}} \right)^{\frac{c_p^*}{c_p^*-R^*}}. \quad (\text{A38})$$

Figure A1a gives the vertical profile of the temperature in the US control atmosphere, and Fig. A1b shows the vertical profiles of θ/θ_d under this temperature condition when we assume that q_v is the specific humidity at saturation, and $q_l + q_s$ gives 0.0, 0.01, 10 0.02, and 0.04. The difference between θ and θ_d becomes larger with height and may not be negligible.

A1.5 Diabatic heating in the physical process

Changing the prognostic variable for thermodynamics from the internal energy to the newly defined potential temperature θ should modify the diabatic heating and sedimentation terms in Eq. (A22). Through the manipulation of Eq. (A26) to Eq. (A32), Eq. (A22) 15 can be written as

$$\rho T \frac{d \ln \Theta}{dt} = Q - \frac{\partial \rho q_l e_l w_l}{\partial z} - \frac{\partial \rho q_s e_s w_s}{\partial z} + \text{DIFF}[T^*]. \quad (\text{A39})$$

Substituting Eq. (A36) into Eq. (A39),

$$\rho \frac{d\theta}{dt} = \frac{1}{c_p^*} \left(\frac{p_{00}}{p} \right)^{\frac{R^*}{c_p^*}} \left(Q - \frac{\partial \rho q_l e_l w_l}{\partial z} - \frac{\partial \rho q_s e_s w_s}{\partial z} + \text{DIFF}[T^*] \right). \quad (\text{A40})$$

T^* is the variable defined to satisfy the following equation:

$$\frac{1}{c_p^*} \left(\frac{\rho_{00}}{\rho} \right)^{\frac{R^*}{c_p^*}} \text{DIFF}[T^*] = \text{DIFF}[\theta]. \quad (\text{A41})$$

A1.6 Summary of governing equations

The governing equations are summarized as follows:

$$\frac{\partial \rho q_v}{\partial t} = -\nabla \cdot (\rho q_v \mathbf{u}) + S_v + \text{DIFF}[q_v], \quad (\text{A42})$$

$$\frac{\partial \rho q_l}{\partial t} = -\nabla \cdot (\rho q_l \mathbf{u}) - \frac{\partial \rho q_l w_l}{\partial z} + S_l + \text{DIFF}[q_l], \quad (\text{A43})$$

$$\frac{\partial \rho q_s}{\partial t} = -\nabla \cdot (\rho q_s \mathbf{u}) - \frac{\partial \rho q_s w_s}{\partial z} + S_s + \text{DIFF}[q_s], \quad (\text{A44})$$

$$\frac{\partial \rho}{\partial t} = -\nabla \cdot (\rho \mathbf{u}) - \frac{\partial \rho q_l w_l}{\partial z} - \frac{\partial \rho q_s w_s}{\partial z}, \quad (\text{A45})$$

$$\frac{\partial \rho \mathbf{u}}{\partial t} = -\nabla \cdot (\rho \mathbf{u} \otimes \mathbf{u}) - \nabla p - \rho g \mathbf{e}_z - \frac{\partial \rho q_l \mathbf{u} w_l}{\partial z} - \frac{\partial \rho q_s \mathbf{u} w_s}{\partial z} + \text{DIFF}[\mathbf{u}], \quad (\text{A46})$$

$$\begin{aligned} \frac{\partial \rho \theta}{\partial t} &= -\nabla \cdot (\rho \theta \mathbf{u}) \\ &+ \frac{1}{c_p^*} \left(\frac{\rho_{00}}{\rho} \right)^{\frac{R^*}{c_p^*}} \left[Q - \frac{\partial \rho q_l e_l w_l}{\partial z} - \frac{\partial \rho q_s e_s w_s}{\partial z} \right] \\ &+ \text{DIFF}[\theta], \end{aligned} \quad (\text{A47})$$

where

$$\rho = \rho_{00} \left(\frac{\rho \theta R^*}{\rho_{00}} \right)^{\frac{c_p^*}{c_p^* - R^*}}, \quad (\text{A48})$$

$$c_p^* \equiv q_d c_{pd} + q_v c_{pv} + q_l c_l + q_s c_s, \quad (\text{A49})$$

$$R^* \equiv q_d R_d + q_v R_v. \quad (\text{A50})$$

A1.7 Boundary condition

The vertical boundary conditions are that the vertical velocities at the top and bottom boundaries are zero. This causes the vertical flux at the top and bottom boundaries for all the prognostic variables to be zero;

$$w = 0, \quad (\text{A51})$$

$$\rho w = 0, \quad (\text{A52})$$

$$\rho q_v w = \rho q_l w = \rho q_s w = 0, \quad (\text{A53})$$

$$\rho u w = \rho v w = \rho w w = 0, \quad (\text{A54})$$

$$\rho \theta w = 0, \quad (\text{A55})$$

at the top and bottom boundaries.

A2 Temporal integration scheme

We conceptually separate the complete set of governing equations into dynamical and physical parts:

$$\frac{\partial \phi}{\partial t} = \left(\frac{\partial \phi}{\partial t} \right)_{\text{dynamics}} + \left(\frac{\partial \phi}{\partial t} \right)_{\text{physics}}. \quad (\text{A56})$$

The diabatic heating process, diffusion by SGS turbulence, sedimentation process of liquid and solid waters, and the source and sink of water substances are treated as physical processes, and the others are treated as dynamical processes.

According to this scheme, the dynamical processes can be written as

$$\frac{\partial \rho q_v}{\partial t} + \nabla \cdot (\rho q_v \mathbf{u}) = 0, \quad (\text{A57})$$

$$\frac{\partial \rho q_l}{\partial t} + \nabla \cdot (\rho q_l \mathbf{u}) = 0, \quad (\text{A58})$$

$$\frac{\partial \rho q_s}{\partial t} + \nabla \cdot (\rho q_s \mathbf{u}) = 0, \quad (\text{A59})$$

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{u}) = 0, \quad (\text{A60})$$

$$\frac{\partial \rho \mathbf{u}}{\partial t} + \nabla \cdot (\rho \mathbf{u} \otimes \mathbf{u}) = -\nabla p - \rho g \mathbf{e}_z \quad (\text{A61})$$

$$5 \quad \frac{\partial \rho \theta}{\partial t} + \nabla \cdot (\rho \theta \mathbf{u}) = 0. \quad (\text{A62})$$

On the other hand, the physical processes are as follows. The governing equations for the physical processes being

$$\frac{\partial \rho q_v}{\partial t} = S_v + \text{DIFF}[q_v], \quad (\text{A63})$$

$$\frac{\partial \rho q_l}{\partial t} = -\frac{\partial \rho q_l w_l}{\partial z} + S_l + \text{DIFF}[q_l], \quad (\text{A64})$$

$$10 \quad \frac{\partial \rho q_s}{\partial t} = -\frac{\partial \rho q_s w_s}{\partial z} + S_s + \text{DIFF}[q_s], \quad (\text{A65})$$

$$\frac{\partial \rho}{\partial t} = -\frac{\partial \rho q_l w_l}{\partial z} - \frac{\partial \rho q_s w_s}{\partial z}, \quad (\text{A66})$$

$$\frac{\partial \rho \mathbf{u}}{\partial t} = -\frac{\partial \rho q_l \mathbf{u} w_l}{\partial z} - \frac{\partial \rho q_s \mathbf{u} w_s}{\partial z} + \text{DIFF}[\mathbf{u}], \quad (\text{A67})$$

$$\frac{\partial \rho \theta}{\partial t} = \frac{1}{c_p^*} \left(\frac{\rho_{00}}{\rho} \right)^{\frac{R^*}{c_p^*}} \left[Q - \frac{\partial \rho q_l e_l w_l}{\partial z} - \frac{\partial \rho q_s e_s w_s}{\partial z} \right] + \text{DIFF}[\theta]. \quad (\text{A68})$$

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



A2.1 Dynamical processes

A Runge–Kutta (RK) scheme with three steps is used as the temporal integration scheme for the dynamical processes. The RK scheme with three steps used in this model is defined as

$$5 \quad k_1 = \Delta t f(\phi^t), \quad (\text{A69})$$

$$k_2 = \Delta t f\left(\phi^t + \frac{1}{3}k_1\right), \quad (\text{A70})$$

$$k_3 = \Delta t f\left(\phi^t + \frac{1}{2}k_2\right), \quad (\text{A71})$$

$$\phi^{t+\Delta t} = \phi^t + k_3, \quad (\text{A72})$$

10 where $f(\phi) \equiv \frac{\partial \phi}{\partial t}$. Taylor expansion of the $\phi^{t+\Delta t}$ calculated by Eq. (A72) around ϕ^t yields

$$\begin{aligned} \phi^{t+\Delta t} &= \phi^t + \Delta t f(\phi^t) + \frac{1}{2} \Delta t^2 f(\phi^t) f'(\phi^t) \\ &\quad + \frac{1}{6} \Delta t^3 f(\phi^t) \{f'(\phi^t)\}^2 + \frac{1}{8} \Delta t^3 \{f(\phi^t)\}^2 f''(\phi^t) \\ &\quad + O(\Delta t^4). \end{aligned} \quad (\text{A73})$$

Theoretically, the Taylor expansion of $\phi(t + \Delta t)$ is

$$\begin{aligned} 15 \quad \phi(t + \Delta t) &= \phi^t + \Delta t f(\phi^t) + \frac{1}{2} \Delta t^2 f(\phi^t) f'(\phi^t) \\ &\quad + \frac{1}{6} \Delta t^3 f(\phi^t) \{f'(\phi^t)\}^2 + \frac{1}{6} \Delta t^3 \{f(\phi^t)\}^2 f''(\phi^t) \\ &\quad + O(\Delta t^4). \end{aligned} \quad (\text{A74})$$

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

This shows that the three-step scheme used in this model only has second-order accuracy, despite the three steps. However, it has third-order accuracy for linear equations, because $f''(\phi) = 0$ if $f(\phi)$ is a linear function. This scheme can calculate small-amplitude perturbations with third-order accuracy, and finite amplitude waves with second-order accuracy. In terms of numerical stability, this scheme has a stability region, which is almost the same as in standard explicit RK schemes with three steps for small perturbations. The stability region is wider than for RK schemes with second-order accuracy, and includes the imaginary axis, which corresponds to neutral rotating modes, while that for second-order schemes does not. This is why we choose the three-step method instead of the two-step method.

The advantage of this scheme compared with ordinary three-step schemes is the reduction of memory load and storage, which is one of the most expensive components of recent computers with low byte per flop (B/F) ratios, along with the benefit of higher numerical stability.

A2.2 Physical processes

The acoustic wave is the fastest mode in the dynamical processes, and the temporal interval for dynamical processes must be less than the grid spacing divided by the speed of the acoustic wave, to satisfy the Courant-Friedrichs-Lewy (CFL) condition. However, the time scale of the physical processes is usually much longer than the interval, so the temporal interval for the physical processes can be much longer than for the dynamical processes. We use a larger temporal interval to calculate the tendencies of the physical processes than of the dynamical processes. We call the time step for the physical processes a large time step, and for dynamical processes, a small time step.

Traditionally, tendencies in physical processes are calculated with large time steps, and the prognostic variables are updated with the Euler scheme with the tendency for large time steps. This causes an artificial acoustic wave, as described below. In this model, the tendency in some physical processes, such as surface flux (sensible heat

flux and latent heat flux) and eddy viscosity and diffusion, are calculated with large time steps in the same way, but they are added to the prognostic variables with the tendency of dynamical processes in small time steps.

Figure A2 shows the horizontal averaged vertical velocity in the planetary boundary layer experiment, whose details are described in Sect. 3. In the control run, in which the temporal interval for the large time step (Δt_{phys}) is the same as that for the small time step (Δt_{dyn}), the velocity is almost zero, as shown in Fig. A2a. However, in the case where $\Delta t_{\text{phys}} > \Delta t_{\text{dyn}}$ and the tendency of the surface flux is added to the prognostic variables at the large time step as in the traditional manner, a vertically propagating artificial wave can be seen, as in Fig. A2b.

In addition, such a wave radiating periodically from a fixed location can cause a spurious stationary wave in the simulation output. This could lead to misinterpretation of the simulation results, although this problem is not directly based on physics or modeling. In most practical cases, the temporal interval for historical output (Δt_{output}) is a multiple of Δt_{large} , and snapshots of physical quantities are the output. In such cases, every snapshot has artificial acoustic waves with the same phase, because the sampling frequency is not sufficient. This results in a spurious stationary wave in the historical output, as we can see in Fig. A2c, that is, forcing by physical processes added at small frequencies results in a spurious stationary wave in the historical data.

The artificial acoustic wave and resulting spurious stationary wave can be avoided if the prognostic variables are updated with the tendency calculated in the physical processes with a small time step, although the tendency is calculated with a large time step. Figure A2d shows that the artificial acoustic wave in (b) and (c) does not appear with this method. This shows that the tendency of the physical processes can be calculated with a large time step (i.e., not every small time step), while the time integration must be done with the dynamical process at a small time step.

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



A3 Spatial discretization for the dynamical processes

We employ the Arakawa-C staggered grid. Central difference schemes are used for the spatial differential for the dynamical processes, because waves such as gravity waves and acoustic waves generally cannot keep their spatial symmetry with odd-order schemes. Based on a consideration of numerical stability (see Appendix B), we choose the fourth-order central difference scheme for the advection (or convection) terms, and the second-order central difference scheme for the pressure gradient term in the momentum equations and divergence term in the continuity equation.

Before the discretization of the differential equations, we diagnose several quantities from the prognostic variables;

Full-level pressure and potential temperature

$$\rho_{i,j,k} = \rho_{00} \left[\frac{(\rho\theta)_{i,j,k} R^*}{\rho_{00}} \right]^{\frac{c_p^*}{c_p^* - R^*}}, \quad (\text{A75})$$

$$\theta_{i,j,k} = \frac{(\rho\theta)_{i,j,k}}{\rho_{i,j,k}}. \quad (\text{A76})$$

Half-level density

$$\bar{\rho}_{i+\frac{1}{2},j,k} = \frac{\rho_{i+1,j,k} + \rho_{i,j,k}}{2}, \quad (\text{A77})$$

$$\bar{\rho}_{i,j+\frac{1}{2},k} = \frac{\rho_{i,j+1,k} + \rho_{i,j,k}}{2}, \quad (\text{A78})$$

$$\bar{\rho}_{i,j,k+\frac{1}{2}} = \frac{\rho_{i,j,k+1} + \rho_{i,j,k}}{2}. \quad (\text{A79})$$

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Half-level velocity

$$\bar{u}_{i+\frac{1}{2},j,k} = \frac{(\rho u)_{i+\frac{1}{2},j,k}}{\bar{\rho}_{i+\frac{1}{2},j,k}}, \quad (\text{A80})$$

$$\bar{v}_{i,j+\frac{1}{2},k} = \frac{(\rho v)_{i,j+\frac{1}{2},k}}{\bar{\rho}_{i,j+\frac{1}{2},k}}, \quad (\text{A81})$$

$$\bar{w}_{i,j,k+\frac{1}{2}} = \frac{(\rho w)_{i,j,k+\frac{1}{2}}}{\bar{\rho}_{i,j,k+\frac{1}{2}}}. \quad (\text{A82})$$

5 Full-level velocity

$$\bar{u}_{i,j,k} = \frac{(\rho u)_{i+\frac{1}{2},j,k} + (\rho u)_{i-\frac{1}{2},j,k}}{2\rho_{i,j,k}}, \quad (\text{A83})$$

$$\bar{v}_{i,j,k} = \frac{(\rho v)_{i,j+\frac{1}{2},k} + (\rho v)_{i,j-\frac{1}{2},k}}{2\rho_{i,j,k}}, \quad (\text{A84})$$

$$\bar{w}_{i,j,k} = \frac{(\rho w)_{i,j,k+\frac{1}{2}} + (\rho w)_{i,j,k-\frac{1}{2}}}{2\rho_{i,j,k}}. \quad (\text{A85})$$

A3.1 Continuity equation

10 Divergence in the continuity equation is calculated with the second-order central difference scheme. The continuity equation is discretized as

$$\left. \frac{\partial \rho}{\partial t} \right|_{i,j,k} = - \frac{(\rho u)_{i+\frac{1}{2},j,k} - (\rho u)_{i-\frac{1}{2},j,k}}{\Delta x_i}$$

$$\begin{aligned}
& - \frac{(\rho v)_{i,j+\frac{1}{2},k} - (\rho v)_{i,j-\frac{1}{2},k}}{\Delta y_j} \\
& - \frac{(\rho w)_{i,j,k+\frac{1}{2}} - (\rho w)_{i,j,k-\frac{1}{2}}}{\Delta z_k}.
\end{aligned} \tag{A86}$$

A3.2 Momentum equations

The advection terms and pressure gradient term are calculated with the fourth and second-order central difference schemes, respectively. The momentum equation is discretized as

$$\begin{aligned}
\left. \frac{\partial \rho u}{\partial t} \right|_{i+\frac{1}{2},j,k} &= - \frac{(\overline{\rho u})_{i+1,j,k} \bar{u}_{i+1,j,k} - (\overline{\rho u})_{i,j,k} \bar{u}_{i,j,k}}{\Delta x_{i+\frac{1}{2}}} \\
& - \frac{(\overline{\rho u})_{i+\frac{1}{2},j+\frac{1}{2},k} \bar{v}_{i+\frac{1}{2},j+\frac{1}{2},k} - (\overline{\rho u})_{i+\frac{1}{2},j-\frac{1}{2},k} \bar{v}_{i+\frac{1}{2},j-\frac{1}{2},k}}{\Delta y_j} \\
& - \frac{(\overline{\rho u})_{i+\frac{1}{2},j,k+\frac{1}{2}} \bar{w}_{i+\frac{1}{2},j,k+\frac{1}{2}} - (\overline{\rho u})_{i+\frac{1}{2},j,k-\frac{1}{2}} \bar{w}_{i+\frac{1}{2},j,k-\frac{1}{2}}}{\Delta z_k} \\
& - \frac{p_{i+1,j,k} - p_{i,j,k}}{\Delta x_{i+\frac{1}{2}}},
\end{aligned} \tag{A87}$$

where

$$\begin{aligned}
\overline{(\rho u)}_{i,j,k} &= \frac{-(\rho u)_{i+\frac{3}{2},j,k} + 7(\rho u)_{i+\frac{1}{2},j,k}}{12} \\
& + \frac{7(\rho u)_{i-\frac{1}{2},j,k} - (\rho u)_{i-\frac{3}{2},j,k}}{12},
\end{aligned} \tag{A88}$$

$$\overline{(\rho u)}_{i+\frac{1}{2},j+\frac{1}{2},k} = \frac{-(\rho u)_{i+\frac{1}{2},j+2,k} + 7(\rho u)_{i+\frac{1}{2},j+1,k}}{12} + \frac{7(\rho u)_{i+\frac{1}{2},j,k} - (\rho u)_{i+\frac{1}{2},j-1,k}}{12}, \quad (\text{A89})$$

$$\overline{(\rho u)}_{i+\frac{1}{2},j,k+\frac{1}{2}} = \frac{-(\rho u)_{i+\frac{1}{2},j,k+2} + 7(\rho u)_{i+\frac{1}{2},j,k+1}}{12} + \frac{7(\rho u)_{i+\frac{1}{2},j,k} - (\rho u)_{i+\frac{1}{2},j,k-1}}{12}, \quad (\text{A90})$$

and the velocities at the cell wall for the staggered control volume in the x direction are defined as

$$\bar{v}_{i+\frac{1}{2},j+\frac{1}{2},k} = \frac{\bar{v}_{i,j+\frac{1}{2},k} + \bar{v}_{i+1,j+\frac{1}{2},k}}{2}, \quad (\text{A91})$$

$$\bar{w}_{i+\frac{1}{2},j,k+\frac{1}{2}} = \frac{\bar{w}_{i,j,k+\frac{1}{2}} + \bar{w}_{i+1,j,k+\frac{1}{2}}}{2}. \quad (\text{A92})$$

In this form, the fourth-order accuracy in the advection term is guaranteed on the condition of constant velocity. The momentum equations in the y and z directions are discretized in the same way. In the vertical equation, $\bar{\rho}_{i,j,k+\frac{1}{2}}g$ is added.

A3.3 Thermodynamics equation

The thermodynamics equation is discretized as

$$\left. \frac{\partial \rho \theta}{\partial t} \right|_{i,j,k} = - \frac{(\rho u)_{i+\frac{1}{2},j,k} \bar{\theta}_{i+\frac{1}{2},j,k} - (\rho u)_{i-\frac{1}{2},j,k} \bar{\theta}_{i-\frac{1}{2},j,k}}{\Delta x_i}$$

$$\begin{aligned}
& - \frac{(\rho v)_{i,j+\frac{1}{2},k} \bar{\theta}_{i,j+\frac{1}{2},k} - (\rho v)_{i,j-\frac{1}{2},k} \bar{\theta}_{i,j-\frac{1}{2},k}}{\Delta y_j} \\
& - \frac{(\rho w)_{i,j,k+\frac{1}{2}} \bar{\theta}_{i,j,k+\frac{1}{2}} - (\rho w)_{i,j,k-\frac{1}{2}} \bar{\theta}_{i,j,k-\frac{1}{2}}}{\Delta z_k}, \tag{A93}
\end{aligned}$$

where

$$\bar{\theta}_{i+\frac{1}{2},j,k} = \frac{-\theta_{i+2,j,k} + 7\theta_{i+1,j,k} + 7\theta_{i,j,k} - \theta_{i-1,j,k}}{12}, \tag{A94}$$

5 and $\bar{\theta}_{i,j+\frac{1}{2},k}$, and $\bar{\theta}_{i,j,k+\frac{1}{2}}$ are defined in the same way.

A3.4 Tracer advection

The tracer advection process is done with the Euler scheme after the temporal integration of the dynamical variables (ρ , ρu , ρv , ρw , and $\rho \theta$). We impose the consistency with continuity (CWC; Gross et al., 2002) and monotonicity of the tracer advection following
10 Niwa et al. (2011).

With the condition of no source/sink, the ratio of the mass of tracers to the total mass in the advection process should be conserved along the trajectory. It is, at the least, necessary that the spatially constant mass concentration should be kept in any motion of fluid. In order to satisfy this condition, we use the same mass flux at the last
15 Runge–Kutta process ($k_3/\Delta t$ in Eq. (A72)) for integration of tracers:

$$\begin{aligned}
\frac{(\rho q)_{i,j,k}^{t+\Delta t} - (\rho q)_{i,j,k}^t}{\Delta t} &= - \frac{(\rho u)_{i+\frac{1}{2},j,k} \bar{q}_{i+\frac{1}{2},j,k} - (\rho u)_{i-\frac{1}{2},j,k} \bar{q}_{i-\frac{1}{2},j,k}}{\Delta x_j} \\
& - \frac{(\rho v)_{i,j+\frac{1}{2},k} \bar{q}_{i,j+\frac{1}{2},k} - (\rho v)_{i,j-\frac{1}{2},k} \bar{q}_{i,j-\frac{1}{2},k}}{\Delta y_j}
\end{aligned}$$

$$-\frac{(\rho w)_{i,j,k+\frac{1}{2}}\bar{q}_{i,j,k+\frac{1}{2}} - (\rho w)_{i,j,k-\frac{1}{2}}\bar{q}_{i,j,k-\frac{1}{2}}}{\Delta z_k}. \quad (\text{A95})$$

In order to satisfy the monotonicity of tracer advection, we employ the Flux Corrected Transport (FCT) scheme, which is a hybrid scheme with a higher-order difference scheme and first-order upwind scheme (Zalesak, 1979). In this model, we use the fourth-order central difference scheme as a higher-order scheme.

If the fourth-order central difference is applied, \bar{q} is discretized as

$$\bar{q}_{i+\frac{1}{2},j,k}^{\text{high}} = \frac{-q_{i+2,j,k} + 7q_{i+1,j,k} + 7q_{i,j,k} - q_{i-1,j,k}}{12}, \quad (\text{A96})$$

and $\bar{q}_{i,j+\frac{1}{2},k}^{\text{high}}$ and $\bar{q}_{i,j,k+\frac{1}{2}}^{\text{high}}$ are defined in the same way. On the other hand, in the first-order upwind scheme, \bar{q} is described as

$$\bar{q}_{i+\frac{1}{2},j,k}^{\text{low}} = \begin{cases} q_{i,j,k} & \text{if } (\rho u)_{i+\frac{1}{2},j,k} > 0, \\ q_{i+1,j,k} & \text{otherwise,} \end{cases} \quad (\text{A97})$$

and $\bar{q}_{i,j+\frac{1}{2},k}^{\text{low}}$ and $\bar{q}_{i,j,k+\frac{1}{2}}^{\text{low}}$ are defined in the same way. The actual \bar{q} is described as

$$\bar{q}_{i+\frac{1}{2},j,k} = C_{i+\frac{1}{2},j,k}\bar{q}_{i+\frac{1}{2},j,k}^{\text{high}} + (1 - C_{i+\frac{1}{2},j,k})\bar{q}_{i+\frac{1}{2},j,k}^{\text{low}}, \quad (\text{A98})$$

and $\bar{q}_{i,j+\frac{1}{2},k}$ and $\bar{q}_{i,j,k+\frac{1}{2}}$ are defined in the same way.

Equation (A95) can be written as

$$(\rho q)_{i,j,k}^{n+1} = (\rho q)_{i,j,k}^n - \frac{1}{\Delta x_j \Delta y_j \Delta z_k} \left[C_{i+\frac{1}{2},j,k} F_{i+\frac{1}{2},j,k}^{\text{high}} + (1 - C_{i+\frac{1}{2},j,k}) F_{i+\frac{1}{2},j,k}^{\text{low}} \right]$$

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

$$\begin{aligned}
 & - \left[C_{i-\frac{1}{2},j,k} F_{i-\frac{1}{2},j,k}^{\text{high}} + \left(1 - C_{i-\frac{1}{2},j,k}\right) F_{i-\frac{1}{2},j,k}^{\text{low}} \right] \\
 & + \left[C_{i,j+\frac{1}{2},k} F_{i,j+\frac{1}{2},k}^{\text{high}} + \left(1 - C_{i,j+\frac{1}{2},k}\right) F_{i,j+\frac{1}{2},k}^{\text{low}} \right] \\
 & - \left[C_{i,j-\frac{1}{2},k} F_{i,j-\frac{1}{2},k}^{\text{high}} + \left(1 - C_{i,j-\frac{1}{2},k}\right) F_{i,j-\frac{1}{2},k}^{\text{low}} \right] \\
 & + \left[C_{i,j,k+\frac{1}{2}} F_{i,j,k+\frac{1}{2}}^{\text{high}} + \left(1 - C_{i,j,k+\frac{1}{2}}\right) F_{i,j,k+\frac{1}{2}}^{\text{low}} \right] \\
 & - \left[C_{i,j,k-\frac{1}{2}} F_{i,j,k-\frac{1}{2}}^{\text{high}} + \left(1 - C_{i,j,k-\frac{1}{2}}\right) F_{i,j,k-\frac{1}{2}}^{\text{low}} \right] \Bigg], \tag{A99}
 \end{aligned}$$

where

$$F_{i+\frac{1}{2},j,k}^{\text{high,low}} = \Delta t \Delta y_j \Delta z_k (\rho u)_{i+\frac{1}{2},j,k} q_{i+\frac{1}{2},j,k}^{\text{high,low}}, \tag{A100}$$

and $F_{i,j+\frac{1}{2},k}^{\text{high,low}}$ and $F_{i,j,k+\frac{1}{2}}^{\text{high,low}}$ are defined in the same way. The anti-diffusive flux is defined as

$$A_{i+\frac{1}{2},j,k} = F_{i+\frac{1}{2},j,k}^{\text{high}} - F_{i+\frac{1}{2},j,k}^{\text{low}}, \tag{A101}$$

and $A_{i,j+\frac{1}{2},k}$ and $A_{i,j,k+\frac{1}{2}}$ are defined in the same way. Equation (A99) can be rewritten as

$$\begin{aligned}
 (\rho q)_{i,j,k}^{n+1} = & (\rho q)_{i,j,k}^n - \frac{1}{\Delta x_i \Delta y_j \Delta z_k} \left\{ \right. \\
 & + \left[F_{i+\frac{1}{2},j,k}^{\text{low}} + C_{i+\frac{1}{2},j,k} A_{i+\frac{1}{2},j,k} \right]
 \end{aligned}$$

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

$$\begin{aligned}
 & - \left[F_{i-\frac{1}{2},j,k}^{\text{low}} + C_{i-\frac{1}{2},j,k} A_{i-\frac{1}{2},j,k} \right] \\
 & + \left[F_{i,j+\frac{1}{2},k}^{\text{low}} + C_{i,j+\frac{1}{2},k} A_{i,j+\frac{1}{2},k} \right] \\
 & - \left[F_{i,j-\frac{1}{2},k}^{\text{low}} + C_{i,j-\frac{1}{2},k} A_{i,j-\frac{1}{2},k} \right] \\
 & + \left[F_{i,j,k+\frac{1}{2}}^{\text{low}} + C_{i,j,k+\frac{1}{2}} A_{i,j,k+\frac{1}{2}} \right] \\
 & - \left. \left[F_{i,j,k-\frac{1}{2}}^{\text{low}} + C_{i,j,k-\frac{1}{2}} A_{i,j,k-\frac{1}{2}} \right] \right\}. \tag{A102}
 \end{aligned}$$

In practice, we calculate Eq. (A102) by the following steps:

1. The tentative values are calculated using the low-order flux:

$$\begin{aligned}
 (\rho q)_{i,j,k}^{\dagger} &= (\rho q)_{i,j,k}^n \\
 & - \frac{1}{\Delta x_i \Delta y_j \Delta z_k} \left[F_{i+\frac{1}{2},j,k}^{\text{low}} - F_{i-\frac{1}{2},j,k}^{\text{low}} \right. \\
 & \quad + F_{i,j+\frac{1}{2},k}^{\text{low}} - F_{i,j-\frac{1}{2},k}^{\text{low}} \\
 & \quad \left. + F_{i,j,k+\frac{1}{2}}^{\text{low}} - F_{i,j,k-\frac{1}{2}}^{\text{low}} \right]. \tag{A103}
 \end{aligned}$$

2. Allowable maximum and minimum values are calculated:

$$\begin{aligned}
 (\rho q)_{i,j,k}^{\text{max}} &= \max\{ \\
 & \quad \max[(\rho q)_{i,j,k}^{\dagger}, (\rho q)_{i,j,k}^n],
 \end{aligned}$$

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



$$\begin{aligned}
 & \max[(\rho q)_{i-1,j,k}^\dagger, (\rho q)_{i-1,j,k}^n], \\
 & \max[(\rho q)_{i+1,j,k}^\dagger, (\rho q)_{i+1,j,k}^n], \\
 & \max[(\rho q)_{i,j-1,k}^\dagger, (\rho q)_{i,j-1,k}^n], \\
 & \max[(\rho q)_{i,j+1,k}^\dagger, (\rho q)_{i,j+1,k}^n], \\
 & \max[(\rho q)_{i,j,k-1}^\dagger, (\rho q)_{i,j,k-1}^n], \\
 & \max[(\rho q)_{i,j,k+1}^\dagger, (\rho q)_{i,j,k+1}^n],
 \end{aligned}$$

(A104)

$$\begin{aligned}
 (\rho q)_{i,j,k}^{\min} = \min\{ & \\
 & \min[(\rho q)_{i,j,k}^\dagger, (\rho q)_{i,j,k}^n], \\
 & \min[(\rho q)_{i-1,j,k}^\dagger, (\rho q)_{i-1,j,k}^n], \\
 & \min[(\rho q)_{i+1,j,k}^\dagger, (\rho q)_{i+1,j,k}^n], \\
 & \min[(\rho q)_{i,j-1,k}^\dagger, (\rho q)_{i,j-1,k}^n], \\
 & \min[(\rho q)_{i,j+1,k}^\dagger, (\rho q)_{i,j+1,k}^n], \\
 & \min[(\rho q)_{i,j,k-1}^\dagger, (\rho q)_{i,j,k-1}^n], \\
 & \min[(\rho q)_{i,j,k+1}^\dagger, (\rho q)_{i,j,k+1}^n]\}.
 \end{aligned}$$

(A105)

3. Several values for the flux limiter are calculated:

$$\begin{aligned}
 P_{i,j,k}^+ = & -\min\left(0, A_{i+\frac{1}{2},j,k}\right) + \max\left(0, A_{i-\frac{1}{2},j,k}\right) \\
 & -\min\left(0, A_{i,j+\frac{1}{2},k}\right) + \max\left(0, A_{i,j-\frac{1}{2},k}\right) \\
 & -\min\left(0, A_{i,j,k+\frac{1}{2}}\right) + \max\left(0, A_{i,j,k-\frac{1}{2}}\right),
 \end{aligned}$$

(A106)

$$\begin{aligned}
P_{i,j,k}^- &= \max\left(0, A_{i+\frac{1}{2},j,k}\right) - \min\left(0, A_{i-\frac{1}{2},j,k}\right) \\
&\quad \max\left(0, A_{i,j+\frac{1}{2},k}\right) - \min\left(0, A_{i,j-\frac{1}{2},k}\right) \\
&\quad \max\left(0, A_{i,j,k+\frac{1}{2}}\right) - \min\left(0, A_{i,j,k-\frac{1}{2}}\right),
\end{aligned} \tag{A107}$$

$$Q_{i,j,k}^+ = [(\rho q)_{i,j,k}^{\max} - (\rho q)_{i,j,k}^{\dagger}] \Delta x_i \Delta y_j \Delta z_k, \tag{A108}$$

$$Q_{i,j,k}^- = [(\rho q)_{i,j,k}^{\dagger} - (\rho q)_{i,j,k}^{\min}] \Delta x_i \Delta y_j \Delta z_k, \tag{A109}$$

$$R_{i,j,k}^+ = \begin{cases} \min(1, Q_{i,j,k}^+ / P_{i,j,k}^+) & \text{if } P_{i,j,k}^+ > 0, \\ 0 & \text{if } P_{i,j,k}^+ = 0, \end{cases} \tag{A110}$$

$$R_{i,j,k}^- = \begin{cases} \min(1, Q_{i,j,k}^- / P_{i,j,k}^-) & \text{if } P_{i,j,k}^- > 0, \\ 0 & \text{if } P_{i,j,k}^- = 0. \end{cases} \tag{A111}$$

4. The flux limiters at the cell wall are calculated:

$$C_{i+\frac{1}{2},j,k} = \begin{cases} \min(R_{i+1,j,k}^+, R_{i,j,k}^-) & \text{if } A_{i+\frac{1}{2},j,k} \geq 0, \\ \min(R_{i,j,k}^+, R_{i+1,j,k}^-) & \text{if } A_{i+\frac{1}{2},j,k} < 0, \end{cases} \tag{A112}$$

and $C_{i,j+\frac{1}{2},k}$ and $C_{i,j,k+\frac{1}{2}}$ are defined as the same way.

A3.5 Boundary condition

The boundary condition at the top and bottom boundaries is

$$W_{i,j,k_{\max}+\frac{1}{2}} = W_{i,j,k_{\min}-\frac{1}{2}} = 0, \tag{A113}$$

$$(\rho w)_{i,j,k_{\max}+\frac{1}{2}} = (\rho w)_{i,j,k_{\min}-\frac{1}{2}} = 0, \tag{A114}$$

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



$$(\rho q_v w)_{i,j,k_{\max}+\frac{1}{2}} = (\rho q_v w)_{i,j,k_{\min}-\frac{1}{2}} = 0, \quad (\text{A115})$$

$$(\rho q_l w)_{i,j,k_{\max}+\frac{1}{2}} = (\rho q_l w)_{i,j,k_{\min}-\frac{1}{2}} = 0, \quad (\text{A116})$$

$$(\rho q_s w)_{i,j,k_{\max}+\frac{1}{2}} = (\rho q_s w)_{i,j,k_{\min}-\frac{1}{2}} = 0, \quad (\text{A117})$$

$$(\rho u w)_{i,j,k_{\max}+\frac{1}{2}} = (\rho u w)_{i,j,k_{\min}-\frac{1}{2}} = 0, \quad (\text{A118})$$

$$5 \quad (\rho v w)_{i,j,k_{\max}+\frac{1}{2}} = (\rho v w)_{i,j,k_{\min}-\frac{1}{2}} = 0, \quad (\text{A119})$$

$$(\rho \theta)_{i,j,k_{\max}+\frac{1}{2}} = (\rho \theta)_{i,j,k_{\min}-\frac{1}{2}} = 0. \quad (\text{A120})$$

$$w_{i,j,k_{\max}+\frac{1}{2}} = 0, \quad (\text{A121})$$

$$w_{i,j,k_{\min}-\frac{1}{2}} = 0. \quad (\text{A122})$$

This leads to the boundary condition of the vertical momentum:

$$10 \quad (\rho w)_{i,j,k_{\max}+\frac{1}{2}} = 0, \quad (\text{A123})$$

$$(\rho w)_{i,j,k_{\min}-\frac{1}{2}} = 0. \quad (\text{A124})$$

For other prognostic variables, the vertical fluxes at the top and bottom boundaries are zero, except those from physical processes.

A4 Numerical filter

15 We impose an explicit numerical filter using the numerical viscosity and diffusion. Although the filter is necessary for numerical stability, too strong a filter could dampen any physically meaningful variability. In this subsection, we describe the numerical filters used in this model, and discuss the strength of the filter.

20 In order to damp the higher wavenumber component selectively, we adopt the hyperviscosity and diffusion in the traditional way. The hyperviscosity and diffusion of the n th

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



order is defined as

$$\frac{\partial}{\partial x} \left[v \rho \frac{\partial^{n-1} f}{\partial x^{n-1}} \right], \quad (\text{A125})$$

where f is an arbitrary variable ($f \in \rho, u, v, w, \theta, q$).

The Laplacian of f is discretized as

$$\Delta f_i = \frac{1}{\Delta x_i} \left[\frac{1}{\Delta x_{i+\frac{1}{2}}} f_{i+1} - \left(\frac{1}{\Delta x_{i+\frac{1}{2}}} + \frac{1}{\Delta x_{i-\frac{1}{2}}} \right) f_i + \frac{1}{\Delta x_{i-\frac{1}{2}}} f_{i-1} \right], \quad (\text{A126})$$

and

$$\Delta^{n/2} f_i = \frac{1}{\Delta x_i} \left[\frac{1}{\Delta x_{i+\frac{1}{2}}} \Delta^{n/2-1} f_{i+1} - \left(\frac{1}{\Delta x_{i+\frac{1}{2}}} + \frac{1}{\Delta x_{i-\frac{1}{2}}} \right) \Delta^{n/2-1} f_i + \frac{1}{\Delta x_{i-\frac{1}{2}}} \Delta^{n/2-1} f_{i-1} \right]. \quad (\text{A127})$$

Here we consider spatially dependent grid interval in calculating the Laplacian. If it is calculated with constant Δx_i as

$$\Delta f_i = \frac{1}{\Delta x_i^2} (f_{i+1} - 2f_i + f_{i-1}), \quad (\text{A128})$$

$$\Delta^{n/2} f_i = \frac{1}{\Delta x_i^2} \left(\Delta^{n/2-1} f_{i+1} - 2\Delta^{n/2-1} f_i + \Delta^{n/2-1} f_{i-1} \right), \quad (\text{A129})$$

non-negligible numerical noise appears where the grid spacing varies (e.g., stretching layer near the top boundary).

GMDD

8, 6021–6094, 2015

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The hyperviscosity and diffusion can be discretized as

$$\frac{\partial}{\partial x} \left[\nu \rho \frac{\partial^{n-1} f}{\partial x^{n-1}} \right] \sim \frac{F_{i+\frac{1}{2}} - F_{i-\frac{1}{2}}}{\Delta x_i}, \quad (\text{A130})$$

where

$$F_{i+\frac{1}{2}} = \frac{\nu_{i+\frac{1}{2}} \rho_{i+\frac{1}{2}}}{\Delta x_{i+\frac{1}{2}}} \left(\Delta^{n/2-1} f_{i+1} - \Delta^{n/2-1} f_i \right). \quad (\text{A131})$$

5 The coefficient, ν , is written as

$$\nu_{i+\frac{1}{2}} = (-1)^{n/2+1} \gamma \frac{\Delta x_{i+\frac{1}{2}}^n}{2^n \Delta t}, \quad (\text{A132})$$

where γ is a non-dimensional coefficient. One-dimensional sinusoidal two-grid noise will decay to $1/e$ with $1/\gamma$ time steps. Note that the theoretical e-folding time is $\frac{2^n}{\pi^n} \frac{\Delta t}{\gamma}$. However, it is $\frac{\Delta t}{\gamma}$ with the fourth-order central scheme used in this model.

10 For the numerical stability of the numerical filter itself, it should satisfy

$$\gamma < 1 \quad (\text{A133})$$

for the one dimensional two-grid noise, and

$$\gamma < \frac{1}{3} \quad (\text{A134})$$

for the three dimensional two-grid noise. The conditions might be stricter for other types of noise.

15

The flux, F , for the numerical filter is added to the advective flux as

$$(\rho u f)_{i+\frac{1}{2}}^\dagger = (\rho u f)_{i+\frac{1}{2}} + F_{i+\frac{1}{2}}, \quad (\text{A135})$$

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



where the first term of the right-hand side is the flux calculated by the advection scheme. In the present model, the advection scheme is the fourth-order central difference scheme (see Appendix A3). This concept is very important for the CWC condition in the tracer equations (see Appendix A3.4). The modified mass flux of the numerical filter should be used in the tracer advection, otherwise the CWC condition is violated.

The numerical viscosity and diffusion in the y and z directions are formulated in the same way as in the x direction, although a special treatment for the z direction is needed. At the top and bottom boundaries, the flux must be zero, $F_{k_{\max}+\frac{1}{2}} = F_{k_{\min}-\frac{1}{2}} = 0$. In order to calculate the $F_{k_{\max}-\frac{1}{2}}$ and $F_{k_{\min}+\frac{1}{2}}$, values beyond the boundaries, $f_{k_{\max}+1}$ and $f_{k_{\min}-1}$, are required, then the mirror boundary condition is assumed; $f_{k_{\max}+1} = -f_{k_{\max}}$ and $f_{k_{\min}-1} = -f_{k_{\min}}$. This condition is appropriate to cause the decay the vertical two-grid noise.

Vertical profiles of density, potential temperature, and water vapor usually have significant (e.g., logarithmic) dependencies on height. Eq. (A130) has a non-zero value even for the steady state, and the numerical filter produces artificial motion. To reduce this artificial motion, we introduce a reference profile which is a function of height, and deviation from the reference is used as f instead of ρ , θ , and q_v in calculating the numerical filter. The reference profile can be chosen arbitrarily, but a profile under hydrostatic balance is usually chosen.

Determination of the value of the non-dimensional coefficient γ is an important issue. If it is too small, the simulation could be numerically unstable or numerical noise could violate the physical variability, while variability could be dampened too much if γ is too large. At least, the effect of the numerical filter on the phenomena of the scale we want to simulate must be reasonably smaller than the effect of the physically oriented viscosity and diffusion, i.e., the eddy viscosity and diffusion representing the effect of the SGS turbulence.

The e-folding time of an eddy whose spatial scale is L is $\frac{2^n L^n}{\gamma \Delta x^n} \Delta t$ according to the numerical filter, and is $\frac{L^2}{C_s^2 (2\Delta x)^2 |S|}$ by eddy viscosity and diffusion for an isotropic

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



grid under neutral stability conditions. The e-folding time of an eddy whose scale is larger than the effective resolution of the numerical filter should be longer than that for eddy viscosity and diffusion, where the effective resolution is the smallest scale of physically meaningful phenomena that a simulation can represent. It requires that $\gamma < 2^{n+2} C_s^2 |S| \Delta t \frac{L^{n-2}}{\Delta x^{n-2}}$. The magnitude of the characteristic velocity, U , is assumed to be $O(1)–O(10) \text{ m s}^{-1}$ for motions whose spatial scale is approximately equal to the effective resolution. Then, $|S| \Delta t (\sim \frac{U}{\Delta x} \Delta t)$ is estimated to be $O(10^{-3})–O(10^{-2})$, because $\Delta x / \Delta t$ is $O(350)–O(1000) \text{ m s}^{-1}$ according to the CFL condition. Roughly speaking, the effective resolution is usually several times the grid spacing. Here, we assume $L / \Delta x \sim 2–10$; Skamarock (2004) suggested that the effective resolution is about six times the grid spacing. It is found that γ should be

$$\gamma < O(10^{-3}) - O(1) \text{ for } n = 4, \quad (\text{A136})$$

$$\gamma < O(1) - O(10^5) \text{ for } n = 8. \quad (\text{A137})$$

This condition is stricter than the stability condition Eq. (A134) for $n = 4$, so this condition must be considered when the value of γ is determined if $n = 4$ is chosen. On the other hand, it is always satisfied if the stability condition is satisfied for $n \geq 8$. This means that in this case, the effect of the numerical filter on phenomena whose spatial scale is larger than the effective resolution is always smaller than that of the eddy viscosity and diffusion, and this condition for γ does not have to be considered if $n \geq 8$ is chosen. The advantage of an explicit numerical filter is that its strength can be controlled or tuned based on such physical considerations.

Odd-order advection schemes are generally more stable numerically than even-order schemes. In general, odd-order schemes can be divided into a central difference term and a filter term (and sometime other additional terms) conceptually. This implicit numerical filter stabilizes the calculations. We estimate the corresponding value of γ for the implicit filter. The spatial differential of a scalar quantity ϕ with the ordinary third-

order upwind difference scheme is written as

$$\frac{\partial \phi}{\partial x} \Big|_i \sim \frac{-\phi_{i+2} + 8\phi_{i+1} - 8\phi_{i-1} + \phi_{i-2}}{12\Delta x} + \frac{\Delta x^3}{12} |U| \frac{\phi_{i+2} - 4\phi_{i+1} + 6\phi_i - 4\phi_{i-1} + \phi_{i-2}}{\Delta x^4}. \quad (\text{A138})$$

The first term on the right-hand side of the equation represents the central difference with fourth-order accuracy. The second term, divided by $|U|$, is written as

$$\frac{\Delta x^3}{12} \frac{\phi_{i+2} - 4\phi_{i+1} + 6\phi_i - 4\phi_{i-1} + \phi_{i-2}}{\Delta x^4} = \frac{\Delta x^3}{12} \left(\frac{\partial^4 \phi}{\partial x^4} \Big|_i + O(\Delta x^2) \right), \quad (\text{A139})$$

and corresponds to fourth-order hyperviscosity and diffusion. This can be considered as implicit numerical filter introduced to the scheme. Their dimensional coefficient is $|U| \frac{\Delta x^3}{12}$, and the non-dimensional coefficient is

$$\gamma = |U| \frac{4\Delta t}{3\Delta x}. \quad (\text{A140})$$

Considering the CFL condition, $\Delta t/\Delta x < 1/c$, γ is $O(10^{-3})$ – $O(10^{-2})$, if U is assumed to be $O(1)$ – $O(10) \text{ ms}^{-1}$, where c is the speed of acoustic wave and is $O(10^2)$ – $O(10^3)$. This mostly satisfies the necessary condition (Eq. (A136)).

The third-order scheme by Kawamura and Kuwahara (1984) is a modification of the third-order scheme to enable changing the strength of the numerical filter, and is written as

$$\frac{\partial \phi}{\partial x} \Big|_i = \frac{-\phi_{i+2} + 8\phi_{i+1} - 8\phi_{i-1} + \phi_{i-2}}{12\Delta x} + C \frac{\Delta x^3}{4} |U| \frac{\phi_{i+2} - 4\phi_{i+1} + 6\phi_i - 4\phi_{i-1} + \phi_{i-2}}{\Delta x^4}. \quad (\text{A141})$$

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



We can change the constant C to control the strength of the numerical filter.

Although these schemes can be thought of as being similar to central difference and explicit fourth-order numerical filters, the total coefficient of the filter depends on the velocity U . The strength of the implicit filter could be too large when the basic wind state is strong, and its effect is not always smaller than that of the eddy viscosity and diffusion representing the effect of SGS turbulence. As we discuss here, it is important to estimate the effect of the numerical filter used in a model, and to control or confirm that the artificial filter does not violate the viscosity and diffusion as a physical parameterization. This point is one of the most important factors in choosing a numerical scheme in this type of study.

A5 Physical processes

Currently, the following processes are implemented as physical processes in SCALELES.

– Cloud microphysics

- A one-moment three-category bulk scheme (Kessler, 1969)
- A one-moment six-category bulk scheme (Tomita, 2008)
- A two-moment six-category bulk scheme (Seiki and Nakajima, 2014)
- A bin method (Suzuki et al., 2010)

– Sub-grid turbulence

- A Smagorinsky–Lilly-type scheme including stability effect developed by Brown et al. (1994)
- A RANS (Reynolds Averaged Navier–Stokes Simulation) turbulence model (Nakanishi and Niino, 2004, level 2.5)

– Radiation

GMDD

8, 6021–6094, 2015

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- A parallel plane radiation model (MstrnX; Sekiguchi and Nakajima, 2008)
- Surface flux
 - A Louis-type bulk model (Louis, 1979; Uno et al., 1995)
 - A Beljaars-type bulk model (Beljaars and Holtslag, 1991; Wilson, 2001)
- 5 – Urban Canopy
 - A single-layer urban canopy model (Kusaka et al., 2001; Kusaka and Kimura, 2004)

Appendix B: Numerical stability

In this model, we use the second-order central difference scheme for the spatial differential terms of the pressure gradient and the divergence of mass flux, and the fourth-order scheme for advection terms. In this section, we investigate the numerical instability of the terms and show why we use the second-order scheme for these terms.

For simplicity, we assume a case in which the initial potential temperature is constant θ_0 , and the initial momentum is also constant. In addition, dry conditions are assumed. The potential temperature is to be constant at all times.

The governing equations are

$$\frac{\partial \rho}{\partial t} = -\nabla \cdot (\rho \mathbf{u}), \quad (\text{B1})$$

$$\frac{\partial \rho \mathbf{u}}{\partial t} = -\frac{\partial p}{\partial \mathbf{x}}, \quad (\text{B2})$$

$$p = p_{00} \left(\frac{\rho R_d \theta_0}{\rho_{00}} \right)^{\frac{c_{pd}}{c_{vd}}}. \quad (\text{B3})$$

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



To investigate the stability, the equations are linearized. The density is divided into the basic value and the deviation from the basic:

$$\rho = \rho_0 + \rho', \quad (\text{B4})$$

where

$$\rho_0 = \frac{p_{00}}{R_d \theta_0}. \quad (\text{B5})$$

Pressure is written as

$$p \sim p_{00} \left(1 + \frac{c_{pd}}{c_{vd}} \frac{\rho'}{\rho_0} \right) = p_{00} + c^2 \rho', \quad (\text{B6})$$

where c is the speed of the acoustic wave ($= \sqrt{\frac{c_{pd}}{c_{vd}} \frac{p_{00}}{\rho_0}}$) in the reference state of $p = p_{00}$ and $\rho = \rho_0$.

The time derivatives are written as

$$\begin{aligned} \frac{\partial \rho}{\partial t} \Big|_{i,j,k} = & - \frac{-a(\rho u)_{i+1,j,k} + b(\rho u)_{i,j,k} - b(\rho u)_{i-1,j,k} + a(\rho u)_{i-2,j,k}}{(b-3a)\Delta x} \\ & - \frac{-a(\rho v)_{i,j+1,k} + b(\rho v)_{i,j,k} - b(\rho v)_{i,j-1,k} + a(\rho v)_{i,j-2,k}}{(b-3a)\Delta y} \\ & - \frac{-a(\rho w)_{i,j,k+1} + b(\rho w)_{i,j,k} - b(\rho w)_{i,j,k-1} + a(\rho w)_{i,j,k-2}}{(b-3a)\Delta z}, \end{aligned} \quad (\text{B7})$$

$$\frac{\partial(\rho u)}{\partial t} \Big|_{i,j,k} = -c^2 \frac{-a\rho_{i+2,j,k} + b\rho_{i+1,j,k} - b\rho_{i,j,k} + a\rho_{i-1,j,k}}{(b-3a)\Delta x}, \quad (\text{B8})$$

$$\frac{\partial(\rho v)}{\partial t} \Big|_{i,j,k} = -c^2 \frac{-a\rho_{i,j+2,k} + b\rho_{i,j+1,k} - b\rho_{i,j,k} + a\rho_{i,j-1,k}}{(b-3a)\Delta y}, \quad (\text{B9})$$

$$\left. \frac{\partial(\rho w)}{\partial t} \right|_{i,j,k} = -c^2 \frac{-a\rho_{i,j,k+2} + b\rho_{i,j,k+1} - b\rho_{i,j,k} + a\rho_{i,j,k-1}}{(b-3a)\Delta z}. \quad (\text{B10})$$

For the second-order central difference, $a = 0$ and $b = 1$, while $a = 1$ and $b = 9$ for the fourth order.

Now we consider the numerical stability of a two-grid noise. An eigen analysis showed that the two-grid noise is the most unstable eigen mode in all the cases we tested. The density with the noise can be written as $\rho_{i,j,k}^t = \rho_0 + A \sin(\pi(i+j+k))$. Using the third-step RK scheme, the density after one time step, $\rho_{i,j,k}^{t+\Delta t}$, is

$$\rho_{i,j,k}^{t+\Delta t} - \rho_0 = \left(1 - 6 \frac{(a+b)^2}{(b-3a)^2} c^2 \frac{\Delta t^2}{\Delta x^2} \right) (\rho_{i,j,k}^t - \rho_0). \quad (\text{B11})$$

The necessary condition for the two-grid noise to decrease in time is

$$\left| 1 - 6 \left(\frac{a+b}{b-3a} \frac{\Delta t}{\Delta t_{\text{CFL}}} \right)^2 \right| < 1, \quad (\text{B12})$$

then

$$\Delta t < \frac{1}{\sqrt{3}} \Delta t_{\text{CFL}}, \quad (\text{B13})$$

for the second-order spatial difference, and

$$\Delta t < \frac{\sqrt{3}}{5} \Delta t_{\text{CFL}}, \quad (\text{B14})$$

for the fourth order, where $\Delta t_{\text{CFL}} = \Delta x/c$. If the fourth-order scheme is adopted, we need to make Δt 0.6 times (or number of time steps multiplied by 1.67) larger than that in the second-order scheme.

GMDD

8, 6021–6094, 2015

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The accuracy of the pressure gradient term and divergence term could especially affect the high-frequency modes of acoustic and gravity waves. The high-frequency modes seem to be less significant meteorologically. We choose the second-order spatial scheme for terms of the pressure gradient and divergence terms to increase Δt in spite of the decreasing accuracy of the terms, and the fourth-order scheme for the other terms.

Appendix C: Density current experiment

Straka et al. (1993) proposed a standard benchmark test of a nonlinear density current problem, and we performed a test experiment with the same settings. A cold bubble whose size is 4×2 km (horizontal and vertical, respectively) and minimum thermal perturbation is -15 K, is placed in the domain's center horizontally, and at 3 km height in a basic resting state whose potential temperature is constant at 300 K. The domain is two dimensional, and its size is 51.2 km \times 6.4 km. Runs are done with various spatial resolutions of 200, 100, 50, and 25 m. The viscosity and diffusion are given by a coefficient of $75 \text{ m}^2 \text{ s}^{-1}$ for the velocities and scalar quantities.

Figure A3 shows a plot of the potential temperature at $t = 900$ s for the 100 m resolution run. The structure, such as the position of the front of the density current, rolls caused by the K-H instability, and the magnitude at the local maxima, is reasonably similar with results of various models shown in Straka et al. (1993). The dependency of the L_2 norm of the potential temperature perturbation as a reference solution of the 25 m run of spatial resolution shows higher-order convergence than the second order between 100 and 50 m runs (Fig. A4). This model uses a fourth-order central difference scheme for advection, which has fourth-order accuracy with constant velocity, and second-order central difference scheme for the acoustic wave. The higher than second-order convergence seems to be due to the fourth-order difference scheme, although the velocity is not constant, and the scheme does not have fourth-order accu-

racy. The convergence is almost first-order between the 200 and 100 m runs. As Straka et al. (1993) mentioned, 200 m is too coarse to resolved this density current.

Acknowledgements. This model was developed by an interdisciplinary team at RIKEN Advanced Institute for Computational Science (AICS) called Team SCALE, from the fields of meteorological science and computer science. Part of the results in this paper were obtained using the K computer at the RIKEN AICS. Figures in this paper were drawn using tools developed by GFD-Dennou Club (<http://www.gfd-dennou.org/index.html.en>) and gnuplot (<http://www.gnuplot.info/>).

References

- Beljaars, A. C. M. and Holtslag, A. A. M.: Flux parameterization over land surfaces for atmospheric models, *J. Appl. Meteorol.*, 30, 327–341, 1991. 6073
- Black, T. L.: The new NMC mesoscale Eta model: Description and forecast examples, *Weather Forecast.*, 9, 265–278, 1994. 6023
- Brown, A. R., Derbyshire, S. H., and Mason, P. J.: Large-eddy simulation of stable atmospheric boundary layers with a revised stochastic subgrid model, *Q. J. Roy. Meteor. Soc.*, 120, 1485–1512, 1994. 6028, 6029, 6072
- Deardorff, J. W.: On the magnitude of the subgrid scale eddy coefficient, *J. Comput. Phys.*, 7, 120–133, 1971. 6030
- Deardorff, J. W.: Stratocumulus-capped mixed layers derived from a three-dimensional model, *Bound.-Lay. Meteorol.*, 18, 495–527, 1980. 6024, 6029, 6030
- Favre, A.: Turbulence: space-time statistical properties and behavior in supersonic flows, *Phys. Fluids*, 26, 2851–2863, 1983. 6043
- Gross, E. S., Bonaventura, L., and Rosatti, G.: Consistency with continuity in conservative advection schemes for free-surface models, *Int. J. Numer. Meth. Fl.*, 38, 307–327, 2002. 6060
- Hodur, R. H.: The naval research laboratory’s coupled ocean/atmosphere mesoscale prediction system (COAMPS), *Mon. Weather Rev.*, 125, 1414–1430, 1997. 6023
- Horiuti, K.: A proper velocity scale for modeling subgrid-scale eddy viscosities in large eddy simulation, *Phys. Fluids*, 5, 146–157, 1993. 6035

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**Grid aspect ratio in
the meteorological
LES**S. Nishizawa et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

- Ito, J., Tanaka, R., and Niino, H.: Large eddy simulation of dust devils in a diurnally-evolving convective mixed layer, *J. Meteorol. Soc. Jpn.*, 88, 63–77, 2010. 6033
- Kawamura, T. and Kuwahara, K.: Computation of high Reynolds number flow around a circular cylinder with surface roughness, *AIAA Paper*, 84-0340, 1984. 6071
- 5 Kessler, E.: On the distribution and continuity of water substance in atmospheric circulation, *Meteor. Mon.*, 10, 1–84, 1969. 6072
- Klemp, J. B. and Wilhelmson, R. B.: The simulation of three-dimensional convective storm dynamics, *J. Atmos. Sci.*, 35, 1070–1096, 1978. 6023
- Kusaka, H., Kondo, H., Kikegawa, Y., and Kimura, F.: A simple single-layer urban canopy model
10 for atmospheric models: Comparison with multi-layer and slab models, *Bound.-Lay. Meteorol.*, 101, 329–358, 2001. 6073
- Kusaka, H., and Kimura, F.: Coupling a single-layer urban canopy model with a simple atmospheric model: Impact on urban heat island simulation for an idealized case, *J. Meteorol. Soc. Jpn.*, 82, 67–80, 2004. 6073
- 15 Leonard, B. P.: A stable and accurate convective modeling procedure based on quadratic upstream interpolation, *Comput. Method. Appl. M.*, 19, 59–98, 1979.
- Leonard, B. P., MacVean, M. K., and Lock, A. P.: Positivity-preserving numerical schemes for multidimensional advection, *Technical Memorandum*, 106055 ICOMP-93-05, NASA, USA, 62 pp., 1993.
- 20 Lilly, D. K.: On the numerical simulation of buoyant convection, *Tellus*, 14, 148–171, 1962. 6027
- Lilly, D. K.: The representation of small-scale turbulence in numerical simulation experiments, in: *Proceedings of the IBM scientific computing symposium on environmental sciences*, White Plains, New York, IBM Form no. 320-1951, 195–209, 1967. 6030
- Louis, J.-F.: A parametric model of vertical eddy fluxes in the atmosphere, *Bound.-Lay. Meteorol.*, 17, 187–202, 1979. 6073
- 25 Mellor, G. L. and Yamada, T.: Development of a turbulence closure model for geophysical fluid problems, *Rev. Geophys. Space Ge.*, 20, 851–875, 1982. 6024
- Miyamoto, Y., Kajikawa, Y., Yoshida, R., Yamaura, T., Yashiro, H., and Tomita, H.: Deep moist atmospheric convection in a subkilometer global simulation, *Geophys. Res. Letters*, 40, 4922–4926, 2013. 6023
- 30 Miyamoto, Y., Yoshida, R., Yamaura, T., Yashiro, H., Tomita, H., and Kajikawa, Y.: Does convection vary in different cloudy disturbances?, *Atmos. Sci. Lett.*, 16, 305–309, doi:10.1002/asl2.558, 2015. 6023

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Moeng, C.-H. and Wyngaard, J. C.: Spectral analysis of large-eddy simulations of the convective boundary layer, *J. Atmos. Sci.*, 45, 3573–3587, 1988. 6024, 6029
- Nakanishi, M. and Niino, H.: An improved Mellor-Yamada level-3 model with condensation physics: Its design and verification, *Bound.-Lay. Meteorol.*, 112, 1–31, 2004. 6024, 6072
- 5 Niwa, Y., Tomita, H., Satoh, M., and Imasu, R.: A three-dimensional icosahedral grid advection scheme preserving monotonicity and consistency with continuity for atmospheric tracer transport, *J. Meteorol. Soc. Jpn.*, 89, 255–268, 2011. 6060
- Saito, K., Fujita, T., Yamada, Y., Ishida, J., Kumagai, Y., Aranami, K., Ohmori, S., Nagasawa, R., Kumagai, S., Muroi, C., Kato, T., Eito, H., and Yamazaki, Y.: The operational JMA nonhydrostatic mesoscale model, *Mon. Weather Rev.*, 134, 1266–1298, 2006. 6023
- 10 Sato, Y., Nishizawa, S., Yashiro, H., Miyamoto, Y., and Tomita, H.: Potential of retrieving shallow-cloud life cycle from future generation satellite observations through cloud evolution diagrams: a suggestion from a large eddy simulation, *SOLA*, 10, 10–14, 2014. 6027
- Satoh, M., Tomita, H., Yashiro, H., Miura, H., Kodama, C., Seiki, T., Noda, A. T., Yamada, Y., Goto, D., Sawada, M., Miyoshi, T., Niwa, Y., Hara, M., Ohno, Y., Iga, S., Arakawa, T., Inoue, T., and Kubokawa, H.: The non-hydrostatic icosahedral atmospheric model: description and development, *PEPS*, 1, 18, doi:10.1186/s40645-014-0018-1, 2014. 6023
- 15 Seiki, T. and Nakajima, T.: Aerosol effect of the condensational process on a convective cloud simulation, *J. Atmos. Sci.*, 71, 833–853, 2014. 6072
- 20 Sekiguchi, M. and Nakajima, T.: A k-distribution-based radiation code and its computational optimization for an atmospheric general circulation model, *J. Quant. Spectrosc. Ra.*, 109, 2779–2793, 2008. 6073
- Scotti, A., Meneveau, C., and Lilly, D. K.: Generalized Smagorinsky model for anisotropic grids, *Phys. Fluids A-Fluid*, 5, 2306–2308, 1993. 6028, 6030, 6031, 6032, 6036, 6041
- 25 Skamarock, W.: Evaluating mesoscale NWP models using kinetic energy spectra, *Mon. Weather Rev.*, 132, 3019–3032, 2004. 6070
- Skamarock, W. C., Klemp, J. B., Dudhia, J., Gill, D. O., Barker, D. M., Duda, M. G., Huang, X.-Y., Wang, W., and Powers, J. G.: A description of the Advanced Research WRF version 3, *NCAR Technical Note*, 475, 2008. 6023
- 30 Smagorinsky, J.: General circulation experiments with the primitive equations, *Mon. Weather Rev.*, 91, 99–164, 1963. 6027

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Straka, J. M., Wilhelmoson, R. B., Wicher, L. J., Anderson, J. R., and Droegemeier, K. K.: Numerical solutions of non-linear density current: A benchmark solution and comparisons, *Int. J. Numer. Meth. Fl.*, 17, 1–22, 1993. 6026, 6076, 6077
- Sullivan, P. P., McWilliams, J. C., and Moeng, C.-H.: A subgrid-scale model for large-eddy simulation of planetary boundary-layer flows, *Bound.-Lay. Meteorol.*, 71, 247–276, 1994. 6024
- Sullivan, P. P. and Patton, E. G.: The effect of mesh resolution on convective boundary layer statistics and structures generated by large-eddy simulation, *J. Atmos. Sci.*, 68, 2395–02415, 2011. 6040
- Suzuki, K., Nakajima, T., Nakajima, T. Y., and Khain, A. P.: A study of microphysical mechanisms for correlation patterns between droplet radius and optical thickness of warm clouds with a spectral bin microphysics model, *J. Atmos. Sci.*, 67, 1126–1141, 2010. 6072
- Tomita, H. and Satoh, M.: A new dynamical framework of nonhydrostatic global model using the icosahedral grid, *Fluid Dyn. Res.*, 34, 357–400, 2004. 6023
- Tomita, H.: New microphysical schemes with five and six categories by diagnostic generation of cloud ice, *J. Meteorol. Soc. Jpn.*, 86, 121–142, 2008. 6072
- Tsuboki, K. and Sakakibara, A.: Large-scale parallel computing of cloud resolving storm simulator, in: *High Performance Computing*, edited by: Zima, H. P. et al., Springer, 243–259, 2002. 6023
- Tripoli, G. J. and Cotton, W. R.: The Colorado State University three-dimensional cloud/mesoscale model-1982: Part I. General theoretical framework and sensitivity experiments, *Atmos. Res.*, 16, 185–220, 1982. 6023
- Uno, I., Cai, X.-M., Steyn, D. G., and Emori, S.: A simple extension of the Louis method for rough surface layer modeling, *Bound.-Lay. Meteorol.*, 76, 395–409, 1995. 6073
- Wilson, D. K.: An alternative function for the wind and temperature gradients in unstable surface layers, *Bound.-Lay. Meteorol.*, 99, 151–158, 2001. 6073
- Xue, M., Droegemeier, K. K., and Wong, V.: The advanced regional prediction system (ARPS) – a multiscale nonhydrostatic atmospheric simulation and prediction tool. Part I: Model dynamics and verification, *Meteorol. Atmos. Physics.*, 75, 161–193, 2000. 6023
- Yakhot, A., Orszag, S., Yakhot, V., and Israeli, M.: Renormalization group formulation of large-eddy simulations, *J. Sci. Comput.*, 4, 139–158, 1989. 6035
- Zalesk, S. T.: Fully multi-dimensional flux-corrected transport algorithms for fluids, *J. Comput. Phys.*, 31, 335–362, 1979. 6061

vanZanten, M. C., Stevens, B., Nuijens, L., Siebesma, A. P., Acherman, A., Burnet, F., Cheng, A., Couvreux, F., Jiang, H., Khairoutdinov, M., Kogan, Y., Lewellen, D. C., Mechem, D., Nakamura, K., Noda, A., Shipway, B. J., Slawinska, J., Wang, S., and Wyszogrodzki, A.: Controls on precipitation and cloudiness in simulations of trade-wind cumulus as observed during RICO, J. Adv. Model. Earth Syst., 3, M06001, doi:10.1029/2011MS000056, 2011. 6024

5

GMDD

8, 6021–6094, 2015

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 1. Notation of symbols.

ρ	total density	kg m^{-3}
q_d	ratio of mass of dry air to total mass	–
q_v	specific humidity	–
q_l	specific liquid water content	–
q_s	specific solid water content	–
t	time	s
\mathbf{u}	velocity vector of air flow	m s^{-1}
u	x component of velocity	m s^{-1}
v	y component of velocity	m s^{-1}
w	z component of velocity	m s^{-1}
w_l	relative velocity of liquid water to gas	m s^{-1}
w_s	relative velocity of solid water to gas	m s^{-1}
S_v	source term of water vapor	$\text{kg m}^{-3} \text{s}^{-1}$
S_l	source term of liquid water	$\text{kg m}^{-3} \text{s}^{-1}$
S_s	source term of solid water	$\text{kg m}^{-3} \text{s}^{-1}$
p	pressure	Nm^{-2}
g	gravitational acceleration	m s^{-2}
f_l	drag force from water loading by liquid water	$\text{kg m}^{-2} \text{s}^{-2}$
f_s	drag force from water loading by solid water	$\text{kg m}^{-2} \text{s}^{-2}$
\mathbf{e}_z	vertical unit vector (upward)	–
R_d	gas constant for dry air for unit mass	$\text{J kg}^{-1} \text{K}^{-1}$
R_v	gas constant for water vapor for unit mass	$\text{J kg}^{-1} \text{K}^{-1}$
T	temperature	K
Q_d	diabatic heating from dry air	$\text{J m}^{-3} \text{s}^{-1}$
Q_v	diabatic heating from water vapor	$\text{J m}^{-3} \text{s}^{-1}$
Q_l	diabatic heating from liquid water	$\text{J m}^{-3} \text{s}^{-1}$
Q_s	diabatic heating from solid water	$\text{J m}^{-3} \text{s}^{-1}$
e_d	internal energy of dry air	J kg^{-1}
e_v	internal energy of water vapor	J kg^{-1}
e_l	internal energy of liquid water	J kg^{-1}
e_s	internal energy of solid water	J kg^{-1}
e	total internal energy	J kg^{-1}
$c_{v,d}$	specific heat at constant volume of dry air	$\text{J kg}^{-1} \text{K}^{-1}$
$c_{v,v}$	specific heat at constant volume of water vapor	$\text{J kg}^{-1} \text{K}^{-1}$
$c_{p,d}$	specific heat at constant pressure of dry air	$\text{J kg}^{-1} \text{K}^{-1}$
$c_{p,v}$	specific heat at constant pressure of water vapor	$\text{J kg}^{-1} \text{K}^{-1}$
c_l	specific heat of liquid water	$\text{J kg}^{-1} \text{K}^{-1}$
c_s	specific heat of solid water	$\text{J kg}^{-1} \text{K}^{-1}$
p_{00}	standard pressure	Pa
θ_d	potential temperature of dry air	K
θ	potential temperature of total air	K

**Grid aspect ratio in
the meteorological
LES**

S. Nishizawa et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Table 2. Filter lengths and the effect of grid aspect ratio on mixing length in the three experiment performed in this study.

	filter length	modification by the grid aspect ratio
control experiment	$2(\Delta x \Delta y \Delta z)^{1/3}$	yes
small filter length experiment	$(\Delta x \Delta y \Delta z)^{1/3}$	yes
fixed mixing length experiment	$2(\Delta x \Delta y \Delta z)^{1/3}$	no ($f(a) = 1$)

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

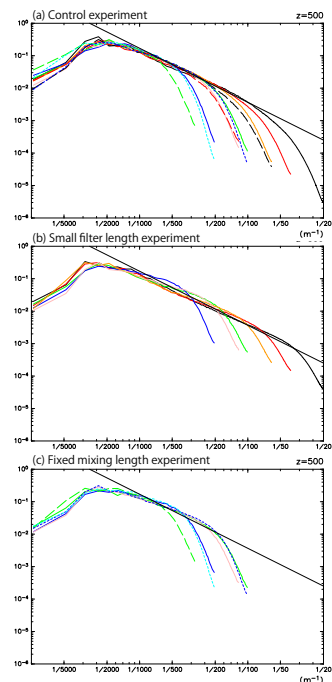


Figure 1. Energy spectrum three dimensional velocity at height of 500 m averaged over $t = 3.5$ to 4 h in **(a)** control experiment, **(b)** small filter length experiment, and **(c)** fixed mixing length experiment. Colors indicate grid aspect ratio; 1 (black), 2 (red), 3 (orange), 5 (green), 6 (pink), 10 (blue), and 20 (cyan). Line types indicate vertical resolution: 10 m (solid line), 30 m (dashed line), and 5 m (dotted line). Linear slope representing the slope of $-5/3$ power fit to the spectrum of the 10mAR1 run between $1/1000$ and $1/100 \text{ m}^{-1}$ is superimposed. Only spectra for $\Delta z = 10 \text{ m}$ runs in the small filter length experiment and for large aspect ratio runs ($a \geq 5$) in the fixed mixing length experiment are shown.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

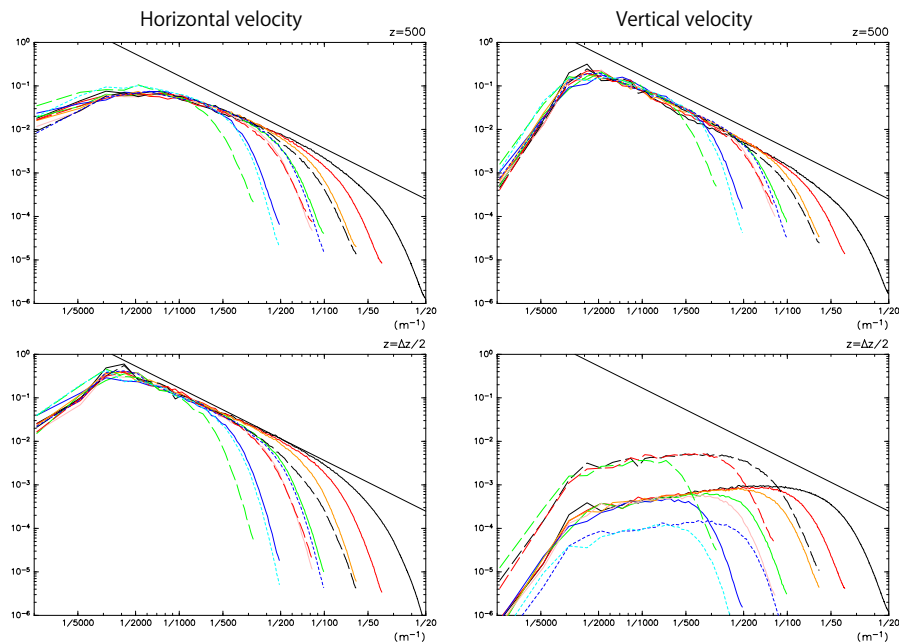


Figure 2. Same as Fig. 1, but spectrum of (left) horizontal and (right) vertical velocity at (top) height of 500 m and (bottom) lowest layer: $z = 2.5, 5,$ and 15 m for $\Delta z = 5, 10,$ and 30 m.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



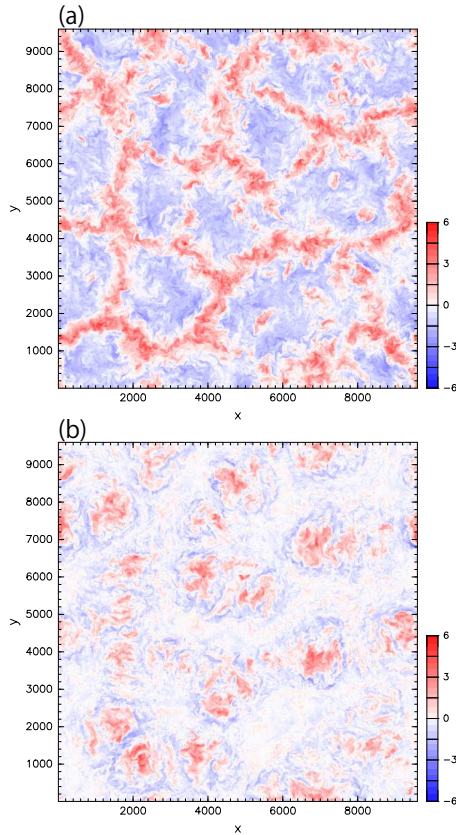


Figure 3. Horizontal cross section of the vertical velocity at **(a)** 300 m and **(b)** 1200 m height in the 10mAR1 run of the control experiment.

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

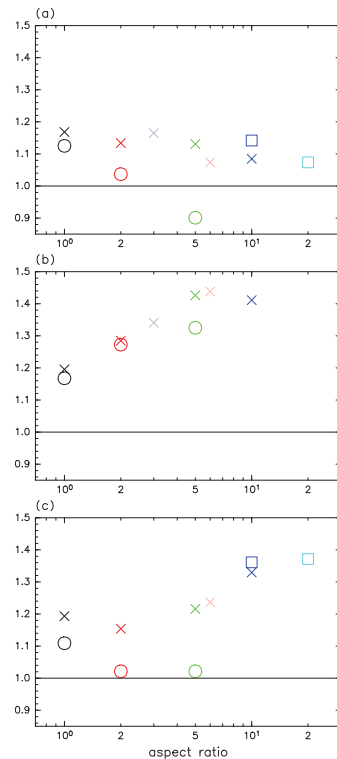


Figure 4. Dependency of the index of energy pile defined in the text on the grid aspect ratio for runs in the **(a)** control experiment, **(b)** small filter length experiment, and **(c)** fixed mixing length experiment. Symbol shows vertical resolution; square, cross, and circle shows 5, 10, and 30 m, respectively. Colors represent the grid aspect ratio as in Fig. 1.

Grid aspect ratio in
the meteorological
LES

S. Nishizawa et al.

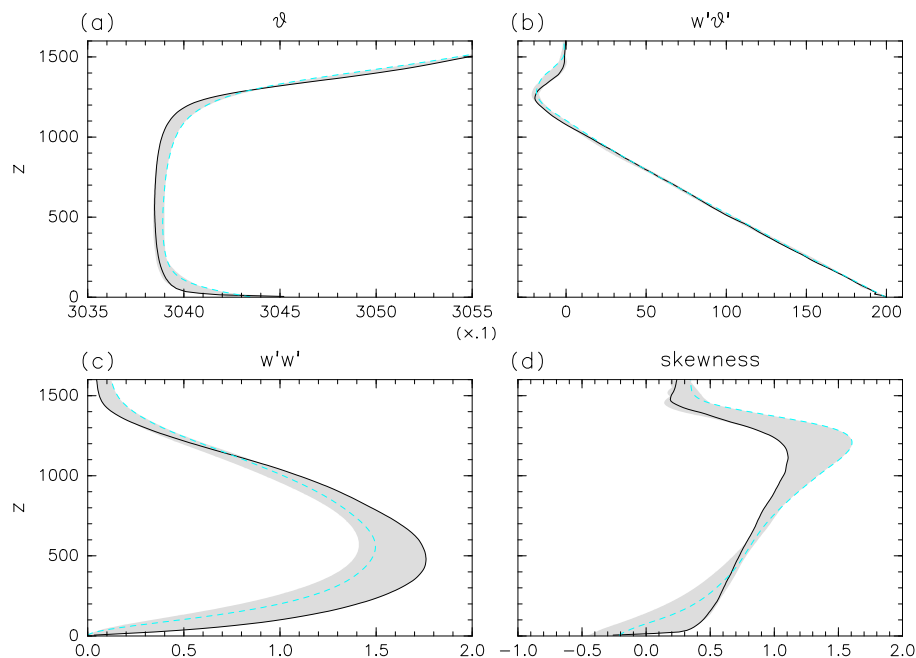


Figure 5. Vertical plots of horizontal mean **(a)** potential temperature [K], **(b)** heat flux [W m^{-2}], **(c)** variance of vertical velocity [$\text{m}^2 \text{s}^{-2}$], and **(d)** skewness of vertical velocity in the control experiment. These values are averaged over $t = 3.5$ to 4 h. Black and cyan lines are results of 10mAR1 and 5mAR20 runs, respectively. Shaded areas represent range between maximum and minimum of all runs in the control experiment.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

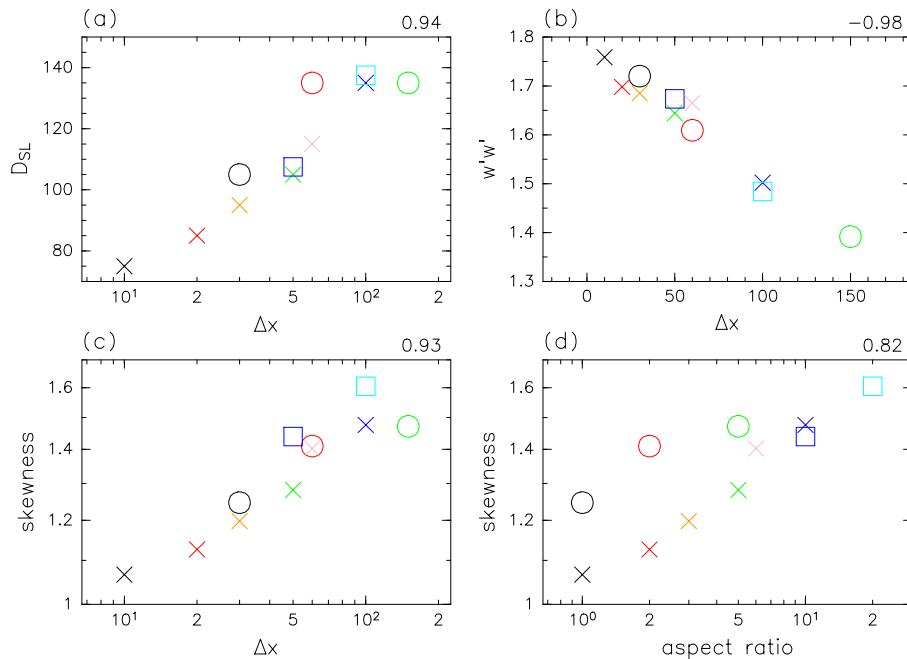


Figure 6. Scatter diagrams between some quantities and grid configurations: **(a)** depth of surface layer vs. horizontal grid spacing, **(b)** variance of vertical velocity at 500 m height vs. horizontal grid spacing, **(c)** skewness of vertical velocity at 1200 m height vs. horizontal grid spacing, and **(d)** skewness vs. grid aspect ratio in the control experiment. Colors and symbols represent grid aspect ratio and vertical resolution, respectively, as in Fig. 4: 1 (black), 2 (red), 3 (orange), 5 (green), 6 (pink), 10 (blue), and 20 (cyan). Squares, crosses, and circles indicate 5, 10, and 30 m, respectively. Value at top right of each diagram is correlation coefficient. Note that the coefficient is calculated with the logarithm of skewness, horizontal grid spacing, and aspect ratio in **(c, d)**.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)

[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

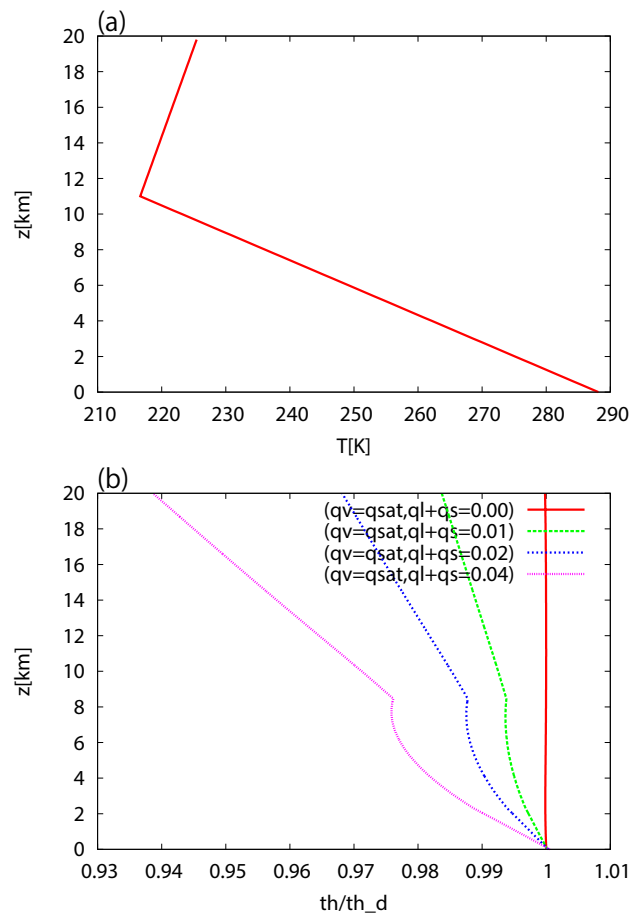


Figure A1. Vertical profile of (a) US standard atmosphere; (b) several profiles of θ/θ_d .

Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

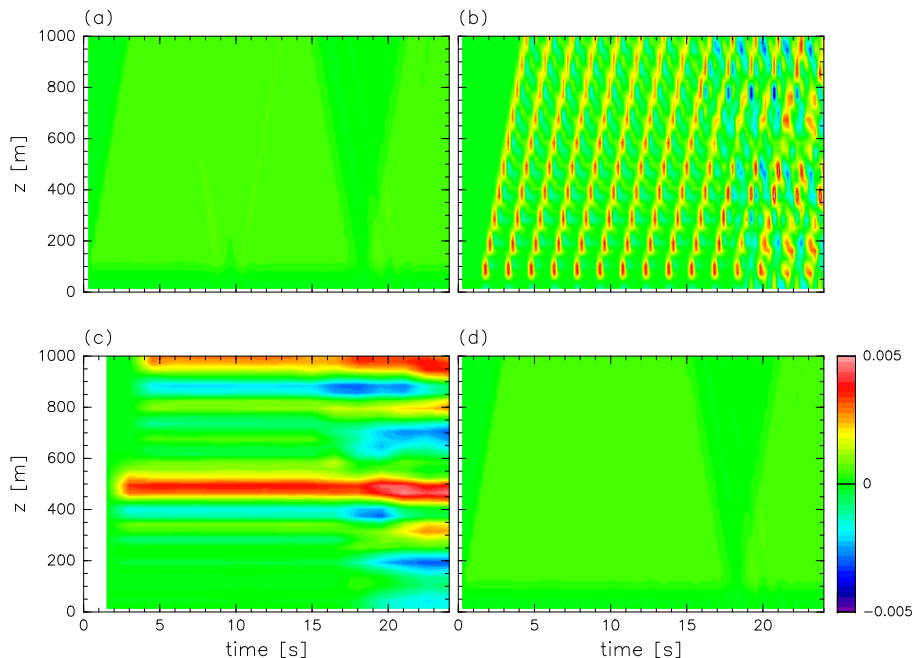


Figure A2. Time–height section of horizontal mean vertical velocity in runs where **(a)** $\Delta t_{\text{dyn}} = \Delta t_{\text{phys}} = 0.03$ s and $\Delta t_{\text{output}} = 0.3$ s, **(b)** $\Delta t_{\text{dyn}} = 0.03$ s, $\Delta t_{\text{phys}} = 1.5$ s, and $\Delta t_{\text{output}} = 0.3$ s, and surface flux is added at large time step intermittently, **(c)** same as **(b)** but $\Delta t_{\text{output}} = \Delta t_{\text{phys}} = 1.5$ s, and **(d)** same as **(b)** but surface flux is added at small time step.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


Grid aspect ratio in the meteorological LES

S. Nishizawa et al.

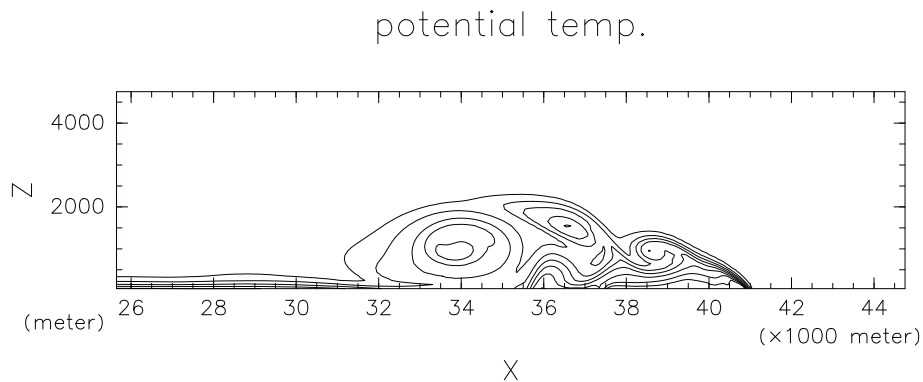


Figure A3. Plot of potential temperature at $t = 900$ s of the 100 m resolution density current experiment. Contour interval is 1 K, and contours are centered around 300 K.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

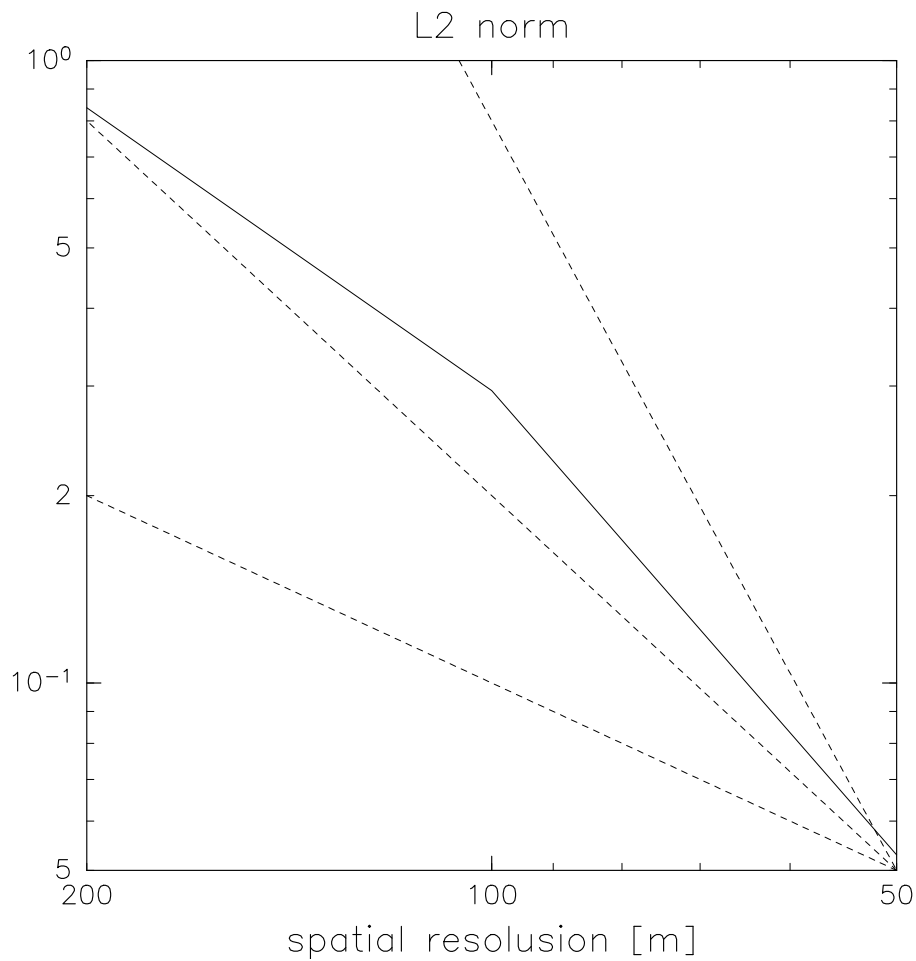


Figure A4. L_2 norm of potential temperature computed against the 25 m resolution experiment. Dashed lines represent first-, second-, and fourth-order convergence.