

1 **A new adaptive data transfer library for model coupling**

2 **C. Zhang^{2,1}, L. Liu^{1,3}, G. Yang^{2,1,3}, R. Li^{2,1}, and B. Wang^{1,3,4}**

3 [1]{Ministry of Education Key Laboratory for Earth System Modeling, Center for Earth
4 System Science (CESS), Tsinghua University, Beijing, China}

5 [2]{Department of Computer Science and Technology, Tsinghua University, Beijing, China}

6 [3]{Joint Center for Global Change Studies (JCGCS), Beijing, China}

7 [4]{State Key Laboratory of Numerical Modelling for Atmospheric Sciences and Geophysical
8 Fluid Dynamics (LASG), Institute of Atmospheric Physics, Chinese Academy of Sciences,
9 Beijing, China.}

10 Correspondence to: L. Liu (liuli-cess@tsinghua.edu.cn), G. Yang (ygw@tsinghua.edu.cn)

11

12 **Abstract**

13 Data transfer means transferring data fields from a sender to a receiver. It is a fundamental
14 and frequently used operation of a coupler. Most versions of state-of-the-art couplers
15 currently use an implementation based on the point-to-point (P2P) communication of the
16 Message Passing Interface (MPI) (referred to as “P2P implementation” hereafter). In this
17 paper, we reveal the drawbacks of the P2P implementation when the parallel decompositions
18 of the sender and the receiver are different, including low communication bandwidth due to
19 small message size, variable and high number of MPI messages, as well as network
20 contention. To overcome these drawbacks, we propose a butterfly implementation for data
21 transfer. Although the butterfly implementation outperforms the P2P implementation in many
22 cases, it degrades the performance when the sender and the receiver have similar parallel
23 decompositions or when the number of processes used for running models is small. To ensure
24 data transfer with optimal performance, we design and implement an adaptive data transfer
25 library that combines the advantages of both butterfly implementation and P2P
26 implementation. As the adaptive data transfer library automatically uses the best
27 implementation for data transfer, it outperforms the P2P implementation in many cases while
28 it does not decrease the performance in any cases. Now, the adaptive data transfer library is

1 open to the public and has been imported into the C-Coupler1 coupler for performance
2 improvement of data transfer. We believe that other couplers can also benefit from it.

3

4 **1 Introduction**

5 Climate System Models (CSMs) and Earth System Models (ESMs) are fundamental tools for
6 simulating, predicting and projecting climate. A CSM or an ESM generally integrates several
7 component models, such as an atmosphere model, a land surface model, an ocean model and a
8 sea-ice model, into a coupled system to simulate the behaviours of the climate system,
9 including the interactions between components of the climate system. More and more coupled
10 models have sprung up in the world. For example, the number of coupled model
11 configurations in the Coupled Model Intercomparison Project (CMIP) has increased from less
12 than 30 (used for CMIP3) to more than 50 (used for CMIP5).

13 High-performance computing is an essential technical support for model development,
14 especially for higher and higher resolutions of models. Modern high-performance computers
15 integrate an increasing number of processor cores for higher and higher computation
16 performance. Therefore, efficient parallelization, which enables a model to utilize more
17 processor cores for acceleration, becomes a technical focus in model development; and a
18 number of component models with efficient parallelization have sprung up. For example, the
19 Community Ice CodE (CICE; Hunke et al., 2008, 2013) at 0.1 °horizontal resolution can scale
20 to 30,000 processor cores on the IBM Blue Gene/L (Dennis et al., 2008); the Parallel Ocean
21 Program (POP; Kerbyson, 2005; Smith et al., 2010) at 0.1 °horizontal resolution can also
22 scale to 30,000 processor cores on the IBM Blue Gene/L and 10,000 processor cores on a
23 Cray XT3 (Dennis, 2007); the Community Atmosphere Model (CAM; Morrison et al., 2008;
24 Neale et al., 2010, 2012) with a spectral element dynamical core (CAM-SE) at 0.25 °
25 horizontal resolution can scale to 86,000 processor cores on a Cray XT5 (Dennis et al., 2012).

26 A coupler is an important component in a coupled system. It links component models together
27 to construct a coupled model, and controls the integration of the whole coupled model
28 (Valcke et al, 2012). A number of couplers now are available, e.g., the Model Coupling
29 Toolkit (MCT; Jacob et al., 2005), the Ocean Atmosphere Sea Ice Soil coupling software
30 (OASIS) coupler (Redler et al., 2010; Valcke, 2013; Valcke et al, 2015), the Earth System
31 Modelling Framework (ESMF; Hill et al., 2004), the CPL6 coupler (Craig et al., 2005), the
32 CPL7 coupler (Craig et al., 2012), the Flexible Modelling System (FMS) coupler (Balaji et al.,

1 2006), the Bespoke Framework Generator (BFG; Ford et al., 2006; Armstrong et al., 2009)
2 and the community coupler version 1 (C-Coupler1; Liu et al., 2014).

3 A coupler generally has much smaller overhead than the component models in current
4 coupled systems. However, it is potentially a time-consuming component in future coupled
5 models. This is because more and more component models (such as land-ice model,
6 chemistry model and biogeochemical model) will be coupled into a coupled model, and the
7 coupling frequency between component models will be higher and higher. Data transfer is a
8 fundamental and frequently used operation in a coupler. It is responsible for transferring data
9 fields between the processes of two component models and for rearranging data fields among
10 processes of the same component model for parallel data interpolation.

11 A coupler may become a bottleneck for efficient parallelization of future coupled models. The
12 most obvious reason is that the current implementation of data transfer in a state-of-the-art
13 coupler may be not efficient enough. For example, due to the low efficiency of data transfer,
14 the coupling from a component model with a horizontal grid (of 576×384 grid points) to
15 another component model with another horizontal grid (of 3600×2400 grid points) can only
16 scale to about 500 processor cores when using the CPL7 coupler (Craig et al., 2012).
17 Therefore, it is highly desirable to improve the parallel data transfer of couplers.

18 In this study, we first propose a butterfly implementation of data transfer. Since the P2P
19 implementation and the butterfly implementation can outperform each other in different cases
20 (Sect. 5), we next develop an adaptive data transfer library that includes both implementations
21 and can adaptively use the better one for data transfer. Performance evaluation demonstrates
22 that such a library significantly outperforms the P2P implementations in most cases and does
23 not degrade the performance in any case. This library has been imported into C-Coupler1 with
24 slight code modification. We believe that other couplers can also benefit from it.

25 The remainder of this paper is organized as follows. We briefly introduce the implementation
26 of data transfer in existing couplers in Section 2. Details of the butterfly implementation and
27 the adaptive data transfer library are presented in Sections 3 and 4, respectively. The
28 performances of data transfer implementations are evaluated in Section 5. Conclusions are
29 given in Section 6.

1 **2 Data transfer implementations in existing couplers**

2 **2.1 P2P implementation**

3 Almost all state-of-the-art couplers use a similar implementation for data transfer. To achieve
4 parallel data transfer, MCT first generates a communication router (known as the data
5 mapping between processes) according to the parallel decompositions (the distribution of grid
6 points among the processes) of the sender and the receiver, and then uses the point-to-point
7 (P2P) communication of the Message Passing Interface (MPI) to transfer the data. A data
8 field will be transferred from a process of the sender to a process of the receiver, only when
9 the two processes have common grid points. In the following context, we call this “P2P
10 implementation” for short.

11 Since MCT has already been imported into OASIS3-MCT, the CPL6 coupler and the CPL7
12 coupler, these couplers also use the P2P implementation for data transfer. Although the other
13 couplers such as ESMF, OASIS4, the FMS coupler and C-Coupler1 do not directly import
14 MCT, they also use the P2P implementation for data transfer.

15 **2.2 Performance bottlenecks of the P2P implementation**

16 In this work, we first investigate the performance characteristics of the P2P implementation,
17 and therefore derive a benchmark from a real coupled model GAMIL2-CLM3, which
18 includes GAMIL2 (Li et al., 2013) that is an atmosphere model and CLM3 (Oleson et al.,
19 2004; Dickinson et al., 2006) that is a land surface model. GAMIL2 and CLM3 share the
20 same horizontal grid of 7,680 (128×60) grid points, but have different parallel decompositions:
21 GAMIL2 uses a regular 2-D parallel decomposition, while CLM3 uses an irregular 2-D
22 parallel decomposition where the grid points are assigned to the processes in a round-robin
23 fashion.

24 In this benchmark, there is only the data transfer with the P2P implementation between the
25 sender and the receiver with the same horizontal grid of GAMIL2-CLM3. The parallel
26 decomposition of the sender is derived from CLM3, and the parallel decomposition of the
27 receiver is derived from GAMIL2. A high-performance computer named Tansuo100 at
28 Tsinghua University, China is used for the performance tests. It has 700 computing nodes,
29 each of which contains two six-core Intel Xeon X5670 CPUs and 32 GB main memory. All

1 computing nodes are connected by a high-speed InfiniBand network with peak
2 communication bandwidth of 5 GB/s.

3 To evaluate the parallel performance of the P2P implementation, 14 2-D coupling fields are
4 transferred between the sender and the receiver. In each test, the sender and the receiver use
5 the same number of processes. Since there are 12 processor cores on each computing node,
6 the number of processes is set to be an integral multiple of 12. The sender and the receiver are
7 located on different computing nodes and the communication of the P2P implementation must
8 go through the InfiniBand network.

9 Figure 1 demonstrates that poor parallel scalability of the P2P implementation can be
10 obtained when the parallel decompositions of the sender and receiver are different. It is well
11 known that the communication performance heavily depends on message size. As shown in
12 Fig. 2, the P2P communication bandwidth achieved generally increases with message size. So
13 when the message size is small (for example, smaller than 4 KB), the communication
14 bandwidth achieved is very low. The message size in the P2P implementation decreases when
15 the number of model processes increases (Fig. 3), indicating that the communication
16 bandwidth becomes lower when increasing the number of processes. The performance of data
17 transfer also heavily depends on the number of MPI messages. As shown in Fig. 4, the
18 variation of average number of MPI messages in the P2P implementation is consistent with
19 the variation of the execution time in Fig. 1: both increase with the number of processes from
20 6 to 48, and go down with the number of processes from 96 to 192. Lower execution time of
21 the P2P implementation will be obtained if more processes are used (the maximum number of
22 processes in both Fig. 1 and Fig. 4 is limited to 192 because GAMIL2-CLM3 will not be
23 further accelerated when using more processes) since the average number of MPI messages
24 will further go down.

25 To further reveal possible reasons for the poor parallel scalability, we evaluate the ideal
26 performance and actual performance in Fig. 5. The ideal performance is much better than the
27 actual performance, and the ratio between the ideal performance and the actual performance
28 significantly increases when increasing the number of processes. The significant gap between
29 the ideal performance and the actual performance is due to network contention. For example,
30 when multiple P2P communications share the same sender process or receiver process, they
31 must wait in order.

1 **3 Butterfly implementation for better performance of data transfer**

2 The drawbacks of the P2P implementation when the sender and the receiver use different
3 parallel decompositions can be identified as low communication bandwidth due to small
4 message size, variable and high number of MPI messages, as well as network contention. To
5 overcome these drawbacks, a prospective solution is to organize the transfer of data using a
6 better algorithm, e.g., the butterfly algorithm (Fig. 6), which has already been studied in
7 computing sciences (Chong et al., 1994; Foster, 1995; Heckbert et al., 1995; Hemmert et al.,
8 2005; Kim et al., 2007; Jan et al., 2013; Petagon et al, 2016). In hardware aspect, the
9 traditional butterfly algorithm and its transformation have been used to design networks
10 (Chong et al., 1994; Kim et al., 2007); in software aspect, the butterfly algorithm has been
11 used to improve the parallel algorithms with all-to-all communications (Foster, 1995), e.g.,
12 Fast Fourier Transform (FFT; Heckbert et al., 1995; Hemmert et al., 2005), matrix
13 transposition (Petagon et al, 2016) and sorting (Jan et al., 2013).

14 Unfortunately, the classical butterfly algorithm cannot be used as is to improve data transfer,
15 because it requires that one process communicates with every other process, that the
16 communication load among processes is balanced and that the number of processes must be a
17 power of 2. In practice, data transfer for model coupling has different characteristics, i.e., one
18 process needs to communicate with a part of other processes, the communication load among
19 processes is always unbalanced and the number of processes cannot be restricted to a power
20 of 2. Therefore, we propose here a new implementation of data transfer involving an
21 additional butterfly kernel to transfer data from the sender with the source parallel
22 decomposition to the receiver with the target parallel decomposition. As the number of
23 processes of the butterfly kernel must be a power of 2, while the number of processes of the
24 sender or the receiver are not necessarily, the butterfly kernel has its own source and target
25 parallel decompositions, and process mappings are needed from the sender onto the butterfly
26 kernel and from the butterfly kernel onto the receiver (see Fig. 7). Next, we present the
27 butterfly kernel and the process mappings, respectively.

28 **3.1 Butterfly kernel**

29 The first question for the butterfly kernel is how to decide its number of processes. Any
30 process of the sender or receiver can be used as a process for the butterfly kernel. Given that
31 the total number of unique processes of the sender and receiver is N_T , the number of processes

1 of the butterfly kernel (N_B) can be any power of 2, which is no larger than N_T . We propose to
2 select the maximum number in order to maximize utilization of resources. We prefer to pick
3 out unique processes first from the sender, and then from the receiver if the sender does not
4 have enough processes.

5 The butterfly kernel is responsible for rearranging the distribution of data among the
6 processes from the source parallel decomposition to the target parallel decomposition. Given
7 the number of processes $N=2^n$, there are n stages in the butterfly kernel. In a stage, all
8 processes are divided into a number of pairs and the two processes of a pair uses MPI P2P
9 communication to exchange data. After each stage, the number of butterfly kernel processes
10 that may have the data that will finally belong to any one process on the target parallel
11 decomposition will become a half. Figure 6 is an example for further illustration, where D^i_j
12 means the data is originally in process P_i according to the source parallel decomposition and
13 is finally in process P_j according to the target parallel decomposition. Before the first stage,
14 all processes ($P_0\sim P_7$) may have the data of P_0 on the target parallel decomposition. After the
15 first stage, only four processes (P_0, P_2, P_4 and P_6) may have that data; and after the second
16 stage, only two processes (P_0 and P_4) may have it.

17 To reveal the advantages and disadvantages of the two implementations, we measure the
18 characteristics of the two implementations based on the benchmark introduced in Section 2.2.
19 The results show that the total amount of data transferred by the butterfly implementation is
20 larger than that by the P2P implementation (Fig. 8), which is the major disadvantage of the
21 butterfly implementation. Meanwhile, comparing with the P2P implementation, the butterfly
22 implementation can have the following advantages:

- 23 1) bigger message size for better communication bandwidth (Fig. 9);
- 24 2) balanced and smaller number of MPI processes among processes (Fig. 10);
- 25 3) ordered communications among processes and fewer communications operated
26 concurrently (Fig. 10), which can dramatically reduce network contention.

27 **3.2 Process mapping**

28 In this subsection, we will introduce the process mappings from the sender to the butterfly
29 kernel and from the butterfly kernel to the receiver. To minimize the overhead of process
30 mapping from the butterfly kernel to the receiver, we map one or multiple processes of the

1 butterfly kernel onto a process of the receiver if the butterfly kernel has more processes than
2 the receiver; otherwise, we map a process of the butterfly kernel onto one or multiple
3 processes of the receiver. In other words, there is no multiple-to-multiple process mapping
4 between the butterfly kernel and the receiver. Similarly, there is no multiple-to-multiple
5 process mapping between the sender and the butterfly kernel.

6 Processes of the sender or the receiver may be unbalanced in terms of the data size transferred,
7 which may result in unbalanced communications among processes of the butterfly kernel. As
8 mentioned in Section 3.1, at each stage of the butterfly kernel, all processes are divided into a
9 number of pairs, each of which is involved in P2P communications. To improve the balance
10 of communications among the processes in the butterfly kernel, one solution is to try to make
11 the process pairs at each stage more balanced in terms of data size of P2P communications, so
12 we propose to reorder the processes of the sender or the receiver according to data size. At the
13 first stage, each time we pick out the process with the largest data size and the process with
14 the smallest data size from the remaining processes that have not been paired, to generate a
15 process group. For the next stage, the outputs of two process groups from the previous stage
16 are paired into a bigger process groups in a similar way. After finishing the iterative pairing
17 throughout all stages, all processes of the sender or the receiver are reordered.

18 The iterative pairing also requires the number of processes to be a power of 2. Given that the
19 number of processes of the sender (or receiver) is N_C and the number of processes of the
20 butterfly kernel is N_B , we first pad empty processes (whose data size is zero) before the
21 iterative pairing to make the number of processes of the sender (or receiver) be a power of 2
22 (denoted N_P), which is no smaller than N_B . Therefore, the reordered N_P processes after the
23 iterative pairing can be divided into N_B groups, each of which contains N_P/N_B processes with
24 consecutive reordered indexes and maps onto a unique process of the butterfly kernel.

25 Figure 11 shows an example of the process mapping, where the sender has five processes (S_0 -
26 S_4 in Fig. 11a), the receiver has 10 processes (R_0 - R_9 in Fig. 11b), and the butterfly kernel uses
27 eight processes (B_0 - B_7 in Fig. 11c). At first, empty processes are padded to the sender (S_5 - S_7
28 in Fig. 11a) and the receiver (R_{10} - R_{15} in Fig. 11b). Next, the iterative pairing is conducted for
29 the sender and the receiver, respectively. The iterative pairing has three stages for the sender.
30 At the first stage, the eight processes of the sender are divided into four groups $\{S_1, S_7\}$,
31 $\{S_0, S_6\}$, $\{S_2, S_5\}$ and $\{S_4, S_3\}$ (Fig. 11a), according to the data size corresponding to each
32 process. These four process groups are divided into two bigger groups ($\{\{S_4, S_3\}, \{S_2, S_5\}\}$ and

1 $\{\{S_1, S_7\}, \{S_0, S_6\}\}$ at the second stage (Fig. 11a). Finally, one process group
2 $\{\{\{S_4, S_3\}, \{S_2, S_5\}\}, \{\{S_1, S_7\}, \{S_0, S_6\}\}\}$ is obtained at the third stage (Fig. 11a), and the eight
3 processes of the sender are reordered as $S_4, S_3, S_2, S_5, S_1, S_7, S_0$ and S_6 , each one being mapped
4 onto one process of the butterfly kernel (Fig. 11c). Similarly, the iterative pairing has four
5 stages for the receiver, and the 16 processes of the receiver are reordered as $R_9, R_{15}, R_7, R_{12},$
6 $R_4, R_8, R_3, R_{10}, R_1, R_{14}, R_5, R_{13}, R_0, R_6, R_2$ and R_{11} finally, with pairs of these being mapped
7 onto one process of the butterfly kernel (Fig. 11c).

8 **4 Adaptive data transfer library**

9 Now, we have two kinds of implementations (the P2P implementation and the butterfly
10 implementation) for data transfer. Although the butterfly implementation can effectively
11 improve the performance of data transfer in many cases (examples are given in Section 5), it
12 has some drawbacks: 1) it generally has a larger total amount of data transferred than the P2P
13 implementation; 2) its number of stages is $\log_2 N$ (where N is the number of processes for the
14 butterfly kernel) (Foster, 1995), which may be bigger than the average number of MPI
15 messages in the P2P implementation in some cases (for example, when the sender and the
16 receiver use the similar parallel decompositions). Therefore, it is possible that the P2P
17 implementation outperforms the butterfly implementation in some cases. To achieve optimal
18 performance for data transfer, we propose an adaptive data transfer library that can take the
19 advantages of the two implementations in all cases.

20 As introduced in Section 3.1, the butterfly implementation is divided into multiple stages.
21 Actually, the data transfer in one stage can be viewed as a P2P implementation with only one
22 MPI message per process. Inspired by this fact, we try to design an adaptive approach that can
23 combine the butterfly and P2P implementations, where some stages in the butterfly
24 implementation are skipped and replaced by P2P communication of more MPI messages per
25 process. When all stages of the butterfly implementation are skipped, the adaptive data
26 transfer library completely switches to the original P2P implementation. That is to say, the
27 adaptive data transfer can adaptively choose the optimal implementation from the P2P
28 implementation and the butterfly implementation. Figure 12 shows an example of the
29 adaptive data transfer library with eight processes, where Stage 2 of the butterfly
30 implementation is skipped and replaced by P2P communication of three MPI messages per
31 process.

1 The most significant challenge of such an adaptive approach is to determine which stage(s) of
2 the butterfly implementation should be skipped. The first attempt was to design a cost model
3 that can accurately predict the performance of data transfer in various implementations. We
4 eventually gave up this approach as it was almost impossible to accurately predict the
5 performance of the communications on a high-performance computer, especially when a lot
6 of users share the computer to run various applications. Performance profiling which means
7 directly measuring the performance of data transfer is more practical to determine an
8 appropriate implementation, because the simulation of earth system modelling always takes a
9 long time to run. Figure 13 shows our flowchart of how the adaptive data transfer library
10 determines an appropriate implementation. It consists of an initialization segment and a
11 profiling segment. The initialization segment generates the process mappings and a candidate
12 implementation that is a butterfly implementation with no skipped stages. The profiling
13 segment iterates through each stage of the butterfly implementation to determine whether the
14 current stage should be skipped or kept. In an iteration, the profiling segment first generates a
15 temporary implementation based on the candidate implementation where the current stage is
16 skipped, and then runs the temporary implementation to get the time the data transfer takes.
17 When the temporary implementation is more efficient than the candidate implementation, the
18 current stage is skipped and the temporary implementation replaces the candidate
19 implementation. When the profiling segment finishes, the appropriate implementation is set to
20 be the candidate implementation. To reduce the overhead introduced by the adaptive data
21 transfer library, the profiling segment truly transfers the data for model coupling. In other
22 words, before obtaining an optimal implementation, the data is transferred by the profiling
23 segment.

24 **5 Performance evaluation**

25 In this section, we empirically evaluate the adaptive data transfer library, through comparing
26 it to the P2P implementation and the butterfly implementation. Both toy models and realistic
27 models (GAMIL2-CLM3 and CESM) are used for the performance evaluation. GAMIL2-
28 CLM3 has been introduced in Section 2.2. CESM (Hurrell et al., 2013) is a state-of-the-art
29 ESM developed by the National Center for Atmospheric Research (NCAR). All the
30 experiments are run on the high performance computer Tansuo100.

1 Next, we will evaluate the overhead of initialization, the performance of transferring data
2 fields between two toy models and between different realistic component models, and the
3 performance of rearranging data fields within a component model for parallel interpolation.

4 **5.1 Overhead of initialization**

5 We first evaluate the initialization overhead of data transfer implementations. As shown in
6 Fig. 14, the initialization overhead of each implementation increases when increasing the
7 number of processes. The initialization overhead of the butterfly implementation is a little
8 higher than that of the P2P implementation, while the initialization overhead of the adaptive
9 data transfer library is 2-3 folds higher than that of the P2P implementation, because the
10 adaptive data transfer library uses extra time on the performance profiling (see Section 4).
11 Considering that one data transfer instance should only be initialized at the beginning and
12 executed many times in a coupled model, we can conclude that the initialization overhead of
13 the adaptive data transfer library is reasonable, especially when the simulation is executed for
14 a very long time.

15 **5.2 Performance of data transfer between toy models**

16 The factors that can impact the performance of a data transfer implementation generally
17 include the number of MPI messages, the size of the data to be transferred (also referred to as
18 the number of fields in this evaluation) and the number of processes used. In this subsection,
19 we evaluate the impact of each factor on the performance of data transfer for different
20 implementations. We first build two toy models that both use the same logically rectangular
21 grid of 192×480 grid points. Coupling fields are transferred between the two toy models. For
22 any test, the two toy models use the same number of processes. Next, we evaluate the
23 performance of data transfer through varying one factor while fixing the other two factors.

24 In the first experiment, we fix the number of processes to be 1024 and the number of coupling
25 fields to be 10, while only vary the number of MPI messages in the P2P implementation. In
26 each test, all processes of the sender have the same number of MPI messages. As the number
27 of MPI messages is determined by the parallel decompositions of the sender and the receiver,
28 we design an algorithm (Algorithm 1) that can generate the parallel decompositions of the two
29 toy models according to the average number of MPI messages of the sender in the P2P
30 implementation. Figure 15 shows the execution time of one data transfer with different

1 implementations when increasing the number of MPI messages per sender process in the P2P
2 implementation from 1 to 90. The P2P implementation can outperform the butterfly
3 implementation when the number of MPI messages is small (say, smaller than 12 in Fig. 15),
4 while the butterfly implementation can outperform the P2P implementation when the number
5 of MPI messages is big (say, bigger than 12 in Fig. 15). The adaptive data transfer library can
6 adaptively choose the optimal implementation from the P2P implementation and the butterfly
7 implementation, and moreover, it improves the performance based on the butterfly
8 implementation when the number of MPI messages is big, because some butterfly stages of
9 the butterfly implementation are skipped. When the number of MPI messages is 90, the
10 adaptive data transfer library can achieve a 19.2-fold performance speedup compared to the
11 P2P implementation.

12 In the second experiment, we fix the number of processes and the number of MPI processes
13 per sender process in the P2P implementation, and vary the number of coupling fields
14 transferred. Figure 16 shows the execution time of one data transfer with different
15 implementations in this experiment. The results show that the execution time of each
16 implementation increases with the increment of data size. When the number of MPI processes
17 per sender process in the P2P implementation is small (Figs. 16a and 16b), the performance of
18 the butterfly implementation is poorer than that of the P2P implementation, especially when
19 the number of 2-D coupling fields gets bigger. When the number of MPI messages per sender
20 process in the P2P implementation is big (Figs. 16c and 16d), the butterfly implementation
21 significantly outperforms the P2P implementation, however, the advantage of the butterfly
22 implementation decreases when increasing the number of coupling fields. The results also
23 demonstrate that the adaptive data transfer library can adaptively choose the optimal
24 implementation from the P2P implementation and the butterfly implementation, and can
25 further improve the performance based on the butterfly implementation.

26 In the third experiment, we fix the number of MPI messages per sender process in the P2P
27 implementation to be 24 and the number of coupling fields transferred to be 10, and vary the
28 number of processes used. Figure 17 shows the execution time of one data transfer with
29 different implementations when varying the number of processes. The P2P implementation
30 outperforms the butterfly implementation, when small number of processes are used (say,
31 smaller than 256 in Fig. 17); while the butterfly implementation outperforms the P2P
32 implementation when large number of processes are used (say, larger than 256 in Fig.17).

1 Similar to above two experiments, the adaptive data transfer library can adaptively choose the
2 optimal implementation from the P2P implementation and the butterfly implementation.

3 The resolution of models become higher and higher these days. How about the performance
4 of the data transfer implementations when model resolution becomes higher? Higher model
5 resolution means that a model will use more processes for accelerating a simulation, while the
6 average number of grid points per process can remain constant. Considering that the numbers
7 of grid points are always balanced among the processes of a model, we make each process
8 (which runs on a unique processor core) of the toy models evenly have around 96 grid points
9 in this evaluation, while enabling processes to have different number of MPI messages and
10 different message sizes (the average number of MPI messages of the sender in P2P
11 implementation is 34). As shown in Fig. 18, although the execution times of all data transfer
12 implementations increase when increasing the number of processes (from 64 to 1024), the
13 butterfly implementation significantly outperforms the P2P implementation. So the adaptive
14 data transfer library adaptively chooses the butterfly implementation, and further slightly
15 outperforms the butterfly implementation when each model uses more than 512 processes
16 because some butterfly stages are skipped.

17 **5.3 Performance of data transfer between realistic models**

18 In this subsection, we evaluate the performance using two realistic models: GAMIL2-CLM3
19 (horizontal resolution of $2.8^\circ \times 2.8^\circ$) and CESM (resolution of $1.9 \times 2.5_{\text{gx1v6}}$).

20 For CESM, we use the data transfer between the coupler CPL7 (Craig et al., 2012) and the
21 land surface model CLM4 (Oleson et al., 2004), where 32 2-D coupling fields on the CLM4
22 horizontal grid (the grid size is $144 \times 96 = 13824$) are transferred. Figure 19 shows the
23 performance of one data transfer of different implementations when increasing the number of
24 processes of both CPL7 and CLM4 from 6 to 192. When the number of processes is small
25 (say, smaller than 24 in Fig. 19), the butterfly implementation is much poorer than the P2P
26 implementation. In this case, the adaptive data transfer library chooses the P2P
27 implementation as the optimal implementation. However, when the number of processes gets
28 bigger (say, larger than 24 in Fig. 19), the butterfly implementation outperforms the P2P
29 implementation. In this case, the adaptive data transfer library based on the butterfly
30 implementation skips some stages, so it outperforms the butterfly implementation. Figure 19
31 also shows that the butterfly implementation and the adaptive transfer library seem to

1 converge when increasing the number of processes per model. When each model uses 192
2 processes, the adaptive data transfer library is 4.01 times faster than the P2P implementation.
3 For GAMIL2-CLM3, we use the data transfer from CLM3 to GAMIL2 where 14 2-D
4 coupling fields on the GAMIL2 horizontal grid (whose grid size is $128 \times 60 = 7680$) are
5 transferred. Figure 20 shows the execution time of one data transfer of each implementation
6 when increasing the number of processes of both GAMIL2 and CLM3 from 6 to 192. The
7 results in Fig. 20 confirm that the adaptive data transfer library can adaptively choose the
8 optimal implementation from the P2P implementation and the butterfly implementation.
9 Compared to the P2P implementation, the adaptive data transfer library achieves an 11.68-
10 fold performance speedup when the number of processes is 96, but achieves a much lower
11 speedup (only 3.48-fold) when the number of processes is 192. This is because the average
12 number of MPI messages per process in the P2P implementation reduces from 32 to 18 when
13 the number of process increases from 96 to 192.

14 **5.4 Performance of data rearrangement for interpolation**

15 Besides data transfer between different component models, there is another kind of data
16 transfer in model coupling that rearranges data inside a model for parallel interpolation of
17 fields between different grids. Here, we use the data rearrangement for the parallel
18 interpolation from the atmosphere grid (whose grid size is $144 \times 96 = 13824$) to the ocean grid
19 (whose grid size is $320 \times 384 = 122880$) in the coupled model CESM for further evaluation. As
20 shown on Fig. 21, the P2P implementation significantly outperforms the butterfly
21 implementation. This is because the parallel decompositions before and after data
22 rearrangement are always similar which leads to small number of MPI messages. For example,
23 average number of MPI messages in the P2P implementation corresponding to Fig. 21 is only
24 6.49 when the model uses 96 processes. In this case, the P2P implementation is chosen as the
25 optimal implementation of the data transfer library, so the data transfer library does not
26 provide real benefit compared to the P2P implementation.

27 **5.5 Performance improvement for a coupled model**

28 With the performance improvement of data transfer, we expect that the adaptive data transfer
29 library will improve the performance of coupled models. For this evaluation, we first
30 imported the adaptive data transfer library into C-Coupler1, used it in the coupled model

1 GAMIL2-CLM3, and measured performance results. As shown in Fig. 22, the adaptive data
2 transfer library achieves higher speedup with respect to the whole model time (when the P2P
3 implementation is used as the baseline) for GAMIL2-CLM3 when using more than 16
4 processes. When each component model uses 128 processes, the butterfly implementation
5 achieves ~4.6% performance improvement, and the adaptive data transfer library achieves
6 ~6.9% performance improvement. So the data transfer library can improve the performance of
7 data transfer, and then improve the performance of the whole coupled model.

8 **6 Conclusions**

9 Data transfer is a fundamental and frequently used operation in a coupler. This paper showed
10 that the P2P implementation currently used in most state-of-the-art couplers for data transfer
11 is inefficient when the parallel decompositions of the sender and the receiver are different,
12 and further revealed the corresponding performance bottlenecks. We showed that the butterfly
13 implementation can outperform the P2P implementation in many cases but degrades the
14 performance in some cases, for example when a small number of processes are used to run
15 models or when the parallel decompositions of the sender and receiver are similar. We
16 therefore designed and implemented an adaptive data transfer library that automatically
17 chooses an optimal implementation between the P2P one and the butterfly one and also
18 further improves the performance based on the butterfly implementation through skipping
19 some butterfly stages. Compared to the P2P implementation, the adaptive data transfer library
20 can improve the performance of data transfer when the parallel decompositions of the sender
21 and the receiver are different.

22 The initialization overhead for the adaptive data transfer library could become expensive
23 when using a large number of processes. In the future version, the adaptive data transfer will
24 allow users to record the results of performance profiling offline to save the time used for
25 performance profiling in next runs of the same coupled model.

26 **Code availability**

27 The source code of the adaptive data transfer library version 1.0 is available at
28 https://github.com/zhang-cheng09/Data_transfer_lib.

29 **Acknowledgements**

1 This work is supported in part by the Natural Science Foundation of China (no. 41275098),
2 the National Grand Fundamental Research 973 Program of China (no. 2013CB956603) and
3 the Tsinghua University Initiative Scientific Research Program (no. 20131089356).

4

1 **References**

- 2 Armstrong, C. W., Ford, R. W., and Riley, G. D.: Coupling integrated Earth System Model
3 components with BFG2, *Concurrency and Computation: Practice and Experience*,
4 2009;21;767–791, doi:10.1002/cpe.1348, 2009.
- 5 Balaji, V., Anderson, J., Held, I., Winton, M., Durachta, J., Malyshev, S., and Stouffer, R. J.:
6 The Exchange Grid: a mechanism for data exchange between Earth system components on
7 independent grids, In *Parallel Computational Fluid Dynamics 2005 Theory and Applications*,
8 2006, 179-186, doi: 10.1016/B978-044452206-1/50021-5, 2006.
- 9 Chong, F. T., and Brewer, E. A.: Packaging and multiplexing of hierarchical scalable
10 expanders, *Parallel Computer Routing and Communication*, Springer Berlin Heidelberg,
11 1994:200-214.
- 12 Craig, A. P., Vertenstein, M., and Jacob, R.: A new flexible coupler for Earth system
13 modelling developed for CCSM4 and CESM1, *Int. J. High Perform. C.*, 26, 31-42,
14 doi:10.1177/1094342011428141, 2012.
- 15 Craig, A. P., Jacob, R., Kauffman, B., Bettge, T., Larson, J., Ong, E., Ding, C., and He, Y.:
16 CPL6: the New Extensible, High Performance Parallel Coupler for the Community Climate
17 System Model, *Int. J. High Perform. C.*, 19, 309–327, 2005.
- 18 Dennis, J. M.: Inverse space-filling curve partitioning of a global ocean model, In *IEEE*
19 *International Parallel & Distributed Processing Symposium*, Long Beach, CA, 2007.
- 20 Dennis, J. M. and Tufo, H. M.: Scaling climate simulation applications on the IBM Blue
21 Gene/L system, *IBM J. Res. Dev.*, 52, 117-126, DOI:10.1147/rd.521.0117, 2008.
- 22 Dennis, J. M., Edwards, J., Evans, K. J., Guba, O., Lauritzen, P. H., Mirin, A. A., St-Cyr, A.,
23 Taylor, M. A., and Worley, P. H.: CAM-SE: a scalable spectral element dynamical core for
24 the Community Atmosphere Model, *Int. J. High Perform. C.*, 26, 74-89,
25 doi:10.1177/1094342011428142, 2012.
- 26 Dickinson, R. E., Oleson, K. W., Bonan, G., Hoffman, F., Thornton, P., Vertenstein, M.,
27 Yang, Z.-L., and Zeng X.: The Community Land surface model and its climate statistics as a
28 component of the Community Climate System Model, *Journal of Climate*, 19(11), 2302–2324,
29 2006.

1 Ford, R. W., Riley, G. D., Bane, M. K., Armstrong, C. W., and Freeman, T. L.: GCF: a
2 general coupling framework, *Concurrency and Computation: Practice and Experience*, 18(2),
3 163–181, 2006.

4 Foster I.: *Designing and building parallel programs: concepts and tools for parallel software*
5 *engineering*, Addison-Wesley, 1995.

6 Heckbert P.: *Fourier Transforms and the Fast Fourier Transform (FFT) Algorithm*, *Computer*
7 *Graphics*, 2: 15-463, 1995.

8 Hemmert, K. S., and K. D. Underwood.: *An analysis of the double-precision floating-point*
9 *FFT on FPGAs*. *Field-Programmable Custom Computing Machines*, 2005. FCCM 2005. 13th
10 *Annual IEEE Symposium on IEEE*, 2005:171-180.

11 Hill, C., DeLuca, C., Balaji, V., Suarez, M., and da Silva, A.: *The Architecture of the Earth*
12 *System Modelling Framework*, *Computing in Science & Engineering*, 6(1), 18–28, 2004.

13 Hurrell, J. W., Holland, M. M., Gent, P. R., Ghan, S., Kay, J. E., Kushner, P. J., Lamarque, J.-
14 F., Large, W. G., Lawrence, D., Lindsay, K., Lipscomb, W. H., Long, M. C., Mahowald, N.,
15 Marsh, D. R., Neale, R. B., Rasch, P., Vavrus, S., Vertenstein, M., Bader, D., Collins, W. D.,
16 Hack, J. J., Kiehl, J., and Marshall, S.: *The Community Earth System Model: a framework for*
17 *collaborative research*, *Bulletin of the American Meteorological Society*, 94(9), 1339–1360,
18 2013.

19 Hunke, E. C. and Lipscomb W. H.: *CICE: the Los Alamos Sea Ice Model Documentation and*
20 *Software User’s Manual 4.0*, Technical Report LA-CC-06-012, Los Alamos National
21 Laboratory, T-3 Fluid Dynamics Group, 2008.

22 Hunke, E. C., Lipscomb, W. H., Turner, A. K., Jeffery, N., and Elliott, S.: *CICE: the Los*
23 *Alamos Sea Ice Model Documentation and Software User’s Manual Version 5.0*, LA-CC-06-
24 012, Los Alamos National Laboratory, Los Alamos NM, 87545, 115, 2013.

25 Jacob, R., Larson, J., and Ong, E.: *M × N Communication and Parallel Interpolation in*
26 *Community Climate System Model version 3 using the Model Coupling Toolkit*, *International*
27 *Journal of High Performance Computing Applications*, 19(3), 293–307, 2005.

28 Jan, B., Montrucchio, B., Ragusa, C., Khan, F. G., and Khan, O.: *Parallel butterfly sorting*
29 *algorithm on gpu*, Acta Press, 2013.

1 Kerbyson, D. J., and Jones, P. W.: A performance model of the parallel ocean program,
2 International Journal of High Performance Computing Applications, 19(3), 261-276,
3 doi:10.1177/1094342005056114, 2005.

4 Kim J., Dally W. J., and Abts D.: Flattened butterfly: A cost-efficient topology for high-radix
5 networks, ISCA, 2007, 35(2):126-137.

6 Li, L. J., Wang, B., Dong, L., Liu, L., Shen, S., Hu, N., Sun, W., Wang, Y., Huang, W., Shi,
7 X., Pu, Y., G. and Yang.: Evaluation of Grid-point Atmospheric Model of IAP LASG version
8 2 (GAMIL2), Advances in Atmospheric Sciences, 30, 855–867, doi:10.1007/s00376-013-
9 2157-5, 2013.

10 Liu, L., Yang, G., Wang, B., Zhang, C., Li, R., Zhang, Z., Ji, Y., and Wang, L.: C-Coupler1: a
11 Chinese community coupler for Earth system modeling, Geoscientific Model Development,
12 7(5), 2281-2302, doi:10.5194/gmd-7-2281-2014, 2014.

13 Morrison, H., and A. Gettelman: A new two-moment bulk stratiform cloud microphysics
14 scheme in the Community Atmosphere Model, version 3 (CAM3). Part I: Description and
15 numerical tests, Journal of Climate, 21(15), 3642–3659, doi:10.1175/2008JCLI2105.1, 2008.

16 Neale, R. B., Richter, J. H., Conley, A. J., Park, S., Lauritzen, P. H., Gettelman, A.,
17 Williamson, D. L., Rasch, P. J., Vavrus, S. J., Taylor, M. A., Collins, W. D., Zhang, M., and
18 Lin, S.: Description of the NCAR Community Atmosphere Model (CAM 4.0), National
19 Center for Atmospheric Research Ncar Koha Openpat, TN-485+STR, 222p., 2010.

20 Neale, R. B., Chen, C. C., Gettelman, A., Lauritzen, P. H., Park, S., Williamson, D. L.,
21 Conley, A. J., Garcia, R., Kinnison, D., Lamarque, J. F., Marsh, D., Mills, M., Smith, A. K.,
22 Tilmes, S., Vitt, F., Morrison, H., Cameron-Smith, P., Collins, W. D., Iacono, M. J., Easter, R.
23 C., Ghan, S. J., Liu, X., Rasch, P. J., and Taylor, M. A.: Description of the NCAR
24 Community Atmosphere Model (CAM 5.0), National Center for Atmospheric Research Ncar
25 Koha Openpat, TN-486+STR, 289p., 2012

26 Oleson, K. W., Dai, Y., Bonan, G., Bosilovich, M., Dickinson, R., Dirmeyer, P., Hoffman, F.,
27 Houser, P., Levis, S., Niu, G. Y., Thornton, P., Vertenstein, M., Yang, Z. L., and Zeng, X.:
28 Technical Description of the Community Land Surface Model (CLM), National Center for
29 Atmospheric Research Ncar Koha Openpat, TN-461+STR, 186p., 2004.

1 Petagon, R., and Werapun, J.: Embedding the optimal all-to-all personalized exchange on
2 multistage interconnection networks + + mathContainer Loading Mathjax, *Journal of Parallel
3 & Distributed Computing* 88(2016):16-30.

4 Redler, R., Valcke, S., and Ritzdorf, H.: OASIS4—a coupling software for next generation
5 Earth System Modelling, *Geoscientific Model Development*, 3(1), 87–104, doi:10.5194/gmd-
6 3-87-2010, 2010.

7 Smith, R., Jones, P., Briegleb, B., Bryan, F., Danabasoglu, G., Dennis, J., Dukowicz, J., Eden,
8 C., Fox-Kemper, B., Gent, P., Hecht, M., Jayne, S., Jochum, M., Large, W., Lindsay, K.,
9 Maltrud, M., Norton, N., Peacock, S., Vertenstein, M., and Yeager, S.: The Parallel Ocean
10 Program (POP) reference manual ocean component of the Community Climate System Model
11 (CCSM) and Community Earth System Model (CESM), Los Alamos National Laboratory,
12 LAUR-10-01853, available at
13 <http://www.cesm.ucar.edu/models/cesm1.1/pop2/doc/sci/POPRefManual.pdf> (last access: 15
14 October 2015), 141 p., 2010.

15 Valcke, S., Balaji, V., Craig, A., DeLuca, C., Dunlap, R., Ford, R. W., Jacob, R., Larson, J.,
16 O’Kuinghttons, R., Riley, G. D., and Vertenstein, M.: Coupling technologies for Earth
17 System Modelling, *Geoscientific Model Development*, 5(6), 1589–1596, doi:10.5194/gmd-5-
18 1589-2012, 2012.

19 Valcke, S.: The OASIS3 coupler: a European climate modelling community software,
20 *Geoscientific Model Development*, 6(2), 373–388, doi:10.5194/gmd-6-373-2013, 2013.


21 Valcke, S., Craig, T., and Coquart, L.: The OASIS3-MCT parallel coupler, in: The Second
22 Workshop on Coupling Technologies for Earth System Models (CW2013), available at:
23 https://wiki.cc.gatech.edu/CW2013/images/a/a0/OASIS_MCT_abstract.pdf (last access: 15
24 October 2015), 2013.

25 Valcke, S., Craig, T. and Coquart, L.: OASIS3-MCT User Guide, OASIS3-MCT_3.0,
26 Technical Report TR/CMGC/15/38, Cerfacs, France, 2015.
27 http://www.cerfacs.fr/oa4web/oasis3-mct_3.0/oasis3mct_UserGuide.pdf
28

Algorithm 1. Generating the parallel decompositions of the sender and the receiver according to an average number of MPI messages of the sender in the P2P implementation.

Input	Number of processes of the sender: M Number of processes of the receiver: N Number of points in the grid: $Grid_pnts$ Average number of MPI messages per process of the sender in the P2P implementation: $Avg_send_msgs, Avg_send_msgs \leq N$ The flag that specifies whether the number of MPI messages among processes are the same: $Is_balanced$
Output	Parallel decomposition of the sender Parallel decomposition of the receiver
1	Determine the parallel decomposition of the sender Considering that the numbers of grid points are always balanced among the processes of a model, assign around $Grid_pnts/M$ grid points to each process of the sender.
2	Determine the number of MPI messages of each process of the sender
2.1	If the flag $Is_balanced$ is set to true, set the number of MPI messages of each process of the sender to be Avg_send_msgs ;
2.2	Otherwise, randomly determine the number of MPI messages of each process of the sender
2.2.1	Initialize the number of MPI messages of each process of the sender to be 1
2.2.2	Randomly select a process of the sender whose number of MPI messages does not exceed N and $Grid_pnts/M$, and then increase its number of MPI messages by 1, until the average number of MPI messages of all processes of the sender reaches Avg_send_msgs .
3	Determine the grid points of each MPI message For each process of the sender, assign the corresponding grid points to all MPI messages of this process (a grid point belongs to only one MPI message)
3.1	If the flag $Is_balanced$ is set to true, assign the grid points to all MPI messages evenly.
3.2	Otherwise, assign the grid points to each MPI message randomly
3.2.1	Assign one grid point to each MPI message
3.2.2	For each of remaining grid points, randomly select an MPI message for it
4	Determine the parallel decomposition of the receiver through assigning the grid points in each MPI message to a process of the receiver For each process of the sender, assign the grid points in each MPI message of it to a distinct receiver process: to make the numbers of grid points balance among the processes of the receiver in the final parallel decomposition, an MPI message with bigger number of grid points will be assigned to a receiver process with smaller total number of grid points that have been assigned to it.


1

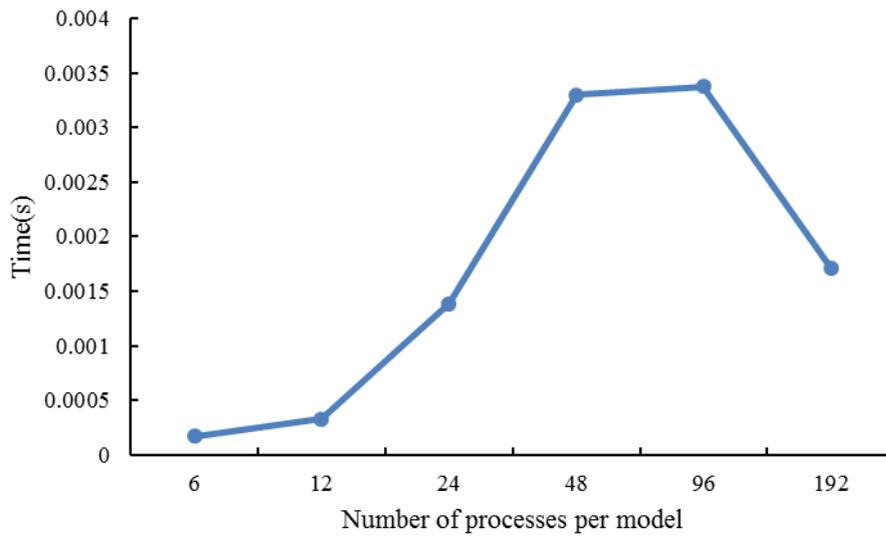

2

3 Figure 1. Average execution time of the P2P implementation when transferring 14 2-D fields
4 from CLM3 to GAMIL2. In each test, the atmosphere model GAMIL2 and the land surface
5 model CLM3 have the same number of processes; they do not share the same computing
6 nodes. The horizontal grid of the 14 2-D fields contains 7680 (128×60) grid points.

7

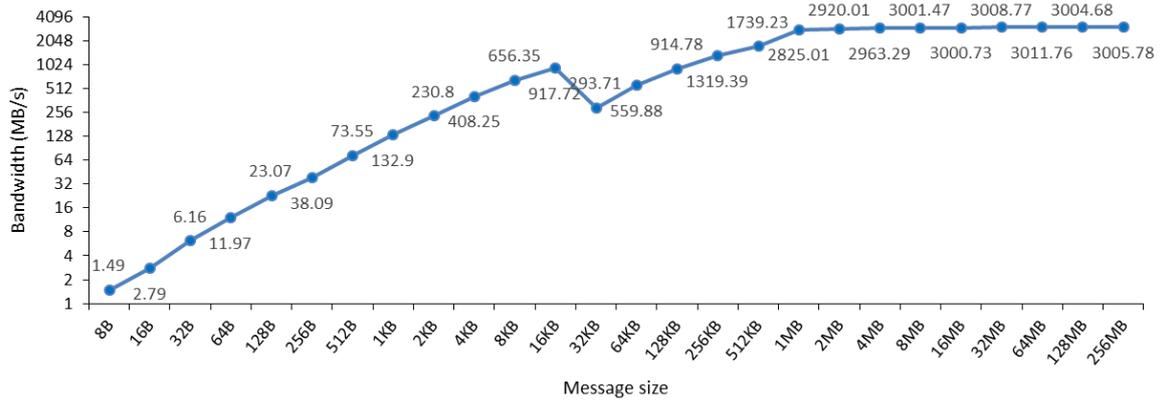


1

2 Figure 2. Variation of bandwidth (y-axis) of an MPI P2P communication with respect to the
 3 message size (x-axis). The results are generated from our benchmark. In the benchmark, one
 4 process sends messages with different sizes to the other process. The two processes of the P2P
 5 communication run on two different computing nodes of Tansuo100.

6

1

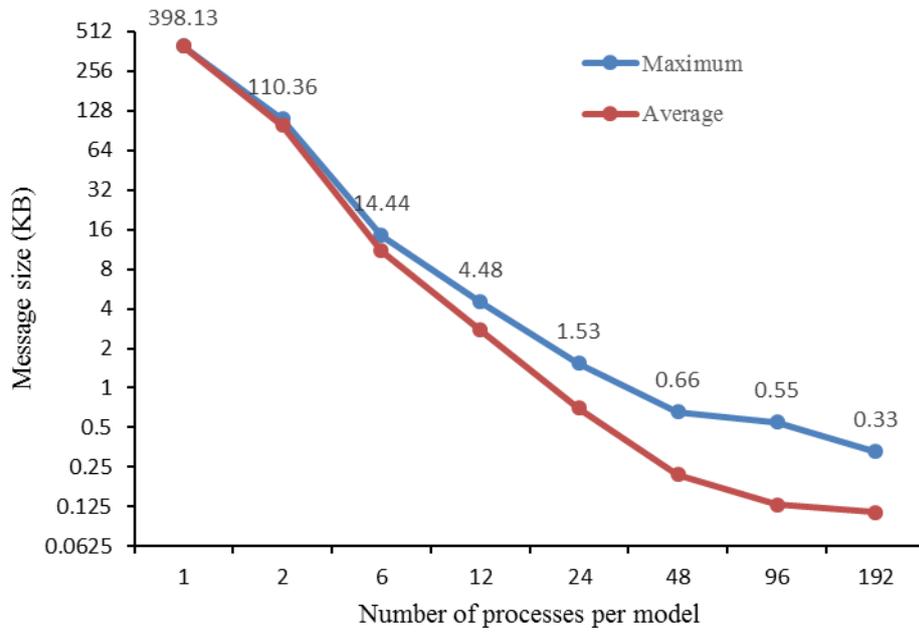


2

3 Figure 3. Variation of message size of the P2P implementation (y-axis) in GAMIL2-CLM3
4 with respect to the number of processes per model (x-axis). The experimental setup is similar
5 to that shown in Fig. 1.

6

1

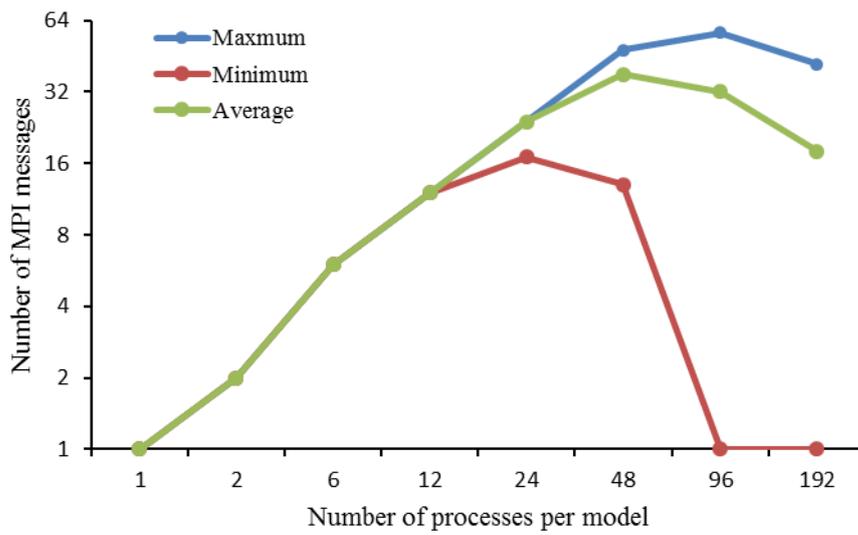


2

3 Figure 4. Variation of the number of MPI messages of one process (y-axis) using the P2P
4 implementation in GAMIL2-CLM3 with respect to the number of processes per model (x-
5 axis). The experimental setup is similar to that shown in Fig. 1.

6

1

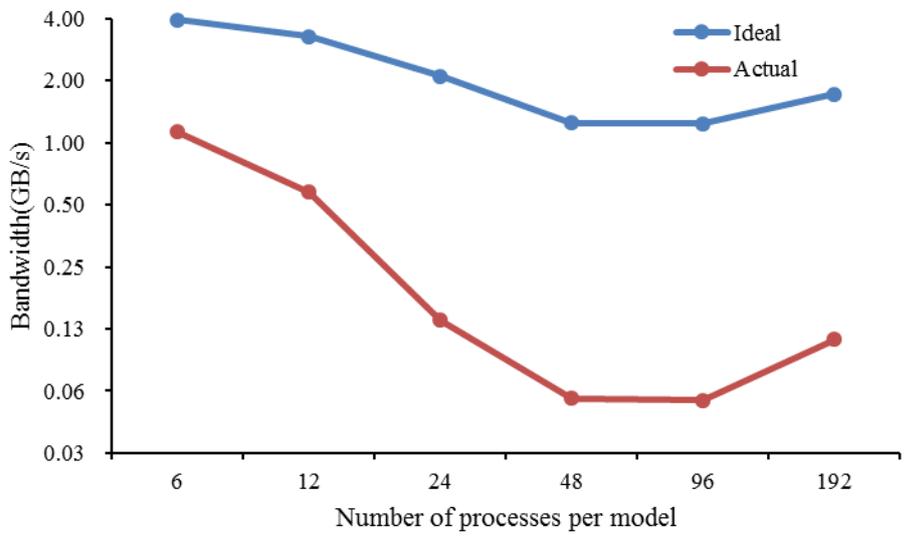


2

3 Figure 5. Ideal and actual bandwidths of the P2P implementation (y-axis) in GAMIL2-CLM3
4 when gradually increasing the number of processes per model (x-axis). The experimental
5 setup is similar to that shown in Fig. 1. The ideal bandwidth is calculated from the message
6 size and the MPI bandwidth measured in Fig. 2; and the actual bandwidth is calculated from
7 Fig. 1.


8

9

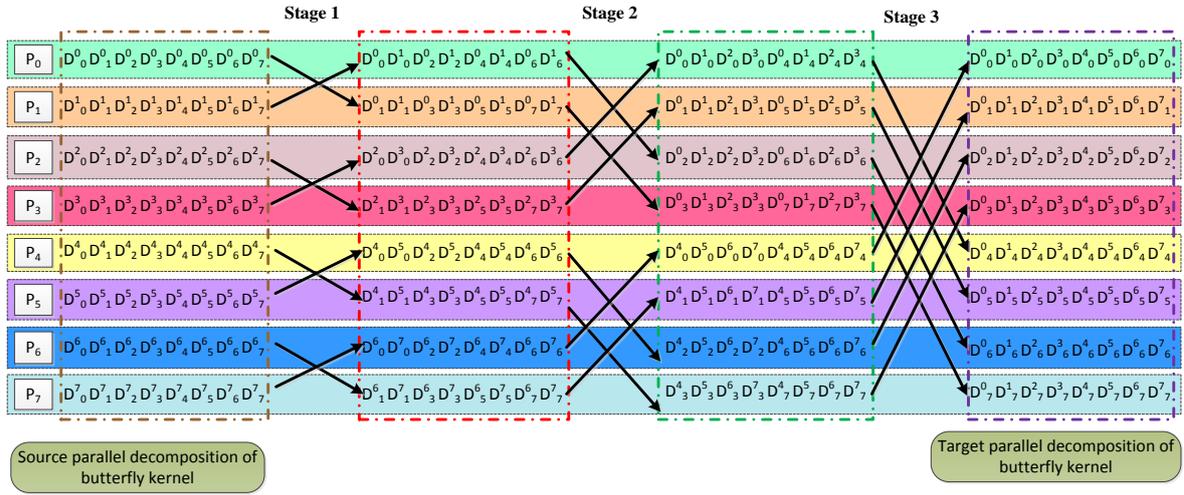

1
 2 Figure 6. An example of the butterfly kernel with eight processes. Each colored row stands
 3 for one process (P_0 - P_7). There are multiple stages (each column of arrows represents a stage
 4 (Stage 1 to Stage 3)) in the butterfly kernel. Each arrow stands for an MPI P2P
 5 communication from one process to another. D_j^i means the data is originally in process P_i
 6 according to the source parallel decomposition and is finally in process P_j according to the
 7 target parallel decomposition.


8

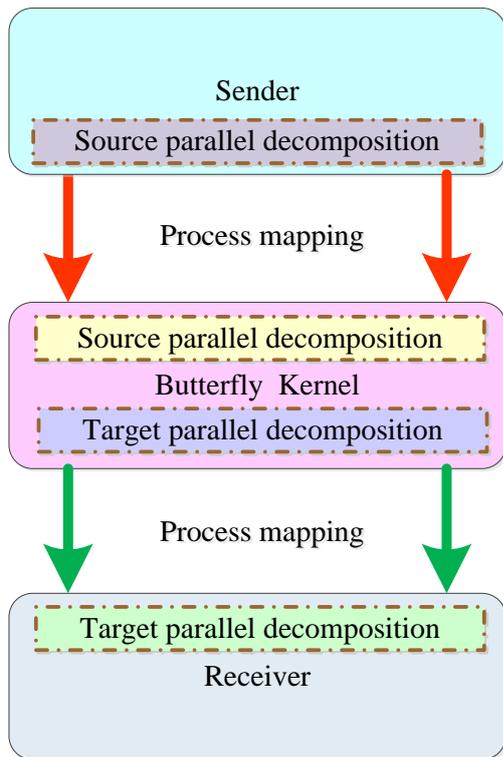

1
2
3
4
5
6

Figure 7. The butterfly implementation, which is composed of three parts: the butterfly kernel; process mapping from the sender to the butterfly kernel; and process mapping from the butterfly kernel to the receiver.

1

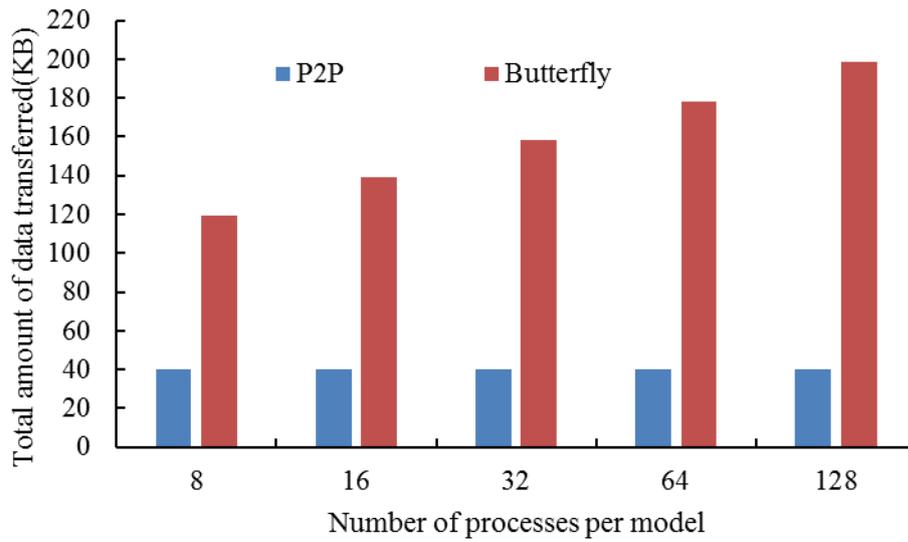


2

3 Figure 8. Total amount of data transferred by P2P implementation and butterfly
4 implementation (y-axis) in GAMIL2-CLM3, when varying the number of processes per
5 model(x-axis). The experimental setup is similar to that shown in Fig. 1.

6

1

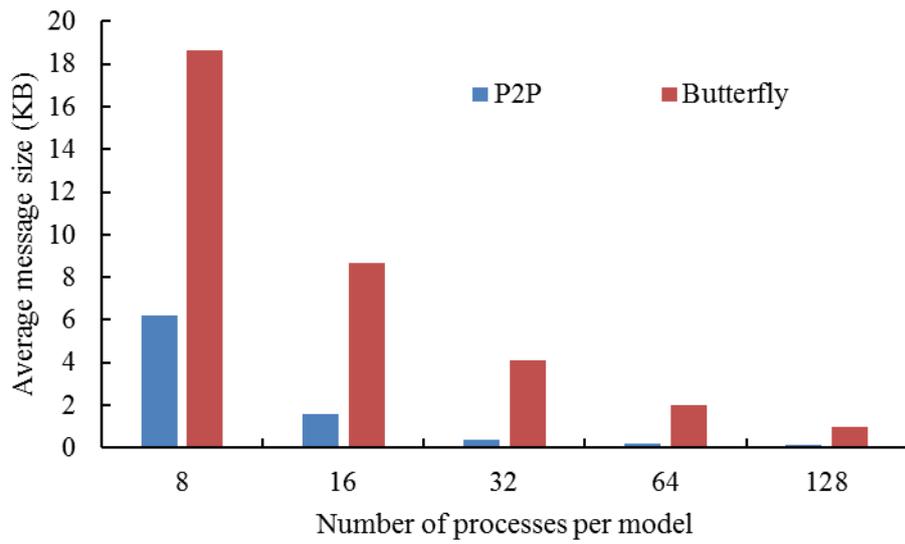


2

3 Figure 9. Average message size transferred by P2P implementation and butterfly
4 implementation (y-axis) in GAMIL2-CLM3, when varying the number of processes per
5 model(x-axis). The experimental setup is similar to that shown in Fig. 1.

6


1

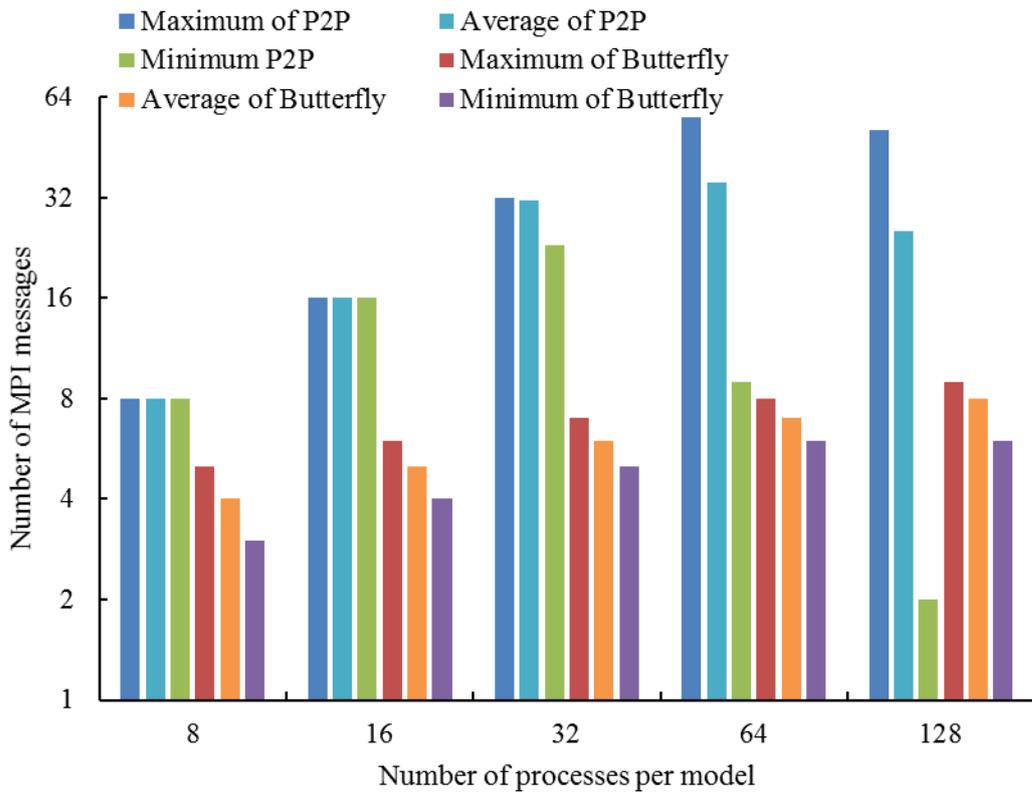


2

3 Figure 10. Maximum number of MPI messages, average number of MPI messages and
4 minimum MPI messages in P2P implementation and butterfly implementation (y-axis), when
5 varying the number of processes per model (x-axis) in GAMIL2-CLM3. The experimental
6 setup is similar to that shown in Fig. 1.


7

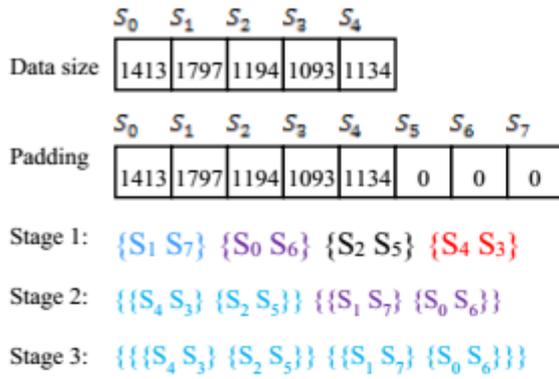

(a)

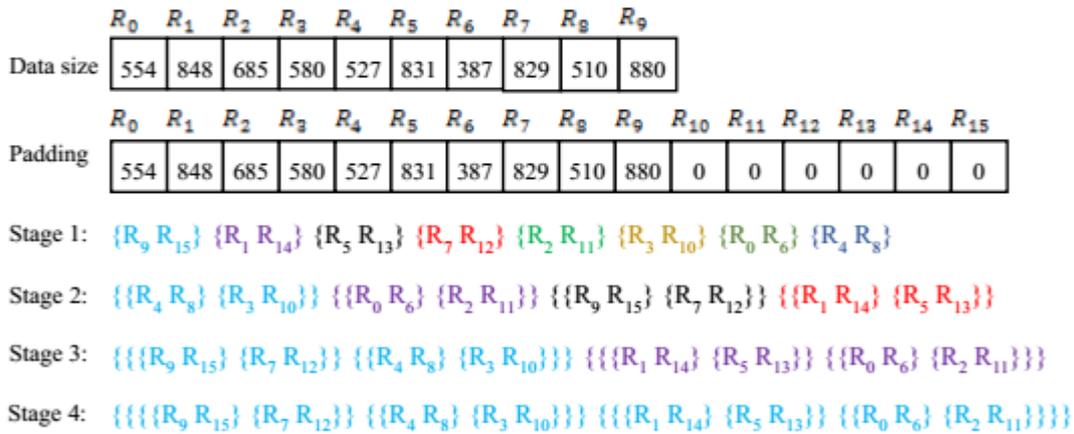

(b)

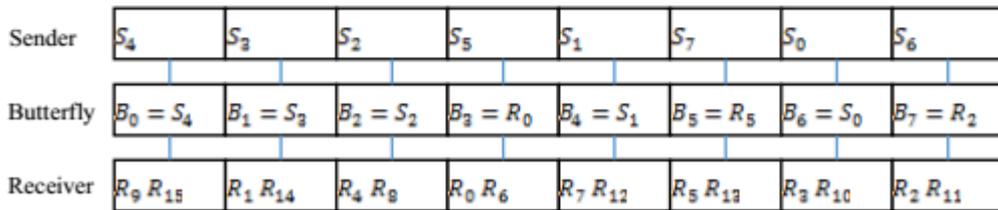

(c)

1

2 Figure 11. An example of process mappings, given that the sender has five processes (S_0 - S_4),

3 the receiver has 10 processes (R_0 - R_9) (there is no common process between the sender and


4 receiver), and the butterfly kernel contains eight processes (B_0 - B_7). Panels (a) and (b) show

5 how to iteratively pair processes of the sender and receiver, respectively. There are

6 multiple stages in the iterative pairing of processes of the sender and receiver. In each stage,


7 the processes in the same color are grouped into one process pair. Panel (c) shows how to map

8 the reordered processes of the sender and receiver onto the processes of the butterfly kernel.

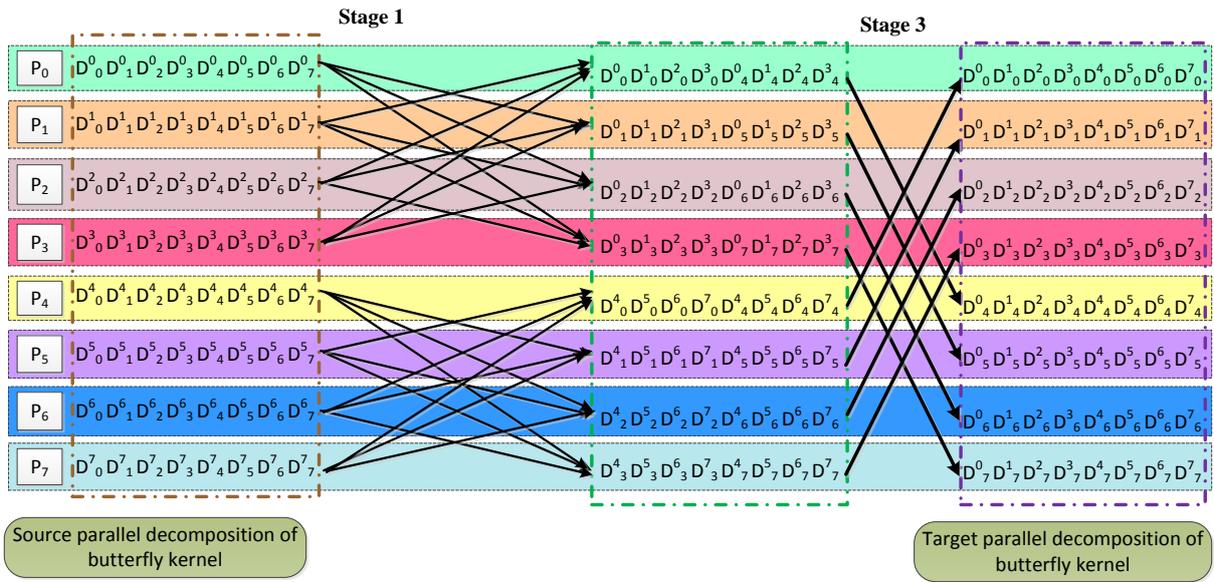

1
2
3
4
5


Figure 12. An example of the adaptive data transfer library with eight processes, where Stage 2 of the butterfly implementation is skipped and replaced by P2P communication of three MPI messages per process.

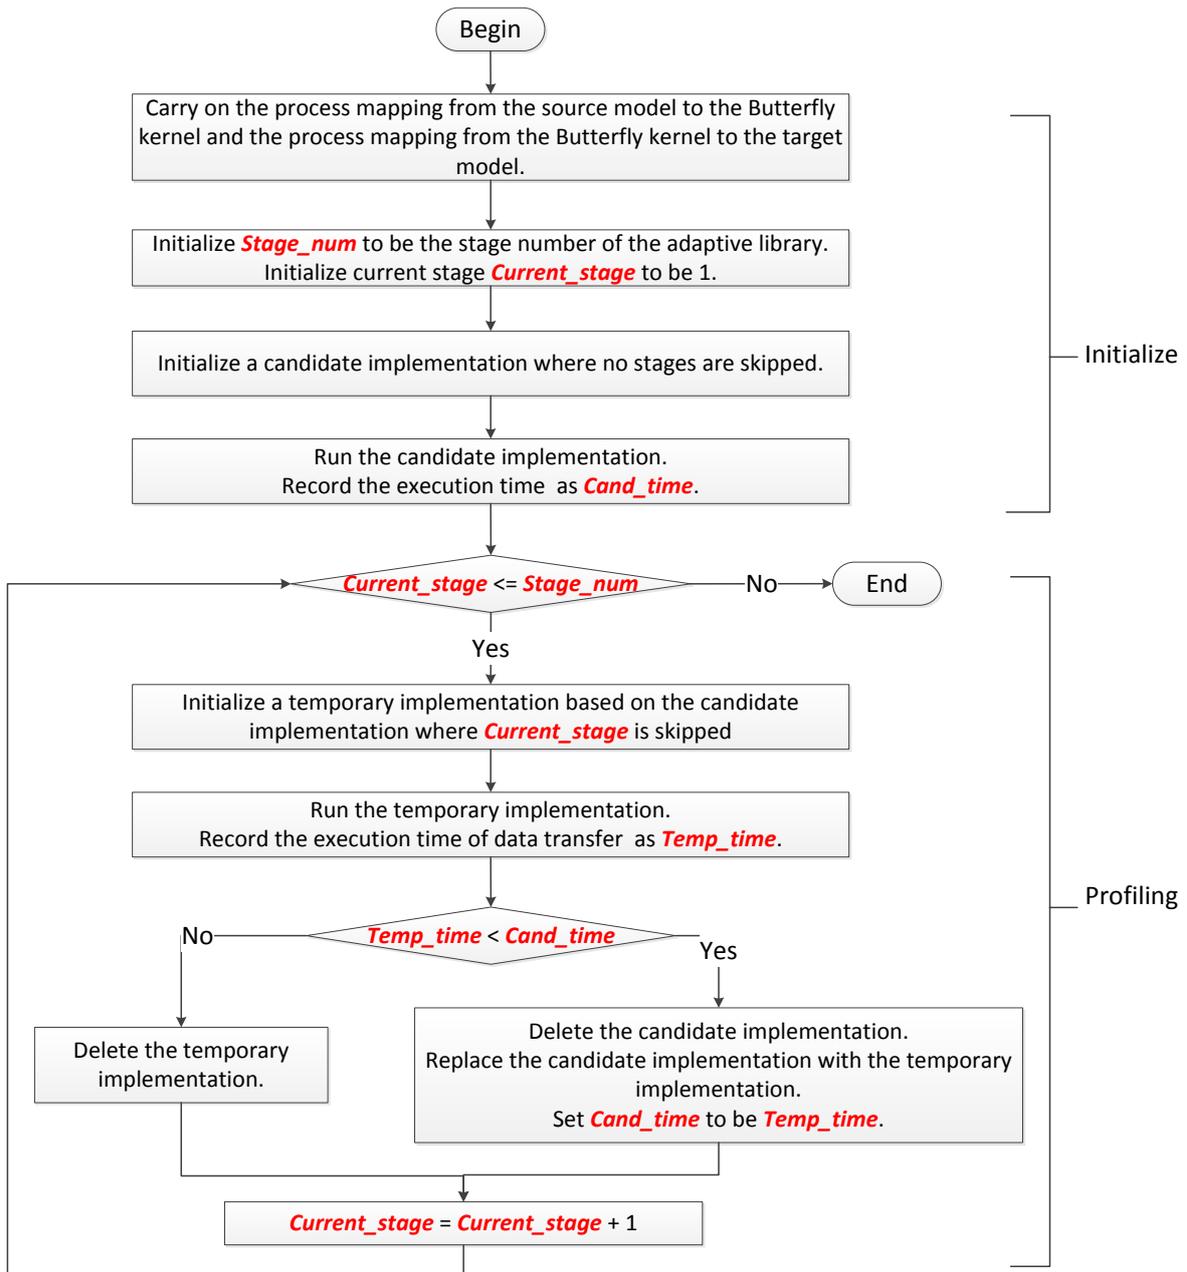

1

2 Figure 13. A flowchart for determining an appropriate implementation of the adaptive data
3 transfer library.


4

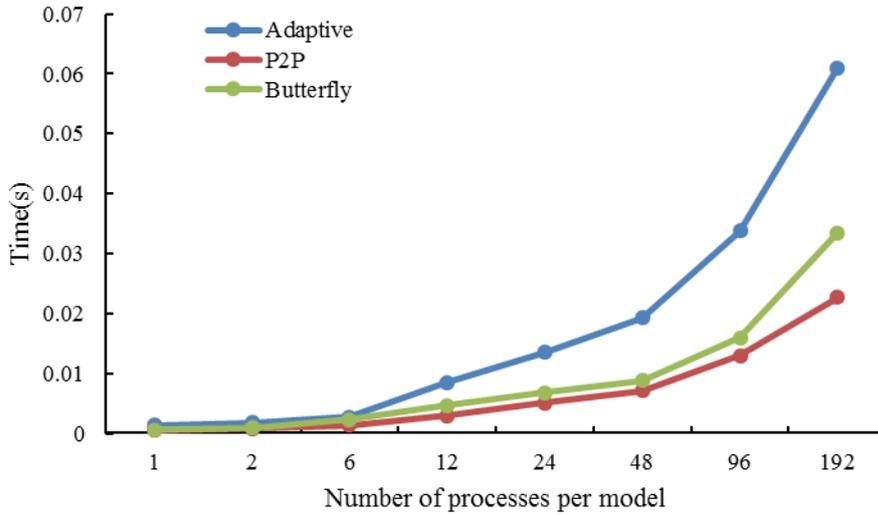

1
2 Figure 14. Initialization time (y-axis) of one data transfer between two toy models using a
3 rectangular grid (of 192×96 grid points) when varying the number of processes per model(x-
4 axis). There are 10 2-D coupling fields transferred from the source toy model to the target toy
5 model. In each test, all processes of the sender in the P2P implementation have the same
6 number of MPI messages. If the number of processes per model is less than 24, the number of
7 MPI messages per sender process in the P2P implementation is equal to the number of
8 processes per model; otherwise, the number of MPI messages per sender process in the P2P
9 implementation is 24. The parallel decompositions of the sender and the receiver for a given
10 average number of MPI messages are generated by Algorithm 1.

11


1

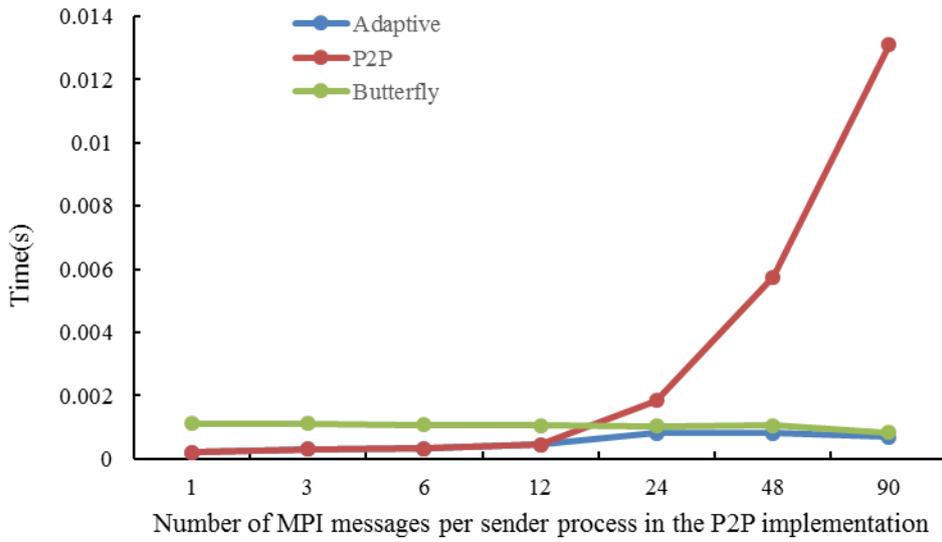


2

3 Figure 15. Average execution time (y-axis) of one data transfer between two toy models with
4 the same rectangular grid (of 192×480 grid points) when varying the number of MPI
5 messages per sender process in the P2P implementation (x-axis). Each toy model is run with
6 1024 processes. There are 10 2-D coupling fields transferred from the source toy model to the
7 target toy model.


8

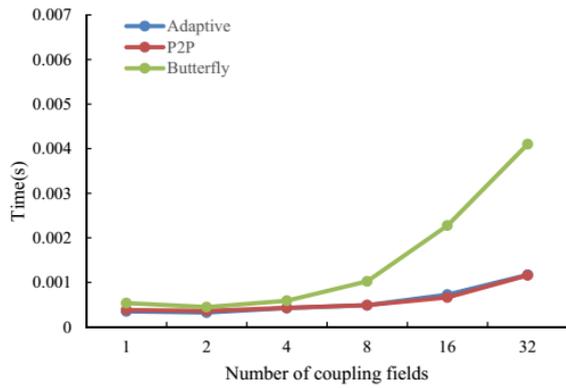


(a)

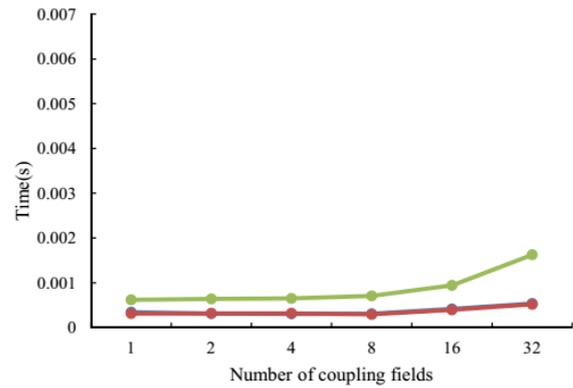

(b)

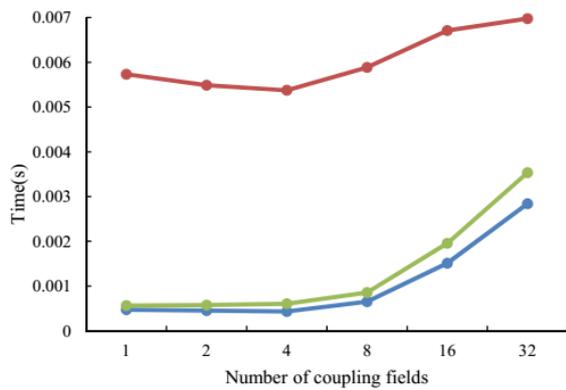

(c)

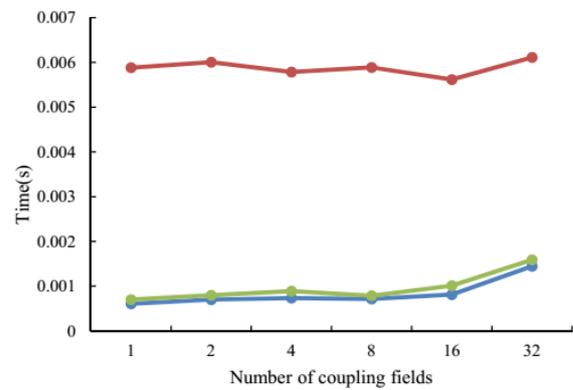


(d)

1
 2 Figure 16. Average execution time (y-axis) of one data transfer between two toy models with
 3 the same rectangular grid (of 192×480 grid points) when varying the number of coupling
 4 fields transferred (x-axis). There are four simulation tests for the evaluation. In simulation (a),
 5 each toy model is run with 256 processes, and the number of MPI messages per sender
 6 process in the P2P implementation is 12. In simulation (b), each toy model is run with 1024
 7 processes, and the number of MPI messages per sender process is in the P2P implementation
 8 12. In simulation (c), each toy model is run with 256 processes, and the number of MPI
 9 messages per sender process in the P2P implementation is 48. In simulation (d), each toy
 10 model is run with 1024 processes, and the number of MPI messages per sender process in the
 11 P2P implementation is 48.

12


1

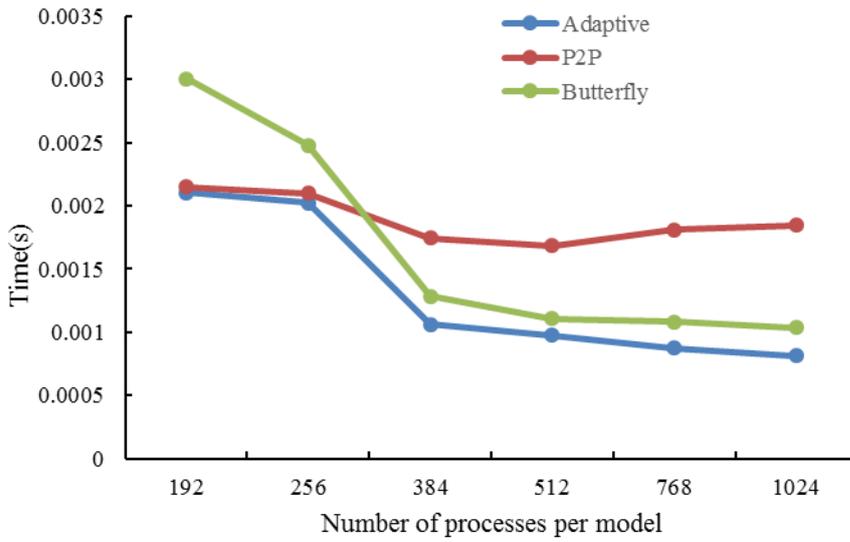

2

3 Figure 17. Average execution time (y-axis) of one data transfer between two toy models with
4 the same rectangular grid (of 192×480 grid points) when varying the number of processes per
5 model (x-axis). There are 10 2-D coupling fields transferred from the source toy model to the
6 target toy model. In each test, the number of MPI messages per sender process in the P2P
7 implementation is 24.


8

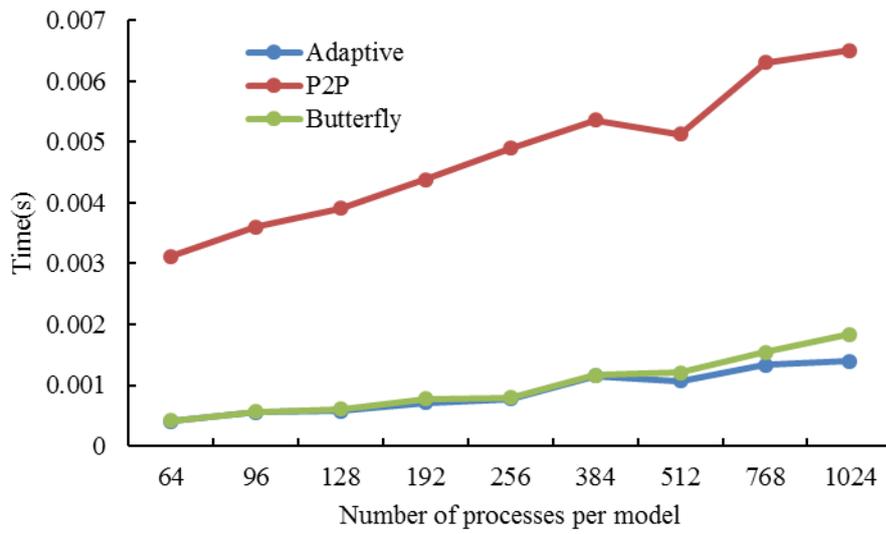

1


2 Figure 18. Average execution time (y-axis) of one data transfer between two toy models. In
 3 this evaluation, each process (running on a unique processor core) of the toy models have 96
 4 grid points, while different processes have different number of MPI messages and different
 5 message sizes in the P2P implementation. The number of coupling fields transferred is set to
 6 20.

7

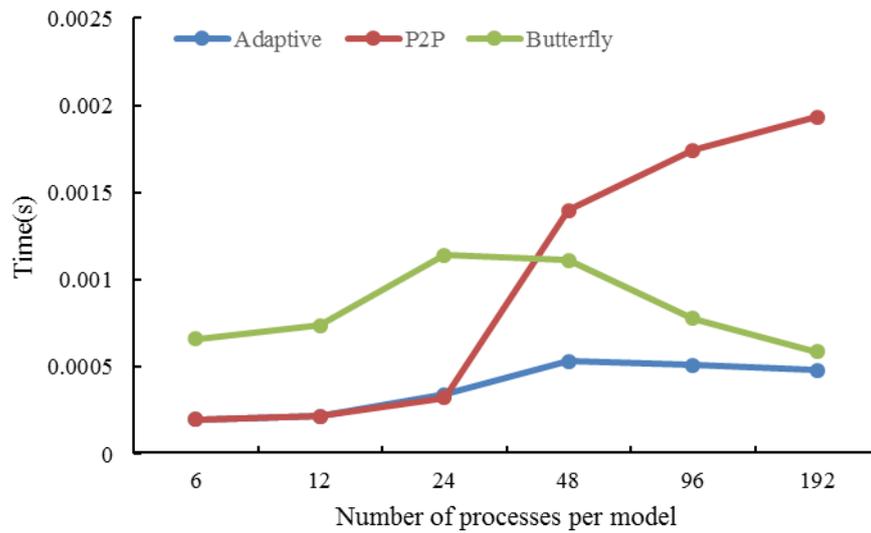


1
2
3
4
5
6
7
8

Figure 19. Average execution time (y-axis) of one data transfer between the land surface model CLM4 and the coupler CPL7 in CESM when varying the number of processes per model (x-axis): 32 coupling fields on the CLM horizontal grid (the grid size is $144 \times 96 = 13824$) are transferred from the land surface model CLM4 to the coupler CPL7. The performance results of the P2P implementation are obtained through running the adaptive data transfer library forcing it to completely switch to the original P2P implementation.

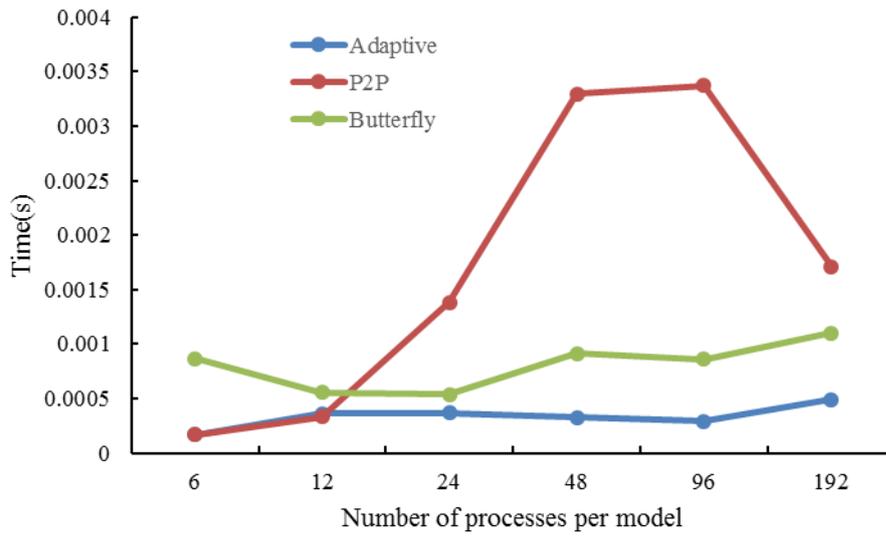


1
 2 Figure 20. Average execution time (y-axis) of one data transfer between the atmosphere
 3 model GAMIL2 and the land surface model CLM3 in GAMIL2-CLM3 when varying the
 4 number of processes per model (x-axis): 14 coupling fields on the GAMIL2 horizontal grid
 5 (the grid size is $128 \times 60 = 7680$) are transferred from the land surface model CLM3 to the
 6 atmosphere model GAMIL2.

7

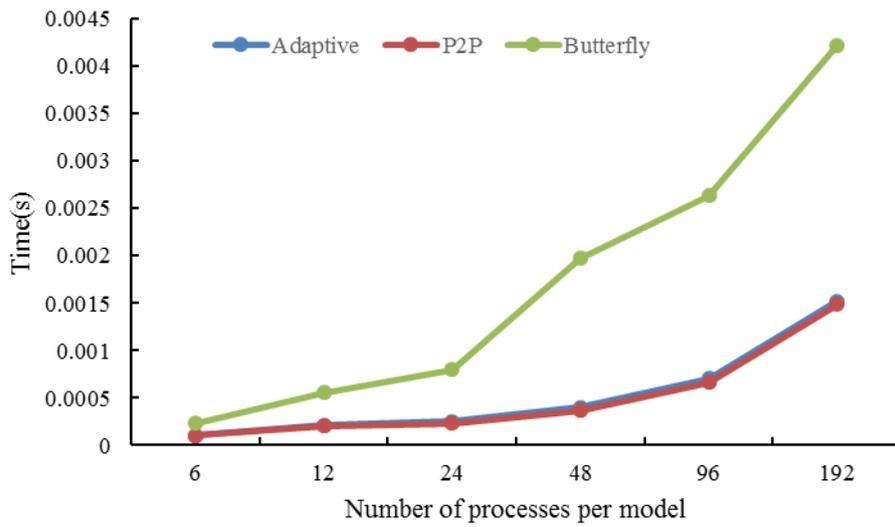

1
 2 Figure 21. Average execution time (y-axis) of one data rearrangement for the parallel
 3 interpolation from the atmosphere grid (the grid size is $144 \times 96 = 13824$) to the ocean grid (the
 4 grid size is $320 \times 384 = 122880$) in CESM when varying the number of processes per model (x-
 5 axis).
 6

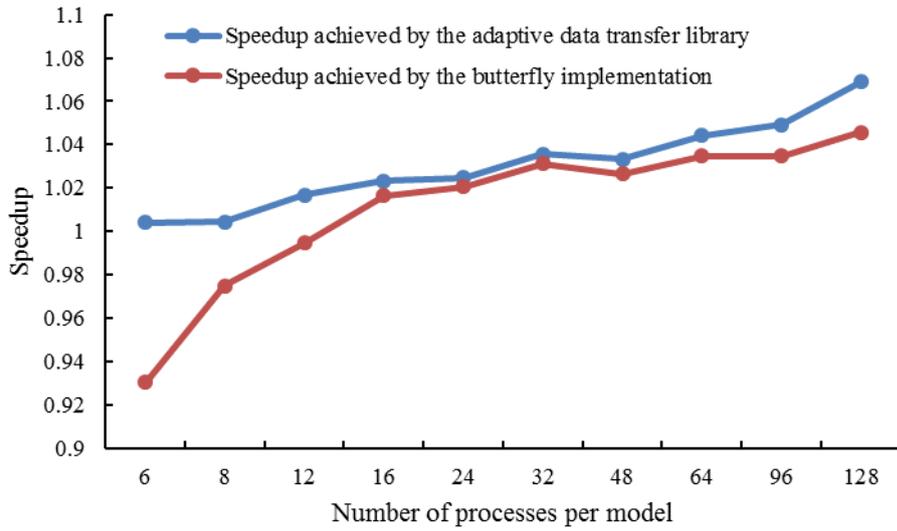

1

2 Figure 22. Performance improvement with respect to the whole model time for the coupled
 3 model GAMIL2-CLM3 achieved by the butterfly implementation and the adaptive data
 4 transfer library, using the P2P implementation as the baseline.