

Authors' Response

Journal Name: Geosci. Model Dev

Manuscript: Bayesian Framework Based on Gaussian Mixture Model and Radial Basis Function Fisher Discriminant Analysis for Flood Spatial Prediction (BayGmmKda V1.1)

The authors would like to thank the reviewers for the useful and constructive comments and suggestions on our manuscript. We have strictly reviewed and revised the manuscript accordingly, and detailed corrections are listed below point by point. The modifications of the manuscript according to the comments of the reviewers are highlighted in the tracked change version of the revised manuscript.

The manuscript has been resubmitted to your journal. We look forward to your positive response.

Sincerely,

Authors' reply to Reviewer 1's comments

Reply to Reviewer's Comments

Reviewer's comment: *The authors use a data-driven tool to establish a relationship between 10 "flood influencing factors" and the flood itself in a district in Vietnam. While there is a merit in experimenting with statistical tools for trying understand flood occurrence, the current version of the manuscript lacks to demonstrate such a value in using data-driven algorithms for flood prediction. particularly, I have concern with the description and evaluation of the tool. Unless a substantial improvement is made both in the methodology framing and presentation of the manuscript, I would not decremented for publication on GMD.*

Response to reviewer's comment: We thank the **Reviewer 1** for giving times and expertise to constructively comment on our manuscript. To address your concerns, we have carefully revised and made a substantial improvement in the description and evaluation of the tool. In addition, the methodology framing and presentation of the manuscript have been carefully checked and improved. We believe that the manuscript is a meaningful contribution to the literature because this is the first time the BayGmmKda tool is proposed for flood study with very promising results.

1) There is no clear objective of the work. And it is not clear how the "tool" can be used for flood mapping or prediction (?). A more focused and tailored decription of the tool would be helpful to understand and potentially use for the readers of GMD.

Response to reviewer's comment:

The objective of the work is to construct a probabilistic model, named as BayGmmKda, for spatial modeling and prediction of flood in Central Vietnam. This region has been critically damaged by floods in recent years due to climate changes and poor land planning. Thus, this model can be very useful since it helps to accurately and reliably construct a flood susceptibility map for this region. Another objective is to employ advanced machine learning algorithms including the Gaussian mixture model with the expectation maximization as well as unsupervised training methods and the Radial Basis Function Fisher Discriminant Analysis. The superiority of the proposed model is demonstrated via comparisons with previously used machine learning approaches including metaheuristic-trained Adaptive neuro fuzzy inference system, Support Vector Machine, and Bayesian classifier.

In this study, prediction of flood zones relies on an assumption that future flood events are governed by the very similar conditions of flooded zones in the past (Tien Bui et al., 2016; Tehrany et al., 2015). Thus, past records of flood occurrences, coupled with conditioning factors of the areas, are employed as data instances that help to establish the probabilistic model. We formulate the flood assessment problem as a supervised learning task. Therefore, the data samples collected in the past are employed to train the proposed BayGmmKda. With the model structure identified through the training phase, the model can then be used to make assessment on the flood susceptibility for all studied region. The probabilistic model is coded in Matlab environment as an easy-to-use toolbox to assist decision makers in flood prediction. The application of the tool as well as its practical usefulness are demonstrated in the section 5.2 and 5.3 of the manuscript. In these two sections, the model's outstanding accuracy is clearly shown and the flood susceptibility map of the studied region constructed by the tool is demonstrated.

Thus, we believe the tool can also be a promising alternative for similar tasks in other studied regions.

Based on the reviewer's suggestion, we have addressed the reviewer's concern by adding more focused and clear description of the BayGmmKda tool in the revised version of the manuscript for the sake of GMD's readers. We copy the text from the revised manuscript (page 3) for your reference:

“To construct flood susceptibility evaluation models, databases of GIS that contains a set of flood influencing factors and information of past flood events is established at the first step. At the next step, advanced soft computing models can be utilized to distinguish the flood vulnerable areas for the entire studied region (Tehrany et al., 2015b). In this way, the flood prediction problem boils down to a supervised classification task. Nevertheless, most models in the current studies can only produce qualitative outputs of flood prediction outcome (i.e. flood–no flood) (Tien Bui et al., 2016b;Tehrany et al., 2015b); probabilistic evaluations have rarely been seen in the literature. Given these motivations, the objective of this study is to construct a probabilistic model for spatial prediction of flood in Central Vietnam. The newly proposed method aims at enhancing the prediction accuracy as well as deriving probabilistic evaluations of flood susceptibility in a regional scale. The derived flood susceptibility is of great usefulness for local authorities in land-use planning and management. The local authorities may overlay the flood susceptibility map onto planned land-use maps in different scenarios.”

2) *The abstract is too short and lacks details of what they attempt to do.*

Response to reviewer's comment: Thanks for your comment. We have extend the abstract to describe the study with more details as follows:

“**Abstract.** In this study, a probabilistic model, named as BayGmmKda, is proposed for flood assessment with a study area in Central Vietnam. The new model is a Bayesian framework constructed by a combination of Gaussian Mixture Model (GMM), Radial Basis Function Fisher Discriminant Analysis (RBFDA), and a Geographic Information System database. To compute the posterior probability of flood, the GMM algorithm is utilized for modeling the data distributions of flood conditioning factors. Additionally, the RBFDA method is employed in BayGmmKda to construct a latent variable that maximizes the data discrimination with respect to the two class labels of ‘flood’ and ‘no-flood’. Experiments used for measuring the model performance point out that the proposed hybrid framework is superior to other benchmark models including the adaptive neuro fuzzy inference system and the support vector machine. To facilitate the model implementation, a software program of BayGmmKda has been developed in Matlab. The BayGmmKda program can accurately establish a flood susceptibility map for the study region. Accordingly, local authorities can overlay this susceptibility map onto various land-use maps for the purpose of land-use planning or management.”

3) *There is no definition of flood/no flood. In fact it is not clear at all as to what flood is made in the paper. I think flood extent maps should be used for the evaluation, instead of just the selected points. As it is currently used, then streamflow should be used for the evaluation.*

Response to reviewer's comment: We thank the reviewer for the comment and would like to explain to you as follows:

Flood points are flood locations that occurred in the study areas, and have been determined based on documentary sources of the Tuong Duong district and interpretation of Landsat 8 Operational Land Imagery. Using DEM, these flood areas were converted to flood points. In addition, flood locations were collected during field works using handheld GPS. A total of 76 flood locations that occurred during the last five years were prepared.

Non-flood points were randomly generated from non-flood areas within the study area based on DEM, i.e. ridges (we has used DEM to generate topographical shades i.e. flat, Ridge, Saddle Ravine, Convex hillside, Saddle hillside, Slope hillside, Concave hillside, Inflection hillside).

Because the above information is available in our previous paper published in Journal of Hydrology, we have provided a citation for this reference in section 3.1 Flood inventory map and flood conditioning factors of the study area) within the revised manuscript. We copy the text here for your review:

“In this study, the flood inventory map established by Tien Bui et al. (2016) was used to analyse the relationships between flood occurrences and influencing factors”

Regarding your comment “*it is not clear at all as to what flood is made in the paper*”, all the floods in this study are flash flood. This is the main flood type in this study area due to characteristics of the terrain. This information has been provided on page 6 of the revised manuscript:

“The flood inventory map stores documentations of past flood events (see **Figure 1**). It is noted that the type of floods in this study area is flash flood. This is the main flood type in this region due to characteristics of the terrain.”

Moreover, we use flood points because flood extent maps are not available. Thus, we employ flood points provided from the sources of local authority and handheld GPS.

Regarding your comment on the streamflow being used for the flood evaluation, in fact, we have performed a literature review on the use of streamflow for evaluating flood susceptibility. However, we found no relevant or feasible guidances to construct the flood susceptibility model for the studied area based on the available data. Thus, we'd like to consider the possibility of using streamflow for flood evaluations in a future research. This direction has been stated in the conclusion of the revised version.

4) While describing the methodology (section 3), there is no connection made between the statistics and the physical flood characteristics? For example, what are the classes (in the classification of section 3.1) deal with?.

Response to reviewer's comment:

We'd to thank reviewer for these comments and we totally agree with the reviewer's opinion at this point. We have provided explanations on the connection made between the statistics and the physical flood characteristics in the beginning of the section 3 of the revised manuscript. We copy the texts in the revised manuscript for your review:

“The flood modeling in this study is considered to be a binary classification problem within which ‘flood’ and ‘non-flood’ are the two class labels of interest. As a result, the probability of pixels belonging to the flood class, which are derived from the model, will be used as susceptibility indices. These susceptibility indices of the pixels are then used to generate the flood susceptibility map.”

5) The paper fails to explain the physical relationship between the "Influencing factors" (Table 1) and the flood processes. And why were those particular factors selected?. How about antecedent soil moisture and other potential factors?

Response to reviewer's comment:

We agree with the reviewer on this comment. Based on the reviewer's comment, we have provided texts in the revised manuscript with the pertinent reference to explain the physical relationship between the "Influencing factors" (Table 1) and the flood processes as well as the reason why we choose those particular influencing factors. We copy the texts from the revised manuscript on page 7 here for your review:

“Based on the previous work of Tien Bui et al. (2016b), the physical relationships between influencing factors and flood processes have been analyzed. Accordingly, a total of ten influencing factors were selected in this study; they include slope (IF₁), elevation (IF₂), curvature (IF₃), topographic wetness index (TWI) (IF₄), stream power index (SPI) (IF₅), distance to river (IF₆), stream density (IF₇), normalized difference vegetation index (NDVI) (IF₈), lithology (IF₉), and rainfall (IF₁₀). These factors are used to analyze the flood vulnerability for the studied area and a GIS database consisting of the flood inventory map and the chosen factors has been established.”

Regarding the comment “How about antecedent soil moisture and other potential factors?”, we'd like to explain as follows:

In fact, the selection of the conditioning factors varies from one study area to another based on different characteristics of each place. One variable can have high degree of impact in

flooding in a specific area, but it can be without any influence in another regions (Kia et al., 2012). In this study, due to the data availability, we have not employed antecedent soil moisture as a conditioning variable. However, we appreciate the reviewer's suggestions and we think that further studies should be carried out to investigate the influences of antecedent soil moisture and other potential factors for the study regions in Vietnam. This point has been addressed in our conclusion in the revised version as follows:

“Result comparison pointed out that the BayGmmKda is superior to other benchmark approaches including ANFIS and SVM. Therefore, the proposed model, featured by **its high predictive accuracy** and the capability of delivering probabilistic outputs, is a promising alternative for flood susceptibility prediction. Nevertheless, the proposed method also suffers from several drawbacks. **BayGmmKda is a data-driven tool; thus, field works at the studied area and data analyses from remote sensing are necessary for the model construction phase. These data collecting and analyzing can be time-consuming. Furthermore, a grid search procedure is used for hyper-parameter setting and this process also requires a high computational cost especially for large-scale data sets. In addition, the outcome of this grid search procedure may not be optimal; more advanced mode selection approaches (e.g. metaheuristics) can be utilized to further improve the model accuracy.** Future extensions of this research may include the model application in flood prediction for other study areas, investigations of other flood conditioning factors (e.g. **streamflow and antecedent soil moisture**) which may be relevant for flood analysis, and improving the current model with other novel soft computing methods (e.g. feature selection, pattern classification, dimension reduction, metaheuristic optimization, etc.). **to alleviate the aforementioned drawbacks as well as to enhance the model performance.**”

6) *Poor writing throughout.*

The following is partial list. - L14: to facilitate - L20: cause heavy loss of - L23-24 is that number refers to annual deaths? - L26: the country - L28: 60% of the area in the country is ... a report produced by - L33: It is possible - L47: what does "scientific manner" means? - L51-52: that is not an accurate description of Dottori et al., because they also provide a water depth. The are based on physical models as well. - L63: can yield - L77: What is that exactly the limitations of the hydrological models? And what is the limitations of the proposed method? - L109: by far a heavily affected - L110: located between - L112: Doesn't watershed include mountains and rivers? - L119: have been damaged... must be relocated - L125; reasonable strategy - many more language corrections through out the text! - A more common terms in flood community such as probability of detection and false alarm ratio (rate) can be used - Remove the background color from figure 2 (the region outside of the study region should be white)

Response to reviewer's comment: We'd like to thank the reviewer for your great help. All addressed grammatical and presentation issues have been addressed in the revised version. The whole manuscript has been proofread to improve the writing. Please refer to the tracked change version for the highlighted corrections.

Based on your comments, we have provided the limitation of hydrological models on page 4 as follows:

“Because of the criticality of flood prediction, this problem has gained an increasing attention from the academic community. Following this trend, various flood analyzing tools have been developed, ranging from relatively simple methods to more sophisticated methodologies involving hydrological and hydraulic models (Winsemius et al., 2013; Papaioannou et al., 2015).

In general, the goal of constructing hydrological models is to acquire an accurate evaluation of

discharge over the watersheds. Moreover, it is noted that to establish such models, large-scale field works and deployments of measuring equipments are necessary for collecting data (Fenicia et al., 2008). A review done by Sanyal and Lu (2004) pointed out that the density of gauging stations in developing countries is very low and this fact imposes a great obstacle for establishing accurate hydrological models. In addition, the complex and nonlinear nature of the flood modeling problem also bring about difficulties for hydrological methods and techniques (Sahoo et al., 2006).”

The limitations of the proposed model have been stated as follows in the conclusion:

“Result comparison pointed out that the BayGmmKda is superior to other benchmark approaches including ANFIS and SVM. Therefore, the proposed model, featured by its high predictive accuracy and the capability of delivering probabilistic outputs, is a promising alternative for flood susceptibility prediction. Nevertheless, the proposed method also suffers from several drawbacks. BayGmmKda is a data-driven tool; thus, field works at the studied area and data analyses from remote sensing are necessary for the model construction phase. These data collecting and analyzing can be time-consuming. Furthermore, a grid search procedure is used for hyper-parameter setting and this process also requires a high computational cost especially for large-scale data sets. In addition, the outcome of this grid search procedure may not be optimal; more advanced mode selection approaches (e.g. metaheuristics) can be utilized to further improve the model accuracy.”

Authors' reply to Reviewer 2's comments

Reply to Reviewer's Comments

General comment

Overall the presented work is technically interesting and contains novelties. However, major revisions are required to make it suitable for publication in GMD.

Response to reviewer's comment:

We thank the reviewer for taking times and expertise to constructively comment on our manuscript. We believe that the manuscript is a meaning full contribution to the body of knowledge because this is the first time the BayGmmKda model is proposed for flood study with very promising result. We have carefully revised and provided a substantial improvement for the revised manuscript according to the reviewer's suggestions.

Regarding your comment "*The paper currently does not clarify the benefits of the proposed data-intensive model for management purposes.*", we 'd like to reply as follows:

The model proposed in this study can make inference on the spatial prediction of flood or flood susceptibility. The current model cannot provide estimation of the magnitude and severity the events. Nevertheless, the flood susceptibility assessment is of great usefulness for local authorities in landuse planning and management by overlaying the flood susceptibility map onto planed land use maps in different scenarios. Accordingly, areas with very high flood susceptibility could be determined. Of cause, the current flood susceptibility map is only in district scale; therefore, after determining high flood susceptibility areas, larger scale studies should be carried out focusing on these areas. Based on the reviewer's comment, we have better

addressed the benefits of the proposed model for land-use management purposes in the introduction part of the revise version as follows on page 3:

“ Given these motivations, the objective of this study is to construct a probabilistic model for spatial prediction of flood in Central Vietnam. The newly proposed method aims at enhancing the prediction accuracy as well as deriving probabilistic evaluations of flood susceptibility in a regional scale. The derived flood susceptibility is of great usefulness for local authorities in land-use planning and management. The local authorities may overlay the flood susceptibility map onto planed land-use maps in different scenarios.”

Regarding your comment *“The presented results seem promising in the region of study but general statements about superiority of the proposed model in comparison with other techniques could only be made through evaluation in other flood prone areas.”*, we ‘d like to reply as follows:

We agree with the reviewer on this comment. The model proposed in this study will be applied for spatial modeling of flood in other study areas in Vietnam as well as in other countries. However, the data collection and processing are time-consuming. Thus, we consider this comment of the reviewer as a future research direction. We have modified the conclusion in the revised version to address this comment of the reviewer.

Regarding the comment *“In terms of presentation and English writing, the paper is quite poor in its current form and does not seem suitable for publication without major edition.”*, We have carefully checked and improved the English writing of the revised manuscript.

Specific comments

1. Abstract is too short and not informative.

Response to reviewer's comment: We agree with the reviewer, therefore we have rewritten the abstract in the revised manuscript as follows:

“**Abstract.** In this study, a probabilistic model, named as BayGmmKda, is proposed for flood assessment with a study area in Central Vietnam. The new model is a Bayesian framework constructed by a combination of Gaussian Mixture Model (GMM), Radial Basis Function Fisher Discriminant Analysis (RBFDA), and a Geographic Information System database. To compute the posterior probability of flood, the GMM algorithm is utilized for modeling the data distribution of flood conditioning factors. Additionally, the RBFDA method is employed in BayGmmKda to construct a latent variable that maximizes the data discrimination with respect to the two class labels of ‘flood’ and ‘no-flood’. Experiments used for measuring the model performance point out that the proposed hybrid framework is superior to other benchmark models including the adaptive neuro fuzzy inference system and the support vector machine. To facilitate the model implementation, a software program of BayGmmKda has been developed in Matlab. The BayGmmKda program can accurately establish a flood susceptibility map for the study region. Accordingly, local authorities can overlay this susceptibility map onto various land-use maps for the purpose of land-use planning or management. ”

2. The literature review of flood forecasting is poor. Current literature review is only focused on specific studies similar to the current work while ignoring the overall picture of flood and streamflow forecasting.

Response to reviewer's comment: We understand that the overall picture of flood and streamflow forecasting is very large for the objective of this particular study. After performing literature review, we see that there are two groups of approaches for flood and streamflow forecasting: (i) the first one is “regression modeling” and (ii) the second one is “classification modeling”

The first approach group has used for very long time, but required detailed monitoring data for modeling, these data are difficult to obtain for Vietnam as a developing country. The modeling result of this approach group could provide spatial and temporal prediction of flood for study areas.

The second group is relatively new and does not require flood monitoring data. It uses “on – flood pixel” and “off - non flood pixel” for flood modeling. Therefore, this approach is feasible for modeling of large areas with the use of remote sensing and GIS data. In other words, the input-output datasets in this approach is very different with those of the traditional approaches. The modeling result of this approach group provide only where flood may occur (spatial prediction of flood or flood susceptibility), this does not provide temporal prediction or flood discharge.

In this study, we use the second approach group, therefore we have mainly specific studies similar to our works and we think that the current literature review is reasonable.

3. What is the definition of flood used in this study? What is the difference between flood and no-flood? How severe an event needs to be to be called flood? How can predictions be useful for government agencies without providing an estimation of the magnitude and severity of the events?

Response to reviewer's comment:

Floods in this study are flood locations that occurred in the study areas and have been determined based on documentary sources of the local district, interpretation of Landsat 8 Operational Land Imagery. In addition, flood locations were collected during field works using handheld GPS. Non-flood points were randomly generated from non-flood areas within the study area based on DEM, i.e. ridges (we has used DEM to generate topographical shades i.e. flat, Ridge, Saddle Ravine, Convex hillside, Saddle hillside, Slope hillside, Concave hillside, Inflection hillside).

Regarding your comment “How severe an event needs to be to be called flood?”, we ‘d like to reply as follows: In this study, only flash flood is modelled. The flood locations used in this study were provided by the local authority. With the current database, the exact information on the severity of these floods is not available. However, all 76 floods in this study caused huge damages to the local people.

The information regarding the determination of flood point in the studied region has been provided more clearly on page 7:

“The flood inventory map stores documentations of past flood events (see **Figure 1**). It is noted that the type of floods in this study area is flash flood. This is the main flood type in this region due to characteristics of the terrain. The map was constructed by gathering information of the study area, field works at flood areas, and analyses from results of the Landsat 8 Operational Land Imagery (from 2010 to 2014) with the resolution of 30m (retrieved from <http://earthexplorer.usgs.gov>). Furthermore, the location of flood events was also verified by field works carried out in 2014 with handheld GPS devices. In summary, the total number of

flood locations during the last five years was recorded to be 76. It is noted that flood locations were determined by overlaying the flood polygons in the inventory map and the Digital Elevation Model (DEM). Moreover, only pixels in the map that associate with flood points are used to extract the influencing factors used for flood prediction.”

Regarding the comment, “How can predictions be useful for government agencies without providing an estimation of the magnitude and severity of the events? ” ,we’d like to response as follows: As we explained in the above answer. The flood model in this study could provide only where flood may occur called spatial prediction of flood or flood susceptibility. The current model is not able to deliver estimation of the magnitude and severity the events. The flood susceptibility is still useful for local authorities in landuse planning and management by overlaying the flood susceptibility map to planed land use maps in different scenario. Subsequently, areas with very high flood susceptibility could be determined. Of course, the flood susceptibility map is only in district scale; therefore, after determining high flood susceptibility areas, larger scale studies should be carried out focusing on these areas.

4. Flood points are used in this study, and not flood areas, with GIS maps. So for information on flood influencing factors in each of these flood points, how many map pixels were used? Was each flood point only associated with the pixel it was located in? If more map pixels than one were used to get information on flood influencing factors for each flood point, how was the area of analysis (relevant pixels) determined for each flood point?

Response to reviewer’s comment:

We have 76 flood polygons in the flood inventory map. However, we used 76 points for these polygons and these points were determined based on overlaying these polygons and the DEM. The grid (30 m size) of the district map was constructed by 3900 columns and 4125 rows.

Regarding the question “Was each flood point only associated with the pixel it was located in?. If more map pixels than one were used to get information on flood influencing factors for each flood point, how was the area of analysis (relevant pixels) determined for each flood point?”: Yes, each flood point only associated with the pixel it was located in. No more map pixels than one were used to get information on flood influencing factors for each flood point. More details on the determination of flood points are provided on page 7 as follows:

“It is noted that flood locations were determined by overlaying the flood polygons in the inventory map and the Digital Elevation Model (DEM). Moreover, only pixels in the map that associate with flood points are used to extract the influencing factors used for flood prediction.”

Technical corrections

There are too many instances of poor English writing throughout the paper to be listed.

Major edition seems necessary to make the paper suitable for publication.

Response to reviewer’s comment: According to the reviewer’s comment, the whole manuscript has been be proofread to improve the English writing.

Reference

- Kia, M. B., Pirasteh, S., Pradhan, B., Mahmud, A. R., Sulaiman, W. N. A., and Moradi, A.: An artificial neural network model for flood simulation using GIS: Johor River Basin, Malaysia, *Environ Earth Sci*, 67, 251-264, 2012.
- Tehrany, M. S., Pradhan, B., Mansor, S., and Ahmad, N.: Flood susceptibility assessment using GIS-based support vector machine model with different kernel types, *CATENA*, 125, 91-101, <http://dx.doi.org/10.1016/j.catena.2014.10.017>, 2015.
- Tien Bui, D., Pradhan, B., Nampak, H., Bui, Q.-T., Tran, Q.-A., and Nguyen, Q.-P.: Hybrid artificial intelligence approach based on neural fuzzy inference model and metaheuristic optimization for flood susceptibility modeling in a high-frequency tropical cyclone area using GIS, *J. Hydrol.*, 540, 317-330, <http://dx.doi.org/10.1016/j.jhydrol.2016.06.027>, 2016.

A Bayesian Framework Based on Gaussian Mixture Model and Radial Basis Function Fisher Discriminant Analysis for Flood Spatial Prediction (BayGmmKda V1.1)

Dieu, Tien Bui¹ and Nhat-Duc, Hoang²

5 ¹Geographic Information System Group, Department of Business Administration and Computer Science, University College of Southeast Norway (USN), Hallvard Eikas Plass, N-3800, Bø I Telemark, Norway.

²Faculty of Civil Engineering, Institute of Research and Development, Duy Tan University, P809 - K7/25 Quang Trung, Danang, Vietnam.

Correspondence to: Nhat-Duc Hoang (hoangnhatduc@dtu.edu.vn)

10 **Abstract.** In this study, a probabilistic model, named as BayGmmKda, is proposed for flood assessment with a study area in Central Vietnam. The new model is a Bayesian framework constructed by a combination of Gaussian Mixture Model (GMM), Radial Basis Function Fisher Discriminant Analysis (RBFDA), and a Geographic Information System database. To compute the posterior probability of flood, the GMM algorithm is utilized for modeling the data distributions of flood conditioning factors. Additionally, the RBFDA method is employed in BayGmmKda to construct a latent variable that
15 maximizes the data discrimination with respect to the two class labels of 'flood' and 'no-flood'. Experiments used for measuring the model performance point out that the proposed hybrid framework is superior to other benchmark models including the adaptive neuro fuzzy inference system and the support vector machine. To facilitate the model implementation, a software program of BayGmmKda has been developed in Matlab. The BayGmmKda program can accurately establish a flood susceptibility map for the study region. Accordingly, local authorities can overlay this susceptibility map onto various
20 land-use maps for the purpose of land-use planning or management.

Key words: Flood Evaluation; Bayesian Classifier; Gaussian Mixture Model; Discriminant Analysis; Latent Variable.

1 Introduction

25 Flood stands out as one of the most destructive phenomena featured by its immense scale of damages as well as its large spatial extent (Dottori et al., 2016). Catastrophic flood events destroy crops, infrastructures, and **cause** heavy loss of human lives. Floods also lead to siltation of the reservoirs and thus limit the capacity of dams designed for flood control (Sanyal and Lu, 2004). This natural hazard is known to negatively affect 170 million people around the globe annually (Kazakis et al., 2015;Judi et al., 2011). On average, people in more than 90 countries are victimized by catastrophic flooding (Kazakis et al.,
30 2015).

Because of monsoonal rainfalls and cyclonic patterns, regions in Southern Asian are **immensely** affected by floods (Loo et al., 2015). Particularly in Vietnam, floods are often triggered by tropical cyclones and the country has undergone destructive consequences of flooding in many provinces. According to Tien Bui et al. (2016b), more than 70% of the population and roughly 60% of the area in **the country is** negatively affected by flood hazards. Based on a report **produced** by
35 Kreft et al. (2014), **flood accounted for destructions that cost approximately \$2.9 billion in the last two decades.**

Additionally, the occurrences of flood in Vietnam are expected to **rise rapidly** in the near future due to the increases of poorly planned infrastructure developments and urbanization near watercourses, as well as an increased activity of deforestation and climate change. Hence, **an accurate model of flood forecasting** becomes **a crucial need** for land-use planning as well as **establishment of** disaster mitigation strategies. **Based on flood prediction models, flood-prone area can be**
40 **identified at a region scale** (Kia et al., 2012;Tien Bui et al., 2016b).

Needless to say, the identification of susceptible areas can significantly reduce damages **of flood** to the national economy and human lives by avoiding infrastructure developments and densely populated settlements in highly flood susceptible areas (Zhou et al., 2016). The prediction outcomes also help Government agency to issue appropriate flood management policies and to focus its limited financial resource to construct large-scale flood defense infrastructure in areas
45 that **feature** great economic values but are highly susceptible to flood (Bubeck et al., 2012). Therefore, **a tool of flood spatial modelling is of great usefulness.**

Recently, there is an increasing trend of applying Geographic Information System (GIS) in flood **spatial modeling**. **GIS technology is a helpful tool** to investigate the multi-dimensional events of flooding (Tien Bui et al., 2016a;Shahabi and

Hashim, 2015;Jia et al., 2016). GIS method is capable of simultaneously analyzing different layers of information (Candy et al., 2014) including flood inventory map and various flood conditioning factors (e.g. topological and hydrological features). The analyses can be used to produce flood susceptibility evaluation results. In addition, flood forecasting systems based on GIS are indeed suitable for a participatory approach to flood management; the reason is that this technique facilitates the communication with the public.

To construct flood susceptibility evaluation models, databases of GIS that contains a set of flood influencing factors and information of past flood events is established at the first step. At the next step, advanced soft computing models can be utilized to distinguish the flood vulnerable areas for the entire studied region (Tehrany et al., 2015b). In this way, the flood prediction problem boils down to a supervised classification task. Nevertheless, most models in the current studies can only produce qualitative outputs of flood prediction outcome (i.e. flood–no flood) (Tien Bui et al., 2016b;Tehrany et al., 2015b); probabilistic evaluations have rarely been seen in the literature. Given these motivations, the objective of this study is to construct a probabilistic model for spatial prediction of flood in Central Vietnam. The newly proposed method aims at enhancing the prediction accuracy as well as deriving probabilistic evaluations of flood susceptibility in a regional scale. The derived flood susceptibility is of great usefulness for local authorities in land-use planning and management. The local authorities may overlay the flood susceptibility map onto planed land-use maps in different scenarios.

The proposed method relies on the Bayesian framework with the Gaussian mixture model (GMM) and the Radial Basis Function Fisher Discriminant Analysis (RBFDA). GMM is employed for density approximation to calculate the posterior probability of flood within the Bayesian framework. Furthermore, to boost the classification accuracy of the Bayesian model, RBFDA is employed to construct a latent variable for from the original GIS database; this latent variable aims at maximizing data discrimination with respect to the two classes of ‘flood’ and ‘no-flood’.

In essence, the proposed integrated framework contains two phases of analysis. RBFDA is first employed for latent variable construction. The Bayesian approach assisted by GMM is then used to perform probabilistic pattern recognition. The first level performs pattern discriminant analysis task and the second level carries out the prediction to derive the model output of flood evaluation. Based on previous studies which indicate that hierarchical model structures can produce improving prediction accuracy (Chou and Tsai, 2012;Shahangian and Pourghassem, 2016;Hoang and Tien Bui, 2016), the

75 **proposed framework** can potentially bring about desirable flood assessment results. The subsequent parts of this study are organized in the following order: Related works on flood prediction are summarized in the second section. The next section introduces the research method of the current paper, **followed by the fourth part that** describes the proposed Bayesian model for flood susceptibility forecasting. The next part reports the model prediction accuracy and comparison. **The last section discusses** some conclusions on this work.

2 A Review of Related Works on Flood Susceptibility Prediction

80 Because of the criticality of flood prediction, this problem has gained an increasing attention from the academic community. Following this trend, various flood analyzing tools have been developed, ranging from relatively simple methods to more sophisticated methodologies involving hydrological and hydraulic models (Winsemius et al., 2013;Papaioannou et al., 2015). **In general, the goal of constructing hydrological models is to acquire an accurate evaluation of discharge over the watersheds. Moreover, it is noted that to establish such models, large-scale field works and**
85 **deployments of measuring equipments are necessary for collecting data (Fenicia et al., 2008). A review done by Sanyal and Lu (2004) pointed out that the density of gauging stations in developing countries is very low and this fact imposes a great obstacle for establishing accurate hydrological models. In addition, the complex and nonlinear nature of the flood modeling problem also bring about difficulties for hydrological methods and techniques (Sahoo et al., 2006).**

In recent years, remote sensing coupled with the advancement of GIS technology has been increasingly shown to be a
90 **reliable method for producing synoptic coverage over a large area in a cost effective way (Sanyal and Lu, 2004;Tien Bui et al., 2016b;Kazakis et al., 2015;Kia et al., 2012).** The new approach based on GIS successfully evades the limitations of the hydrological models and equips decision-makers with a powerful flood analysis tools. GIS databases integrated with data-driven methods have demonstrated their effectiveness and accuracy in large scaled flood predictions. An fuzzy logic based algorithm has been used to develop a map of flooded areas from synthetic aperture radar imagery, used for the operational
95 flood management system in Italia, was established by Pulvirenti et al. (2011). A model based on the frequency ratio approach and GIS for spatial prediction of flooded regions was first introduced by Lee et al. (2012); the spatial database were constructed by field surveys and maps of the topography, geology, land cover, and infrastructure.

Prediction models with artificial neural network (ANN) have been employed for flood susceptibility evaluation by various scholars (Kia et al., 2012; Seckin et al., 2013; Rezaeianzadeh et al., 2014; Radmehr and Araghinejad, 2014); previous works have shown ANN as a capable nonlinear modeling tool. Nevertheless, ANN learning is prone to overfitting and its performance has been shown to be inferior to that of support vector machine (Hoang and Pham, 2016).

Kazakis et al. (2015) introduced a multi-criteria index to assess flood hazard areas that relies on GIS and Analytical Hierarchy Process (AHP); in this methodology, the relative importance of each flood conditioning factors for the occurrence and severity of flood were determined via AHP. More recently, Support Vector Machine-based flood susceptibility analysis approaches have been proposed by Tehrany et al. (2015a) and Tehrany et al. (2015b); the research finding is that SVM is more accurate than other benchmark models including the decision tree classifier and the conventional frequency ratio model.

Mukerji et al. (2009) constructed flood forecasting models based on an adaptive neuro-fuzzy interference system (ANFIS), Genetic Algorithm optimized ANFIS; experiments demonstrated that ANFIS attained the most desirable accuracy. Recently, a metaheuristic optimized neural fuzzy inference system, named as MONF, has been introduced by Tien Bui et al. (2016b); the research finding is that MONF is more capable than decision tree, ANN, SVM, and conventional ANFIS.

As can be seen from the literature review, various data-driven and advanced soft computing approaches have been proposed to construct different flood forecasting models. In most previous studies, the flood prediction was formulated as a binary pattern recognition problem in which the model output is either flood or no flood. Probabilistic models have rarely been examined to cope with the complexity as well as uncertainty of the problem under concern. Therefore, our research aims at enriching the body of knowledge by proposing a novel Bayesian probabilistic model to estimate the flood vulnerability with the use of a GIS database.

3 Research Method


3.1 Flood inventory map and flood conditioning factors of the study area

3.1.1 The study area

In this research, Tuong Duong district (central Vietnam) is selected as the study area (see **Figure 1**). This is byfar a heavily affected flood region in the country (Reynaud and Nguyen, 2016). The area of the district is approximately 2803 km²

and locates between the longitudes of 18°58'42"N and 19°39'16"N, and between the latitudes of 104°15'58"E and 104°55'57"E. The topographical feature of the Tuong Duong district is inherently complex with mountainous areas, watersheds, and rivers. Drastic floods often divided the district into several isolated areas which are very difficult to approach for rescuing or evacuation purposes.

The district has two separated seasons, namely a cold season (from November to March) and a hot season (from April to October). The yearly rainfall of the district is within the range of 1679 mm and 3259 mm. The rainfall amount is primarily intensified during the rainy period which contributes to roughly 90% of the total annual rainfall. Due to the district's location as well as its topographic and climatic features, the study area is highly susceptible to flood events with immense infliction to human casualty and economic value. An examination carried out by Reynaud and Nguyen (2016) reported that approximately 40% of families have been damaged by floods and roughly 20% of families must be relocated from the flooded areas; the average loss of flood goes up to 24% of the family income each year.

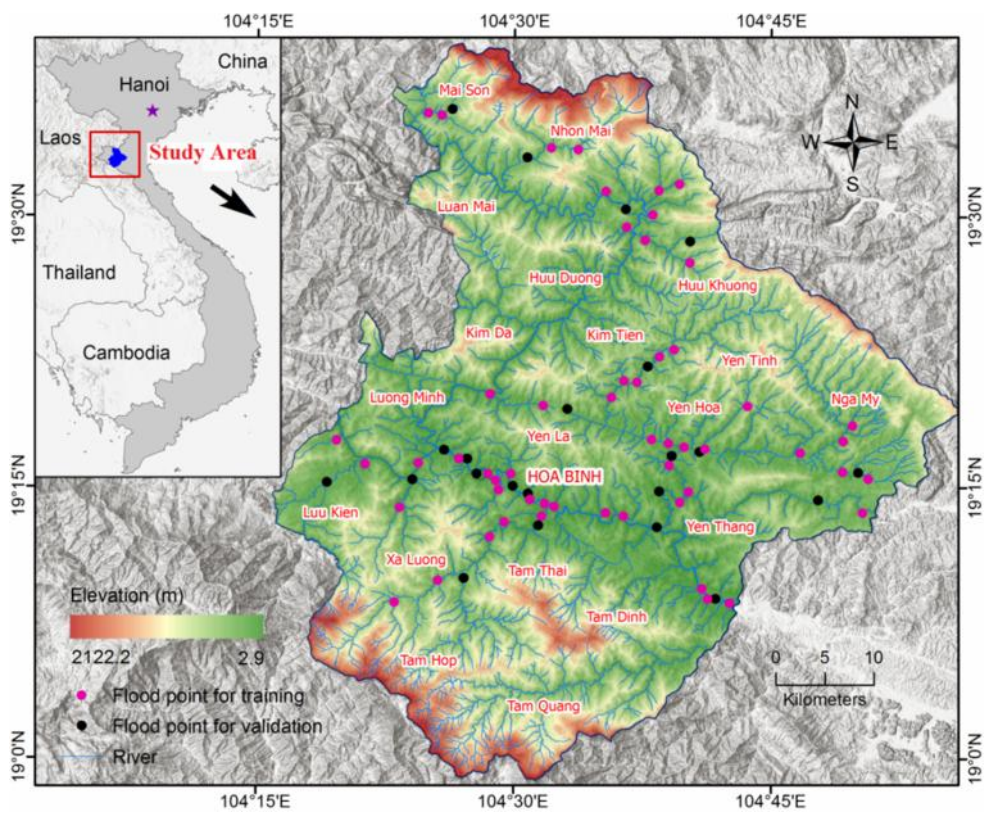

135 **Figure 1** Tuong Duong district (Central Vietnam)

3.1.2 Flood inventory map

Prediction of flood zones can be based on an assumption that future flood events are governed by the very similar conditions of flooded zones in the past. Therefore, it is a **reasonable** strategy to analyze past records of flood occurrences (Tien Bui et al., 2016b;Tehrany et al., 2015b). The first step of this analysis is to establish a flood inventory map for the region under investigation. **In this study, the flood inventory map established by Tien Bui et al. (2016b) was used to analyse the relationships between flood occurrences and influencing factors.**

The flood inventory map stores documentations of past flood events (see **Figure 1). It is noted that the type of floods in this study area is flash flood. This is the main flood type in this region due to characteristics of the terrain.**The map was constructed by gathering information of the study area, field works at flood areas, and analyses from results of the Landsat 8 Operational Land Imagery (from 2010 to 2014) with the resolution of 30m (retrieved from <http://earthexplorer.usgs.gov>). Furthermore, the location of flood events was also verified by field works carried out in 2014 with handheld GPS devices. In summary, the total number of flood locations during the last five years was recorded to be 76. **It is noted that flood locations were determined by overlaying the flood polygons in the inventory map and the Digital Elevation Model (DEM). Moreover, only pixels in the map that associate with flood points are used to extract the influencing factors used for flood prediction.**

3.1.3 Flood influencing factors

To construct a flood prediction model, besides the flood inventory map, it is crucial to determine the flood influencing factors (Tehrany et al., 2015a). It is worth to notice that the selection of the flood governing factors varies due to different characteristics of study areas and the availability of data (Papaioannou et al., 2015). **Based on the previous work of Tien Bui et al. (2016b), the physical relationships between influencing factors and flood processes have been analyzed. Accordingly, a total of ten influencing factors were selected in this study; they include slope (IF₁), elevation (IF₂), curvature (IF₃), topographic wetness index (TWI) (IF₄), stream power index (SPI) (IF₅), distance to river (IF₆), stream density (IF₇), normalized difference vegetation index (NDVI) (IF₈), lithology (IF₉), and rainfall (IF₁₀). These factors are used to analyze the flood vulnerability for the studied area and a GIS database consisting of the flood inventory map and the chosen factors has been established.**The information of ten conditioning factors of flood occurrence employed in this study is summarized in **Table 1**. The distributions of the ten factors within the studied region are illustrated in **Figure 2**.

Table 1 Flood influencing variables and their category descriptions

Factors	Notation	Description of factor categories
Slope (°)	IF ₁	1 (0 to 0.5); 2 (0.5 to 2); 3 (2 to 5); 4 (5to 8); 5 (8 to 13); 6 (13 to 20); 7 (20 to 30); 8 (>30)
Elevation (100m)	IF ₂	1 (<1); 2 (1 to 2); 3 (2 to 3); 4 (3 to 4); 5 (4 to 5); 6 (5 to 6); 7 (6 to 7); 8 (7 to 10); 9 (10 to 13); 10 (>13)
Curvature	IF ₃	1 (<-2); 2 (-2 to -0.05) ; 3 (-0.05 to 0.05); 4 (0.05 to 2); 5 (>2)
Topographic Wetness Index (TWI)	IF ₄	1 (<6.5); 2 (6.5 to 7.5); 3 (7.5 to 8.5); 4 (8.5 to 9.5); 5 (9.5 to 10.5); 6 (10.5 to 11.5); 7 (11.5 to 12.5); 8 (>12.5)
Stream Power Index (SPI)	IF ₅	1 (<1); 2 (1 to 3); 3 (3 to 5); 4 (5 to 7); 5 (7 to10); 6 (10 to 15); 7 (15 to 20); 8 (20 to 30); 9 (30 to 50); 10 (>50)
Distance to river (m)	IF ₆	1 (<40); 2 (40 to 80); 3 (80 to 120); 4 (120 to 200); 5 (200 to400); 6 (400 to 700); 7 (700 to 1500); 8 (>1500)
Stream density (km/km2)	IF ₇	1 (<1); 2 (1 to 3); 3 (3 to 5); 4 (5 to 7); 5 (7 to9); 6 (>9)
Normalized Difference Vegetation Index (NDVI)	IF ₈	1 (<0.3); 2 (0.3to 0.35); 3 (0.35 to 0.4); 4 (0.4 to 0.45); 5 (0.45 to0.5); 6 (0.5 to 0.55); 7 (0.55 to 0.6); 8 (>0.6)
Lithology (rock type)	IF ₉	1 (Q); 2 (Nkb); 3 (Jmh); 4 (T3npb); 5 (T2); 6 (C-bslk); 7 (D-ntdl); 8 (S2-D1hn); 9 (O3-S1sc3); 10 (O3-S1sc2); 11 (O3-S1sc1); 12 (PR2bk)
Rainfall (1000mm)	IF ₁₀	1 (<1.82); 2 (1.82 to 1.92); 3 (1.92 to 2.02); 4 (2.02 to 2.12); 5 (2.12 to 2.22); 6 (2.22 to 2.32); 7 (2.32 to 2.42); 8 (>2.42)

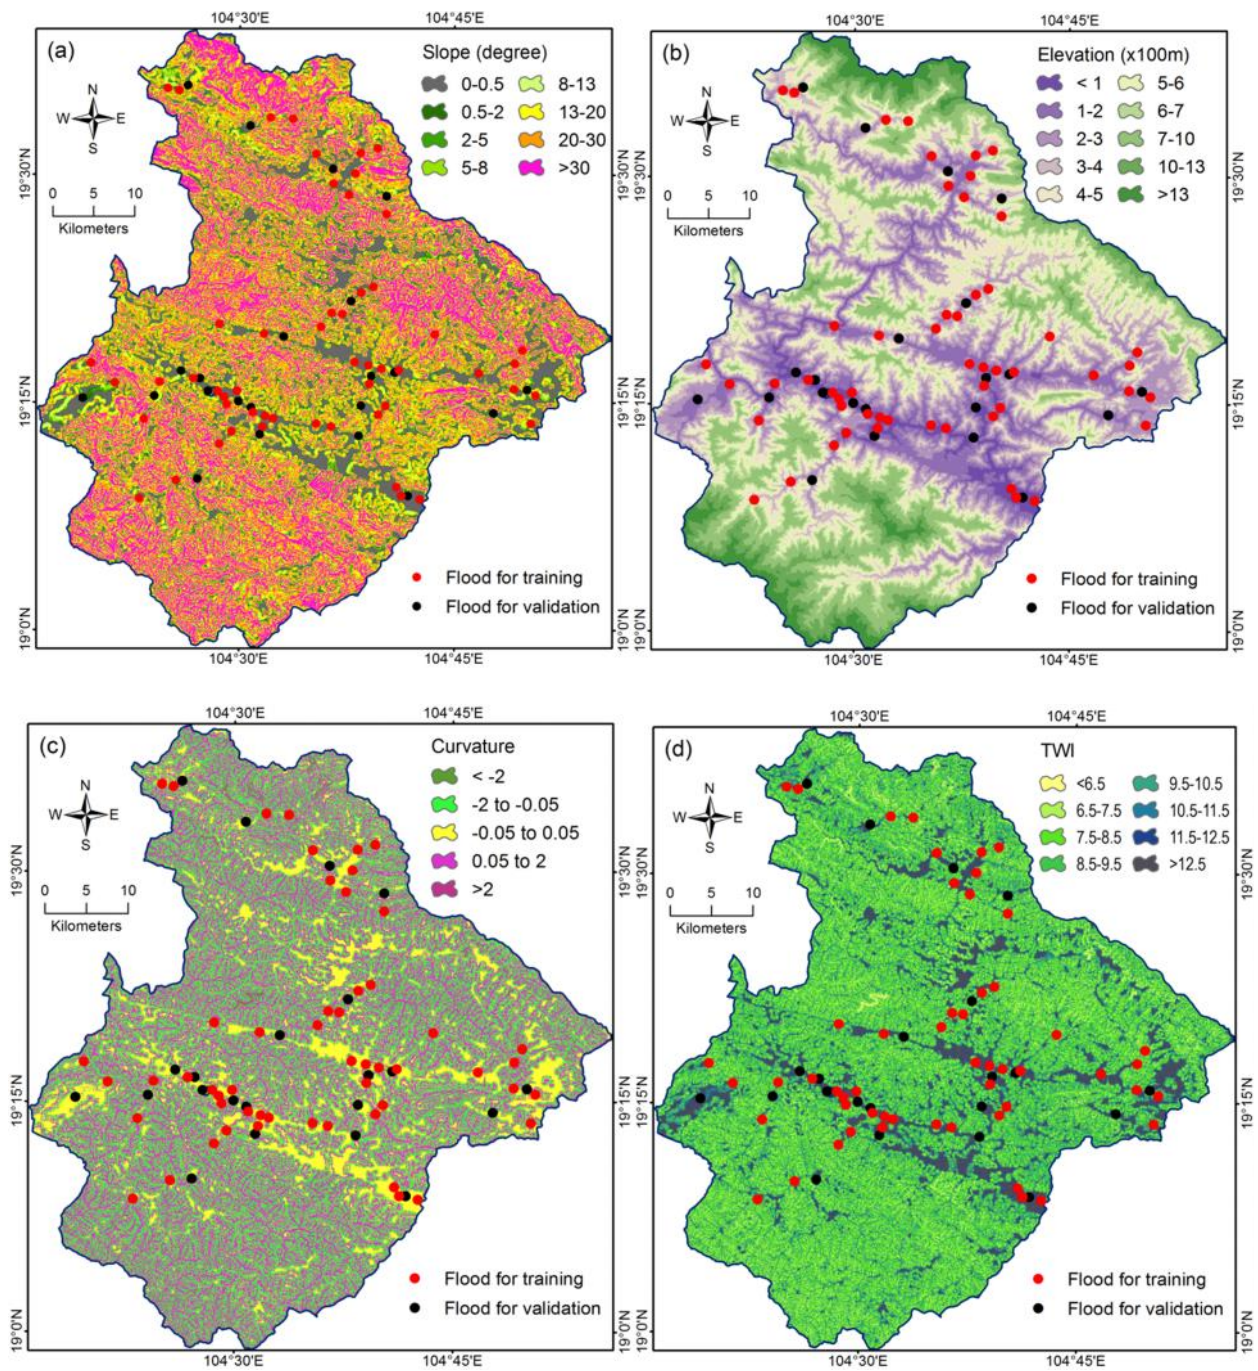


Figure 2 Flood influencing factors: (a) Slope, (b) Elevation, (c) Curvature, (d) Topographic wetness index

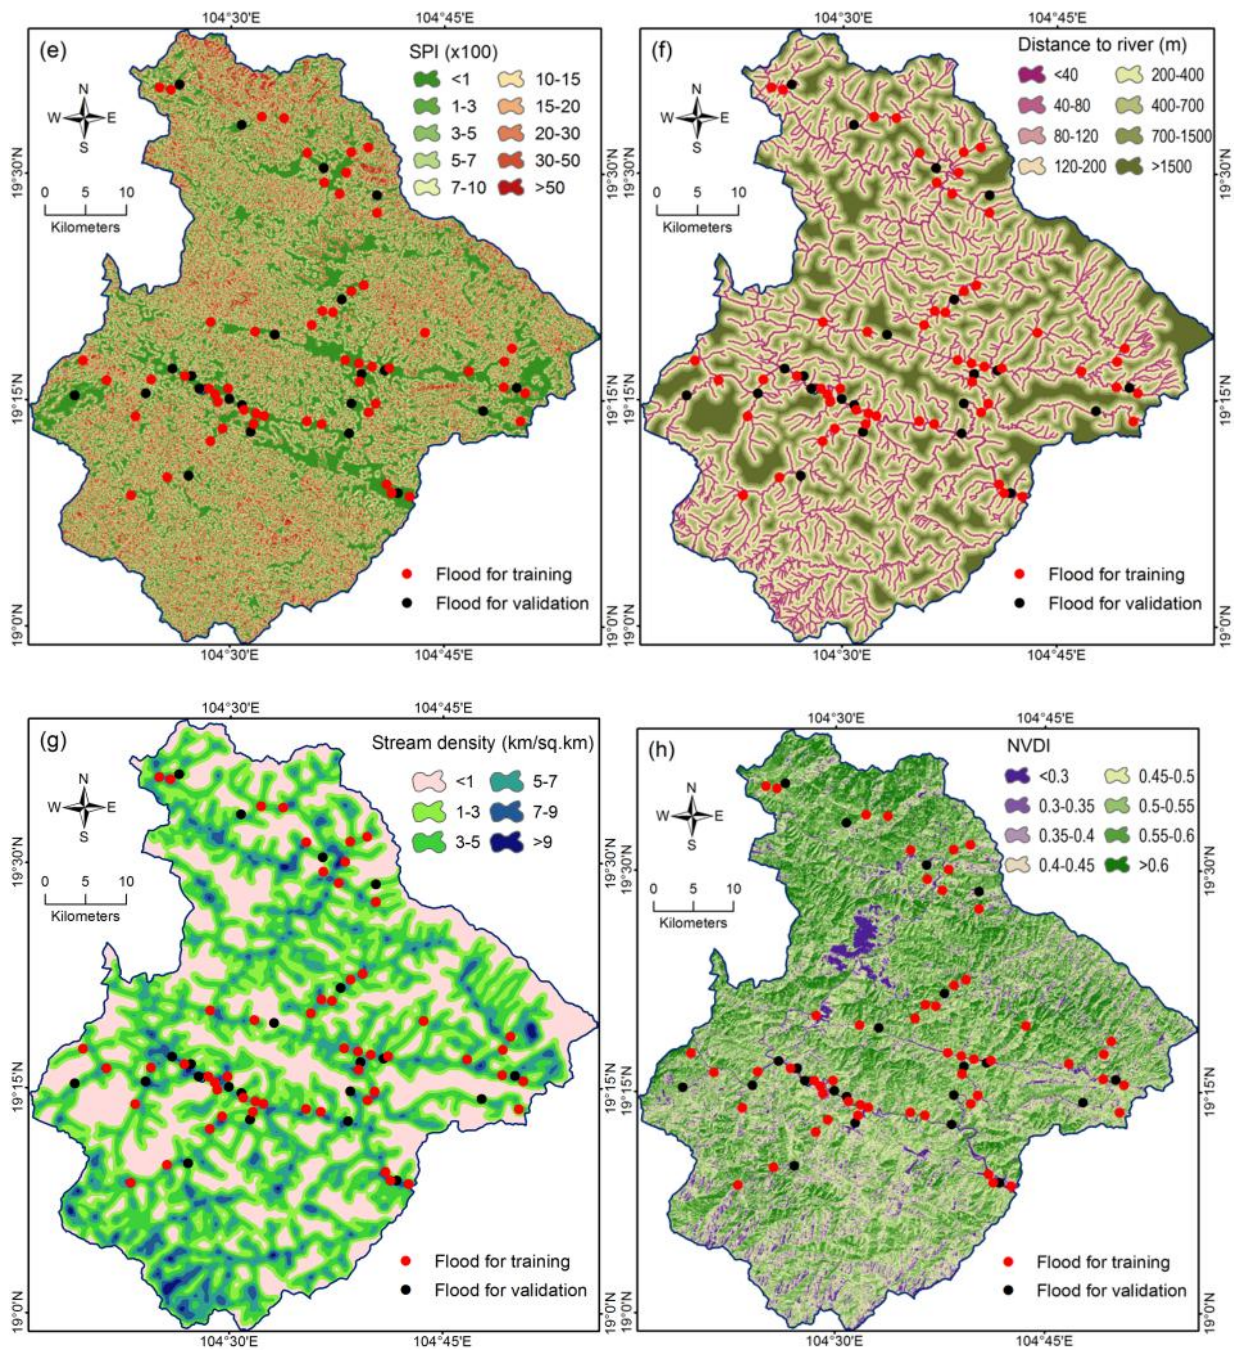


Figure 2 (Cont.) Flood influencing factors: (e) Stream power index, (f) Distance to river, (g) Stream density, (h) Normalized

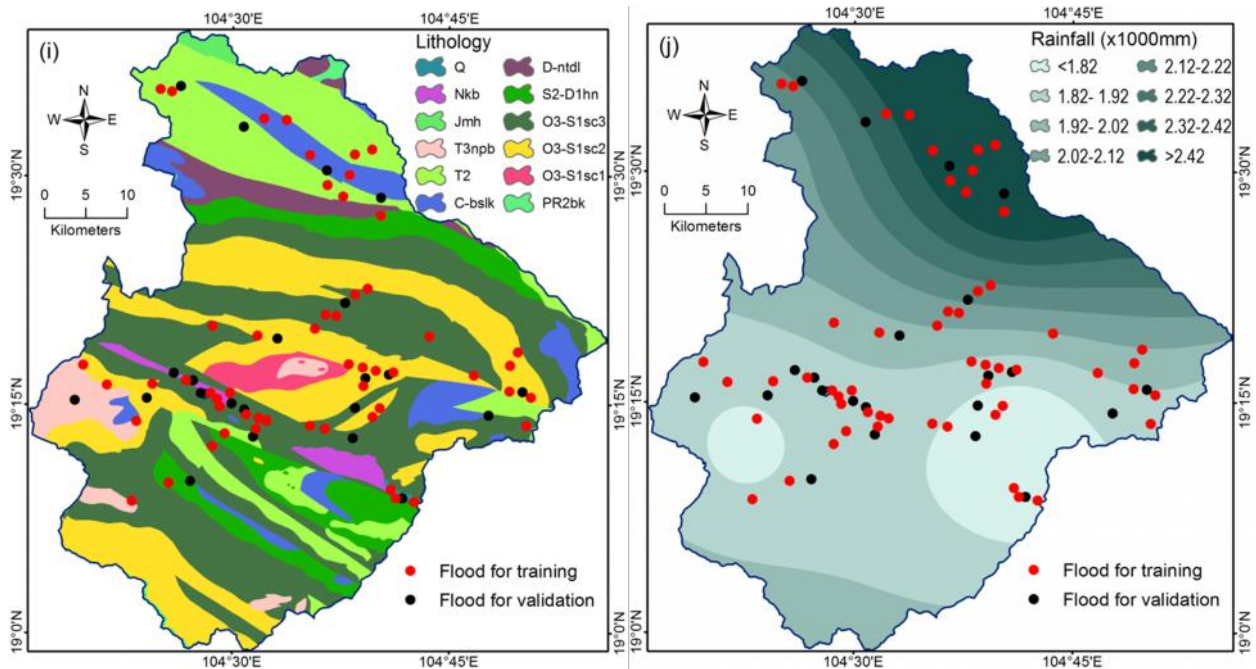


Figure 2 (Cont.) (i) Lithology, (j) Rainfall

3.2 Bayesian Framework for Pattern Classification

The flood prediction in this study is considered as a pattern classification problem within which ‘flood’ and ‘non-flood’ are the two class labels of interest. As a result, the probability of pixels belonging to the flood class, which are derived from the model, will be used as susceptibility indices. These susceptibility indices of the pixels are then used to generate the flood susceptibility map. To cope with the complexity as well as the uncertainty of the problem of interest, Bayesian framework is employed in this study to evaluate the flood susceptibility of each data sample. The Bayesian framework provides a flexible way for probabilistic modeling. This method features a strong ability for dealing with uncertainty and noisy data (Theodoridis, 2015; Cheng and Hoang, 2016). Nevertheless, previous studies have rarely examined the capability of this approach for inferring flood susceptibility.

Basically, pattern classification aims at assigning a pattern to one of $M = 2$ distinctive class labels C_k which k is either 1 or 2. $C_1 = 0$ and $C_2 = 1$ denote the labels of ‘flood’ and ‘non-flood’, respectively. To recognize an input pattern based on the information supplied by its feature vector X , we need to attain the posterior probability $P(C_k|X)$, which indicates the likelihood that the feature vector X falls into a certain group C_k . Based on such information, the pattern will be categorized to

the group with the highest posterior probability. The posterior probability $P(C_k|X)$ is calculated as follows (Webb and Copsey, 2011):

$$P(C_k | X) = \frac{p(X | C_k) \times P(C_k)}{p(X)} \quad (1)$$

where $P(C_k | X)$ denotes the posterior probability. $p(X | C_k)$ represents the likelihood which is also called the class-conditional probability density function (PDF). $P(C_k)$ denotes the prior probability, which implies the probability of the class before any feature is measured. The denominator $p(X)$ is the evidence factor; this quantity is merely a scale factor for guaranteeing that the posterior probabilities are valid; it can be calculated as follows:

$$P(X) = \sum_{k=1}^M p(X | C_k) \times P(C_k) \quad (2)$$

Generally, the prior probabilities $P(C_k)$ can be calculated by computing the ratio of training instances in each class. Thus, the bulk in establishing a Bayesian classification model is to calculate the likelihood $p(X/C_k)$. This likelihood expresses the density of input patterns in the learning space within a certain group of data. In most of situations, $p(X/C_k)$ is unknown and must be estimated from the available data. In this research, the Gaussian mixture model is utilized for computing the $p(X/C_k)$ quantity.

3.3 Gaussian Mixture Model for Density Estimation

3.3.1 Gaussian Mixture Model (GMM)

Generally, density estimation can be defined as the problem of approximating a PDF given a finite number of data instances (Scott, 2015). GMM has been shown to be an effective parametric method for modeling of data distribution especially in high dimensional space (McLachlan and Peel, 2000;Theodoridis and Koutroumbas, 2009). Previous studies (Paalanen, 2004;Figueiredo and Jain, 2002;Gómez-Losada et al., 2014;Arellano and Dahyot, 2016) point out that any continuous distribution can be approximated arbitrarily well by a finite mixture of Gaussian distributions. Due to their usefulness as a flexible modeling tool, GMMs have received an increasing attention from the academic community (Zhang et al., 2016;Khanmohammadi and Chou, 2016;Ju and Liu, 2012).

In a d -dimensional space the Gaussian PDF is defined mathematically in the following form:

$$215 \quad N(x | \mu) = \frac{1}{(2f)^{d/2} |\Sigma|^{1/2}} \exp\left\{-\frac{1}{2}(x - \mu)^T \Sigma^{-1}(x - \mu)\right\} \quad (3)$$

where μ denotes the vector of variable mean and Σ represents the matrix of covariance; and $\mu = \{\mu, \Sigma\}$ denotes a set of distribution parameter.

A GMM is, in essence, an aggregation of several multivariate Normal distributions; hence, its PDF for each data sample is computed as a weighted summation of Gaussian distributions (see **Figure 3**):

$$220 \quad p(x | \Theta) = \sum_{i=1}^k r_i p_i(x | \mu_i) = \sum_{i=1}^k r_i N(x | \mu_i) \quad (4)$$

where $\Theta = \{r_1, r_2, \dots, r_k, \mu_1, \mu_2, \dots, \mu_k\}, \{r_1, r_2, \dots, r_k\}$ is called the mixing coefficients of k Gaussian components

and $\sum_{i=1}^k r_i = 1$.

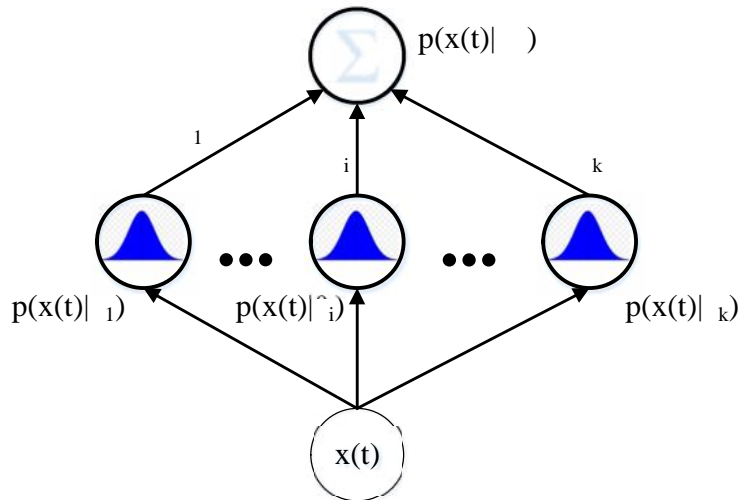


Figure 3 Structure of Gaussian Mixture Model (GMM)

Accordingly, the PDF for all data samples can be expressed as follows (Ju and Liu, 2012):

$$p(X | \Theta) = \prod_{t=1}^n p(x_t | \Theta) = L(\Theta | X) \quad (5)$$

Identifying a GMM's parameters Θ can be considered as unsupervised learning task within which a dataset of independently distributed data points $X = \{x_1, \dots, x_N\}$ generated from an integrated distribution dictated via the PDF $p(X | \Theta)$. The goal is to find the most appropriate value of Θ , denoted as Θ_e , that maximizes the log-likelihood function:

$$\Theta_e = \arg \max_{\Theta} \log(L(X, \Theta)) = \log\left(\prod_{t=1}^n p(x_t | \Theta)\right) = \sum_{t=1}^n \log\left(\sum_{i=1}^k r_i p_i(x_t | \mu_i)\right) \quad (6)$$

Practically, instead of dealing with the log-likelihood function, an equivalent objective function Q is optimized (Ju and Liu, 2012):

$$\text{Max. } Q = \sum_{t=1}^n \sum_{i=1}^k w_{it} \log[r_i p_i(x_t | \mu_i)] \quad (7)$$

where w_{it} is a posteriori probability for the i th class, $i = 1, \dots, k$ and w_{it} satisfies the following conditions:

$$w_{it} = \frac{r_i p_i(x_t | \mu_i)}{\sum_{s=1}^k r_s p_s(x_t | \mu_s)} \text{ and } \sum_{i=1}^k w_{it} = 1 \quad (8)$$

The expectation maximization (EM) algorithm is a standard method to compute Θ_e . Besides the EM method, this study employs an unsupervised learning approach for determining GMMs proposed by Figueiredo and Jain (2002). These two algorithms are briefly reviewed in the next section of the paper.

3.3.2 Learning of finite Mixture Model with the Expectation Maximization (EM) Algorithm

The EM method is a statistical approach to fit a GMM based on historical data; this method converges to a maximum likelihood estimate of model parameters (McLachlan and Krishnan 2008). It can be recapitulated as follows (McLachlan and Peel, 2000). Commencing from an initial parameter Θ_o , an iteration of the EM algorithm consists of the *E-step* in which the current conditional probabilities $p_i(x_t | \mu_i) = N(x_t | \mu_i, \Sigma_i)$ that x_t generated from the i th mixture component are calculated, and the *M-step* within which the maximum likelihood estimates of μ_i are updated. The iteration of EM algorithm terminates when the change value of the objective function is lower than a threshold value.

These two steps of the EM procedure are stated as follows:

E-step: estimating the expected classes of all data samples for each class w_{it} based on Eq. (8).

250 *M-step*: calculating maximum likelihood given the data's class membership distribution using the following equations:

$$r_i^{new} = \frac{1}{n} \sum_{t=1}^n w_{it} \quad (9)$$

$$\tilde{\mu}_i^{new} = \frac{\sum_{t=1}^n w_{it} x_t}{\sum_{t=1}^n w_{it}} \quad (10)$$

$$\Sigma_i^{new} = \frac{\sum_{t=1}^n w_{it} (x_t - \tilde{\mu}_i^{new})(x_t - \tilde{\mu}_i^{new})^T}{\sum_{t=1}^n w_{it}} \quad (11)$$

3.3.3 Unsupervised learning of finite mixture model

255 The EM algorithm increases the log-likelihood iteratively until convergence is detected; and this approach generally can derive a good set of estimated parameters. Nonetheless, EM suffers from low convergence speed in some data sets, high sensitivity to initialization condition, and sub-optimal estimated solutions (Biernacki et al., 2003). Moreover, additional efforts are required to determine an appropriate number of Gaussian distributions within the mixture.

As an attempt to alleviate such drawbacks of EM, Figueiredo and Jain (2002) put forward an unsupervised algorithm
 260 for learning a GMM from multivariate data. The algorithm features the capability of identifying a suitable number of Gaussian components autonomously; and by experiments, the authors show that the algorithm is not sensitive to initialization. In other words, this unsupervised approach incorporates the tasks of model estimation and model selection in a unified algorithm. Generally, this method can initiate with a large number of components. The initial values for component means can be assigned to all data points in the training set; in an extreme case, it is possible to distribute the component
 265 number equal to the data point number. This algorithm gradually fine-tunes the number of mixture components by casting out element of Normal distributions that are irrelevant for the data modeling process (Paalanen, 2004).

Furthermore, Figueiredo and Jain (2002) employed the Minimum Message Length (MML) criterion (Wallace and Dowe, 1999) as an index for model selection; the application of this criterion for the case of GMM learning leads to the following objective function (Figueiredo and Jain, 2002):

$$\Omega(\Theta | X) = \frac{N}{2} \sum_{i: \Gamma_i > 0} \ln\left(\frac{n\Gamma_i}{12}\right) + \frac{C_{nz}}{2} \ln\left(\frac{n}{12}\right) + \frac{C_{nz}(N+1)}{2} - \ln L(X, \Theta) \quad (12)$$

where n denotes the size of the training set, N represents the number of hyper-parameters needed to construct a Gaussian distribution, and C_{nz} is the number of Gaussian distribution component featuring nonzero weight ($\Gamma_i > 0$). Accordingly, the EM method is then utilized to minimize Eq. 12 with a fixed number of C_{nz} .

In detail, the EM algorithm is employed to estimate Γ_i as follows:

$$\Gamma_i^{new} = \frac{\max\{0, (\sum_{t=1}^n w_{it}) - \frac{N}{2}\}}{\sum_{j=1}^k \max\{0, (\sum_{t=1}^n w_{jt}) - \frac{N}{2}\}} \quad (13)$$

Accordingly, the parameters \sim_i^{new} and Σ_i^{new} are updated based on Eq. 10 and 11, respectively. The algorithm stops when the relative decrease in the objective function $\Omega(\Theta | X)$ becomes smaller than a preset threshold (e.g. 10^{-5}).

3.4 Radial Basis Function Fisher Discriminant Analysis for Latent Variable Generation

In machine learning, discriminant analysis presents a highly useful technique to construct relevant input patterns from the original data set. This technique aims at unraveling the underlying structure of the data which is helpful for pattern recognition. Introduced by Mika et al. (1999), the Radial Basis Function Fisher Discriminant Analysis (RBFDA) is an extension of the Fisher Discriminant Analysis for dealing with data nonlinearity. RBFDA can be conveniently utilized to project the feature from the original learning space to a projected space that expresses a high degree of class separability (Theodoridis and Koutroumbas, 2009). Using this kernel technique, the data from an input space I is first mapped into a high dimensional feature space F . Hence, discriminant analysis tasks can be performed nonlinearly in I .

Herein, $W(\cdot)$ is defined as a transformation from an input space I to a high dimensional feature space F , to compute w (the projecting vector), it is necessary to maximize the Fisher discriminant ratio as follows:

$$J(w) = \frac{w^T S_B^w w}{w^T S_W^w w} \quad (14)$$

where $S_B^w = (m_1^w - m_2^w)(m_1^w - m_2^w)^T$ (15)

290

$$S_W^w = \sum_{k=1}^C \sum_{i=1}^{Nk} (W(x_i) - m_k^w)(W(x_i) - m_k^w)^T \quad (16)$$

$$m_k^w = \frac{1}{Nk} \sum_{i=1}^{Nk} W(x_i^k) \quad (17)$$

To obtain w , the kernel trick is applied. Thus, one only needs to establish a formulation of the algorithm which only requires dot-product $W(x) \cdot W(y)$ of the training data and employ kernel functions which calculate $W(x) \cdot W(y)$. The widely-employed Radial Basis Kernel Function (RBKF) is expressed in the following formula (with \dagger denotes the kernel function bandwidth):

295

$$K(x, y) = \exp\left(-\frac{\|x - y\|^2}{2\dagger^2}\right) \quad (18)$$

Since a solution of the vector w lies in the span of all data samples in the projected space, the transformation vector w is shown in the following formula:

$$w = \sum_{i=1}^N r_i W(x_i) \quad (19)$$

300

From Eq. (17) and Eq. (19), we have: $w^T m_k^w = \frac{1}{Nk} \sum_{j=1}^N \sum_{i=1}^{Nk} r_j k(x_j, x_i^k) = r^T M_k$ (20)

where $M_k = \frac{1}{Nk} \sum_{i=1}^{Nk} k(x_j, x_i^k)$

Taking into account the formulas of $J(w)$, S_B^w , as well as Eq. (20), we can restate the numerator of Eq. (14) in the following manner:

$$w^T S_B^w w = r^T M r \quad (21)$$

305 where $M = (M_1 - M_2)(M_1 - M_2)^T$

Similarly, based on the Eq. (17) that defines m_k^w , the denominator of Eq. (14) can be demonstrated in the following way:

$$w^T S_w^w w = r^T N r \quad (22)$$

where $N = \sum_{k=1}^2 K_k (I - 1_{l_k}) K_k^T$; K_k denotes a N -by- N_k kernel matrix with a typical element is $k(x_n, x_m^k)$. I represents the

310 identity matrix and 1_{l_k} is a matrix within which all positions are $1/l_k$.

Considering all Eq. (14), Eq. (21), and Eq. (22), the solution of RBFDA can be found by maximizing:

$$J(r) = \frac{r^T M r}{r^T N r} \quad (23)$$

The optimization problem with the objective function expressed in Eq. (23) is found by identifying the primal eigenvector of $N^{-1}M$. Based on the optimization results, an input patten in I is projected on to a line defined by the vector w in the following manner:

315

$$w.W(x) = \sum_{i=1}^N r_i k(x_i, x) \quad (24)$$


4 The proposed Bayesian Framework for Flood Susceptibility Prediction

4.1 The established GIS database

To formulate a flood assessment model, the first stage is to construct a GIS database (see **Figure 4**) within which locations of past flood events, maps of topographic feature, Landsat 8 data, maps of geological feature, and precipitation statistical records are acquired and integrated. In this study, the data acquisition, processing, and integration were performed with ArcGIS (version 10.2) and IDRISI Selva (version 17.01) software packages.

320

Furthermore, a C++ application has been developed by the authors to transform the flood susceptibility indices into a GIS format for ArcGIS implementation. Accordingly, the compiled outcomes are employed to form a database that includes the aforementioned flood conditioning features with two class outputs: “flood” and “no-flood”. As mentioned earlier, a total of 76 flood locations has been recorded. To balance the dataset and reliably construct the flood prediction model, 76 locations of non-flood areas are randomly sampled and included for analysis. Hence, the total database consists of 152 data samples.

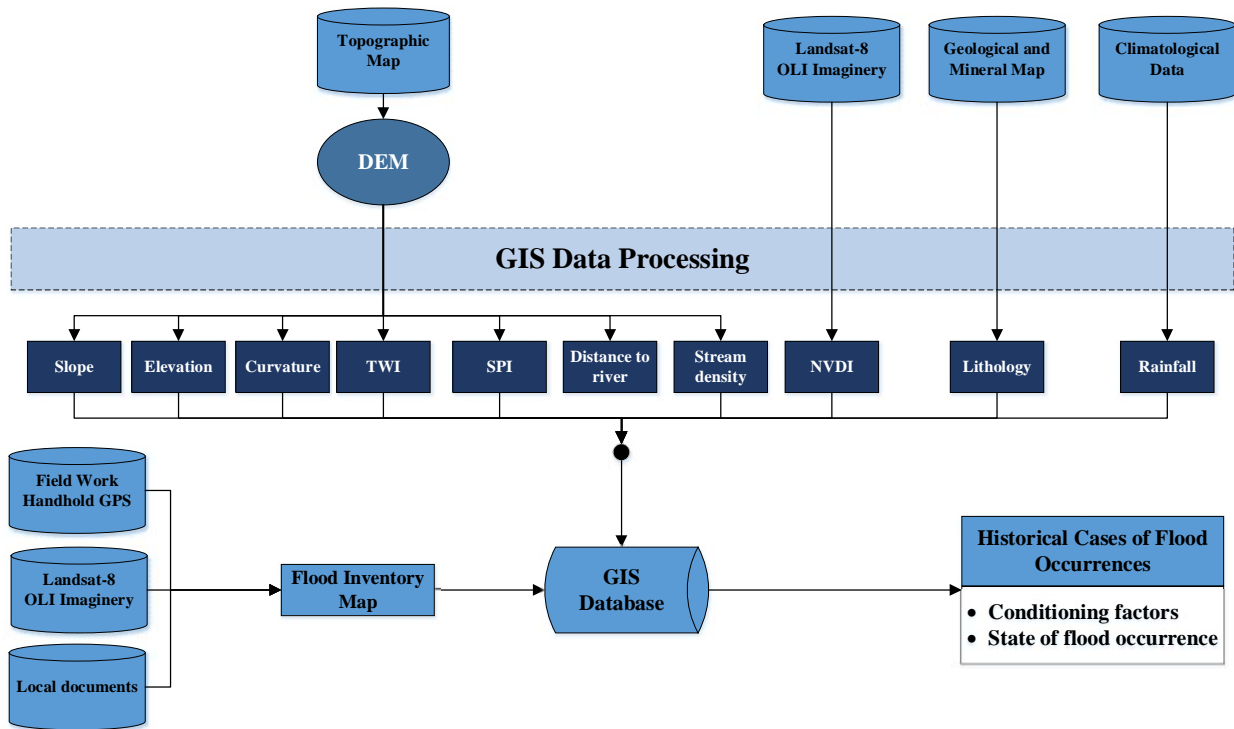

330

Figure 4 The established GIS database

4.2 The Proposed Model Structure

The proposed model for flood vulnerability assessment that incorporates RBFDA, the Bayesian classification framework, and GMM is presented in this section of the study. As stated earlier, the model employs RBFDA as the first level of analysis to generate a latent input factor. This RBFDA-based latent factor aims at expressing a data projection that features the highest data separation. The Bayesian classification framework coupled with GMM is utilized in the next level

335

of analysis within which this framework analyzes all relevant conditioning variables and the newly created latent variable to derive the evaluation result. The overall flowchart of the proposed Bayesian framework based on GMM and RBFDA for flood susceptibility prediction, named as BayGmmKda, is demonstrated in **Figure 5**.

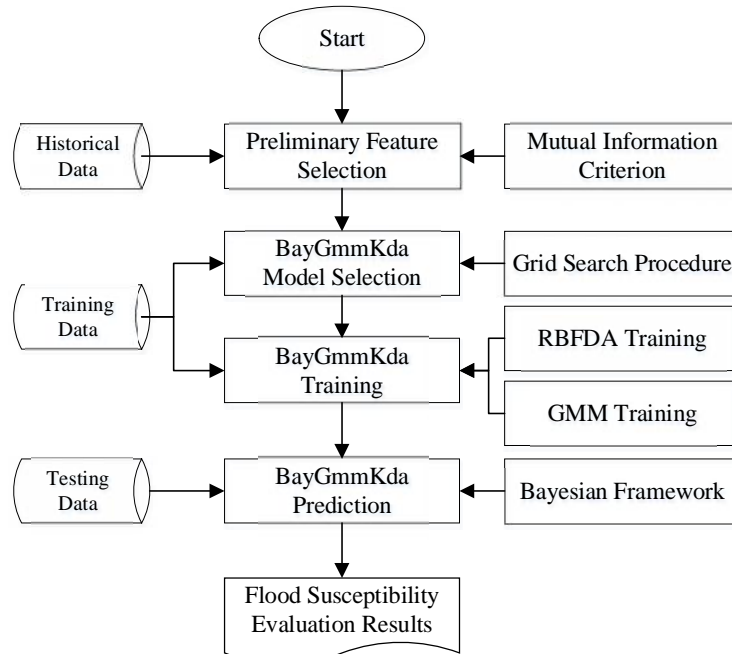


Figure 5 The proposed BayGmmKda

To construct and evaluate the prediction model, the whole dataset, including 152 data samples, is separated into two sets: Training Set (90% or 137 samples) employed for model establishing and Testing Set (10% or 15 samples) used for model testing. It is noted that the input variables of the dataset have been normalized using the Min-Max normalization; the purpose of data normalization is to hedge against the situation of unbalanced variable magnitudes.

Furthermore, it is beneficial to equip the model with an initial feature selection procedure in which the relevancies of flood influencing factors are examined. In this research, the mutual information (Kwak and Choi, 2002;Hoang et al., 2016), a widely employed criterion for feature selection in machine learning, is selected to express the pertinence of each influencing factor to the flood evaluation outcomes (either flood or no-flood). Basically, the mutual information can be defined as a measure of the mutual dependence between the two random variables; this criterion quantifies the amount of information

that can be attained about one random variable through the information of another one (Qian and Shu, 2015). It is noticed
355 that the larger the mutual information, the stronger the relevancy between the flood conditioning factor and the class output.

In addition, to establish the BayGmmKda model, it is required to provide the hyper-parameters of the quantity of
mixture components (k) used in GMM and the kernel function bandwidth (\uparrow) used in RBFDA. It is worth reminding that to
train GMM for density estimation, the model employs two methods: the EM algorithm and the unsupervised algorithm. In
case of the EM algorithm, this study employs the Akaike information criterion (AIC) (Akaike, 1974) to identify an
360 appropriate the number of k . The value of k is allowed to vary from 1 to 20; AIC is then used to select a model that exhibits a
good fit to the data and concurrently requires a few number of mixture components, which indicates less complexity (Olivier
et al., 1999). When the unsupervised GMM learning (Figueiredo and Jain, 2002) is used, the model starts with a maximum
component number of 20, the algorithm autonomously carries out the model selection process by removing irrelevant
mixture components.

365 On the other hand, a simple grid search procedure is performed to select a suitable value of the kernel function
bandwidth (\uparrow) used in RBFDA. Within this grid search, the available values of \uparrow can be one of the following set:
{0.01, 0.05, 0.1, 0.5, 1, 5, 10, 50, 100}; in addition, the Training set is subdivided into Training Subset 1 (90%)
and Training Subset 2 (10%). Thus, the Training Subset 1 plays the role as a training set for constructing BayGmmKda with
a value of \uparrow ; the appropriateness of a hyper-parameter is expressed by the rate of correct classification with the Training
370 Subset 2. The parameter \uparrow corresponding to the highest classification accuracy rate is selected for the prediction phase.

When a suitable set of tuning parameters, including the number of mixture component k and the kernel function
bandwidth (\uparrow), are properly specified, the training phases of RBFDA and GMM can be carried out. Based on the whole
Training Set, RBFDA construct a discriminant analysis based latent variable. GMM is trained based on the original input
factors and the RBFDA-based latent factor. Consequently, based on the class conditioning likelihood estimated by GMM,
375 the Bayesian classification framework is formulated to derive a class output (either flood or no-flood) to a novel input
pattern.

4.3 The Developed Matlab Interface of BayGmmKda

380

It is noted that GMM with the EM training algorithm is implemented with the Matlab statistical toolbox (MathWorks, 2012a); meanwhile, the BayGmmKda performs the unsupervised algorithm with the program code provided by Figueiredo (2002). The RBFDA algorithm and the unified BayGmmKda model have been coded in Matlab by the authors. In addition, a software program with a graphical user interface (GUI) (see **Figure 6**) for the implementation of the BayGmmKda model has been coded in Matlab environment by the authors. The GUI development aims at providing a user-friendly system for performing flood susceptibility predictions.

385

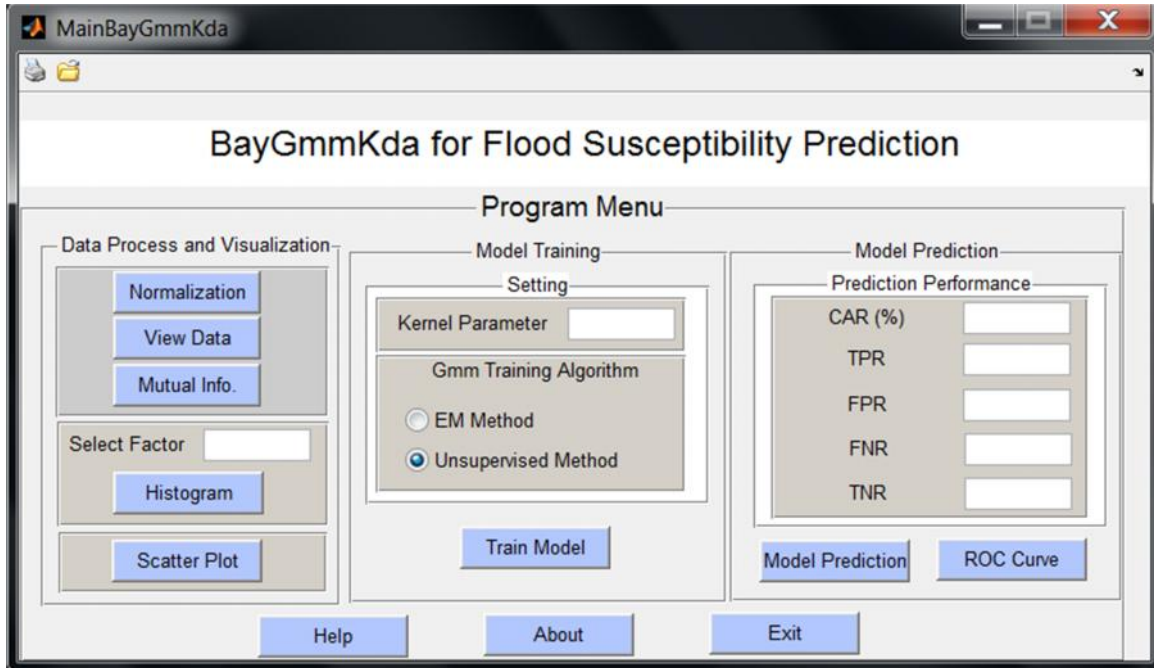


Figure 6 Main Menu of BayGmmKda

390

As shown in **Figure 6**, the program consists of three modules: Data Process and Visualization, Model Training, and Model Prediction. The first module provides basic functions for data inspection and visualization including data normalization, data viewing, and preliminary feature selection with mutual information. In the second module, the users simply provide model parameters including the kernel function parameter and the GMM training method. The trained model is employed to carry out prediction tasks in the third module, within which the model prediction performance is reported.

5. Experimental Results

395 5.1 BayGmmKda Implementation

The outcome of the preliminary examination on the pertinence of flood influencing factors is reported in **Figure 7**. As mentioned earlier, the relevancies of influencing factors are exhibited by the mutual information criterion. Based on the outcome, IF_5 (SPI) features the highest mutual dependence, followed by IF_7 (stream density) and IF_8 (NVDI). Influencing factors of IF_4 (TWI) and IF_{10} (rainfall) exhibit comparatively low values of mutual information. Because **all the** mutual
400 information values are not null, all conditioning factors deem to be relevant and should be retained for the subsequent processes of model training and prediction.

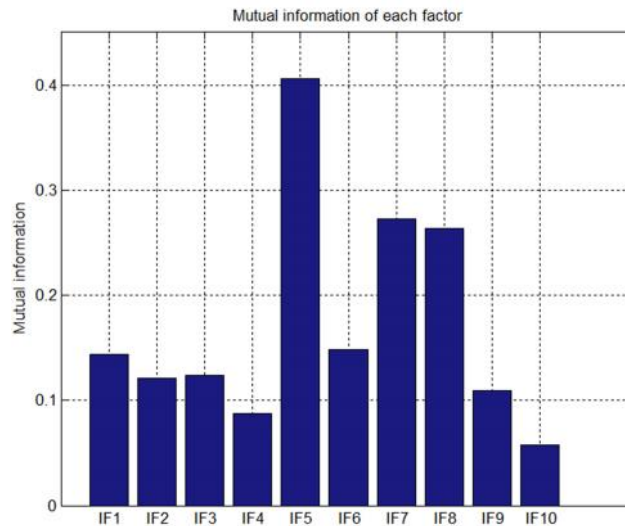


Figure 7 Mutual information of flood conditioning factors

405 It is worth reminding that the BayGmmKda's training phase **is** executed in two consecutive steps: RBFDA training and GMM training. RBFDA analyzes the data in Training Set to establish a latent factor which is a one-dimensional representation of the original input pattern. **Figure 8** illustrates a typical latent factor constructed by RBFDA. In the next step of the training phase, GMM is constructed by the original input patterns with their corresponding labels which **consist** of ten input factors and with the RBFDA -based latent feature.

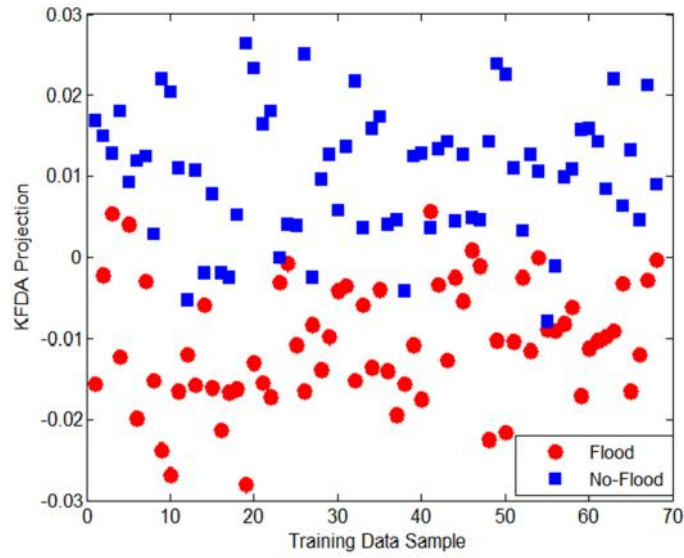


Figure 8 RBFDA-Based Latent Factor Construction

410

Commonly, the classification accuracy rate, denoted as CAR, is employed to exhibit the rate of correctly classified instances. In addition, a more detailed analysis on the model capability can be presented by calculating true positive rate TPR, false positive rate FPR, false negative rate FNR, and true negative rate TNR. **These four rates are** also commonly
 415 utilized to exhibit the predictive capability of a prediction model (Hoang and Tien-Bui, 2016). The four metrics are calculated as follows:

$$TPR = \frac{TP}{TP + FN}; FPR = \frac{FP}{FP + TN}; FNR = \frac{FN}{TP + FN}; TNR = \frac{TN}{TN + FP} \quad (25)$$

where *TP*, *TN*, *FP*, and *FN* **represent** the values of true positive, true negative, false positive, and false negative, respectively.

420

Besides, the two indices of TPR and FPR can be graphically summarized by means of Receiver Operating Characteristic (ROC) curve (van Erkel and Pattynama, 1998). The ROC curve basically demonstrates the trade-off between the two
 425 aforementioned TPR and FPR when the threshold for accepting the positive class of ‘flood’ varies. In addition, the area under the curve of ROC, or AUC for short, can be employed to quantify the classification performance; generally, a better model is characterized by a larger value of AUC.

425

As aforementioned, the data set **is** randomly separated into the Training Set and the Testing Set which occupy 90% and 10% of the data samples, respectively. The Training Set is employed to train the mode; meanwhile, the Testing Set is used

for validating the model capability after being trained. Since one selection of data for the Training Set and the Testing Set may not truly demonstrate the model's predictive capability, this study carries out a repetitive sub-sampling procedure within which 30 experimental runs is carried out. In each experimental run, 10% of the data set is retrieved in a random manner from the database to constitute Testing Set; the rest of the database is included in the Training Set.

430 The testing performance of the proposed Bayesian framework for flood susceptibility is reported in **Table 2** and **Figure 9**, which provides the average ROC curves of the proposed model framework, obtained from the random subsampling process, with two methods of GMM training. Herein, the two Bayesian models that employ the EM algorithm and the unsupervised learning algorithms for training GMM are denoted as BayGmmKda-EM and BayGmmKda-UL, respectively. As can be seen from this table, BayGmmKda with the unsupervised learning algorithm demonstrates clearly better predictive
 435 performance (CAR = 89.58%, AUC = 0.94, TPR = 0.96, TNR = 0.91) than that of the BayGmmKda with EM algorithm (CAR = 86.67%, AUC = 0.93, TPR = 0.95, TNR = 0.85). The performances of BayGmmKda-EM and BayGmmKda-UL are comparable in true positive rates. However, BayGmmKda-UL deems more accurate than BayGmmKda-EM when the two models predicts patterns with negative class label (no-flood).

Table 2 Prediction Results of BayGmmKda

Data Set	CAR (%)	AUC	TPR	FPR	FNR	TNR
<i>Average</i>						
BayGmmKda-EM	86.67	0.93	0.95	0.12	0.15	0.85
BayGmmKda-UL	89.58	0.94	0.96	0.12	0.09	0.91
<i>Standard deviation</i>						
BayGmmKda-EM	6.51	0.07	0.05	0.10	0.12	0.12
BayGmmKda-UL	7.22	0.05	0.04	0.11	0.10	0.10

440

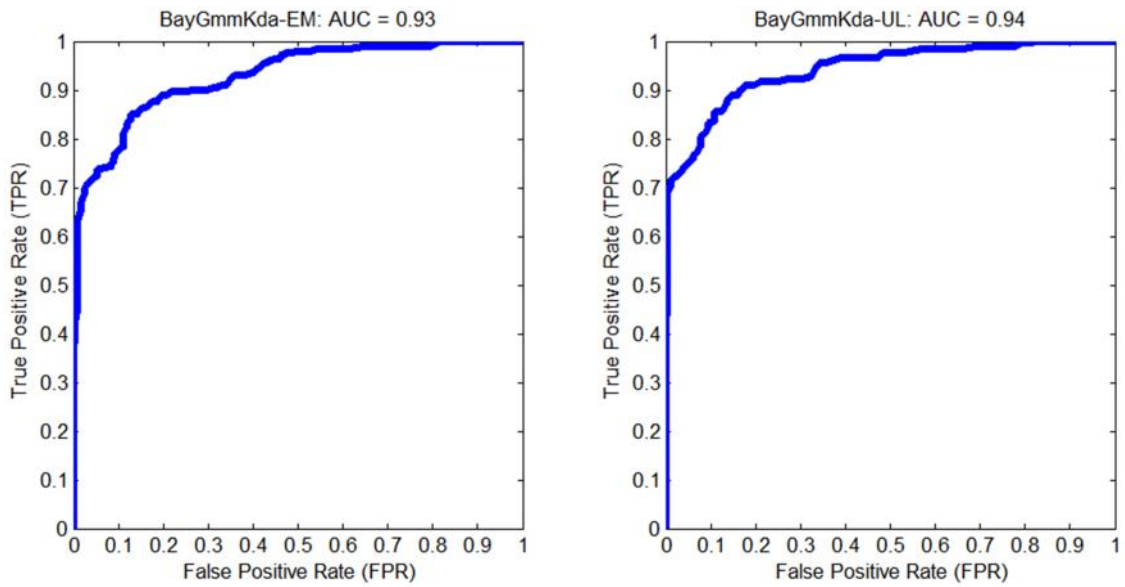


Figure 9 ROC plots of the proposed BayGmmKda

5.2 Result Comparison

445 In this experiment of the current research, the result of the BayGmmKda model is benchmarked with those of other machine learning models including the support vector machine (SVM), the adaptive neuro fuzzy inference system (ANFIS), and the GMM-based Bayesian Classifier. The above soft computing models are chosen for result comparison because SVM and ANFIS have been recently verified to be effective tools for predicting flood vulnerability (Tien Bui et al., 2016b; Tehrani et al., 2015b). It is noted that the GMM-based Bayesian Classifier, denoted as BayGmm for short, is the
 450 Bayesian framework for classification which employs GMM for density estimation, but is not integrated with the RBFDA algorithm.

Furthermore, comparison between BayGmmKda and BayGmm is helpful to confirm the advantage of the newly constructed BayGmmKda and to verify the usefulness of RBFDA in enhancing the discriminative capability of the hybrid framework. Furthermore, since the performance of BayGmmKda-UL is better than that obtained from BayGmmKda-EM,
 455 the proposed BayGmmKda as well as the BayGmm trained by the unsupervised approach (Figueiredo and Jain, 2002) for GMM learning is selected for accuracy comparison in this section.

To construct the SVM model, the model's hyperparameters of the regularization constant (C) and the parameter of the radial basis kernel function (γ) need to be specified. Herein, a grid search process, that is identical to the one used to

identify the kernel function bandwidth used in RBFDA, is employed to fine-tuned such hyperparameters of the SVM. It is noted that SVM method is implemented in Matlab package (MathWorks, 2012b). Meanwhile, the ANFIS model used in this section is trained with the metaheuristic approach described in the previous work of Tien Bui et al. (2016b).

Table 3 Prediction Result Comparison

Models	CAR (%)	AUC	TPR	FPR	FNR	TNR
<i>Average</i>						
BayGmmKda	89.58	0.94	0.96	0.12	0.09	0.91
ANFIS	85.63	0.83	0.84	0.13	0.16	0.87
BayGmm	85.02	0.92	0.82	0.13	0.17	0.88
SVM	83.75	0.82	0.78	0.10	0.22	0.90
<i>Standard deviation</i>						
BayGmmKda	7.22	0.05	0.04	0.11	0.10	0.10
ANFIS	6.17	0.05	0.14	0.10	0.14	0.10
BayGmm	7.24	0.08	0.11	0.10	0.11	0.10
SVM	10.33	0.06	0.16	0.11	0.16	0.11

It is noted that a random subsampling with 30 runs is employed for all models in this experiment. The result comparison between the proposed BayGmmKda and other benchmark methods is reported in **Table 3**. The experimental outcome shows that out that the proposed BayGmmKda, which is a hybridization of GMM, RBFDA and Bayesian framework, yields the best values of CAR = 89.58% and AUC = 0.94. ANFIS (CAR = 85.63%, AUC = 0.83) is the second best model, followed by BayGmm (85.02%, AUC = 0.92) and SVM (83.75%, AUC = 0.82).

Furthermore, to better confirm the superiority of the proposed method, the Wilcoxon signed-rank test, a non-parametric test, is employed to analyze the model prediction outcomes. This approach is commonly employed to evaluate whether classification outcomes of prediction models are significantly dissimilar. It is noted that the assumption of normality in the data is not required for the implementation of the Wilcoxon signed-rank test. It is noted that the significance level of the statistical test is usually set to be 0.05.

Using this test, the p -values that obtained from experimental results of the four models can be computed; based on the threshold value of 0.05, if the p -value falls below the threshold, we can reject the null hypotheses the prediction outcomes attained from the two models are statistically similar. Outcomes of the Wilcoxon signed-rank test is reported in **Table 4**. It is

noted that the signs “++”, “+”, “--”, and “-” represent a significant win, a win, a significant loss, and a loss, respectively. Thus, the test reliably confirms that proposed BayGmmKda achieves significant wins over all other models (ANFIS, BayGmm, and SVM).

480

Table 4 Model Comparison Based on the Wilcoxon signed-rank test

	BayGmmKda	ANFIS	BayGmm	SVM
BayGmmKda		++	++	++
ANFIS	--		+	+
BayGmm	--	-		+
SVM	--	-	-	

5.3 Construction of Flood Susceptibility Map with the Proposed BayGmmKda Model

Experimental outcomes have indicated that BayGmmKda can deliver the best flood susceptibility prediction for the district of Tuong Duong (in Central Vietnam). Accordingly, in this section, the proposed model is utilized to compute the flood vulnerability index for all pixels within this studied district. The computed outcomes have been converted to GIS format and used to construct a flood susceptibility map by means of the ArcGIS 10.2 software package.

485

The flood susceptibility map (see **Figure 10**) has been combined with the map of flood inventory to compute the percentage of the flood locations and the percentage of the susceptibility map; accordingly, we can obtain a graphic curve which visualizes five flood hazard levels: very high (10%), high (10%), moderate (10%), low (20%), and very low (50%). A further examination on the constructed flood vulnerability map reveals that that 10% of the Tuong Duong district was categorized as ‘very high’ and this category covers 73.68% of the total number of flood locations. Meanwhile, the levels of ‘high’ and ‘moderate’ both cover 10% of the region and account for 15.79% and 7.9% of the flooded locations, respectively. The levels of ‘low’ and ‘very low’ aggregately cover 70% of the map but they only contain 2.63% of the total number of flood locations. Particularly, 50% of the district, which is categorized to the hazard level of ‘very low’, contains no flood location. Furthermore, it can be seen that approximately 89% of the recorded floods occurred in the areas of ‘very high’ and ‘high’ levels of flood hazard as indicated by BayGmmKda. This fact strongly verifies the reliability of the proposed Bayesian framework.

490

495

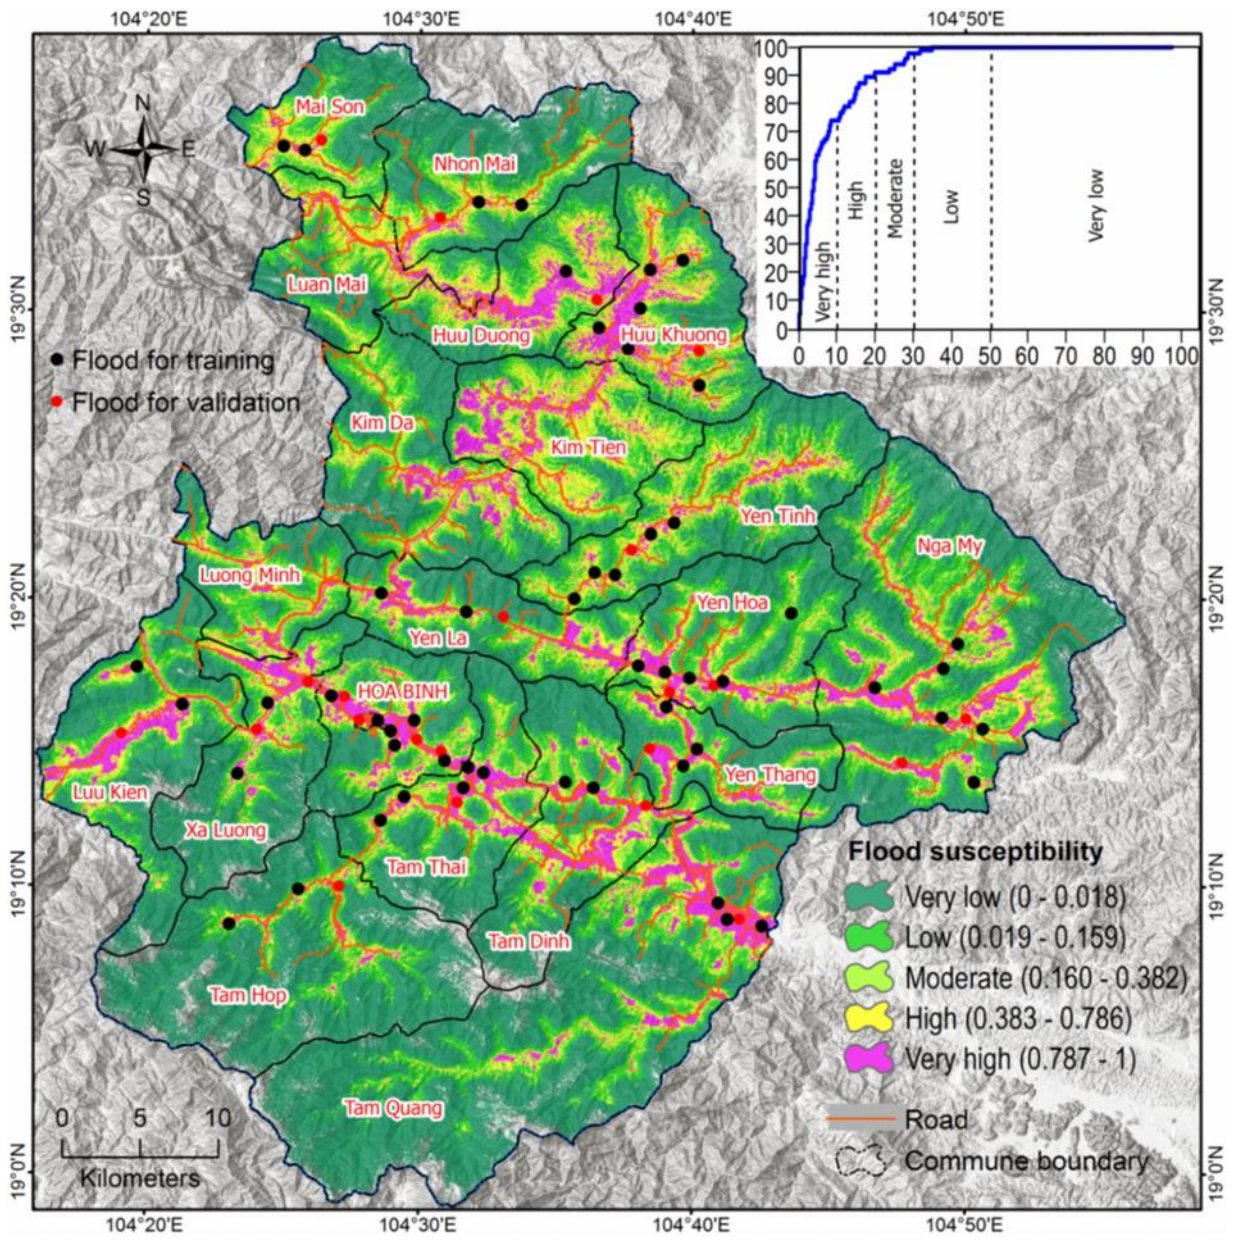


Figure 10 The constructed flood susceptibility map for the study area

6. Conclusion

505 This research has developed a new tool, named as BayGmmKda, for flood susceptibility evaluation with the data collected in the Tuong Duong district (in Central Vietnam). The newly constructed model is a Bayesian framework for classification with the utilizations of GMM for density approximation and RBFDA for discriminant analysis. A GIS database has been established to train and test the BayGmmKda method. The training phase of BayGmmKda can be divided into two steps: discriminant analysis with RBFDA in which a latent factor is generated and density estimation using GMM. After the training phase, the Bayesian framework is employed to compute the posterior probability of the two class labels (flood and no-flood). Furthermore, a Matlab program with GUI has been developed to ease the implementation of the BayGmmKda model in flood vulnerability assessment.

510 It is noted that in this study, the GMM training is performed with two methods: the EM algorithm and the unsupervised learning approach. Furthermore, a repeated subsampling process with 30 experimental runs is carried to evaluate the model prediction outcome. The subsampling process verified by statistical test confirms that the GMM method trained by the unsupervised learning approach has attained a better prediction accuracy compared with the EM algorithm. Therefore, this method of GMM learning is strongly recommended for other studies in the same field.

515 Furthermore, the experiments demonstrate that the latent factor created by RBFDA is really helpful in boosting the classification accuracy of the BayGmmKda model. This melioration in accuracy of the BayGmmKda stems from its integrated learning structure. As described earlier, the classification task is performed by a hybridization of discrimination analysis and Bayesian framework. The Bayesian model carried out the classification task by consideration the patterns in the original dataset and an additional factor produced from the discrimination analysis.

525 Result comparison pointed out that the BayGmmKda is superior to other benchmark approaches including ANFIS and SVM. Therefore, the proposed model, featured by its high predictive accuracy and the capability of delivering probabilistic outputs, is a promising alternative for flood susceptibility prediction. Nevertheless, the proposed method also suffers from several drawbacks. BayGmmKda is a data-driven tool; thus, field works at the studied area and data analyses from remote sensing are necessary for the model construction phase. These data collecting and analyzing can be time-consuming. Furthermore, a grid search procedure is used for hyper-parameter setting and this process also requires a high computational

cost especially for large-scale data sets. In addition, the outcome of this grid search procedure may not be optimal; more advanced mode selection approaches (e.g. metaheuristics) can be utilized to further improve the model accuracy. Future extensions of this research may include the model application in flood prediction for other study areas, investigations of other flood conditioning factors (e.g. streamflow and antecedent soil moisture) which may be relevant for flood analysis, and improving the current model with other novel soft computing methods (e.g. feature selection, pattern classification, dimension reduction, metaheuristic optimization, etc.). to alleviate the aforementioned drawbacks as well as to enhance the model performance.

7. Code availability

The Matlab code of the BayGmmKda model is given in the Supplement.

8. Data availability

The dataset used in this research is given in the Supplement.

540 Acknowledgements

Data for this research are from the Project No. B2014-02-21 and were provided by Dr. Quoc-Phi Nguyen (Hanoi University of Mining and Geology, Vietnam)

References

- 545 Akaike, H.: A new look at the statistical identification model, IEEE Trans. Automat. Control., 19, 716–723, 10.1109/TAC.1974.1100705, 1974.
- Arellano, C., and Dahyot, R.: Robust ellipse detection with Gaussian mixture models, Pattern Recognit., 58, 12-26, <http://dx.doi.org/10.1016/j.patcog.2016.01.017>, 2016.
- 550 Biernacki, C., Celeux, G., and Govaert, G.: Choosing starting values for the EM algorithm for getting the highest likelihood in multivariate Gaussian mixture models, Comput. Stat. Data. Anal., 41, 561-575, [http://dx.doi.org/10.1016/S0167-9473\(02\)00163-9](http://dx.doi.org/10.1016/S0167-9473(02)00163-9), 2003.
- Bubeck, P., Botzen, W., and Aerts, J.: A review of risk perceptions and other factors that influence flood mitigation behavior, Risk. Anal. , 32, 1481–1495, 10.1111/j.1539-6924.2011.01783.x, 2012.
- 555 Candy, A. S., Avdis, A., Hill, J., Gorman, G. J., and Piggott, M. D.: Integration of Geographic Information System frameworks into domain discretisation and meshing processes for geophysical models, Geosci. Model Dev. Discuss., 2014, 5993-6060, 10.5194/gmdd-7-5993-2014, 2014.
- Cheng, M.-Y., and Hoang, N.-D.: Slope Collapse Prediction Using Bayesian Framework with K-Nearest Neighbor Density Estimation: Case Study in Taiwan, J. Comput. Civ. Eng., 30, 04014116, doi:10.1061/(ASCE)CP.1943-5487.0000456, 2016.
- 560 Chou, J.-S., and Tsai, C.-F.: Concrete compressive strength analysis using a combined classification and regression technique, Autom. Constr., 24, 52-60, <http://dx.doi.org/10.1016/j.autcon.2012.02.001>, 2012.

- Dottori, F., Salamon, P., Bianchi, A., Alfieri, L., Hirpa, F. A., and Feyen, L.: Development and evaluation of a framework for global flood hazard mapping, *Adv. Water Resour.*, 94, 87-102, <http://dx.doi.org/10.1016/j.advwatres.2016.05.002>, 2016.
- 565 Fenicia, F., Savenije, H. H. G., Matgen, P., and Pfister, L.: Understanding catchment behavior through stepwise model concept improvement, *Water Resour. Res.*, 44, n/a-n/a, 10.1029/2006WR005563, 2008.
- Figueiredo, M. A. T.: <http://www.lx.it.pt/~mtf/>, Access Date: 01/04/2016, 2002.
- Figueiredo, M. A. T., and Jain, A. K.: Unsupervised learning of finite mixture models, *IEEE Trans. Pattern Anal. Mach. Intell.*, 24, 381-396, 10.1109/34.990138, 2002.
- 570 Gómez-Losada, Á., Lozano-García, A., Pino-Mejías, R., and Contreras-González, J.: Finite mixture models to characterize and refine air quality monitoring networks, *Sci. Total Environ.*, 485-486, 292-299, <http://dx.doi.org/10.1016/j.scitotenv.2014.03.091>, 2014.
- Hoang, N.-D., and Pham, A.-D.: Hybrid artificial intelligence approach based on metaheuristic and machine learning for slope stability assessment: A multinational data analysis, *Expert. Syst. Appl.*, 46, 60-68, <http://dx.doi.org/10.1016/j.eswa.2015.10.020>, 2016.
- 575 Hoang, N.-D., and Tien-Bui, D.: A Novel Relevance Vector Machine Classifier with Cuckoo Search Optimization for Spatial Prediction of Landslides, *J. Comput. Civ. Eng.*, 30, 04016001, 10.1061/(ASCE)CP.1943-5487.0000557, 2016.
- Hoang, N.-D., and Tien Bui, D.: Predicting earthquake-induced soil liquefaction based on a hybridization of kernel Fisher discriminant analysis and a least squares support vector machine: a multi-dataset study, *B. Eng. Geol. Environ.*, 1-14, 10.1007/s10064-016-0924-0, 2016.
- 580 Hoang, N.-D., Tien Bui, D., and Liao, K.-W.: Groutability estimation of grouting processes with cement grouts using Differential Flower Pollination Optimized Support Vector Machine, *Appl. Soft Comput.*, 45, 173-186, <http://dx.doi.org/10.1016/j.asoc.2016.04.031>, 2016.
- Jia, X., Morel, G., Martell-Flore, H., Hissel, F., and Batoz, J.-L.: Fuzzy logic based decision support for mass evacuations of cities prone to coastal or river floods, *Environ. Modell. Softw.*, 85, 1-10, <http://dx.doi.org/10.1016/j.envsoft.2016.07.018>, 2016.
- 585 Ju, Z., and Liu, H.: Fuzzy Gaussian Mixture Models, *Pattern Recognit.*, 45, 1146-1158, <http://dx.doi.org/10.1016/j.patcog.2011.08.028>, 2012.
- Judi, D. R., Burian, S. J., and McPherson, T. N.: Two-Dimensional Fast-Response Flood Modeling: Desktop Parallel Computing and Domain Tracking, *J. Comput. Civ. Eng.*, 25, 184-191, doi:10.1061/(ASCE)CP.1943-5487.0000064, 2011.
- 590 Kazakis, N., Kougias, I., and Patsialis, T.: Assessment of flood hazard areas at a regional scale using an index-based approach and Analytical Hierarchy Process: Application in Rhodope-Evros region, Greece, *Sci Total Environ.*, 538, 555-563, <http://dx.doi.org/10.1016/j.scitotenv.2015.08.055>, 2015.
- 595 Kia, M. B., Pirasteh, S., Pradhan, B., Mahmud, A. R., Sulaiman, W. N. A., and Moradi, A.: An artificial neural network model for flood simulation using GIS: Johor River Basin, Malaysia, *Environ. Earth Sci.*, 67, 251-264, 10.1007/s12665-011-1504-z, 2012.
- Kreft, S., Eckstein, D., Junghans, L., Kerestan, C., and Hagen, U.: Global climate risk index 2015: Who suffers most from extreme weather events, Report from Germanwatch, 1-31, 2014.
- 600 Kwak, N., and Choi, C.-H.: Input feature selection by mutual information based on Parzen window, *IEEE Trans. Pattern Anal. Mach. Intell.*, 24, 1667-1671, 10.1109/TPAMI.2002.1114861, 2002.

- Khanmohammadi, S., and Chou, C.-A.: A Gaussian mixture model based discretization algorithm for associative classification of medical data, *Expert. Syst. Appl.*, 58, 119-129, <http://dx.doi.org/10.1016/j.eswa.2016.03.046>, 2016.
- 605 Lee, M. J., Kang, J. e., and Jeon, S.: Application of frequency ratio model and validation for predictive flooded area susceptibility mapping using GIS, In *Proc. of the 2012 IEEE International Geoscience and Remote Sensing Symposium*, 2012, 895-898,
- Loo, Y. Y., Billa, L., and Singh, A.: Effect of climate change on seasonal monsoon in Asia and its impact on the variability of monsoon rainfall in Southeast Asia, *Geosci. Front.*, 6, 817-823, <http://dx.doi.org/10.1016/j.gsf.2014.02.009>, 2015.
- 610 MathWorks: *Statistics Toolbox*, The MathWorks, Inc., 2012a.
- MathWorks: *Bioinformatics Toolbox*, The MathWorks, Inc., 2012b.
- McLachlan, G., and Peel, D.: *Finite Mixture Models*, Wiley-Interscience; 1 edition, Printed United States 2000.
- McLachlan, G., and Krishnan, T.: *The EM Algorithm and Extensions*, 2nd Edition, Wiley Series in Probability and Statistics, John Wiley & Sons, Hoboken, New Jersey, USA, 2008.
- 615 Mika, S., Rätsch, G., Weston, J., Schölkopf, B., and Müller, K.: Fisher discriminant analysis with kernels, In *Proc. of the 1999 IEEE Neural Networks for Signal Processing*, Madison, WI, 23 Aug 1999-25 Aug 1999, 41-48, 10.1109/NNSP.1999.788121, 1999.
- Mukerji, A., Chatterjee, C., and Raghuvanshi, N. S.: Flood Forecasting Using ANN, Neuro-Fuzzy, and Neuro-GA Models, *J. Hydrol. Eng.*, 14, 647-652, doi:10.1061/(ASCE)HE.1943-5584.0000040, 2009.
- 620 Olivier, C., Jouzel, F., and Matouat, A. E.: Choice of the Number of Component Clusters in Mixture Models by Information Criteria, In *Proc. of the Vision Interface '99*, May 18-21 1999, Trois-Rivieres, Quebec, Canada, 74 - 81, 1999.
- Paalanen, P.: Bayesian classification using Gaussian mixture model and EM estimation: implementations and comparisons, Technical Report, Department of Information Technology, Lappeenranta University of Technology, 2004.
- 625 Papaioannou, G., Vasiliades, L., and Loukas, A.: Multi-criteria analysis framework for potential flood prone areas mapping, *Water. Resour. Manage.*, 29, 399-418., 2015.
- Pulvirenti, L., Pierdicca, N., Chini, M., and Guerriero, L.: An algorithm for operational flood mapping from Synthetic Aperture Radar (SAR) data using fuzzy logic, *Nat. Hazards Earth Syst. Sci.*, 11, 529-540, 10.5194/nhess-11-529-2011, 2011.
- 630 Qian, W., and Shu, W.: Mutual information criterion for feature selection from incomplete data, *Neurocomputing*, 168, 210-220, <http://dx.doi.org/10.1016/j.neucom.2015.05.105>, 2015.
- Radmehr, A., and Araghinejad, S.: Developing Strategies for Urban Flood Management of Tehran City Using SMCDM and ANN, *J. Comput. Civ. Eng.*, 28, 05014006, doi:10.1061/(ASCE)CP.1943-5487.0000360, 2014.
- 635 Reynaud, A., and Nguyen, M.-H.: Valuing Flood Risk Reductions, *Environ. Model. Assess.*, 21, 603-617, 10.1007/s10666-016-9500-z, 2016.
- Rezaeianzadeh, M., Tabari, H., Arabi Yazdi, A., Isik, S., and Kalin, L.: Flood flow forecasting using ANN, ANFIS and regression models, *Neural. Comput. & Applic.*, 25, 25-37, 10.1007/s00521-013-1443-6, 2014.
- 640 Sahoo, B., Chatterjee, C., Raghuvanshi, N. S., Singh, R., and Kumar, R.: Flood Estimation by GIUH-Based Clark and Nash Models, *J. Hydrol. Eng.*, 11, 515-525, doi:10.1061/(ASCE)1084-0699(2006)11:6(515), 2006.
- Sanyal, J., and Lu, X.: Application of remote sensing in flood management with special reference to monsoon Asia: a review, *Nat. Hazards*, 33, 283-301, 2004.

- 645 Scott, D. W.: *Multivariate Density Estimation Theory, Practice, and Visualization*, 2nd Edition, John Wiley & Sons, Hoboken, New Jersey, United States, 2015.
- Seckin, N., Cobaner, M., Yurtal, R., and Haktanir, T.: Comparison of Artificial Neural Network Methods with L-moments for Estimating Flood Flow at Ungauged Sites: the Case of East Mediterranean River Basin, Turkey, *Water. Resour. Manage.*, 27, 2103-2124, [10.1007/s11269-013-0278-3](https://doi.org/10.1007/s11269-013-0278-3), 2013.
- 650 Shahabi, H., and Hashim, M.: Landslide susceptibility mapping using GIS-based statistical models and Remote sensing data in tropical environment, *Scientific Reports*, 5, 9899, [10.1038/srep09899](https://doi.org/10.1038/srep09899), 2015.
- Shahangian, B., and Pourghassem, H.: Automatic brain hemorrhage segmentation and classification algorithm based on weighted grayscale histogram feature in a hierarchical classification structure, *Biocybern. Biomed. Eng.*, 36, 217-232, <http://dx.doi.org/10.1016/j.bbe.2015.12.001>, 2016.
- 655 Tehrany, M. S., Pradhan, B., and Jebur, M. N.: Flood susceptibility analysis and its verification using a novel ensemble support vector machine and frequency ratio method, *Stoch. Environ. Res. Risk. Assess.*, 29, 1149-1165, [10.1007/s00477-015-1021-9](https://doi.org/10.1007/s00477-015-1021-9), 2015a.
- Tehrany, M. S., Pradhan, B., Mansor, S., and Ahmad, N.: Flood susceptibility assessment using GIS-based support vector machine model with different kernel types, *CATENA*, 125, 91-101, <http://dx.doi.org/10.1016/j.catena.2014.10.017>, 2015b.
- 660 Tien Bui, D., Nguyen, Q. P., Hoang, N.-D., and Klempe, H.: A novel fuzzy K-nearest neighbor inference model with differential evolution for spatial prediction of rainfall-induced shallow landslides in a tropical hilly area using GIS, *Landslides*, 1-17, [10.1007/s10346-016-0708-4](https://doi.org/10.1007/s10346-016-0708-4), 2016a.
- Tien Bui, D., Pradhan, B., Nampak, H., Bui, Q.-T., Tran, Q.-A., and Nguyen, Q.-P.: Hybrid artificial intelligence approach based on neural fuzzy inference model and metaheuristic optimization for flood susceptibility modeling in a high-frequency tropical cyclone area using GIS, *J. Hydrol.*, 540, 317-330, <http://dx.doi.org/10.1016/j.jhydrol.2016.06.027>, 2016b.
- 665 Theodoridis, S., and Koutroumbas, K.: *Pattern Recognition*, Academic Press, Elsevier Inc., Printed in the United States of America, 2009.
- Theodoridis, S.: *Machine Learning: A Bayesian and Optimization Perspective*, Academic Press, Elsevier, Printed in The United States, 2015.
- 670 van Erkel, A. R., and Pattynama, P. M. T.: Receiver operating characteristic (ROC) analysis: Basic principles and applications in radiology, *Eur. J. Radiol.*, 27, 88-94, [http://dx.doi.org/10.1016/S0720-048X\(97\)00157-5](http://dx.doi.org/10.1016/S0720-048X(97)00157-5), 1998.
- Wallace, C. S., and Dowe, D. L.: Minimum Message Length and Kolmogorov Complexity, *Comput. J.*, 42, 270-283, [10.1093/comjnl/42.4.270](https://doi.org/10.1093/comjnl/42.4.270), 1999.
- 675 Webb, A. R., and Copsey, K. D.: *Statistical Pattern Recognition*, John Wiley & Sons, United Kingdom, 2011.
- Winsemius, H. C., Van Beek, L. P. H., Jongman, B., Ward, P. J., and Bouwman, A.: A framework for global river flood risk assessment, *Hydrol. Earth. System. Sci.*, 17, 1871-1892, [10.5194/hess-17-1871-2013](https://doi.org/10.5194/hess-17-1871-2013), 2013.
- Zhang, G., Mahfouf, M., Abdulkareem, M., Gaffour, S.-A., Yang, Y.-Y., Obajemu, O., Yates, J., Soberanis, S. A., and Pinna, C.: Hybrid-modelling of compact tension energy in high strength pipeline steel using a Gaussian Mixture Model based error compensation, *Appl. Soft Comput.*, 48, 1-12, <http://dx.doi.org/10.1016/j.asoc.2016.06.007>, 2016.
- 680 Zhou, Z., Liu, S., Zhong, G., and Cai, Y.: Flood Disaster and Flood Control Measurements in Shanghai, *Nat. Hazards Rev.*, Just Released, [10.1061/\(ASCE\)NH.1527-6996.0000213](https://doi.org/10.1061/(ASCE)NH.1527-6996.0000213), 2016.