

## REPLY TO REFEREE #1

The authors are grateful to the referee for the positive feedback and the constructive comments. We accept them all and acknowledge the help in improving the manuscript. Our point by point replies are highlighted in red below as well as in the revised manuscript (to be submitted after the comments from Referee #2 will become available).

### Specific comments:

P4/I14: not clear if fixed pressure levels are used. I suggest to write "...are pressures of the fixed pressure levels. . ."

Agreed. Text has been changed according to the referee comment in the revised manuscript.

P5/I24: this is better referred to as "linear combination" than "polynomial".

Agreed. Text has been changed according to the referee comment in the revised manuscript.

P6/I10: say here which LBL model has been used.

Agreed. Text concerning LBL model has been moved earlier in the revised manuscript, according to the referee comment.

P6/I10: is it justified to say that only 83 profiles cover the variability of humidity and temperature?

This profile set has been assembled at ECMWF to represent the range of variations in temperature and absorber amount found in the real atmosphere. This set was sampled from a large profile dataset containing 121,462,560 profiles generated using the experimental suite of the ECMWF forecasting system. To make this point clear, we added a new reference and the following sentence in the revised manuscript:

"It is important to emphasise that this profile set was carefully chosen from a set of more than 100 million profiles to represent a wide range of physically realistic atmospheric states (Matricardi, 2008)."

P6/I34: use "state vector" instead of "profile vector".

Agreed. Text has been changed according to the referee comment in the revised manuscript.

P7/I10:  $\gamma$  should be bold in the denominator.

Thanks much for spotting this typo. It has been modified in the revised manuscript.

P8/I5: refer to table 2.

At P8/I5 we refer to Table 1, which presents the results for the dependent profile set. We refer to Table 2 at P9/I24, where the results for the independent profile set are discussed. Hope this clarifies, otherwise don't hesitate to let us know.

P8/I31: in this and the following sentence you use twice "underestimate" which does not seem to make sense. Please check.

Agreed. We checked and confirm that “underestimate” is correct in both sentences. However, to make it more clear we modified the sentence as follows:

“However, in such a case where the optical depths are underestimated, then the atmosphere as a whole is too transparent”.

P10/l8: why does it make sense to compare RTTOV-gb to two other implementations of R98? Would it not be more sensible to use different absorption models. For ARTS one could use individual LBL calculation rather than the predefined models. Please comment.

As stated in P9/l40 of the original manuscript, “In this analysis, ARTS settings for absorption model have been selected to adopt as much as possible the same absorption model as RTTOV-gb”. Indeed, the goal of that analysis is to test the fast RT modeling (RTTOV-gb) with respect to accurate but slower LBL calculation, all the other settings (including gas absorption model) being equal. To make this point more clear the following sentence has been added:

“Since the goal of this analysis is to test the fast RT modeling (RTTOV-gb) with respect to accurate LBL calculation, all other settings being equal, ARTS settings for absorption model have been selected to adopt as much as possible the same absorption model as RTTOV-gb”.

## REPLY TO REFEREE #1 – Add on

After reading the comments from Referee #2 we modified to shorten Section 3.1. Thus, one of our reply to Referee #1 is changed slightly as follows.

### Specific comments:

**P8/I31:** in this and the following sentence you use twice “underestimate” which does not seem to make sense. Please check.

**Agreed. We checked and confirm that “underestimate” is correct in both sentences. However, to make it more clear we modified the text as follows:**

**“For the satellite (down-looking) case, these effects tend to compensate due to a warmer background (e.g. overestimated optical depths cause more emission from the atmosphere but less contribution from the relative warmer background)”.**

## REPLY TO REFEREE #2

The authors are grateful to the referee for the constructive comments. We revised the manuscript accordingly. Our point by point replies are shown in red hereafter, while modifications to the text are highlighted in yellow within the revised manuscript (modifications in red are made according to the referee #1 comments).

### General comment:

Numerical weather prediction (NWP) uses input from a large number of observation systems, but ground-based microwave radiometers (MWRs) are not yet considered despite that these instrument should provide valuable additional information. The preferred manner to incorporate remote sensing data is to assimilate measured radiances (instead of making use of external retrievals) and this requires that a radiative transfer model for the observation system is at hand. The forward models used at NWP centres presently lack treatment of MWRs, and this manuscript presents an extension of the RTTOV model to remove this shortcoming. This is a valuable contribution that fits with the scope of the journal.

That said, the value of the manuscript depends critically on if the extension actually becomes part of future releases of RTTOV, or not. The manuscript is not clear on this point, the extension is just said to be "under discussion". My review below will be based on the assumption that the extension will be accepted. If this will not happen, I think the manuscript has to change focus. This is the case as the manuscript is of little interest for extending any other fast forward model, the discussion is quite specific for RTTOV.

Further, the 1D-var examples shown (Sec 3.4) could have been performed with many other forward models, i.e. they could have been obtained without extending RTTOV. That is, I encourage the authors to confirm that the extension will be incorporated into the official RTTOV version.

We agree with the referee this aspect is important. However, it does not depend totally on the authors. Indeed, for RTTOV-gb to become part of future releases of RTTOV it would require additional efforts from NWP SAF for documentation, maintenance, user support, etcetera. This is currently not planned within NWP SAF activities. However, we started the process and this issue has been recently discussed at the NWP SAF Steering Group meeting. We are also looking for opportunities for funding these activities.

The alternative option is to release RTTOV-gb as a stand-alone package through the TOPROF website. Users will still have to sign a license agreement with NWP SAF before they can download the package, but TOPROF will be responsible for documentation, maintenance, user support, etcetera.

If the NWP SAF Steering Group will not recommend the integration of RTTOV-gb in future RTTOV releases, the alternative option will definitely be pursued. This may be sought as an intermediate step, which would minimize the NWP SAF efforts without hampering the development of ground-based MWR data assimilation. Based on the successful outcome of these activities, the integration of RTTOV-gb in RTTOV may be reconsidered in the future.

In this perspective, RTTOV-gb will be made available one way or the other and thus we believe this issue shall not affect the value of the manuscript.

To make this point clearer, we modified the text as follows in the revised manuscript: "The conditions of release of RTTOV-gb are currently under discussion among NWPSAF and COST action TOPROF. This may happen through an integration of RTTOV-gb into future RTTOV releases or as a stand-alone package disseminated through the TOPROF website."

Specific comments:

Page 2, line 8: Why parenthesis around "in cloudy areas"? It causes confusion, is it from WMO, or your own comment?

The statement "in cloudy areas" comes from WMO. We removed parenthesis in the revised manuscript.

Page 2, line 9: How do you define the acronym? It is below used to mean both one or several radiometers.

The acronym "MWR" stands for "microwave radiometers" (i.e. plural). We modified the revised manuscript accordingly.

Page 3, line 33: What are the approximations? Make sure that what you write here is synced with the text in page 4, line 7.

The Radiative Transfer Equation in equation (2) assumes negligible scattering. This is stated just after Equation (2). Note that the liquid water contribution is included in the transmittance profile just as other absorbing gaseous species. This is consistent with what stated at page 4, line 7.

Eq 2: It is highly confusing to use tau as symbol for transmittance. Tau is the standard symbol for optical depth (as you also noticed on page 4, line 34). Please consider to change notation. Maybe you follow the standard notation in RTTOV, but I don't see that as a sufficiently strong argument.

We agree with the referee that tau is a common notation for optical depth. We used tau for transmittances in the manuscript to be consistent with the RTTOV nomenclature (used in several papers and ECMWF technical memoranda) and with the names of the variables used in the RTTOV/RTTOV-gb code. The authors here aim to be as consistent as possible with the RTTOV notation in public literature and code. This is also strategic in the perspective of RTTOV-gb integration into RTTOV official releases (as already discussed in the general comment above). We hope this makes a sufficiently strong argument.

Page 3, line 37: To define a transmittance, you must give two points (here just TOA).

Agreed. Text has been changed according to the referee comment in the revised manuscript.

Page 4, line 22: The term describes the contribution of cosmic background radiation.

Agreed. Text has been changed according to the referee comment in the revised manuscript.

Page 5, line 8: For consistency, unit for CLW should be added.

Agreed. The CLW unit has been added in the revised manuscript.

Page 5, line 23: Don't see the logic behind "Thus" here. Is there not even a contradiction between the sentence before and including "Thus"? Just remove the first sentence and "Thus" in the second one? Anyhow, I did not follow this part before reaching Eq 9.

Agreed. The sentence has been modified according to the referee comment in the revised manuscript.

Page 6, line 13: By using the word "optimally" you imply that you have considered all possible combinations. Is that really true?

The statement "optimally" refers to the best set of elevation angles found among the considered configurations. For each configuration, we chose 6 elevation angles within the elevation angle range of commercial MWR (90-0°). Note that we did not consider very low elevation angles, since the predictors were originally developed for satellite simulations up to 15° elevation angle.

However, we agree with the reviewer that the statement "optimally" may be misleading and thus decided to remove it in the revised manuscript.

Page 7, line 15: What is the transpose of software code?

As opposite to the TL code, which inputs state vector profile and outputs radiances, the AD code inputs radiances and outputs state vector profiles. Thus, the AD code is often referred to as the transpose of the TL code. But we agree with the referee this sounds like a jargon and thus we removed it in the revised manuscript.

Page 7, line 26: Should it be "employment"?

Sorry, we meant "exploitation". Thanks for spotting this typo. It has been modified in the revised manuscript.

Sec 3.1: A lot of details (with low interest) in this section. Particularly, I don't see the point with all the tables. I don't argue about this further, just encourages the authors to consider a shortening of the section.

In order to address the referee's comment, we shortened Section 3.1 in the revised manuscript. However, we prefer to keep the Tables, as we believe they are useful to the discussion and provide a reference for potential future RTTOV-gb users.

Page 8, line 13: Here you use V-band without introduction. Very few knows the definition of these "bands". Why not just use frequencies?

Agreed. We now introduce the frequency bands in the revised manuscript: "Channels from 22 to 31 GHz are in the so called K-band while channels from 51 to 58 GHz are in the so-called V-band." We prefer to use "V-band" and "K-band" instead of repeating the channel frequencies every time.

Comparison with ARTS: According to Fig 5 there is a significant deviation to ARTS already for "clear sky", but my understanding of the text is that the same absorption models are used for oxygen and water absorption. So why is the "bias" bigger here than in Fig 3? This seems to indicate a deviation already between LBL R98 and ARTS. Have you checked this?

We do expect differences larger in Fig. 5 (RTTOV-gb vs ARTS) than in Fig. 3 (RTTOV-gb vs LBL), due to the reasons discussed in the manuscript: (1) larger regression error (Fig. 5 shows results from a dataset completely independent from the training set) and (2) larger computing differences (ARTS uses radiative transfer routines completely independent from the ones used by RTTOV-gb and LBL).

However, we agree with the reviewer that Fig.5 shows unexpected large bias at the three most transparent V-band channels (i.e. 51.26, 52.28, and 53.25 GHz). Indeed, the difference between LBL R98 and ARTS confirms systematic differences below 0.1 K at all but the above three channels. This may be due to small differences in the implementation of the R98 gas absorption and/or the radiative transfer code. We discussed this with ARTS developers and plans were made to further investigate. We added the following text to Section 3.1 for clearing this point: "This is dominated by a bias contribution induced by systematic differences found between LBL and ARTS at these three channels (~0.3-0.5 K, not shown). This may be caused by small differences in the implementation of the R98 gas absorption and/or the radiative transfer code. This issue is currently under investigation, though its understanding goes beyond the scope of this paper."

Sec 3.4: When reading about OSSE in the abstract, I expected much more than this. The section shows some test retrievals (by 1d-var/OEM) with a priori taken from a model. I don't know if there exists an official definition of OSSE, but I expected to find a much more elaborated exercise (e.g. 4d-var) when OSSE was mentioned. That is, I recommend to not denote this as an OSSE.

As specified in the abstract, the acronym "OSSE" stands for "Observing-System Simulation Experiment". We neither know of an official definition. To our understanding (\*), OSSE requires simulated observations with simulated errors to be drawn from a simulated atmosphere and provided to a data assimilation system to produce estimates of the atmospheric state. An OSSE involves the following steps: 1) Generate a "nature" atmosphere; 2) Compute synthetic observations; 3) Assimilate the synthetic observations; and 4) Assess the impact. These steps have been followed in our analysis. The only difference with respect to the elaborated exercise the referee mention to is that we perform a 1D- instead of a 3D- or 4D-VAR experiment. But this is clearly stated in the abstract ("RTTOV-gb has been applied as the forward model operator within a 1-Dimensional Variational (1D-Var) software tool in an Observing-System Simulation Experiment"). Therefore, we prefer to leave it as is. A more extensive evaluation of RTTOV-gb in a 3D-Var experiment is planned as subject of our future work.

(\*) e.g. see

<https://cimss.ssec.wisc.edu/model/osse/osse.html>

<http://gmao.gsfc.nasa.gov/projects/osse/>

Qpack + ARTS speed: As I did not understand the relation between Qpack2 and ARTS (that should be explained clearer in the manuscript), I asked a colleague that I had heard mention Qpack. He happened to notice the comment on calculation speed and then said that the speed of ARTS depends critically on several settings. Moreover, he also said that using ARTS through Qpack2 means a lot of overhead and if the Jacobian calculation is clocked inside Qpack2 this does not necessarily reflect the true performance of ARTS. Without understanding the details here, I must still ask if these issues have been considered?

In the revised manuscript, we chose to remove the mention to Qpack2. Qpack2 is really not relevant here, as Jacobians can be computed directly from ARTS. Indeed, tests on computing speed were made directly on ARTS (i.e. no use of Qpack2).

Nonetheless, we agree with the Referee that ARTS computing speed depends on several settings. We discussed with the ARTS developers a way to perform this comparison properly, and realized it needs a close collaboration of the two teams. We leave this for future work, as it goes beyond the scope of the present manuscript.

To satisfy the Referee comment, we keep just a conservative statement in the revised manuscript: "Of course the priority of LBL models is more accuracy than speed, though settings may be tuned to improve the computation performances. Although a detailed analysis on computation speed goes beyond the scope of this paper, we found that RTTOV-gb is faster than our implementation of ARTS (Martinet et al. 2015) for both the direct and Jacobian calculations."

Similarly, in the Summary: "As expected, RTTOV-gb demonstrates to be faster than the line-by-line models such as ARTS for both the direct and the Jacobians calculation"

In addition, is the calculation speed of RTTOV-gb really the main contribution? Considering the relatively low number of MWRs and their relatively low number of channels, compared to all satellite data, I assume that NWP centre easily could afford a slow forward model to assimilate MWR data. However, they would still tend to ignore MWR data as long as those data require usage of an additional forward model. This another way to express why it is critical if this extension will be part of the official RTTOV or not.

We agree with the referee that the calculation speed of RTTOV-gb is not the main contribution, due to the relative low number of ground-based MWR observations. We concur that NWP centers hardly accept new forward models, as this means additional efforts in terms of implementation and maintenance. This is the reason why we decided to adapt RTTOV despite the availability of other RT codes, whose speed may have been enough for the purpose.

We concur the main point is that RTTOV-gb works exactly the same as RTTOV from the user perspective, making the technical overheads for implementation and maintenance minimal. This shall make the road to ground-based MWR data assimilation at NWP centers easier.

Following the referee's comment, we include the following text to the revised manuscript (Section 4): "As from the user perspective RTTOV-gb works exactly the same as RTTOV, its implementation and



maintenance shall require minimal technical overheads at those NWP centers already using RTTOV. This shall facilitate the road towards the data assimilation of ground-based MWR worldwide.”

**Sec 6: Place this section before Conclusions.**

We moved Section 6 (Code and data availability) one section earlier, just after Section 4 (Summary). This follows the GMD “Manuscript types” guidelines: “Inclusion of Code and/or data availability sections is mandatory for all papers and should be located at the end of the article, after the conclusions, and before any appendices or acknowledgements.”

See the link below for more details:

[http://www.geoscientific-model-development.net/about/manuscript\\_types.html](http://www.geoscientific-model-development.net/about/manuscript_types.html)

# RTTOV-gb - Adapting the fast radiative transfer model RTTOV for the assimilation of ground-based microwave radiometer observations

Francesco De Angelis<sup>1</sup>, Domenico Cimini<sup>2,1</sup>, James Hocking<sup>3</sup>, Pauline Martinet<sup>4</sup>, Stefan Kneifel<sup>5</sup>.

<sup>1</sup>CETEMPS, University of L'Aquila, L'Aquila, Italy

<sup>2</sup>IMAA-CNR, Potenza, Italy

<sup>3</sup>MET OFFICE, Exeter, United Kingdom

<sup>4</sup>METEO FRANCE – CNRM/GAME, Toulouse, France

<sup>5</sup>INSTITUTE FOR GEOPHYSICS AND METEOROLOGY, University of Cologne, Cologne, Germany

*Correspondence to:* F. De Angelis (francesco.deangelis1@graduate.univaq.it)

**Abstract.** Ground-based microwave radiometers (MWR) offer a new capability to provide continuous observations of the atmospheric thermodynamic state in the planetary boundary layer. Thus, they are potential candidates to supplement radiosonde network and satellite data to improve numerical weather prediction (NWP) models through a variational assimilation of their data. However in order to assimilate MWR observations a fast radiative transfer model is required and such a model is not currently available. This is necessary for going from the model state vector space to the observation space at every observation point. The fast radiative transfer model RTTOV is well accepted in the NWP community, though it was developed to simulate satellite observations only. In this work, the RTTOV code has been modified to allow for simulations of ground-based upward looking microwave sensors. In addition, the Tangent Linear, Adjoint, and K-modules of RTTOV have been adapted to provide Jacobians (i.e. the sensitivity of observations to the atmospheric thermodynamical state) for ground-based geometry. These modules are necessary for the fast minimization of the cost function in a variational assimilation scheme. The proposed ground-based version of RTTOV, called RTTOV-gb, has been validated against accurate and less time-efficient line-by-line radiative transfer models. In the frequency range commonly used for temperature and humidity profiling (22-60 GHz), root-mean-square brightness temperature differences are smaller than typical MWR uncertainties ( $\sim 0.5$  K) at all channels used in this analysis. Brightness temperatures (TB) computed with RTTOV-gb from radiosonde profiles have been compared with nearly simultaneous and colocated ground-based MWR observations. Differences between simulated and measured TB are below 0.5 K for all channels except for the water vapor band, where most of the uncertainty comes from instrumental errors. The Jacobians calculated with the K-module of RTTOV-gb have been compared with those calculated with the brute force technique and those from the line-by-line model ARTS. Jacobians are found to be almost identical, except for liquid water content Jacobians for which a 10% difference between ARTS and RTTOV-gb at transparent channels around 450hPa is attributed to differences in liquid water absorption models. Finally, RTTOV-gb has been applied as the forward model operator within a 1-Dimensional Variational (1D-Var) software tool in an Observing-System Simulation Experiment (OSSE). For both temperature and humidity profiles, the 1D-Var with RTTOV-gb improves the retrievals with respect to NWP model in the first few kilometers from the ground.

## 1 Introduction

The planetary boundary layer (PBL) is the single most important under-sampled part of the atmosphere (National Research Council, 2008). While the thermodynamical state of the atmosphere is well measured at the surface by ground in-situ sensors and in the upper troposphere by satellite sounders, there is currently an observational gap in the PBL. According to the WMO Statement Of Guidance For Global Numerical Weather Prediction (WMO, 2014), there are four priorities for atmospheric variables not adequately measured in the PBL: wind profiles, temperature and humidity profiles **in cloudy areas**, precipitation, and snow mass. Ground-based microwave radiometers (MWR) provide temperature and humidity profiles in both clear- and cloudy-sky conditions with high temporal resolution and low-to-moderate vertical resolution, with information mostly residing in the PBL (Cimini et al., 2006). Ground-based MWR offer to bridge the current observational gap by providing continuous temperature and humidity profiles in the PBL. When combined with satellite observations, the total information content of the derived atmospheric profiles can be significantly enhanced (Ebell et al., 2013). The data assimilation (DA) of MWR observations into numerical weather prediction (NWP) models may be particularly important in nowcasting and severe weather (fog, convection, turbulence, etc.) initiation. The assimilation of MWR data has been recently investigated (Cimini et al., 2014; Caumont et al 2015), assimilating temperature and humidity profile retrievals from a network of 13 MWR members from the international MWRnet network (Cimini et al., 2012). Results showed neutral-to-positive impact. However, these experiments used retrieved variables (temperature and humidity profiles) whereas the assimilation of raw measurement (TBs) is found more **performing** in the case of satellite data (Geer et al., 2008).

Accordingly, a potential way to increase the impact of MWR DA is to assimilate measured radiances (or brightness temperatures, TB) directly instead of retrieved profiles. With this type of assimilation, all the degrees of freedom for signal of MWR (Löhnert et al., 2009) can be used to improve the NWP model forecast in the PBL. In order to assimilate TB, a radiative transfer (RT) forward model is needed. The RT model allows to compute the TB for selected radiometer channels based on the NWP model state vector. TB differences between the modeled and measured observations can be used within a variational scheme (Courtier et al., 1998) that takes the corresponding uncertainties into account to retrieve temperature and humidity profiles in the first few kilometers from the ground, where **MWR provide** the maximum information content. In addition, the Jacobians (i.e. partial derivatives with respect to the state vector) of the radiative transfer model are required to minimize the distances of the atmospheric state from both the first guess and the observations in a variational data assimilation process. These Jacobians represent the sensitivities of observations to the atmospheric thermodynamical state.

The fast RT model RTTOV (Radiative Transfer for the TIROS Operational Vertical Sounder (TOVS)) is widely used to simulate radiances from space-borne passive sensors. RTTOV has already been used for many years by many national meteorological services for assimilating down-looking observations from visible, infrared, and microwave radiometers, spectrometers and interferometers (Hocking et al., 2015 and references therein) aboard satellite platforms. The FORTRAN-90 code originally developed at ECMWF in the early 90's (Eyre, 1991) was intended for TOVS direct radiance assimilation within 3- and 4-dimensional variational analysis schemes (3DVAR, 4DVAR). Subsequently the original code has gone through several developments (e.g. Saunders et al.,

1999; Matricardi et al., 2001), more recently within the EUMETSAT NWPSAF, of which RTTOV v11.3 is the latest version available. Since its first implementation and throughout its current version, RTTOV has been developed and exploited for satellite observation perspective only. The model allows rapid simulations of radiances for a suite of passive sensors given the atmospheric state vector, i.e. profiles of temperature, gas concentration, cloud liquid water content and surface properties. The only one variable gas needed for RTTOV v11 in the microwave band is water vapor. An important feature of RTTOV is that, in addition to the forward (or direct) radiative transfer, it also computes the Jacobians, i.e. the gradient of the radiances with respect to the state vector at the location in state space specified by the input state vector values. The Jacobians are calculated in Tangent Linear (TL), Adjoint (AD) and K-modules of RTTOV.

There are other fast RT models used by NWP community for satellite data assimilation, like the Community Radiative Transfer Model (CRTM - Ding et al., 2011). However, to our knowledge no fast RT model is currently available to simulate ground-based radiometric observations. In this work, the version 11.2 of RTTOV has been modified to handle ground-based microwave radiometer observations. The efforts for adapting RTTOV to ground-based observations started within the COST action ES1202 (EG-CLIMET) and have been continued within COST action ES1303 (TOPROF). The ground-based version of RTTOV developed here, called RTTOV-gb, is able to simulate brightness temperatures from ground-based upward-looking microwave radiometers. In addition, the TL, AD, and K-modules of RTTOV have been adapted to provide Jacobians for ground-based geometry. We believe that the availability of RTTOV-gb with its K-module will enable more widespread and better use of MWR observations in NWP models.

This paper introduces RTTOV-gb, the ground-based version of the fast radiative transfer model RTTOV. In section 2 we describe the modifications made to the original RTTOV code for the ground-based radiative transfer calculation. Section 3 discusses the performance of RTTOV-gb by evaluating its simulations against those from accurate line-by-line RT models (3.1), against ground-based real MWR observations (3.2), against analytic Jacobian calculations (3.3), and finally within an 1-dimensional variational (1D-Var) assimilation scheme (3.4). Section 4 summarizes the findings and draws the final conclusions.

## 2 The formulation of the radiative transfer model

### 2.1 Radiative transfer model

Given a state vector  $\mathbf{x}$  (the atmospheric thermodynamical state profile in radiative transfer problem), the radiance vector (or brightness temperature)  $\mathbf{y}$  is computed as:

$$\mathbf{y} = \mathbf{H}(\mathbf{x}) \quad (1)$$

where  $\mathbf{H}$  is the radiative transfer model (also referred to as the observation operator).

The core of RTTOV-gb simulates ground-based radiometer radiances using an approximated form of the radiative transfer equation (RTE) for ground-based (upward-looking) observation geometry:

$$L_{\text{ATM},i} = \tau_{i,\text{toa}} * B_i(T_{\text{BKG}}) + \int_{\tau_{i,\text{toa}}}^1 B_i(T) d\tau \quad (2)$$

where  $L_{\text{ATM},i}$  is the radiance at the ground for channel  $i$ , neglecting scattering effects,  $B_i$  is the Planck radiance at channel  $i$  for a scene temperature  $T$ ,  $\tau_{i,\text{toa}}$  is the transmittance from the surface to the top-of-the-atmosphere and

$T_{\text{BKG}}$  is the microwave cosmic background temperature (2.728 K). Note that in the spectral range under consideration (20-60 GHz), scattering is negligible for particles of the size of atmospheric molecules and cloud droplets, and even for larger ice and snow particles (Kneifel et al., 2010). From a ground-based perspective, the transmittances and optical depths are accumulated from the surface to the space instead of from the space to the surface as in the original RTTOV satellite perspective. Consequently, several subroutines have been modified to reverse the accumulation of transmittances and optical depths through the atmospheric path (see Section 6).

The RTE (2) is valid for both clear- and cloudy-sky conditions because in the microwave band RTTOV takes into account the liquid water as an absorbing species and its effects are included through a contribution to the transmittance profile. The first term of the right-hand side of the RTE (2) is the cosmic background radiation, the second term is the atmospheric contribution.

The RTE (2) has been numerically solved over  $N$  atmospheric levels which are numbered from the top of the atmosphere as follow:

- level  $j = 1$ , pressure  $P_j = 0.005\text{hPa}$ , temperature  $T_j = T_1$ , transmittance  $\tau_{ij} = \tau_{i,\text{toa}}$  for channel  $i$ ;
- levels from  $j = 2$  to  $j = N-1$ ,  $P_j$  are pressures of the fixed-pressure levels,  $\tau_{ij}$  is the surface-to-level transmittance for channel  $i$ ;
- level  $j = M$ , the first level which lies strictly above the input 2 m pressure (i.e.  $M \leq N$  and  $P_M < P_{2\text{m}}$ ),  $\tau_{ij} = \tau_{i,M}$  for channel  $i$ ;
- level  $j = N$ ,  $P_N = 1050\text{hPa}$ , surface air temperature  $T_N = T_S$ ,  $\tau_{iN} = 1$  for all channels;

For the ground-based perspective and each channel (omitting the  $i$  index for convenience), we define:

$$\begin{cases} \Delta\tau_j = \tau_{j+1} - \tau_j \\ \Delta B_j = B_j - B_{j+1} \\ \Delta d_j = d_j - d_{j+1} \end{cases} \quad (3)$$

where  $\Delta d_j$  is the optical depth of the single layer  $j$ ,  $d_j$  is the level-to-surface optical depth.

The contribution of the cosmic background radiation is:

$$L_{\text{COSMIC}} = \tau_1 * B(T_{\text{BKG}}) \quad \text{with } \tau_1 = \tau_{\text{toa}} \quad (4)$$

The atmospheric contribution is:

$$L_A = \int_{\tau_{\text{LEV}=1}}^{\tau_M} B(T) d\tau + ST = \sum_{j=M}^1 \left( \int_{\tau_j}^{\tau_{j+1}} B d\tau \right) + ST \quad (5)$$

where:

$$\int_{\tau_j}^{\tau_{j+1}} B d\tau = \tau_{j+1} B_{j+1} - \tau_j B_j + \frac{1}{\Delta d_j} \Delta B_j \Delta \tau_j = \Delta \tau_j * [B_{j+1} + \Delta B_j \frac{1}{\Delta d_j}] - \tau_j \Delta B_j \quad (6)$$

and  $ST$  is the contribution of the first layer above the surface:

$$ST = B_S(1 - \tau_M) - (B_M - B_S) + (B_M - B_S) * (1 - \tau_M) * \frac{1}{d_M} \quad (7)$$

with  $B_S$  the Planck function evaluated at the input 2 m temperature.

In equation (6) we have used a parameterization of the Planck function (i.e. the so-called linear-in-tau assumption, where tau means the optical depth of the single layer, corresponding to  $\Delta d$  in the notation used in this study). In the linear-in-tau assumption the source function throughout the layer is linear with the optical depth of the layer (Saunders et al., 2010):

$$B[T(\Delta d)] = B_{j+1} + (B_j - B_{j+1}) \frac{\Delta d}{\Delta d_j} \quad (8)$$

where  $B_j$  is the Planck function for the top of the layer,  $B_{j+1}$  is the Planck function at the bottom of the layer and  $\Delta d_j$  is the optical depth of the layer. In ground-based perspective  $\Delta d$  goes from 0 to  $\Delta d_j$  from the bottom to the top of the layer.

The radiance for each channel  $i$  is then converted to an equivalent black-body temperature which is usually called Brightness Temperature (TB) using the inverse Planck function.

## 2.2 The input atmospheric profiles and near-surface variables

The input profile data may be supplied on an arbitrary set of pressure levels. These consist of vertical profiles of temperature (K) and humidity (ppmv) for clear-sky, and additional cloud liquid water content (CLW in kg/kg) profiles for simulating cloudy conditions. In addition, pressure, temperature and humidity values at 2 m altitude are required. The transmittance calculations described below are performed using atmospheric layers bounded by a number of fixed pressure levels. RTTOV-gb interpolates the input profiles to the fixed pressure levels for the transmittance calculation, but note that the RTE is integrated on the pressure levels supplied by the user (Hocking, 2014).

Currently RTTOV-gb uses fixed 101 pressure levels from 0.005hPa to 1050hPa for the transmittance calculation. These levels have been specifically selected for ground-based perspective to be denser close to ground (34 levels below 2km) than those usually used for the satellite perspective. Moreover they were chosen to improve the accuracy of the optical depth prediction scheme used by RTTOV-gb compared to that obtained with the levels used for satellite simulations. The vertical levels spacing is shown in Figure 1 in terms of level altitude differences.

## 2.3 Transmittance model

The main variable computed in the radiative transfer model is the atmospheric optical depth for each channel  $i$  and for each atmospheric layer  $j$ . The optical depths depend on the viewing angle of the instrument, pressure, temperature, and concentrations of the absorbing species. The optical depth differences between adjacent pressure levels are obtained through a linear combination in  $X_{kj}$ , the so-called predictors ( $j$  being the level and  $k$  the number of predictors, from 1 to  $P$ ). The predictors are derived from the input state vector profile and depend on temperature  $T$  and specific humidity  $q$  at and above the considered levels. The optical depth from the surface to the level  $j$  in channel  $i$  along a path at an angle  $\theta$  from the vertical,  $d_{ij}$ , is obtained as follow:

$$d_{ij} = d_{i,j+1} + \sum_{k=1}^P a_{ijk} X_{kj} \quad (9)$$

with  $a_{ijk}$  the regression coefficients between optical depths and predictors.

The contribution of the water vapor on the optical depth is treated separately from that of uniformly-mixed gases although they are calculated with two algorithms of the same form.

There are three types of predictors for satellite perspective, predictors 7 (Matricardi et al., 2001), 8 (Matricardi, 2005) and 9 (Saunders, 2010), each of which is better suited for a specific application. The functional dependence of the predictors used in RTTOV to parameterize the optical depths depends on factors such as the absorbing gas, the angle  $\theta$ , the reference temperature and specific humidity profiles (the average of the training profile set, respectively  $T_j^{\text{ref}}$  and  $q_j^{\text{ref}}$ ). Also the number of predictors depends on the selected gas.

We found the predictors 7 to give the best results for the ground-based geometry and thus they are used herewith to train RTTOV-gb. The predictors 7 and the profile variables involved in the predictors calculation are listed in Appendix A. Note that predictors 7 were originally developed for satellite simulations up to 60° zenith angles and as such, the errors in the optical depth prediction increase for zenith angles above ~75° (i.e. for elevation angles below ~15°). For MWR observations of the PBL thermodynamics, these scanning angles turn out to be crucial, because of the information carried by opaque channels on the PBL temperature profile. Thus, it is foreseen that an alternative set of predictors, specific for low elevation angles in the ground-based geometry, may be worth investigating and developing in the future, though it is beyond the scope of this study.

The coefficients  $a_{ikj}$  are calculated by linear regression of  $\{d_{i,j} - d_{i,j+1}\}$  against  $X_{kj}$ . For the regression,  $d_{ik}$  are calculated using a line-by-line (LBL) model for a set of atmospheric profiles. **LBL RT models provide accurate calculation of the atmospheric transmittances and radiances, given the atmospheric profile of gas concentrations, and predefined spectral frequency grid.** The LBL optical depths must cover the full spectral range of all the radiometer channels of interest and provide a sufficient resolution to represent accurately the transmittances in the channel spectral bands. The LBL model described by Rosenkranz (1998; R98 herewith) has been used for gas absorption to calculate the clear-sky transmittances needed in the RTTOV-gb regression coefficients computation. Here we use 83 profiles from a NWPSAF profile dataset interpolated on 101 pressure levels, already used for training RTTOV. **It is important to emphasise that this profile set was carefully chosen from a set of more than 100 million profiles to represent a wide range of physically realistic atmospheric states (Matricardi, 2008).** Transmittances are computed for 6 selected scanning angles which are discussed in Section 3.1. We limit the lowest elevation angle used in the training phase to 10° because of the already mentioned limitation of the predictors 7.

If the optical depth for uniformly-mixed gases and water vapor are  $d_{ij}^M$  and  $d_{ij}^W$  respectively, the total optical depth is:

$$d_{ij} = d_{ij}^M + d_{ij}^W \quad (10)$$

Then, optical depths are converted to transmittances:

$$\tau_{ij} = \exp(-d_{ij}) \quad (11)$$

Finally, RTTOV-gb computes the output radiances and TB from the derived transmittances and the input vertical temperature profile using the radiative transfer equation (2).

## 2.4 Jacobians: Tangent Linear, Adjoint and gradient matrix models

The Jacobian matrix  $K$  gives the change in radiance  $\delta y$  for a change in any element of the state vector  $\delta x$  assuming a linear relationship about a given atmospheric state  $x_0$ :

$$\delta y = K(x_0) \delta x \quad (12)$$

The elements of  $K$  contain the partial derivatives  $\delta y_i / \delta x_j$ , where the subscript  $i$  refers to channel and  $j$  to layer number. The Jacobian provides the radiance sensitivity for each channel given unit perturbations at each level of the **state vector** and in each of the surface parameters. It shows clearly, for a given profile, which layers in the atmosphere are most sensitive to changes in temperature and variable gas concentrations for each channel. The  $K$ -module of RTTOV computes the  $K(x_0)$  matrix for each input profile. Alternatively, the Jacobians can be computed with the so-called brute force (BF) method where  $K$  is estimated by perturbing each element of the



atmospheric state vector, repeating the RTTOV direct module iteratively. However, the calculations of the Jacobians with the BF method are slower and less rigorous than with the K-module of RTTOV.

It is not always necessary to store and access the full matrix  $K$ ; thus, the RTTOV package has routines to compute the tangent linear only, i.e. the change in radiances  $y_i$  for a given change in atmospheric profile  $\delta \mathbf{x}$  around an initial atmospheric state  $\mathbf{x}_0$ .

$$\delta \mathbf{y}(\mathbf{x}_0) = \left[ \delta \mathbf{x} \frac{\partial y_1}{\partial \mathbf{x}}, \delta \mathbf{x} \frac{\partial y_2}{\partial \mathbf{x}}, \delta \mathbf{x} \frac{\partial y_3}{\partial \mathbf{x}}, \dots, \delta \mathbf{x} \frac{\partial y_{nchan}}{\partial \mathbf{x}} \right] \quad \text{with } \frac{\partial}{\partial \mathbf{x}} = \nabla_{\mathbf{x}} = \left[ \frac{\partial}{\partial x_1}, \frac{\partial}{\partial x_2}, \dots, \frac{\partial}{\partial x_N} \right] \quad (13)$$

Similarly, the adjoint routines compute the change in any quantity of the state vector (e.g. T, q, surface variables etc)  $\delta \mathbf{x}$  around an assumed atmospheric state  $\mathbf{x}_0$ , given a change in the radiances  $\delta \mathbf{y}$ .

$$\nabla_{\mathbf{x}} = \nabla_{\mathbf{x}} \mathbf{y} \cdot \nabla_{\mathbf{y}} = K(\mathbf{x}_0)^T \cdot \nabla_{\mathbf{y}} \quad (14)$$

$$\delta \mathbf{x}(\mathbf{x}_0) = \left[ \delta \mathbf{y} \frac{\partial x_1}{\partial \mathbf{y}}, \delta \mathbf{y} \frac{\partial x_2}{\partial \mathbf{y}}, \delta \mathbf{y} \frac{\partial x_3}{\partial \mathbf{y}}, \dots, \delta \mathbf{y} \frac{\partial x_N}{\partial \mathbf{y}} \right] \quad (15)$$

For very large systems, it may be not feasible to calculate the full Jacobian matrix  $K$  and the tangent linear and adjoint operations are computed instead.

The TL code is derived directly from the forward model because it represents the analytic derivative of the radiance (forward model outputs) with respect to the atmospheric state vector  $\mathbf{x}$ . The AD code is derived from the TL code. Finally, the K code is obtained from the AD code distributing the AD level derivatives through the number of channels. Before running TL, AD, and K models, the direct model needs to be run, because many of the intermediate variables calculated by the direct model are needed by the TL, AD and K-modules.

### 3 Performance of RTTOV-gb

The performance of RTTOV-gb has been tested in four different ways, reported in the following sub-sections: validation against the LBL RT model used as reference for the training and against another independent reference LBL RT model (3.1); a comparison of TB simulated with RTTOV-gb from a radiosonde profile dataset with nearly-colocated MWR measurements (3.2); a comparison of Jacobians calculated with the RTTOV-gb K-module and the brute force method, and also with Jacobians computed with an analytical model (3.3); **exploitation** of RTTOV-gb as forward model operator within a 1-dimensional variational scheme (3.4).

#### 3.1 Comparison with line-by-line model computed radiances

To compare RTTOV-gb against the LBL model adopted for the regression training, we computed clear-sky TB with both RTTOV-gb and R98 at selected channels from the set of 83 atmospheric profiles used in the training phase. Resulting TB differences are a measure of the regression error. Here we focus on the systematic (bias) and root-mean-square (RMS) TB differences. We consider 14 channels commonly used by commercial MWR, in particular the Humidity And Temperature PROfiler (HATPRO, Rose et al., 2005): 22.24, 23.04, 23.84, 25.44, 26.24, 27.84, 31.40, 51.26, 52.28, 53.86, 54.94, 56.66, 57.30, and 58.00 GHz. Channels from 22 to 31 GHz are in the so-called K-band while channels from 51 to 58 GHz are in the so-called V-band.

Table 1 shows bias and RMS at 4 elevation angles (90, 30, 19 and 10°) and 4 elevation angle combinations used for regression training (predictors 7 are used). This to investigate the best performing combination. The 4 sets of elevation angles are 90-53-42-35-30-26°; 90-42-30-24-19-16°; 90-42-30-24-19-10°; and 90-42-30-19-10-5°.



Bias and RMS are lower than the manufacturer error specification for HATPRO channels ( $\sim 0.5$  K - Rose et al., 2005) for all the considered training sets and elevation angles, with the exception of 22-31 GHz channels at  $10^\circ$  elevation angle with the training sets  $90$ - $26^\circ$ ,  $90$ - $10^\circ$  and  $90$ - $5^\circ$ . This result seems to confirm that predictors 7 are not ideal for elevation angles lower than  $15^\circ$ . However, it is encouraging to note that even at  $10^\circ$ , bias and RMS are within the instrumental error for all the channels when the training set  $90$ - $16^\circ$  is adopted. Note that the agreement at low elevation angles is better for the V-band opaque channels, which are most important for PBL temperature retrieval. Table 1 shows that the best among the considered training configurations is the set of elevation angles from  $90^\circ$  to  $16^\circ$ . Somewhat surprising, this configuration gives acceptable results even at  $10^\circ$ , despite this elevation angle is outside the training angle range.

Figure 2 shows two spectra computed at HATPRO channels by RTTOV-gb and LBL R98 for the same atmospheric profile belonging to the dependent set. For this particular case, TB differences between the two models are within 0.1 K for all channels.

For the whole 83-profile dataset, Figure 3 shows statistics (bias, RMS and maximum value) of the LBL R98 minus RTTOV-gb TB difference at four elevation angles ( $90$ ,  $30$ ,  $19$  and  $10^\circ$ ). The best training configuration determined above (elevation angles from  $90^\circ$  to  $16^\circ$ ) is used. At  $90^\circ$  elevation, bias and RMS are respectively less than 0.030 K and 0.060 K for K-band (22-31GHz), while 0.003 K and 0.025 K for the V-band opaque channels (54-58GHz). For these channels the maximum difference does not exceed 0.15 K. The agreement is slightly worse at transparent V-band channels (51-54 GHz), with bias, RMS, and maximum difference respectively within 0.03 K, 0.2 K, and 0.6 K. The larger discrepancies at transparent V-band channels are probably due to the combined influence of temperature and water vapor, which likely decreases the correlation of layer opacity with the two thermodynamical variables. Similar results are found for other elevation angles, such as  $30$  and  $19^\circ$ . Note that the error statistics at  $90^\circ$  elevation (i.e. zenith) are about one order of magnitude larger than the analogous statistics of the original nadir-looking RTTOV (Saunders, 2002; Saunders, 2010). We believe the reason is the behaviour of the two terms contributing to the total radiance (Eq.2), i.e. the background and the atmospheric contributions. Uncertainty in atmospheric optical depth, as those induced by regression, will influence the total radiance through the effects on these two terms. For the satellite (down-looking) case, these effects tend to compensate due to a warmer background (e.g. overestimated optical depths cause more emission from the atmosphere but less contribution from the relative warmer background). Conversely, for the ground-based perspective there is no compensation of the two terms because of the cold cosmic background (e.g. overestimated optical depths causes more emission from the atmosphere and less contribution from the relative colder background).

Figure 3 shows bias, RMS, and maximum difference respectively up to -0.3, 0.4, 1.5 K for K-band channels at  $10^\circ$  elevation. These are significantly larger compared to higher elevation angles. This is attributed to the use of predictors 7, which are not designed for elevation angles lower than  $15^\circ$ . This may also be due to the fact that  $10^\circ$  is outside the elevation angle range used in the training configuration ( $90^\circ$ - $16^\circ$ ). However, Table 1 shows that extending the range of training elevation angles to  $10^\circ$  or less generally degrades statistics. In any case, we highlight that the RMSs in Figure 3 are smaller than the uncertainty associated with TB observations ( $\sim 0.5$  K) for all channels and all elevation angles.

Similarly, RTTOV-gb has been compared with the reference LBL model using an independent set of 52 profiles (i.e. not used for training). The same 101 pressure levels described earlier are used. Bias, RMS and maximum of LBL R98 minus RTTOV-gb TB differences are shown in Figure 4. Results are for the best training configuration and for elevation angles 90, 30, 19 and 10°. Statistics are similar to those obtained with the dependent profile set. In this case however, the error statistics are of the same order of magnitude than the analogous performance of the original nadir-looking RTTOV with an independent profile set (Saunders, 2002; Saunders, 2010). For elevation angles down to 19°, biases range from less than 0.002 K for the opaque channels to 0.020 K for K-band, while RMS is less than 0.060 K for K-band and 0.025 K for the opaque channels. The maximum TB differences do not exceed 0.5 K. Similarly to the test with the dependent profile set, larger discrepancies are found in the transparent V-band channels (51-54 GHz) and for K-band channels at 10° elevation. All the statistics obtained with the independent profile set and the best training configuration are summarized in Table 2. Consistently with the dependent test, the independent test in Figure 4 and Table 2 confirms that the RMSs are smaller than the uncertainty associated with TB observations for all channels and all elevation angles. The previous tests against the reference LBL R98 model have been performed also at the 22 frequency channels (22-60 GHz) used by another commercial microwave radiometer, the MP-3000A (Cimini et al., 2011; 2015). Statistics, reported in Table 3 in terms of bias and RMS, are similar to those obtained for HATPRO channels, at both K- and V-band.

Note that LBL R98 is the model used to train the regression scheme. In order to perform a completely independent test, we compare RTTOV-gb with an independent reference radiative transfer model, the Atmospheric Radiative Transfer Simulator (ARTS, Buehler et al. 2005; Eriksson et al., 2011; Eriksson et al., 2015) and a completely different profile dataset. In this test, HATPRO observations are simulated using RTTOV-gb and ARTS from a set of 1327 thermodynamic profiles from the AROME analysis over Bordeaux from April to October 2014. AROME is the French convective scale NWP model with a 2.5 km horizontal grid mesh developed by Météo-France (Seity et al., 2010). Both clear- and cloudy-sky conditions are considered. This dataset, which is limited in space, time, and thus in atmospheric conditions, was chosen to demonstrate the performance of RTTOV-gb in typical deployment environment. Since the goal of this analysis is to test the fast RT modeling (RTTOV-gb) with respect to accurate LBL calculation, all other settings being equal, ARTS settings for absorption model have been selected to adopt as much as possible the same absorption model as RTTOV-gb: R98 for oxygen and water vapor absorption, and the model described in Liebe et al. (1993) for cloud liquid water (referred as MPM93 within ARTS). Note that MPM93 is the only option for liquid water absorption available in ARTS. Conversely RTTOV-gb is consistent with the original RTTOV, which adopts a combination of Liebe et al. (1991) and Lamkaouchy et al. (1997) models (English et al., 1999).

This comparison is presented in Figure 5 in terms of bias, standard deviation (std), and RMS of ARTS minus RTTOV-gb TB differences at 90° elevation angle. Here we have discarded TB differences that are larger than 3 std from the mean (21 profiles out of 1327). Bias less than 0.18 K for K-band and less than 0.08 K for opaque V-band channels are found. RMS and standard deviation are close, ranging from 0.1-0.25 K for K-band channels, and within 0.1 K for V-band opaque channels (55-58 GHz). Similar to previous tests, larger discrepancies are found in the more transparent V-band channels (51-54 GHz) with a RMS error up to 0.5 K at 51 GHz in cloudy-sky. But here the RMS is dominated by a bias contribution induced by systematic differences found between LBL and ARTS at these three channels (~0.3-0.5 K, not shown). This may be caused by small differences in the

implementation of the R98 gas absorption and/or the radiative transfer code. This issue is currently under investigation, though its understanding goes beyond the scope of this paper. Comparing Figures 4 and 5, we notice slightly larger statistics (by 0.1-0.2 K) in the RTTOV-gb vs. ARTS than in the RTTOV-gb vs. R98 tests. We attribute this to the fact that RTTOV-gb is totally independent of ARTS and moreover to the specific profile dataset, which likely introduces biases with respect to the RTTOV-gb training climatology. Note that TB differences for all the channels are of the same order of magnitude of those found between ARTS and the original nadir-looking RTTOV (Buehler et al., 2006). This demonstrates comparable capabilities between RTTOV-gb and the original version of RTTOV. RMS TB differences between RTTOV-gb and ARTS at 90° elevation are within 0.5 K, thus below the uncertainty associated with TB observations. From the three tests above, we can conclude that in the elevation angle range from 90 to 10° the forward model error due to the use of the fast RT with respect to the reference LBL model is within the instrument uncertainty. This confirms that RTTOV-gb can be safely deployed in place of a LBL model into variational assimilation schemes.

### 3.2 Comparison with real observations

Another way to evaluate RTTOV-gb is to compare TB simulated from radiosonde profiles with TB measured by a nearly colocated microwave radiometer. This comparison provides an end-to-end evaluation of the model, though radiosonde drift, MWR calibration, finite beamwidth, discretization, and instrumental noise all contribute to the total uncertainty. Nevertheless, observations minus background model (O-B) differences are the primary input for direct radiance assimilation into a NWP model and thus need to be investigated and understood. For this analysis, we exploit a dataset of 365 radiosonde profiles collected over Bordeaux from April to October 2014, together with the nearly simultaneous TB observed by a ground-based microwave radiometer (HATPRO) operated at the radiosonde launching site. The dataset was first reduced to clear-sky conditions. To be conservative, clear-sky conditions have been selected using a three-fold screening, based on (i) ceilometer Cloud Base Height (CBH), (ii) sky infrared temperature ( $T_{IR}$ ), and (iii) 20-minute standard deviation of liquid water path ( $\sigma_{LWP}$ ) from HATPRO. Thus, periods with CBH below maximum range (8000m),  $T_{IR} > -30^{\circ}\text{C}$ , or  $\sigma_{LWP} > 10^{-2} \text{ kg/m}^3$  were rejected. Moreover, cases with integrated water vapor differences between microwave radiometer and radiosonde profiles larger than 1 mm have been discarded in order to reduce instrumental uncertainties involved in the comparison. After this screening, only 23 profiles remained for the analysis. Bias, standard deviation, and RMS differences between TB observed by the microwave radiometer and simulated with both RTTOV-gb and ARTS are shown in Figure 6. With respect to the MWR observations, RTTOV-gb shows bias from 0.02 K at 22.24 GHz to 0.5 K at 23.84 GHz in the K-band and from 0.16 K to 0.31 K in the V-band opaque channels. RMS range from 0.90 K to 0.47 K in the K-band and from 0.41K to 0.64K in the V-band opaque channels. Larger bias is found at V-band transparent channels: 1-2 K at 51.26 GHz and 4-5 K at at 52.28GHz with either RTTOV-gb or ARTS simulations. Note that RTTOV-gb and ARTS show similar statistics with respect to MWR observations. This result is very important as it suggests that forward model errors due to the fast model approximation are not dominant. Note that bias values of the same order of magnitude for the 51-54 GHz range were previously reported (Hewison et al. 2006; Lohnert and Maier, 2012; Martinet et al. 2015, Blumberg et al., 2015), employing MWR of different types and manufacturers. This may be attributed to a combination of uncertainties from instrument calibration and gas absorption models. In fact, semi-transparent

channels (as in the 51-54 GHz range) suffer from larger calibration uncertainties due to the lack of a close reference-temperature calibration point. In addition, their response is influenced by the water vapour continuum and oxygen line coupling, which contribute significantly to the uncertainties because their parametrization is extrapolated from laboratory measurements to typical atmospheric conditions. It is beyond the scope of this paper to investigate spectroscopy issues, but our results support previous evidence and point to the need for further lab measurements (Boukabara et al., 2005; Cadeddu et al., 2007). Considering that O-B systematic differences are usually evaluated and removed before assimilating data into NWP, we believe that statistics in Figure 6 support the safe use of RTTOV-gb for direct radiance assimilation of MWR TB into NWP models.

### 3.3 Comparison of Jacobians

After testing the RTTOV-gb direct module, the RTTOV-gb Jacobians calculation needs to be tested in order to provide a complete tool for a fast and safe MWR data assimilation. First, a consistency test of the Jacobians calculated with TL-, AD- and K-modules of RTTOV-gb has been performed to ensure the correctness of the TL/AD/K coding modified for ground-based perspective. The test resulted in nearly the same Jacobians for TL, AD- and K-modules. Subsequently, the temperature and humidity Jacobians calculated with RTTOV-gb K-module have been compared with those computed with the brute force (BF) method for a specific cloudy sky profile. The BF method calculates the Jacobian by finite differences by calling the direct module multiple times after perturbing each individual input profile variable. The consistency of K-module with BF was confirmed using the RTTOV test suite (Brunel et al., 2014), bearing in mind that some small differences between the Jacobians are expected. Figure 7 shows the temperature and absolute humidity Jacobians for the V- and K-bands channels. The Jacobians computed with RTTOV-gb BF and K-module are almost identical with differences smaller than 1%. As expected, the TB sensitivity to atmospheric temperature is higher in the low troposphere, especially in the PBL, and it increases with frequency in the spectral range between 51 and 58 GHz. Between 22 and 31 GHz, the sensitivity of the TBs to water vapor is almost independent of altitude and decreases with increasing frequency.

The Jacobians for cloud liquid water (CLW) are needed when cloudy-sky conditions are considered. Figure 8 shows a comparison of CLW Jacobians calculated with RTTOV-gb K-module and BF method. Similar to temperature and humidity, they are found to be almost identical (differences smaller than 0.1%, likely due to truncation errors). As expected, the TB sensitivity to CLW increases with frequency in the K-band, while it decreases with frequency in the V-band due to the increasingly dominant oxygen absorption. TB are sensitive to CLW at all levels up to 322hPa (about 10km), where RTTOV, and thus also RTTOV-gb, have set their upper limit for non-zero CLW.

For a completely independent test, Jacobians calculated with RTTOV K-module have been compared with those computed with the reference radiative transfer model ARTS. ARTS Jacobians are derived from a semi-analytical expression described in Eriksson and Buehler, 2015. As shown in Figure 9, temperature and humidity Jacobians from ARTS and RTTOV-gb are found to be almost identical, either for K-band and V-band channels, with differences smaller than 3% for temperature and 5% for humidity. Figure 10 shows the comparison of CLW Jacobians from ARTS and RTTOV-gb. These are similar to each other, both in shape and order of magnitude, from surface up to 322 hPa (RTTOV cloud limit). However, differences of about 10% occur around 450 hPa,

particularly at transparent channels (31, 51 and 52 GHz). These are likely due to small differences in the liquid water absorption models in ARTS and in RTTOV-gb, as mentioned above in Section 3.1. However, for a typical CLW profile, these model differences lead to small TB differences (order of 0.1 K) and are thus deemed as negligible.

### 3.4 1D-Var application

Finally, RTTOV-gb has been tested as forward model within a 1-dimensional variational (1D-Var) scheme. For this purpose, the 1D-Var software package provided by the NWPSAF (Weston, 2014) has been adapted in the framework of the COST Action TOPROF to exploit RTTOV-gb. Among other modifications, the 1D-Var tool has been modified to allow the assimilation of observations at different elevation angles for the same instrument. The 1D-Var approach searches the atmospheric state  $\mathbf{x}$  that minimizes both the distance to the background  $\mathbf{x}_b$  and the observation  $\mathbf{y}$ . The cost function  $J$  needs to be minimized modifying the different variables defined in the control vector  $\mathbf{x}$  (Cimini et al., 2010):

$$J = \frac{1}{2}[\mathbf{y} - H(\mathbf{x})]^T R^{-1}[\mathbf{y} - H(\mathbf{x})] + \frac{1}{2}[\mathbf{x} - \mathbf{x}_b]^T B^{-1}[\mathbf{x} - \mathbf{x}_b] \quad (16)$$

Here  $B$  represents the background-error covariance matrix and  $R$  the observation error covariance matrix.  $H$  represents the observation operator, in our case RTTOV-gb. The background profile comes from a short-range forecast of a NWP model or from a colocated radiosonde. Here,  $\mathbf{x}_b$  is a 3-hour forecast from the French convective scale model AROME. The Jacobians needed to minimize the cost function  $J$  are calculated with the RTTOV-gb K-module.

The aim is to retrieve temperature and humidity profiles and column-integrated liquid water path from MWR observations through a 1D-Var retrieval approach exploiting RTTOV-gb. To this aim, an Observing-System Simulation Experiment (OSSE) was set up with 224 AROME analyses profiles in February 2015 over the Alps with the new horizontal grid mesh of 1.3 km. These analyses are made of 90-level pressure, temperature, specific humidity and liquid water content profiles, typical of an alpine valley and mountainous region in winter. Both clear- and cloudy-sky conditions are considered. Starting from the AROME unperturbed profiles (the “truth”), background profiles are created by perturbing the initial AROME profiles according to the background error covariance matrix  $B$ . In this study, the  $B$  matrix was computed from an AROME ensemble assimilation system following the approach used to derive this matrix operationally at Météo-France (Brousseau et al., 2011). By applying RTTOV-gb to the unperturbed AROME, observations are created by adding synthetic observation errors to the RTTOV-gb simulations. The synthetic random errors are assumed to follow a diagonal  $R$  matrix with reasonable standard deviations, i.e.  $\sim 0.2$ - $1.0$  K depending on channels (Hewison, 2007).

In clear-sky conditions, temperature and specific humidity are used as control variables in the 1D-Var. A comparison between temperature and humidity retrievals obtained with 1D-Var, the corresponding unperturbed and background profiles for two retrieval examples are shown in Figure 11. As expected, the 1D-Var retrievals are closer to the “truth” than the background profiles. In this case 1-D-Var provides an improvement with respect to the background in the first 2 km for temperature and in the first 4 km for humidity, which is encouraging for future data assimilation experiments. A comprehensive evaluation of RTTOV-gb plus 1D-Var for data assimilation using real MWR observations will be subject of future work.



Here, we just underline that the main advantage of RTTOV-gb with respect to LBL models is the considerably lower computation time. Of course the priority of LBL models is more accuracy than speed, though settings may be tuned to improve the computation performances. Although a detailed analysis on computation speed goes beyond the scope of this paper, we found that RTTOV-gb is faster than our implementation of ARTS (Martinet et al. 2015) for both the direct and Jacobian calculations. Moreover, our tests demonstrate that the computation time for Jacobians is shorter by a factor of 8 for RTTOV-gb K-module than for direct module with brute force method.

#### 4 Summary

The version 11.2 of the fast radiative transfer model RTTOV, developed for space-borne sensors, has been successfully modified to simulate ground-based microwave radiometer observations. In addition to the direct module, which allows to simulate ground-based MWR observations, the TL-, AD- and K-modules of RTTOV have been modified in order to provide temperature, humidity and cloud liquid water Jacobians for the ground-based perspective. We introduced the ground-based version of RTTOV, called RTTOV-gb, and demonstrated its potential for fast MWR TB simulations from thermodynamic profiles. RTTOV-gb has been validated against accurate, but less time-efficient, reference line-by-line models and real MWR observations. Results demonstrate its applicability as a forward model within a variational scheme for fast and safe MWR data assimilation into NWP models. It is believed that the direct assimilation of TB, instead of retrieved profiles, may improve the impact of MWR observations for temperature and humidity profiles analysis in the first few kilometers from the ground, where MWR provide the maximum information content.

The performance of RTTOV-gb has been validated by comparison with TB simulated with the line-by-line model R98 (Rosenkranz, 1998), the same model as used for the RTTOV training phase. For both dependent and independent profile sets, RMS are below the typical TB uncertainty of ground-based MWR ( $\sim 0.5$  K) ranging from a maximum of 0.06 K for the water vapor band to 0.025 K for the V-band opaque channels. Larger discrepancies are observed at the transparent V-band channels (51 and 52 GHz), with RMS within 0.20 K, and at elevation angle  $10^\circ$ . TB simulated with RTTOV-gb from AROME analyses have also been compared with those simulated with the reference line-by-line model ARTS. At  $90^\circ$  elevation, for both clear- and cloudy-sky conditions TB differences do not exceed 0.25 K in terms of biases and RMS at all HATPRO channels except for the transparent V-band channels 51-52 GHz (up to 0.5 K in cloudy-sky conditions). Finally, RTTOV-gb has been validated by radiosonde-derived TB with real nearly collocated MWR observations. In this case RMS increases with respect to the RTTOV-gb/LBL comparisons ranging from 0.90 K to 0.47 K in the K-band and from 0.41 K to 0.64 K in the V-band opaque channels. Larger discrepancies were found at V-band transparent channels, which may be explained by calibration and gas absorption uncertainties. However, the statistics of RTTOV-gb and ARTS simulations with respect to MWR observations are similar for each channel, suggesting that forward model errors due to the fast model approximation are not dominant. Temperature, humidity and cloud liquid water Jacobians computed with RTTOV-gb K-modules were found to be similar in shape and magnitude with those calculated with the brute force method or with the ARTS model.

Finally, RTTOV-gb has been tested as a forward model within a 1D-Var software package in an OSSE to improve AROME thermodynamic profiles estimated by directly assimilating synthetic MWR TB. For both

1 temperature and humidity profiles the 1D-Var considerably improves the retrievals with respect to the  
2 background, in the first few kilometers from the ground. Concerning the computation speed, RTTOV-gb with K-  
3 module is found to be 8 times faster in computing Jacobians than the brute force method. As expected, RTTOV-  
4 gb demonstrates to be faster than the line-by-line models such as ARTS for both the direct and the Jacobians  
5 calculation.

6 Ultimately, this analysis confirms that RTTOV-gb is able to correctly simulate ground-based MWR radiances  
7 and to reproduce reasonable temperature, humidity and cloud liquid water Jacobians. In conclusion RTTOV-gb  
8 is well suited for serving as forward model in a variational data assimilation scheme for a direct, safe, and fast  
9 NWP data assimilation of real MWR radiance observations. As from the user perspective RTTOV-gb works  
10 exactly the same as RTTOV, its implementation and maintenance shall require minimal technical overheads at  
11 those NWP centers already using RTTOV. This shall facilitate the road towards the data assimilation of ground-  
12 based MWR worldwide.

## 14 5 Code and data availability

15 The original RTTOV v11.2 can be obtained via the request form in the NWPSAF web site  
16 (<http://nwpsaf.eu/site/software/rttov/rttov-v11/>).

17 The efforts for adapting RTTOV to ground-based observations started within the COST (<http://www.cost.eu/>)  
18 action ES1202 (EG-CLIMET) and have been continued within COST action ES1303 (TOPROF,  
19 <http://www.toprof.eu/>). The modifications needed to adapt the radiative transfer equation from satellite to the  
20 ground-based perspective have been made in the subroutine src/main/rttov\_integrate.F90. The RTTOV  
21 subroutines that have been modified in RTTOV-gb to reverse the way to initialize and accumulate transmittances  
22 and optical depths are respectively src/main/rttov\_transmit.F90 and src/main/rttov\_opdep.F90. The calculation of  
23 the predictors 7 for the ground-based perspective have been adapted in the subroutine  
24 src/main/rttov\_profaux.F90. Modifications made in the direct module of RTTOV v11.2 code have been imported  
25 in the corresponding TL-, AD- and K-modules subroutines (i.e. rttov\_integrate\_tl.F90, rttov\_integrate\_ad.F90,  
26 rttov\_integrate\_k.F90; rttov\_transmit\_tl.F90, rttov\_transmit\_ad.F90, rttov\_transmit\_k.F90; rttov\_opdep\_tl.F90,  
27 rttov\_opdep\_ad.F90, rttov\_opdep\_k.F90). The conditions of release of RTTOV-gb are currently under  
28 discussion among NWPSAF and COST action TOPROF. This may happen through an integration of RTTOV-gb  
29 into future RTTOV releases or as a stand-alone package disseminated through the TOPROF website.

30 All the informations needed to download the ARTS code can be found in the web site  
31 <http://www.radiativetransfer.org/>.

32 The NWPSAF profiles, from which we interpolated the profile sets used for the RTTOV-gb training and  
33 independent test, are available at [https://nwpsaf.eu/deliverables/rtm/profile\\_datasets.html](https://nwpsaf.eu/deliverables/rtm/profile_datasets.html).

34 The AROME analyses used for ARTS/RTTOV-gb comparison and 1D-Var application, and the  
35 MWR/radiosondes dataset used for the validation against real MWR measurement can be obtained by email to  
36 [pauline.martinet@meteo.fr](mailto:pauline.martinet@meteo.fr).

## 6 Acknowledgements

This work has been stimulated through the COST Action ES1303 (TOPROF), supported by COST (European Cooperation in Science and Technology). **Part of the work was supported by the EU H2020 project GAIA-CLIM (Ares(2014)3708963/Project 640276).** The authors would like to acknowledge the NWPSAF and Met Office, in particular Peter Rayer, for providing support on RTTOV coding and the Meteo-France for providing AROME analyses and measurements performed in the Bordeaux campaigns.

## Appendix A

The predictors  $X_{kj}$  introduced in Section 2 are functions of the absorbing gas, the zenith angle  $\theta$ , the pressure, temperature and water vapor mixing ratio profiles, and finally the reference temperature and water vapor mixing ratio profiles (i.e. the average of the training profile set). These are defined in Matricardi et al. (2001) and briefly summarized below. Introducing at each fixed level  $j$  the pressure  $P^{\text{prof}}(j)$ , the temperature and the water vapor mixing ratio  $T^{\text{prof}}(j)$  and  $W^{\text{prof}}(j)$ , and the corresponding reference  $T^{\text{ref}}(j)$  and  $W^{\text{ref}}(j)$ , the following variables are defined:

$$T(j) = [T^{\text{prof}}(j) + T^{\text{prof}}(j+1)]/2$$

$$T^*(j) = [T^{\text{ref}}(j) + T^{\text{ref}}(j+1)]/2$$

$$W(j) = [W^{\text{prof}}(j) + W^{\text{prof}}(j+1)]/2$$

$$W^*(j) = [W^{\text{ref}}(j) + W^{\text{ref}}(j+1)]/2$$

$$P(j) = [P^{\text{prof}}(j) + P^{\text{prof}}(j+1)]/2$$

$$T_r(j) = T(j)/T^*(j)$$

$$\delta T(j) = T(j) - T^*(j)$$

$$W_r(j) = W(j)/W^*(j)$$

$$T_w(j) = \sum_{l=N-1}^j P(l+1)[P(l+1) - P(l)]T_r(l+1) \text{ with } T_w(j=N) = 0 \text{ at the surface.}$$

$$W_w(j) = \left\{ \sum_{l=N-1}^j P(l+1)[P(l+1) - P(l)]W(l) \right\} / \left\{ \sum_{l=N-1}^j P(l+1)[P(l+1) - P(l)]W^*(l) \right\}$$

The RTTOV predictors 7 are derived from the variables above as listed in Table A1.

Predictor 7	Mixed Gases	Water Vapor
$X_{1,j}$	$\sin(\theta)$	$\sin^2(\theta)W_r^2(j)$
$X_{2,j}$	$\sin^2(\theta)$	$(\sin(\theta)W_w(j))^2$
$X_{3,j}$	$\sin(\theta)T_r(j)$	$(\sin(\theta)W_w(j))^4$
$X_{4,j}$	$\sin(\theta)T_r^2(j)$	$\sin(\theta)W_r(j)\delta T(j)$
$X_{5,j}$	$T_r(j)$	$\sqrt{\sin(\theta)W_r(j)}$
$X_{6,j}$	$T_r^2(j)$	$\sqrt[4]{\sin(\theta)W_r(j)}$
$X_{7,j}$	$\sin(\theta)T_w(j)$	$\sin(\theta)W_r(j)$
$X_{8,j}$	$\sin(\theta)\frac{T_w(j)}{T_r(j)}$	$(\sin(\theta)W_r(j))^3$
$X_{9,j}$	$\sqrt{\sin(\theta)}$	$(\sin(\theta)W_r(j))^4$



$X_{10,j}$	$\sqrt{\sin(\theta)} \sqrt[4]{T_w(j)}$	$\sin(\theta) W_r(j) \delta T(j)  \delta T(j) $
$X_{11,j}$	0	$(\sqrt{\sin(\theta) W_r(j)}) \delta T(j)$
$X_{12,j}$	0	$\frac{(\sin(\theta) W_r(j))^2}{W_w}$
$X_{13,j}$	0	$\frac{\sqrt{\sin(\theta) W_r(j) W_r(j)}}{W_w(j)}$
$X_{14,j}$	0	$\sin(\theta) \frac{W_r^2(j)}{T_r(j)}$
$X_{15,j}$	0	$\sin(\theta) \frac{W_r^2(j)}{T_r^4(j)}$

**Table A1: Predictors 7 used for mixed gases and water vapor (after Matricardi et al. 2001).**

## References

- Blumberg, W.G., Turner, D.D., Löhnert, U., Castleberry, S., Ground-Based Temperature and Humidity Profiling Using Spectral Infrared and Microwave Observations. Part II: Actual Retrieval Performance in Clear-Sky and Cloudy Conditions, J. Appl. Meteor. Climatol., 54, 2305–2319, doi: <http://dx.doi.org/10.1175/JAMC-D-15-0005.1>, 2015.
- Boukabara S. A., S. A. Clough, J.-L. Moncet, A. F. Krupnov, M. Yu. Tretyakov, and V. V. Parshin, Uncertainties in the Temperature Dependence of the Line-Coupling Parameters of the Microwave Oxygen Band: Impact Study, IEEE Trans. Geosci. Rem. Sens., 43, 5, doi: 10.1109/TGRS.2004.839654, 2005.
- Brousseau, P., Berre, L., Bouttier, F. and Desroziers, G., Background error covariances for a convective scale data assimilation system: AROME 3D-Var. Q. J. Roy. Meteorol. Soc. 137, 409422, 2011.
- Brunel, P., Hocking, J., RTTOV v11 Test Suite, Met Office Doc ID: NWPSAF-MO-TV-031, 2014.
- Buehler, S. A., P. Eriksson, T. Kuhn, A. von Engeln and C. Verdes, ARTS, the Atmospheric Radiative Transfer Simulator, J. Quant. Spectrosc. Radiat. Transfer, 91(1), 65-93, doi:10.1016/j.jqsrt.2004.05.051, 2005.
- Buehler, S. A., Courcoux, N., John, V.O., Radiative transfer calculations for a passive microwave satellite sensor: Comparing a fast model and a line-by-line model, J. Geophys. Res., 111, D20304, doi:10.1029/2005JD006552, 2006.
- Cadeddu, M. P., V. H. Payne, S. A. Clough, K. Cady-Pereira, and J. C. Liljegren, “The effect of the oxygen line-parameter modeling on temperature and humidity retrievals from ground-based microwave radiometers,” IEEE Trans. Geosci. Remote Sens., vol. 45, no. 7, pp. 2216– 2223, Jul. 2007.
- Caumont O., B. Vincendona, D. Cimini, U. Löhnert, L. Alados-Arboledas, R. Bleisch, F. Buffa, M. E. Ferrario, A. Haeefe, T. Huet, F. Madonna, G. Pace, Assimilation of humidity and temperature observations retrieved from ground-based microwave radiometers into a convective-scale model, submitted to QJRM, 2015.
- Cimini, D., Hewison, T. J., Martin, L., Güldner, J., Gaffard, C., Marzano, F., Temperature and humidity profile retrievals from groundbased microwave radiometers during TUC, Meteorol. Z., 15, 45–56, 2006.
- Cimini, D., Westwater, Ed R., Gasiewski, A.J., Temperature and Humidity Profiling in the Arctic Using Ground-Based Millimeter-Wave Radiometry and 1DVAR, IEEE Transactions on Geoscience and Remote Sensing, Vol. 48, No. 3, March 2010.

Cimini, D., E. Campos, R. Ware, S. Albers, G. Graziano, J. Oreamuno, P. Joe, S. Koch, S. Cober, E. Westwater, Thermodynamic Atmospheric Profiling during the 2010 Winter Olympics Using Ground-based Microwave Radiometry, *Trans. Geosci. Remote Sens.*, 49, pp. 4959–4969, 2011.

Cimini D., O. Caumont, U. Löhnert, L. Alados-Arboledas, R. Bleisch, J. Fernández-Gálvez, T. Huet, M. E. Ferrario, F. Madonna, O. Maier, F. Nasir, G. Pace, and R. Posada, An International Network of Ground-Based Microwave Radiometers for the Assimilation of Temperature and Humidity Profiles into NWP Models, *Proceedings of 9th International Symposium on Tropospheric Profiling*, ISBN 978-90-815839-4-7, L'Aquila, ITALY, 3-7 September, 2012.

Cimini, D., Caumont, O., Löhnert, U., Alados-Arboledas, L., Bleisch, R., Huet, T., Ferrario, M.E., Madonna, F., Haeefe, A., Nasir, F., Pace, G., Posada, R., A data assimilation experiment of temperature and humidity profiles from an international network of ground-based microwave radiometers, *Proc. Microrad 2014*, Pasadena, USA, 24-27 March, ISBN: 978-1-4799-4645-7, 978-1-4799-4644-0/14/\$31.00, 2014.

Cimini, D., Nelson, M., Güldner, J., and Ware, R.: Forecast indices from a ground-based microwave radiometer for operational meteorology, *Atmos. Meas. Tech.*, 8, 315-333, doi:10.5194/amt-8-315-2015, 2015.

Courtier, P., Andersson, E., Heckley, W., Vasiljevic, D., Hamrud, M., Hollingsworth, A., Rabier, F., Fisher, M. and Pailleux, J., The ECMWF implementation of three-dimensional variational assimilation (3D-Var). I: Formulation. *Q.J.R. Meteorol. Soc.*, 124: 1783–1807. doi: 10.1002/qj.49712455002, 1998.

Ding, Shouguo, Ping Yang, Fuzhong Weng, Quanhua Liu, Yong Han, Paul Van Delst, Jun Li, and Bryan Baum: Validation of the community radiative transfer model. *Journal of Quantitative Spectroscopy and Radiative Transfer* 112 (6): 1050-1064, 2011.

Ebell, K., E. Orlandi, A. Hünerbein, U. Löhnert, S. Crewell, Combining ground and satellite based measurements in the atmospheric state retrieval: Assessment of the information content, *J. Geophys. Res.* 18, 6940–6956, 2013

English, S.J., Poulsen, C., Smith, A.J., Forward modelling for liquid water cloud and land surface emissivity *Proceedings of ECMWF workshop on ATOVS*, ECMWF, Reading, UK, 2-5 November 1999.

Eriksson, P., S. A. Buehler, C. P. Davis, C. Emde, and O. Lemke, ARTS, the atmospheric radiative transfer simulator, Version 2, *J. Quant. Spectrosc. Radiat. Transfer*, doi:10.1016/j.jqsrt.2011.03.001, 2011.

Eriksson, P., Buehler, S., ARTS user guide (online: [http://www.radiativetransfer.org/misc/arts-doc-stable/uguide/arts\\_user.pdf](http://www.radiativetransfer.org/misc/arts-doc-stable/uguide/arts_user.pdf)), 2015.

Eyre, J. R., A fast radiative transfer model for satellite sounding systems. *ECMWF Technical Memorandum* 176, 1991.

Geer, A. J., Bauer, P. and Lopez, P. Lessons learnt from the operational 1D 4DVar assimilation of rain and cloud affected SSM/I observations at ECMWF. *Q. J. Roy. Meteorol. Soc.* 134 (635), 1513 1525. 2008.

Hewison T. J., D. Cimini, L. Martin, C. Gaffard and J. Nash, Validating clear air absorption model using ground-based microwave radiometers and vice-versa, *Meteorologische Zeitschrift*, Vol.15, No.1, 27-36, 2006.

Hewison, T., 1D-VAR Retrievals of Temperature and Humidity Profiles From a Ground-Based Microwave Radiometer, *IEEE TGRS*, Vol. 45, No. 7, pp. 2163-2168, Jul. 2007.

Hocking, J., Interpolation methods in the RTTOV radiative transfer model, *Forecast Research Technical Report* No: 590, June 2014.

Hocking, J., Rayer, P., Saunders, R., Matricardi, M., Geer, A., Brunel, P., Vidot, J., RTTOV v11 Users Guide, Doc ID: NWPSAF-MO-UD-028 (online: [https://nwpsaf.eu/deliverables/rtn/docs\\_rtto11/users\\_guide\\_11\\_v1.4.pdf](https://nwpsaf.eu/deliverables/rtn/docs_rtto11/users_guide_11_v1.4.pdf)), 2015.

Kneifel, S., U. Löhnert, A. Battaglia, S. Crewell, D. Siebler, Snow scattering signals in ground-based passive microwave measurements. *J. Geophys. Res.*, 115, D16214, 2010.

Lamkaouchy, K., Balama, A., Ellison, W.J., New permittivity data for sea water (30-100 GHz). Extension of ESA report 11197/94/NL/CN, 1997.

Lauritson L., Nelson, G.J., Porto, F.W., Data extraction and calibration of TIROS-N/NOAA radiometers. NOAA Tech. Memo. NESS 107, 1979.

Liebe, H.J., Hufford, G.A., Manabe T., A model for the complex permittivity of water at frequencies below 1 THz, *Int. J. Infrared and Millimetre Waves* 12 659-671, 1991.

Liebe, H.J., G.A.Hufford, M.G.Cotton: "Propagation modeling of moist air and suspended water/ice particles at frequencies below 1000GHz", AGARD 52nd Specialists' Meeting of the Electromagnetic Wave Propagation Panel, Ch3, 1993.

Löhnert U., Turner D., Crewell S., Ground-Based Temperature and Humidity Profiling Using Spectral Infrared and Microwave Observations. Part I: Simulated Retrieval Performance in Clear-Sky Conditions, *Journal of Applied Meteorology and Climatology*, 48(5):1017-1032, 2009.

Löhnert, U., Maier, O.: Operational profiling of temperature using ground-based microwave radiometry at Payerne: prospects and challenges, *Atmos. Meas. Tech.*, 5, 1121-1134, doi:10.5194/amt-5-1121-2012, 2012.

Martinet, P., Dabas, A., Donier, J.-M., Douffet, T., Garrouste, O., Guillot, R., 1D-Var Temperature retrievals from Microwave Radiometer and convective scale Model, *Tellus A* 2015, 67, 27925, <http://dx.doi.org/10.3402/tellusa.v67.27925>, 2015.

Matricardi, M., Chevallier, F., Tjemkes 2001, S., An improved general fast radiative transfer model for the assimilation of radiance observations. ECMWF Technical Memorandum 345, 2001.

Matricardi, M., The generation of RTTOV regression coefficients for IASI and AIRS using a new profile training set and a new line-by-line dataset. ECMWF Technical Memorandum 564, 2008.

Matricardi, M., The inclusion of aerosols and clouds in RTIASI, the ECMWF fast radiative transfer model for the Infrared Atmospheric Sounding Interferometer. ECMWF Technical Memorandum 474, 2015.

National Research Council, Committee on Developing Mesoscale Meteorological Observational Capabilities to Meet Multiple Needs, *Observing Weather and Climate from the Ground Up: A Nationwide Network of Networks*, ISBN: 978-0-309-12986-2, 250 pages, 2008.

Rose, T., Crewell, S., Löhnert, U., and Simmer, C.: A network suitable microwave radiometer for operational monitoring of the cloudy atmosphere, *Atmos. Res.*, 75, 183–200, 2005.

Rosenkranz, P.W., Water vapor microwave continuum absorption: A comparison of measurements and models. *Radio Science* 33: doi: 10.1029/98RS01182. issn: 0048-6604, 1998.

Saunders, R.W., Matricardi, M., Brunel, P., An Improved Fast Radiative Transfer Model for Assimilation of Satellite Radiance Observations. *Q.J.Royal Meteorol. Soc.*, 125, 1407-1425. 1999.

Saunders, R., RTTOV-7 Science and validation report (online: [https://nwpsaf.eu/deliverables/rtn/rttov7\\_svr.pdf](https://nwpsaf.eu/deliverables/rtn/rttov7_svr.pdf)), 2002.

1 Saunders, R., RTTOV-9 Science and validation report, Doc ID: NWPSAF-MO-TV-020 (online:  
2 [https://www.nwpsaf.eu/deliverables/rtn/rttov9\\_files/rttov9\\_svr.pdf](https://www.nwpsaf.eu/deliverables/rtn/rttov9_files/rttov9_svr.pdf)), 2010.  
3 Seity, Y., Brousseau, P., Malardel, S., Hello, G., Benard, P., Bouttier, F., Lac, C.,  
4 Masson, V., The AROME–France convective-scale operational model. Mon. Weather Rev. 139: 976–991. 2010.  
5 Weinreb, M.P., Fleming, H.E., McMillin, L.M., Neuendorffer, A.C., “Transmittances for the TIROS Operational  
6 Vertical Sounder”, NOAA Tech. Rep. NESS 85, 1981.  
7 WMO Statement Of Guidance For Global Numerical Weather Prediction, 2014. (online:  
8 <http://www.wmo.int/pages/prog/www/OSY/SOG/SoG-Global-NWP.pdf>).  
9 Weston, P., NWPSAF 1D-Var User Manual, Met Office Doc ID: NWPSAF-MO-UD-032, 2014.

10

## BIAS (K)

## RMS (K)

## Elevation angle 90°

CHAN #	Frequency(GHz)	90°-26°	90°-16°	90°-10°	90°-5°	90°-26°	90°-16°	90°-10°	90°-5°
1	22.24	-0.007	-0.016	0.004	-0.170	0.033	0.059	0.047	0.373
2	23.04	-0.002	-0.009	0.011	-0.159	0.029	0.052	0.050	0.352
3	23.84	0.005	0.002	0.023	-0.132	0.028	0.043	0.053	0.308
4	25.44	0.009	0.011	0.029	-0.087	0.029	0.036	0.056	0.224
5	26.24	0.009	0.011	0.028	-0.074	0.029	0.035	0.054	0.195
6	27.84	0.008	0.012	0.025	-0.059	0.029	0.034	0.050	0.158
7	31.40	0.009	0.011	0.023	-0.049	0.033	0.038	0.049	0.128
8	51.26	0.017	0.024	0.043	-0.101	0.175	0.176	0.159	0.244
9	52.28	0.021	0.025	0.039	-0.070	0.202	0.201	0.186	0.246
10	53.86	0.010	0.012	0.015	0.001	0.116	0.118	0.115	0.122
11	54.94	0.002	0.003	0.004	-0.008	0.023	0.023	0.023	0.023
12	56.66	0.001	0.001	0.001	0.001	0.007	0.007	0.007	0.007
13	57.30	0.001	0.001	0.001	0.001	0.005	0.005	0.005	0.005
14	58.00	0.000	0.001	0.001	0.001	0.004	0.004	0.004	0.004

## Elevation angle 30°

CHAN #	Frequency(GHz)	90°-26°	90°-16°	90°-10°	90°-5°	90°-26°	90°-16°	90°-10°	90°-5°
1	22.24	0.002	0.027	0.020	0.036	0.033	0.047	0.046	0.180
2	23.04	0.000	0.025	0.019	0.029	0.030	0.047	0.043	0.173
3	23.84	-0.002	0.020	0.016	0.014	0.026	0.040	0.040	0.162
4	25.44	-0.004	0.013	0.013	-0.007	0.024	0.037	0.037	0.150
5	26.24	-0.004	0.010	0.012	-0.012	0.023	0.036	0.035	0.145
6	27.84	-0.003	0.008	0.011	-0.016	0.024	0.037	0.033	0.137
7	31.40	-0.004	0.006	0.010	-0.019	0.155	0.043	0.036	0.131
8	51.26	0.010	0.018	0.027	-0.079	0.029	0.171	0.162	0.211
9	52.28	0.016	0.019	0.026	-0.073	0.138	0.149	0.143	0.174
10	53.86	0.003	0.007	0.008	-0.005	0.026	0.028	0.028	0.027
11	54.94	0.001	0.001	0.001	-0.001	0.007	0.007	0.007	0.007
12	56.66	0.000	0.000	0.000	-0.000	0.002	0.002	0.002	0.002
13	57.30	0.000	0.000	0.000	-0.000	0.001	0.001	0.001	0.001
14	58.00	0.000	0.000	0.000	-0.000	0.001	0.001	0.001	0.001

## Elevation angle 19°

CHAN #	Frequency(GHz)	90°-26°	90°-16°	90°-10°	90°-5°	90°-26°	90°-16°	90°-10°	90°-5°
1	22.24	-0.050	-0.004	-0.065	0.203	0.078	0.044	0.086	0.317
2	23.04	-0.053	-0.005	-0.070	0.189	0.079	0.042	0.089	0.298
3	23.84	-0.056	-0.007	-0.074	0.158	0.083	0.038	0.090	0.259
4	25.44	-0.046	-0.007	-0.070	0.099	0.089	0.036	0.087	0.192
5	26.24	-0.039	-0.006	-0.066	0.080	0.089	0.036	0.084	0.171
6	27.84	-0.028	-0.005	-0.059	0.055	0.091	0.036	0.078	0.149
7	31.40	-0.018	-0.004	-0.052	0.035	0.103	0.043	0.077	0.139
8	51.26	0.020	0.013	-0.018	-0.003	0.139	0.128	0.132	0.152
9	52.28	-0.031	0.012	-0.004	0.021	0.085	0.085	0.085	0.097
10	53.86	0.004	0.001	-0.000	0.003	0.013	0.010	0.010	0.011
11	54.94	0.002	0.000	0.000	0.001	0.005	0.003	0.003	0.004
12	56.66	0.000	0.000	0.000	0.000	0.001	0.001	0.001	0.001
13	57.30	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	58.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

CHAN #	Frequency(GHz)	BIAS (K)				RMS (K)			
		Elevation angle 10°							
		90°-26°	90°-16°	90°-10°	90°-5°	90°-26°	90°-16°	90°-10°	90°-5°
1	22.24	-0.299	-0.324	<b>-0.626</b>	<b>-0.930</b>	0.428	0.381	<b>0.681</b>	<b>1.035</b>
2	23.04	-0.297	-0.317	<b>-0.632</b>	<b>-0.955</b>	0.461	0.369	<b>0.685</b>	<b>1.027</b>
3	23.84	-0.391	-0.312	<b>-0.648</b>	<b>-0.998</b>	<b>0.662</b>	0.356	<b>0.698</b>	<b>1.067</b>
4	25.44	<b>-0.544</b>	-0.294	<b>-0.664</b>	<b>-1.055</b>	<b>1.214</b>	0.343	<b>0.716</b>	<b>1.128</b>
5	26.24	<b>-0.573</b>	-0.284	<b>-0.663</b>	<b>-1.065</b>	<b>1.414</b>	0.342	<b>0.718</b>	<b>1.143</b>
6	27.84	<b>-0.592</b>	-0.270	<b>-0.659</b>	<b>-1.075</b>	<b>1.685</b>	0.349	<b>0.716</b>	<b>1.159</b>
7	31.40	<b>-0.594</b>	-0.260	<b>-0.680</b>	<b>-1.129</b>	<b>2.023</b>	0.377	<b>0.731</b>	<b>1.205</b>
8	51.26	0.000	-0.088	-0.337	<b>-0.609</b>	0.272	0.103	0.350	<b>0.633</b>
9	52.28	-0.021	-0.029	-0.106	-0.202	0.083	0.034	0.112	0.214
10	53.86	0.022	0.000	-0.007	-0.014	0.037	0.003	0.011	0.021
11	54.94	0.005	0.000	-0.002	-0.004	0.009	0.001	0.003	0.006
12	56.66	0.000	0.000	-0.000	-0.000	0.001	0.000	0.000	0.001
13	57.30	0.000	0.000	-0.000	-0.000	0.000	0.000	0.000	0.001
14	58.00	0.000	0.000	-0.000	-0.000	0.000	0.000	0.000	0.000

Table 1: Statistics for the comparison between RTTOV-gb and the line-by-line model R98 (Rosenkranz, 1998) at elevation angles 90, 30, 19 and 10° (R98 minus RTTOV-gb). The HATPRO channel number (CHAN #), the channel central frequency, bias and RMS for each RTTOV training configuration are reported. The values which are larger than 0.5 K are highlighted in bold.

TRAINING CONFIGURANTION: Elevation angles from 90° to 16°									
CHAN #	Frequency(GHz)	BIAS (K)				RMS (K)			
		90°	30°	19°	10°	90°	30°	19°	10°
1	22.24	-0.008	0.021	-0.004	-0.282	0.049	0.045	0.042	0.326
2	23.04	-0.002	0.020	-0.006	-0.276	0.042	0.045	0.042	0.319
3	23.84	0.007	0.017	-0.008	-0.273	0.035	0.044	0.045	0.320
4	25.44	0.018	0.001	-0.009	-0.257	0.032	0.042	0.051	0.339
5	26.24	0.011	0.007	-0.009	-0.247	0.031	0.041	0.052	0.342
6	27.84	0.009	0.004	-0.008	-0.232	0.031	0.040	0.053	0.346
7	31.40	0.008	0.001	-0.010	-0.230	0.036	0.046	0.061	0.365
8	51.26	-0.004	-0.017	-0.015	-0.094	0.156	0.159	0.127	0.115
9	52.28	-0.004	-0.009	-0.004	-0.033	0.169	0.131	0.076	0.039
10	53.86	-0.001	0.002	-0.001	-0.002	0.095	0.025	0.015	0.012
11	54.94	0.002	0.000	-0.000	-0.000	0.023	0.011	0.008	0.003
12	56.66	0.002	0.000	0.000	0.000	0.010	0.004	0.002	0.000
13	57.30	0.001	0.000	0.000	0.000	0.009	0.003	0.001	0.000
14	58.00	0.001	0.000	0.000	0.000	0.008	0.002	0.001	0.000

Table 2: Statistics for the comparison between RTTOV-gb and the line-by-line model R98 (Rosenkranz, 1998) with the best RTTOV training configuration and the independent profile set (R98 minus RTTOV-gb). HATPRO channel number (CHAN #), the channel central frequency, bias and RMS at elevation angles 90, 30, 19 and 10° are reported.

		DEPENDENT PROFILE SET							
		BIAS (K)				RMS (K)			
CHAN #	Frequency(GHz)	90°	30°	19°	10°	90°	30°	19°	10°
1	22.23	-0.016	0.027	-0.004	-0.319	0.059	0.047	0.044	0.376
2	22.50	-0.015	0.026	-0.004	-0.321	0.058	0.047	0.044	0.378
3	23.03	-0.009	0.025	-0.005	-0.318	0.053	0.045	0.042	0.370
4	23.83	0.002	0.020	-0.007	-0.313	0.043	0.040	0.038	0.357
5	25.00	0.010	0.014	-0.007	-0.300	0.039	0.037	0.037	0.346
6	26.23	0.011	0.010	-0.006	-0.284	0.037	0.036	0.036	0.343
7	28.00	0.011	0.008	-0.005	-0.270	0.036	0.037	0.037	0.3500
8	30.00	0.011	0.006	-0.004	-0.266	0.038	0.040	0.040	0.366
9	51.25	0.024	0.018	0.013	-0.088	0.177	0.171	0.128	0.104
10	51.76	0.024	0.019	0.013	-0.056	0.189	0.164	0.111	0.066
11	52.28	0.025	0.019	0.012	-0.029	0.203	0.149	0.085	0.034
12	52.80	0.029	0.020	0.008	-0.011	0.207	0.116	0.052	0.014
13	53.37	0.019	0.017	0.002	-0.002	0.181	0.068	0.022	0.005
14	53.85	0.012	0.007	0.001	0.000	0.120	0.029	0.010	0.003
15	54.40	0.006	-0.000	0.001	0.000	0.055	0.012	0.006	0.002
16	54.94	0.004	0.001	0.000	0.000	0.023	0.007	0.003	0.001
17	55.50	0.002	0.001	0.000	-0.000	0.013	0.004	0.002	0.000
18	56.02	0.001	0.000	0.000	-0.000	0.009	0.003	0.001	0.000
19	56.66	0.001	0.000	0.000	-0.000	0.007	0.002	0.000	0.000
20	57.29	0.001	0.000	-0.000	-0.000	0.005	0.001	0.000	0.000
21	57.96	0.001	0.000	-0.000	-0.000	0.004	0.001	0.000	0.000
22	58.80	0.000	0.000	-0.000	-0.000	0.004	0.001	0.000	0.000

1

		INDEPENDENT PROFILE SET							
		BIAS (K)				RMS (K)			
CHAN #	Frequency(GHz)	90°	30°	19°	10°	90°	30°	19°	10°
1	22.23	-0.008	0.022	-0.003	-0.284	0.049	0.046	0.042	0.157
2	22.50	-0.008	0.021	-0.005	-0.279	0.048	0.046	0.043	0.158
3	23.03	-0.002	0.020	-0.006	-0.277	0.042	0.045	0.042	0.154
4	23.83	0.007	0.017	-0.008	-0.274	0.035	0.044	0.045	0.164
5	25.00	0.012	0.011	-0.009	-0.263	0.033	0.043	0.051	0.206
6	26.23	0.011	0.007	-0.009	-0.247	0.031	0.041	0.052	0.236
7	28.00	0.010	0.004	-0.008	-0.232	0.031	0.040	0.053	0.257
8	30.00	0.008	0.002	-0.009	-0.228	0.033	0.043	0.057	0.273
9	51.25	-0.005	-0.018	-0.016	-0.094	0.156	0.160	0.128	0.067
10	51.76	-0.005	-0.014	-0.010	-0.061	0.162	0.149	0.105	0.039
11	52.28	-0.005	-0.009	-0.004	-0.037	0.170	0.131	0.077	0.020
12	52.80	-0.004	0.000	-0.001	-0.015	0.169	0.098	0.044	0.015
13	53.37	-0.003	0.007	-0.003	-0.005	0.145	0.056	0.021	0.015
14	53.85	-0.002	0.002	-0.002	-0.002	0.097	0.026	0.015	0.012
15	54.40	0.000	-0.002	-0.001	-0.001	0.047	0.015	0.011	0.007
16	54.94	0.002	0.000	-0.000	-0.000	0.023	0.011	0.008	0.003
17	55.50	0.002	0.000	0.000	-0.000	0.016	0.007	0.005	0.001
18	56.02	0.002	0.000	0.000	-0.000	0.013	0.005	0.003	0.001
19	56.66	0.001	0.000	0.000	0.000	0.010	0.004	0.002	0.000
20	57.29	0.000	0.000	0.000	0.000	0.009	0.003	0.001	0.000
21	57.96	0.000	0.000	0.000	0.000	0.008	0.002	0.000	0.000
22	58.80	0.000	0.000	0.000	0.000	0.007	0.002	0.000	0.000



Table 3: Statistics for the comparison between RTTOV-gb and the line-by-line model R98 at MP-3000A channels with the **best** RTTOV training configuration, for both dependent (top) and independent (bottom) profile set (**R98 minus RTTOV-gb**). MP3000A channel number (CHAN #), the channel central frequency, bias and RMS at elevation angles 90, 30, 19 and 10° are reported.

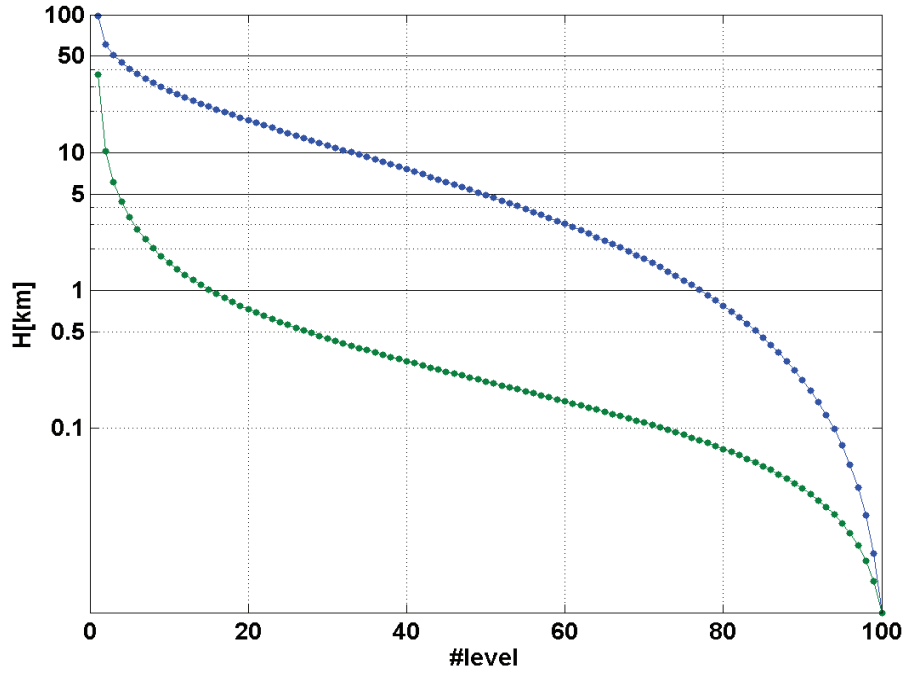


Figure 1: Vertical spacing of profiles levels used for RTTOV in this analysis. Level altitudes and altitude differences between levels are reported respectively with blue and green lines. Note that y-axis is in logarithmic scale.

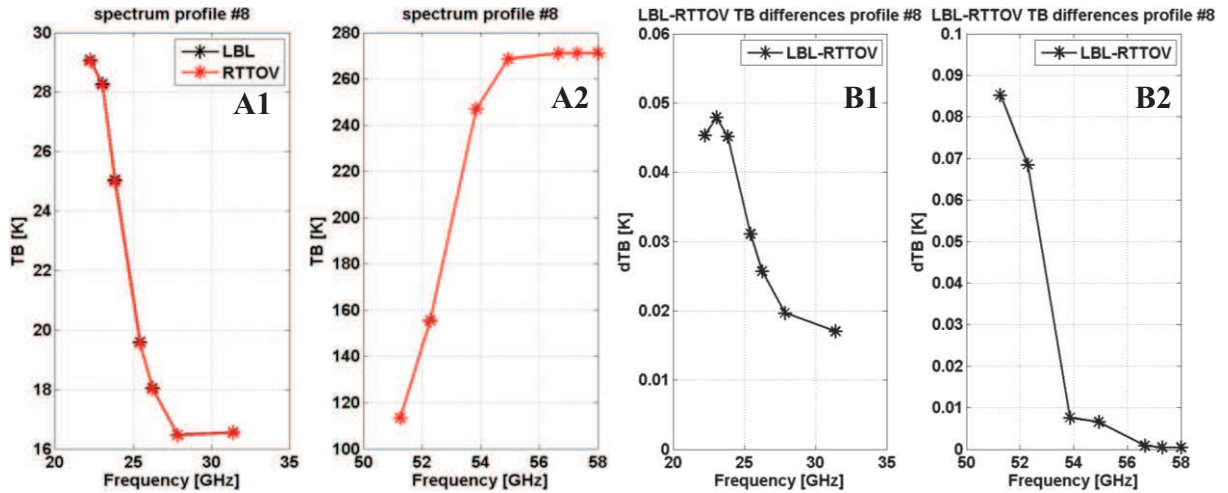


Figure 2: (A1) TB at K-band channels (20-35 GHz) computed by RTTOV-gb (red stars) and LBL R98 (black stars) from profile #8 of the dependent set. (A2) Same as A1, but for V-band channels (50-60GHz). (B1) TB differences (**R98 minus RTTOV-gb**) at K-band channels. (B2) Same as B1, but for V-band channels.



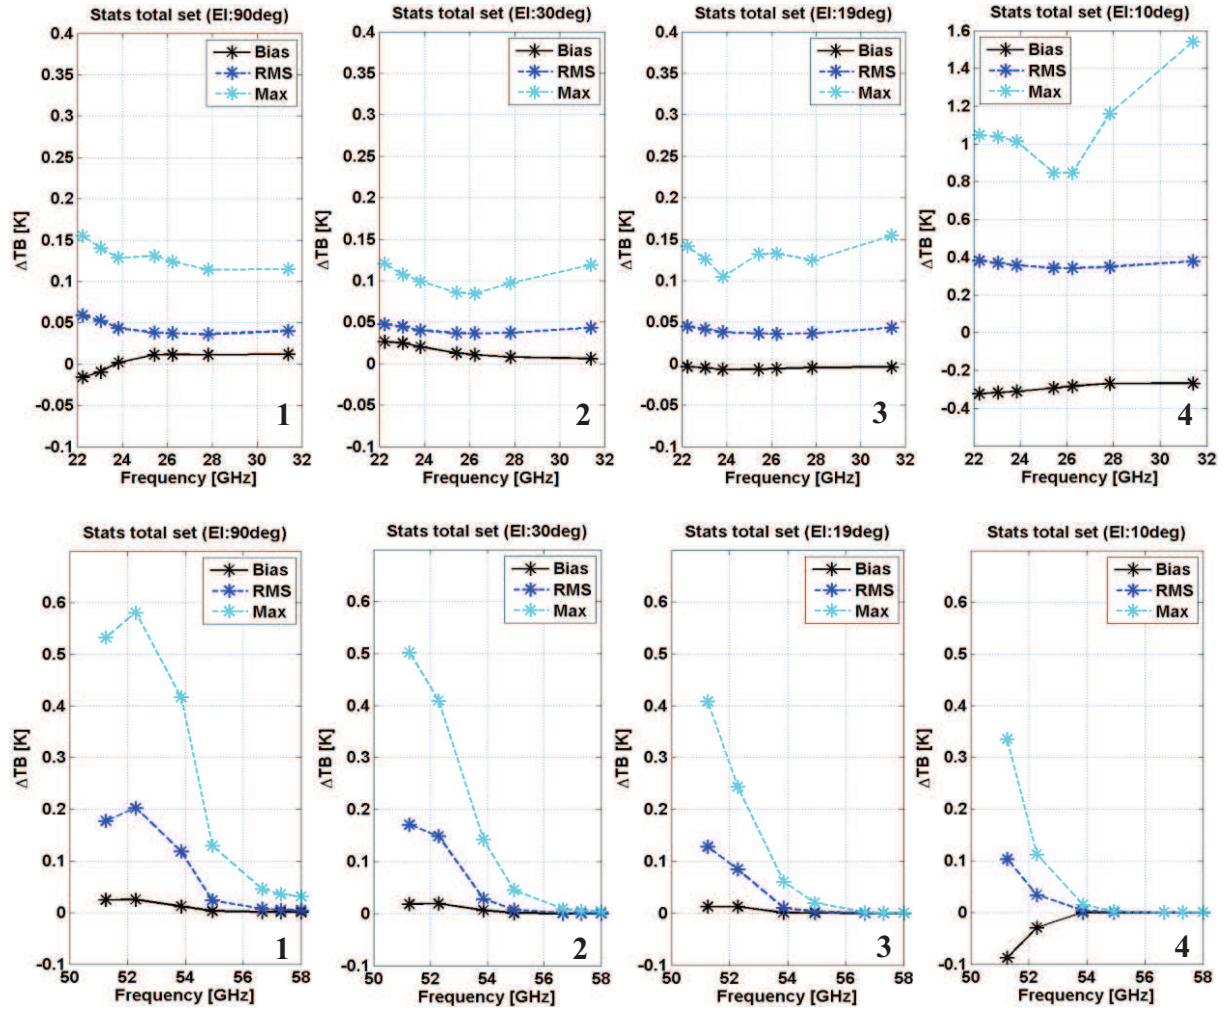


Figure 3: Bias (black solid line), RMS (blue dashed line) and maximum (cyan dashed line) of TB difference between RTTOV-gb and LBL R98 (Rosenkranz, 1998) for the dependent 83-profile set and the **best** training configuration (**R98 minus RTTOV-gb**). Top panels: K-band channels; Bottom panels: V-band channels. Panels number 1-2-3-4 report results at 90-30-19-10° elevation angle, respectively. Note that top panel 4 has different y-axis scale with respect to the other top panels.

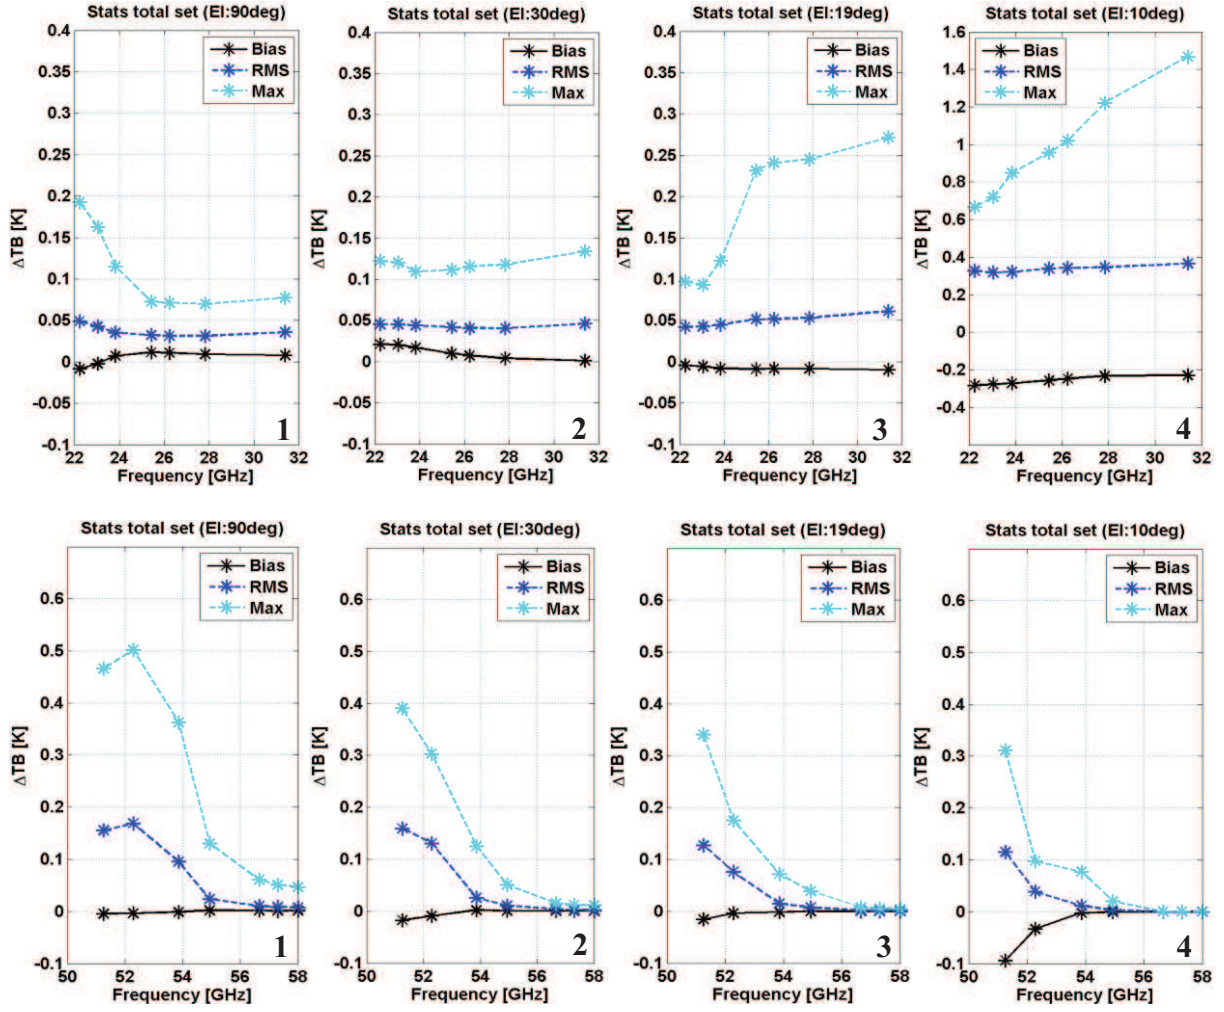


Figure 4: Same as Figure 3 but for the independent 52-profile set (R98 minus RTTOV-gb). Top panels: K-band channels; Bottom panels: V-band channels. Panels number 1-2-3-4 report results at 90-30-19-10° elevation angle, respectively. Note that top panel 4 has different y-axis scale with respect to the other top panels.

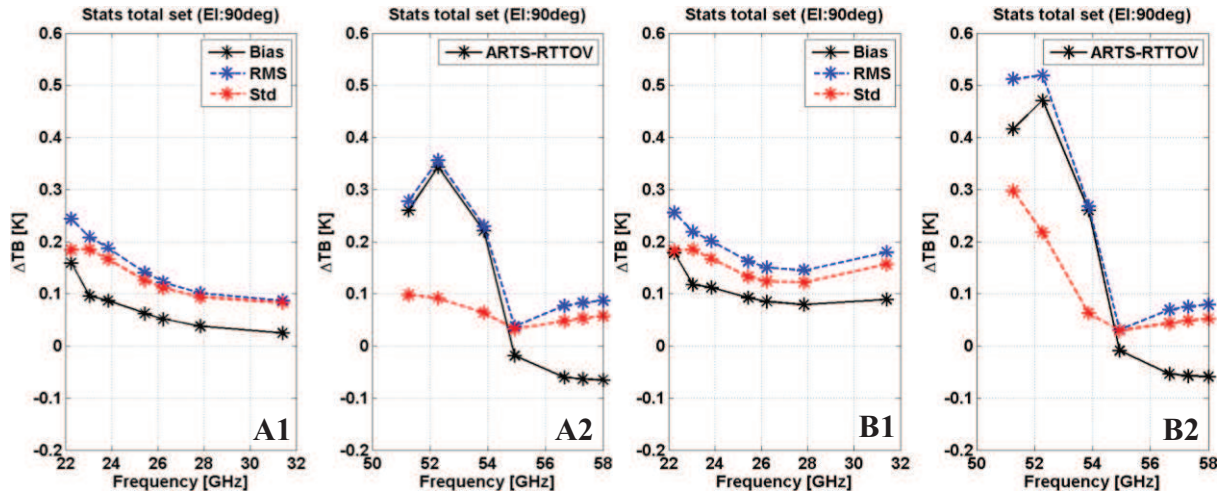


Figure 5: Bias (black solid line), standard deviation (red dashed line) and RMS (blue dashed line) of TB differences between RTTOV-gb and the reference radiative transfer model ARTS (Eriksson et al., 2015), for both clear (A1-2) and cloudy (B1-2) sky conditions (ARTS minus RTTOV-gb). Panels 1-2 are for K- and V-band channels, respectively. All panels report results at 90° elevation angle.

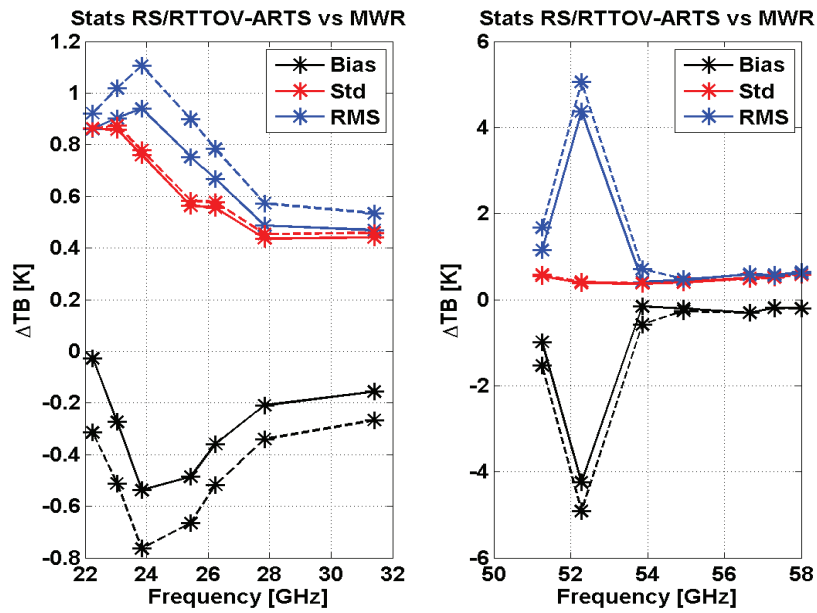


Figure 6: Bias (black line), standard deviation (red line) and RMS (blue line) of differences between TB measured with the microwave radiometer and TB simulated from radiosonde profiles respectively with RTTOV-gb (solid lines) and the reference radiative transfer model ARTS (dashed lines), both for clear-sky at 90° elevation angle (measurements minus simulations).



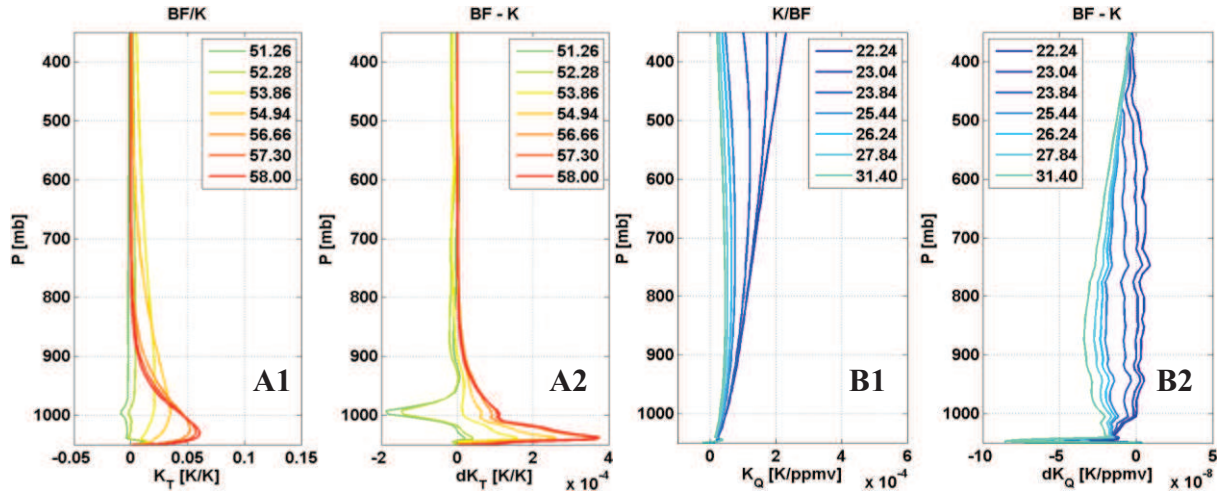


Figure 7: Jacobians calculated with the RTTOV-gb BF method and K-module. Panels A1: temperature Jacobians for V-band channels; Panels B1: absolute humidity for K-band channels. Note that BF method (solid) and K-module (dashed) are not distinguishable as they nearly completely overlap. Panels A2 and B2 show Jacobian differences between BF and K, respectively for temperature and absolute humidity.

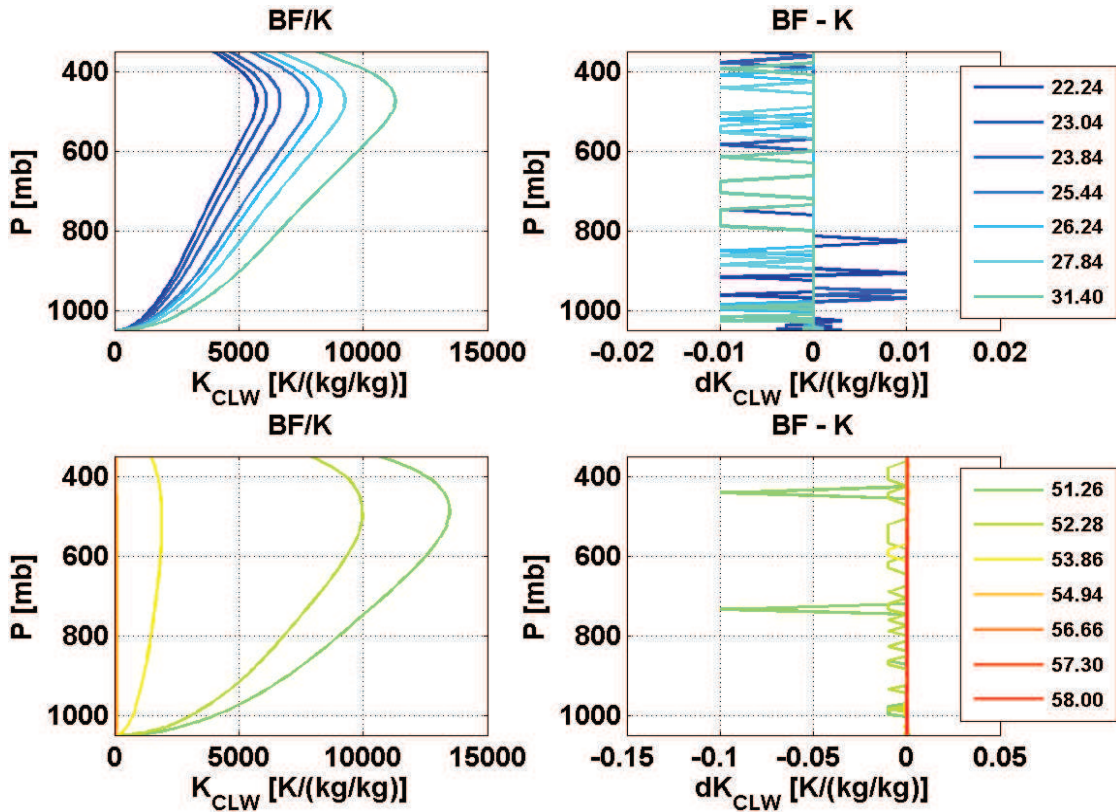


Figure 8: Cloud Liquid Water Jacobians calculated with RTTOV-gb BF method and K-module (left) and Jacobian differences between BF and K (right), respectively for K-band (top) and V-band (bottom) channels. Note that BF method (solid) and K-module (dashed) are not distinguishable as they nearly completely overlap.

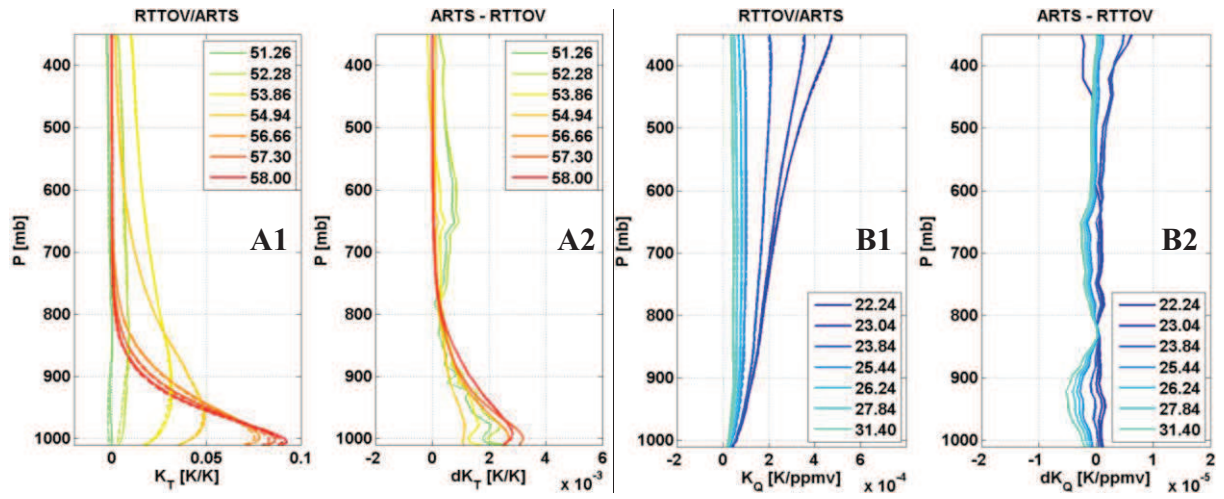


Figure 9: As in Figure 7, but for Jacobians calculated with ARTS (solid line) and RTTOV-gb K-module (dashed line). Panels A2 and B2 show Jacobian differences between ARTS and RTTOV-gb K-module, respectively for temperature and absolute humidity.

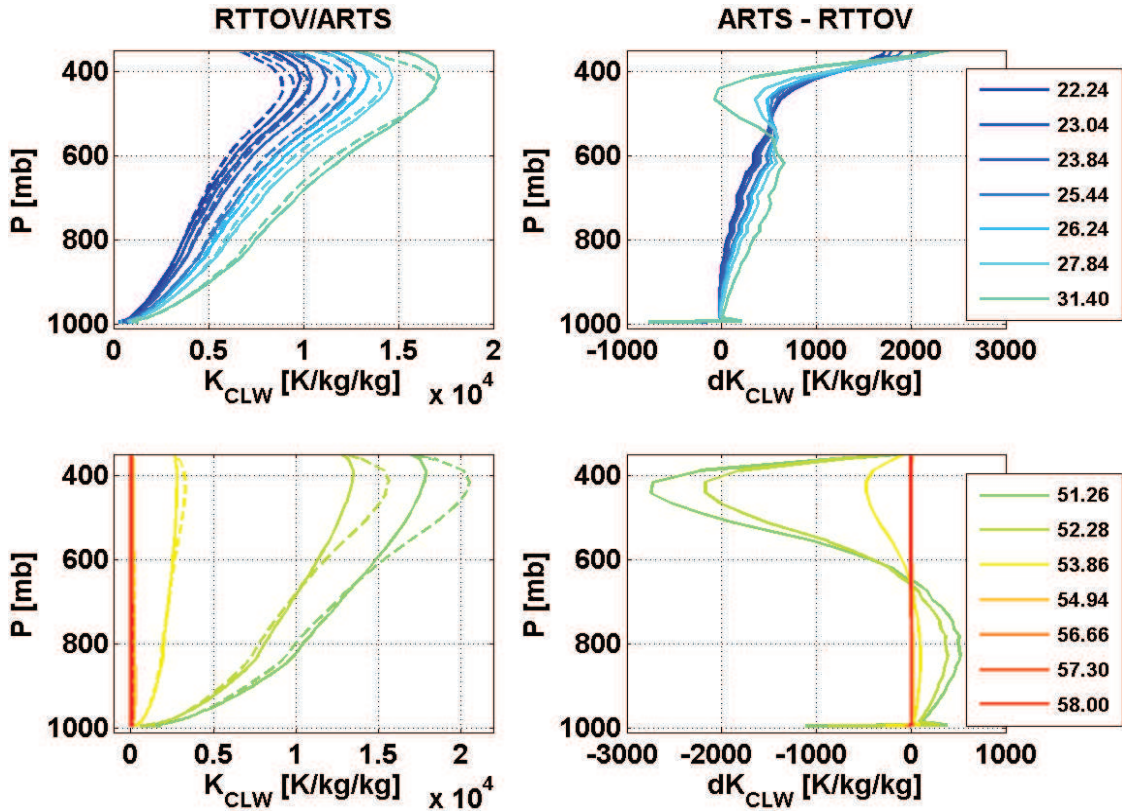


Figure 10: As in Figure 8, but for Jacobians calculated with ARTS (solid line) and RTTOV-gb K-module (dashed line).

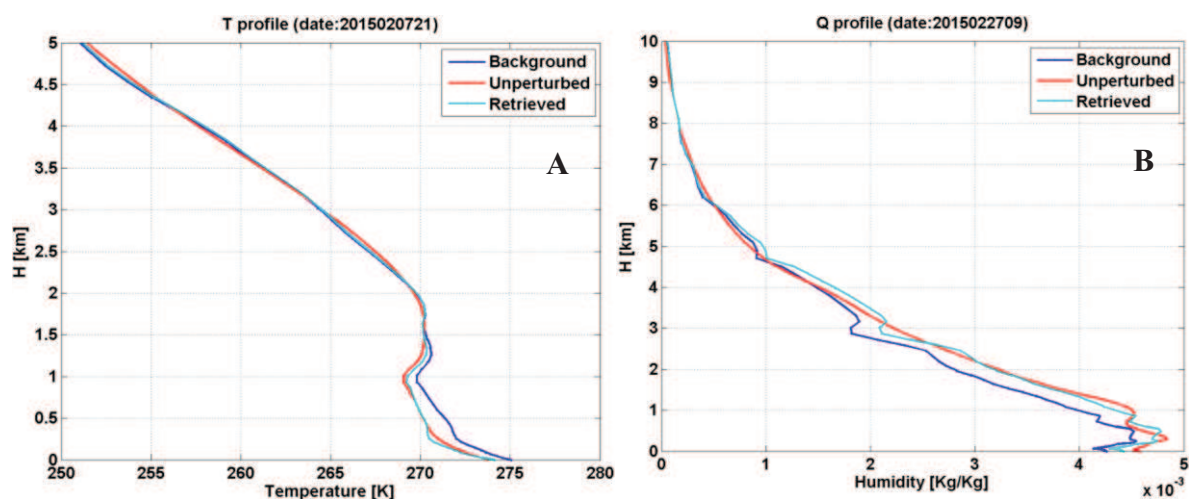


Figure 11: Temperature (Panel A) and Humidity (Panel B) profiles of Background (blue line), Truth (red line) and 1D-Var retrievals (cyan line) for two clear-sky profiles.