

October 17, 2017

Dear Dr. Neal,

Thank you for considering our revised manuscript. Please find below our replies to each of the two reviewers, with our comments italicized. We are also attaching a tracked-changes PDF, with deletions struck through and additions italicized. We would briefly like to draw your attention to the major changes we've made. First, we have substantially expanded and re-written our literature review (section 3) to address the concerns of Dr. Turowski. We have also included in the review a brief discussion of reach-scale vs. landscape-scale modeling approaches. Second, we added a section (9.1) discussing the potential for validating our model in the field, as requested by both reviewers. Finally, we added a section (9.3) comparing and contrasting our model with previous work. We have addressed all of the other, more minor reviewer comments as well, including expanding Figure 4 and revising our discussion of smoothed entrainment/erosion thresholds in section 4.3.1. We feel that the revised manuscript is greatly improved, and that it will be of interest to the readers of *GMD*.

Thank you for considering our revised manuscript,

Charles M. Shobe, on behalf of all coauthors

RESPONSE TO REVIEWERS

CHARLES M. SHOBE, ON BEHALF OF ALL COAUTHORS

1. RESPONSE TO REVIEW BY JENS TUROWSKI

Author's note: reviewer comments are reproduced here, and our responses are *italicized*.

General comments

In the paper, the authors develop a new formulation for river sediment transport and erosion, with a formulation that both honors conservation of mass along the stream, as in transport-limited formulations, and calculates the erosion of bedrock, as in detachment-limited formulations. While I do not have a problem with the model development and the description of the numerical implementation, the literature overview is incomplete and the introduction, review, discussion and conclusions will need to be adjusted. In particular, the author have overlooked a number of contributions (more than half of those that exist by my count, and there are not that many!) that attempted to solve the same problem. These include the Exner-equation-based approach by Inoue et al. (JGR, 2014), the adaption of erosion-deposition models for partially alluviated beds by Turowski (WRR, 2009) and Turowski and Hodge (ESurf, 2017), the 2-D models by Nelson and Seminara (GRL, 2011 and GRL, 2012) and Inoue et al. (JHE, 2016 and ESPL, 2017), and the formulations based on St.-Venant equations (the most relevant paper here is by Fowler et al., SIAM J. Appl. Math., 2007). There might be other papers and the authors should look out for them. Really, the number of publications is not that large, and a review should encompass the entirety of the literature. I think the formulation proposed here is sufficiently different to previous models to warrant publications, but it is definitely necessary to put it into proper context. The discussion could contrast the different model formulations and highlight the differences, advantages and disadvantages of the new formulation. Finally, it would be useful to develop testable hypotheses that can be used to discriminate the various models.

We thank the reviewer for taking the time to review our manuscript, and for their helpful comments. In response to the reviewer's point that several items are missing from our literature review, we have re-written and expanded the introduction (section 1) and literature review section (section 3). The review now includes

almost all of the contributions noted by the reviewer. We have also added a section (section 9.3) dedicated to elucidating the similarities and differences between our model and previous models. In response to the reviewer’s comment noting that testable hypotheses would be useful (which was echoed by the other reviewer), we have added section 9.1, which discusses some of the testable hypotheses generated by the examples we present in the paper. Below, we address the reviewer’s specific line-by-line comments.

Specific comments

2.20 I am not too happy with the term ‘hybrid’ here. This implies that two rather different approaches are put together. I rather see the two model families that are commonly termed detachment- and transport-limited as rather extreme approximations of a single approach. See also the comment to 2.30.

We had been using the term ‘hybrid’ following Hobley et al (2011), but we have removed that term from the paper. At the end of the introduction, we introduce our review by saying that we will “review existing models that fall between these two end-members.”

2.20 There are a number of important contributions missing in this overview. Inoue et al. (JGR, 2014) described a 1-D model based on an adapted Exner equation. There is also the surface-roughness model by Johnson (JGR, 2014; cited elsewhere). Turowski and Hodge (ESurf, 2017) and Turowski (WRR, 2009) adapted the erosion-deposition framework to partially alluviated beds, the latter in a stochastic context (although these papers are more concerned with cover dynamics on the reach scale, rather than sediment routing on the catchment scale). Nelson and Seminara (GRL, 2011 and 2012) and Inoue et al. (JHE, 2016, and ESPL 2017) described fully coupled 2-D models. I’d also like to point out the family of landscape evolution models that sprang from Smith and Bretherton’s (WRR, 1972) seminal work. These have since been continuously developed and expanded. Versions of these models including bedrock erosion terms have been discussed by Fowler et al. (SIAM J. Appl. Math., 2007), Smith (JGR, 2010), and Cattán et al. (Math. Geosci., 2017). The Fowler et al. paper is the most relevant here.

We have restructured the review to incorporate these contributions (the only ones we do not include are the Smith (2010) and Cattán et al (2017) papers. We felt that the focus of Smith (2010) on subcritical vs supercritical flow, and the focus of Cattán et al (2017) on numerical techniques made them less applicable than Smith and Bretherton (1972) and Fowler (2007), which we now discuss.

In response to this comment and one from the other reviewer asking for a discussion of reach-scale vs. landscape-scale models, we have added a paragraph to the review discussing the differences in approach between the reach-scale cover models and landscape evolution models incorporating bedrock-alluvial dynamics.

2.30 The work of Hodge et al. (JGR, 2012), Chatanantavet and Parker (WRR, 2008) and Turowski and Hodge (ESurf, 2017) should probably be cited here.

We now include discussions of these three contributions in the review, as well as Chatanantavet and Parker (2009).

2.30 Here, the different concepts of sediment transport and bedrock incision models seem to be muddled. An incision law attempts to predict the bedrock erosion rate, given sediment flux, hydrodynamics, etc. A sediment transport model predicts the sediment transport rates, given the hydrodynamics. Many of the cited erosion models (such as the saltation-abrasion model or the stream power model) were not constructed to include the prediction of sediment transport rates. The assumption that the river is always under capacity, allowing to neglect mass conservation, is separate from this. In essence, there is a description of mass conservation (such as the Exner equation or the erosion-deposition framework) and a description of erosion mechanics (such as the saltation-abrasion model or the stream power model). As the authors are aware, one of these is often neglected in landscape evolution modelling – the mass conservation in the so-called detachment-limited models and the erosion mechanics in the so-called transport-limited models. The authors do seem to be aware of this distinction, as they advocate their formulation as one that might work with different erosion models.

In our revised review, we have been careful to state whether each model discussed a) conserves sediment and b) contains an incision rule. As we note in comment 3.4, we have deleted the term 'under-capacity' because of the confusion around that term existing in the literature.

3.2 Earth capitalized.

Fixed.

3.4 There have been several other potential solutions. See comment to 2.20.

As discussed above, we have restructured the review to include the contributions noted by the reviewer. We feel that the revised review both better acknowledges the general body of work on this topic and better categorizes existing models than the original manuscript did.

3.5 Erosion-deposition models are NOT equivalent to ‘under-capacity’ models.

We have deleted the term ‘under-capacity’ due to its confusing use in the literature. We included this comment originally because Davy and Lague (2009) note that their erosion-deposition model, when the sediment transport length scale is constant in space, becomes equivalent to the model of Beaumont et al (1992). However, we now understand that the term ‘under-capacity’ in that context may be confused with the detachment-limited assumption (e.g., mass conservation may be neglected). As such, we do not use the term in the revised paper.

3.13 If I remember correctly, this validation is for alluvial rivers, right?

That is correct. To make this clear, we have changed this sentence to read: “The erosion-deposition framework, validated for alluvial rivers by the laboratory experiments of...”

3.18 There are two papers that have done these modifications, at least partially: Turowski (WRR, 2009) extended a stochastic Markov-chain model of bed-load transport to partially alluviated beds and Turowski and Hodge (ESurf, 2017) described a 1-D model. Both these papers focus on cover dynamics rather than sediment routing.

As discussed above, we have re-written the review to incorporate these two (and other) contributions. Additionally, we have discussed in the review the differences between approaches that focus on cover dynamics vs. those that focus on catchment-scale sediment routing and landscape evolution.

6.21 The exponential model is functionally equivalent to that derived by Turowski et al. (2007, cited elsewhere). If H is the average height of the sediment, then this H scales with the total mass of sediment residing on the bed.

We have referenced Turowski et al. (2007) in this sentence.

8.33 To me, ‘shown’ seems to be an overstatement here. Also, the meaning of state function may be unclear to readers in the current context.

We have substantially revised section 4.3.1 to make our meaning more clear. In so doing, we have replaced “shown” with “...the sediment transport literature suggests...”. We have also removed the term “state function.”

9.5 It is unclear why this approach is deemed necessary and why this particular function is chosen. The motivation for a different approach seems sufficiently clear,

but the authors could better describe their train of thoughts for arriving at eq. (9).

In our re-writing of section 4.3.1, we have clarified our thought process with regards to the development of the smoothed-threshold functions. The added text is copied below.

“If a distribution of thresholds exists, erosion should decline to zero not exactly when available stream power drops below the user-defined threshold as would be the case for a standard threshold model, but when available stream power is significantly below the defined threshold. As available stream power becomes larger than the defined threshold, entrainment and erosion should increase smoothly as a greater portion of the distribution of thresholds is exceeded. In the limit where available stream power is many times greater than the user-defined threshold, available stream power should simply be reduced by the user-defined threshold. An exponential function describing the increase in entrainment/erosion as available stream power increases relative to threshold stream power satisfies these requirements without adding any model parameters. We include an optional exponential expression for threshold stream power. . . .”

10.6 The formulation seems a bit cynical here – either the model is a good representation of reality, and then one should just have to deal with sharp discontinuities, or it is not. To choose a particular model set up to ease the analysis of the results (or to recommend it) is rather unscientific.

We have re-focused section 4.3.1 and deleted the sentences about the relative ease of model analysis. Our main purpose with the smoothed-threshold approach is to provide a mathematically simple way to honor the reality that entrainment and erosion thresholds are not generally simple constants, and to do so without adding any additional model parameters. We believe that exponential smoothing of the erosion and entrainment thresholds is a reasonable representation of reality. To avoid confusing the reader and/or distracting from this main point, we deleted the sentences relating to how discontinuities in a model response surface can hinder analysis.

10.12 Eq. (11) holds only if the sediment and the water move at the same speed. The (mass) concentration is defined as $M_{\text{sediment}}/M_{\text{water}}$ for a control volume. The mass is related to the mass transport capacity (Q_s with units kg/s) including sediment velocity V_{sediment} as $M_{\text{sediment}} * V_{\text{sediment}} = Q_{\text{sediment}} * \text{transport_length}$ (and a similar equation for water).

We have added the following sentence to the end of section 4.4: “Eq. (11) assumes that sediment and water move at the same speed such that all changes in $\frac{Q_s}{Q}$ are driven by erosion and deposition.”

11.8 Eq. (18) may be clearer if the common factors in the two terms are taken out of the parenthesis. In effect, this is a standard stream power model long profile, with an erodibility coefficient that is an inverse sum of the coefficients for bedrock and alluvium.

We have added equations making this change. The form of equation 18 was intended to facilitate comparison with Davy and Lague (2009), who showed their slope-area relationships in a similar way. However, we agree with the reviewer’s point that putting the S-A relationship in a form more familiar to the basic stream power prediction will likely be helpful for readers. We have added one more step to our derivation (now equation 19) in which we separate U and A^m from the two additive terms. In addition, we take this opportunity to add text to address the reviewer’s point (made in comment on 20.5) that constraining $\frac{V}{r}$ in natural channels would be useful. Our additional text and equations are shown below.

“Eq. (18) may be rearranged to show that SPACE predicts a standard stream power slope-area relationship modulated by $\frac{V}{r}$ as well as sediment and bedrock erodibility:”

$$(1) \quad S = \left[\frac{V}{K_s r} + \frac{1}{K_r} \right]^{1/n} U^{1/n} A^{-m/n}.$$

“The ratio between the effective settling velocity V and the runoff rate r controls the relative importance of the bedrock and alluvial components of the steady-state channel slope. In the simplified case of $K_s = K_r$, a ratio of $\frac{V}{r} = 1$ would indicate equal contributions from the two regimes. Quantifying $\frac{V}{r}$ for natural systems could therefore give a valuable indication of process dynamics in natural channels.”

14.1 This sentence is rather awkward. Consider reformulating.

We have changed this sentence to read: “Because sediment deposition in a cell depends on both Q_s^{in} from upstream and sediment entrained from the cell itself, we can substitute Q_s^{out} for Q_s in the deposition term. Eq. (29) may then be solved to yield the local analytical solution for Q_s within a model cell:”

17.4 Earth capitalized.

Fixed.

20.5 Eq. (43) may be clearer if the common factors in the two terms are taken out of the parenthesis. In effect, this is a standard stream power model long profile, with a modulating factor depending on runoff and settling velocity. It would also be interesting to quantify this factor to see how far typical values are different from one.

We have added one last step in our derivation (now equation 45) to address this point. The new equation, shown below, should be more familiar to people used to working with the standard stream power model.

“Eq. (45) may be re-written to show that it predicts a standard stream power slope-area relationship that is modified by the ratio of settling velocity to effective runoff:”

$$(2) \quad S = \left[\frac{V}{r} + 1 \right]^{1/n} \left[\frac{U}{K_s} \right]^{1/n} A^{-m/n}.$$

In response to the comment about quantifying V/r , we agree that because this ratio is an important control on the transport-limited vs. detachment-limited model behavior, it is worth quantifying. At this point however, we feel that the constraints on V are too poor to facilitate adequate comparison. We intend to focus future work on unpacking V so it no longer lumps together so many processes and variables. We have added text in section 4.5 (after equation 19) to emphasize the importance of this ratio to the reader, and to suggest that quantifying it in natural channels could be a valuable exercise.

“The ratio between the effective settling velocity V and the runoff rate r controls the relative importance of the bedrock and alluvial components of the steady-state channel slope. In the simplified case of $K_s = K_r$, a ratio of $\frac{V}{r} = 1$ would indicate equal contributions from the two regimes. Quantifying $\frac{V}{r}$ for natural systems could therefore give a valuable indication of process dynamics in natural channels.”

24.20 The test results do not indicate that the model is useful for natural settings as claimed here. They just demonstrate that the numerical implementation is working.

We have removed this sentence, as the preceding sentence already makes the point that the numerical implementation is working.

2. RESPONSE TO REVIEW BY FIONA CLUBB

Author’s note: reviewer comments are reproduced here, and our responses are *italicized*.

General comments

This paper derives a new formulation for modelling of channel evolution incorporating simultaneous erosion of bedrock and sediment transport, set within the Landlab modelling framework. This modelling framework has the potential to be useful to many within the earth science community by tackling a gap between the two end member scenarios of detachment- and transport- limited models: although previous models between these have been proposed, the inclusion of the authors' model within the Landlab framework allows it to be used easily by the community and for the results of the authors' study to be reproduced, as well as being applicable over large spatial and temporal scales. The manuscript is well written, clear, and the derivation of the model is well laid out. I therefore believe that the paper is suited to publication within GMD following to some corrections which I have specified below.

We thank the reviewer for taking the time to review this manuscript, and for their helpful suggestions. We have endeavored to thoroughly address all comments below.

Specific comments

Abstract: previous models have been presented in the literature that include combine erosion and deposition, which the authors review in Section 2, but there is no mention in the abstract of the novelty of the authors' approach compared to these previous methods. The abstract should describe precisely why a new modelling approach is needed for this problem.

In our revisions we have tried to stress that the novelty of our approach involves the ability to transition between transport- and detachment-limited states (which some existing models can do), the ability to erode sediment and bedrock at the same time (which some existing models can do), but most importantly the ability to do both of those in a 2-D landscape evolution model that is designed to be coupled to other models and run over landscape evolution space and time scales. Basically, we feel that we are incorporating the best features of existing models (with a slightly different mathematical formulation) into an extensible and efficient landscape evolution modeling tool. Further, we are expanding upon existing models by applying the explicit erosion/deposition framework to a mixed bedrock-alluvial channel model. We have changed the abstract to add: "Modeling landscape evolution over large spatial and temporal scales requires a model that can 1) transition freely between transport-limited and detachment-limited behavior, 2) simultaneously treat sediment transport and bedrock erosion, and 3) run in 2-D over large grids and be coupled with other surface process models.", and "SPACE improves on previous models of bedrock-alluvial rivers by explicitly calculating sediment erosion and deposition rather than relying on a flux-divergence (Exner) approach."

Page 1, Lines 18 - 20: sentence needs reworded.

We broke the first sentence up into two to improve readability and clarity. It now reads: “Rivers are the primary agents of land-surface lowering in non-glaciated landscapes (e.g., Whipple, 2004). Erosion and sediment transport in rivers affect human river management (e.g., Graf et al., 2010), landscape mass balance (e.g., Armitage et al., 2011), and global biogeochemical cycling (e.g., Hilton, 2017).”

Page 2, Line 5: ‘...the superiority of one model over the other in tests against real landscapes...’: I think it would be useful to include in the introduction some examples of how these different models have been tested against real landscapes. A brief review of this would be useful to the reader, and set the context for providing some demonstration of the potential of using equivalent tests for the SPACE model.

We have written a new section (section 2) to discuss how these models have been tested against one another. This, as noted by the reviewer, will help provide context for our later discussion of how SPACE could be tested in the field (section 9).

Page 4, Lines 1 - 7: The authors could expand here upon what the limitations are of the erosion-deposition models of Lague (2010) and Zhang et al. (2015).

We have re-written the review to more fully educate readers about the pros and cons of the many different modeling approaches out there. This includes a statement about the advantages of the SPACE algorithm over those two models, which are that 1) SPACE uses explicit calculation of sediment erosion and deposition instead of an Exner-style conservation rule, and 2) SPACE is easily applied to landscape evolution modeling exercises because of its status as a Landlab component.

Page 4, Lines 15-17: Other models have been developed that model mixed bedrock alluvial channels that are not mentioned here, as noted by Reviewer 1. I think it is worth mentioning here the difference between the reach-scale approach generally taken by the development of these mixed bedrock-alluvial models compared to the whole landscape scale that is used as a framework in this paper, to demonstrate the need for and motivation behind development of the SPACE model. It would also be good to discuss the challenges behind scaling reach-scale models up to whole landscapes.

As we note in our response to reviewer 1, we have extensively re-written and expanded our literature review (section 3) to take these other contributions into account. The new review contains a discussion of several of these models that

are focused on reach-scale cover dynamics. At that point, we discuss why some of these models are likely not to scale well for landscape evolution applications (the computational cost of solving 2-D flow equations, for example). We hope that this shows the reader why SPACE is an important contribution.

Page 5, Eq 1: Do you think that including a variable channel width would be possible in the model, or would this be too computationally expensive to do for large spatial/temporal scales? I know this is discussed in the previous section as processes which are not treated in the model, but it would be interesting to have an idea of which processes would potentially be possible to include in future developments, and what isn't due to scale issues.

This is a good question. As numerous authors have pointed out, the “default” channel width closure (i.e., width goes as the square root of discharge) is computationally efficient but not physically-based. It would indeed be possible to incorporate dynamic channel width into the model. We view the approach of Lague (2010), in which stresses are partitioned between the channel bed and banks according to a trapezoidal cross-section approximation, as one potential way of incorporating width changes. There are also more complex approaches for calculating or approximating the shear stress across the channel cross-section, which we discuss in the added text below. We have not attempted to incorporate such rules into the SPACE model, and so cannot be sure what the computational cost would be, nor how that cost would scale with grid size. Our rationale for excluding dynamic width from the SPACE model is both potential computational cost but also the substantial number of parameters already necessary to describe the coupled evolution of sediment and bedrock. Adding an empirical or semi-empirical width adjustment rule would substantially increase model complexity.

In order to make it clear to the reader that dynamic width could be incorporated, we have added the following in section 4.3:

“While we employ a simple closure for channel width in which width scales as the square root of water discharge (Leopold and Maddock, 1953; Wohl and David, 2008), it may be desirable for some applications to add dynamic channel width adjustments to the model, as previous work has suggested that width trades off with slope in transient channels (e.g., Finnegan et al., 2005; Turowski et al., 2006; 2009; Wobus et al., 2006; Whittaker et al., 2007; Attal et al., 2008; Lague, 2010; Yanites and Tucker, 2010). One option for incorporating dynamic width is to calculate or approximate shear-stress distributions across channel cross-sections (Kean and Smith, 2004; Wobus et al., 2006; 2008; Turowski et al., 2009). A simpler dynamic width rule can be obtained by partitioning erosive power between the bed and banks under a trapezoidal channel assumption (Flintham and Carling, 1988) as detailed in (Lague, 2010). Different approaches have different numbers of parameters and computational costs, and further work will be necessary to elucidate

which advances beyond the standard empirical width closure are tractable within the SPACE landscape evolution model framework.”

Figure 2: It seems like it would be possible to include the tool effect as well as the cover effect, where E_r would decrease where $H/H_* = 0$ as there are no tools for effective incision into bedrock? Is there potential for this to be included as an option in the model formulation?

It is indeed possible to include the tools effect, but we suggest that a more effective way to do so would be to assert that E_r increases with Q_s until Q_s reaches transport capacity (where transport capacity is Q_s when erosion equals deposition, or $E_r + E_s = D_s$). The advantage of this approach is that bedrock erosion actively responds to the amount of sediment in transport, not the amount of sediment resting on the bed. The cover effect, or reduction in E_r as H/H_ increases, would compete with the increase in E_r as Q_s increases. We do not incorporate this effect into the current version of SPACE because it complicates model comparison with analytical solutions, but it could certainly be incorporated into future versions.*

We agree with the reviewer that it would be helpful to explain to the reader how the tools effect could be incorporated. To that end, we have added two sentences to the end of section 3.3: “The “tools effect” on bedrock erosion could be incorporated into the model by assuming that E_r at a given H/H_ increases with Q_s until Q_s reaches transport capacity (which is Q_s when $E_s + E_r = D_s$). Because increases in H/H_* already account for the “cover effect,” the E_r dependence on Q_s need only be positive and not decline with increasing Q_s (Sklar and Dietrich, 2001; Sklar and Dietrich, 2004; Gasparini et al., 2006; Turowski et al., 2007).”*

Page 8, Line 33: It would be useful to explain ‘state function’ in some more detail here.

In response to this comment, the following comment, and comments from the other reviewer, we have re-structured and re-worded section 4.3.1 (see response to next comment below). In doing so, we no longer use the term ‘state function.’

Page 9, Line 6: What is the justification for choosing an exponential decline in erosion at the threshold value here?

The idea here is to account for the fact that sediment entrainment and bedrock erosion thresholds in nature cannot generally be characterized by a single value. Rather, the threshold for a given population of sediment grains or a given areal exposure of bedrock is likely to be a distribution of values. The distribution will be influenced by such variables as grain size and sorting, flow history, and sediment flux for sediment, and weathering, local mineralogy, and joint spacing and

orientation for bedrock (see our revised section 4.3.1 for references). We chose an exponential function because it accounts for a smoothed threshold while still yielding the behavior expected from a single-value threshold. For example, when stream power is far above the user-defined threshold, excess stream power is $\omega - \omega_c$ just as in single-threshold cases. Conversely, when stream power is far below the defined threshold, the threshold term approximately equals ω (the available stream power), meaning that entrainment or erosion is effectively zero. The other benefit of choosing an exponential function over some other form is that it does not require any additional model parameters because the user-defined threshold scales the exponential function.

To make all of this clear to the reader, we have re-written section 4.3.1. We focus on summarizing support for the idea of a distribution of thresholds rather than a single number, and we have added a sentence explaining that we prefer the exponential because it adds no model parameters: “We chose an exponential function because it allows for smoothing of entrainment and erosion thresholds, and therefore honors the reality that such thresholds tend to be distributions of values rather than a single value, without adding any model parameters.”

Page 12, Line 27: Is there a specific value of q/V above which the model predicts detachment-limited behaviour? It would be good to clarify this here.

In the erosion/deposition model presented by Davy and Lague (2009), there is a dimensionless number $\frac{V}{\tau}$ that predicts the behavior. When $\frac{V}{\tau} > 1$, behavior is transport-limited and vice versa. However, this only holds when eroding a single layer, as incorporating multiple layers increases the number of factors that influence sediment entrainment (for example, in SPACE, H/H_* has a strong influence). There is not a specific value that governs the DL/TL transition in the SPACE model, because the dimensionless ratios presented in this section do not incorporate all of these effects. Still, we think that it is worth presenting the simple case from Davy and Lague (2009), so we have added text to say:

“Specifically, following Davy and Lague (2009), we can define a dimensionless number $\frac{V}{\tau}$ that governs the transition between detachment-limited and transport-limited dynamics. In the sediment-only case (when $H \gg H_*$), or in the bedrock-only case ($H = 0$), $\frac{V}{\tau} > 1$ gives transport-limited behavior and $\frac{V}{\tau} < 1$ results in detachment-limited behavior (Davy and Lague, 2009). In cases where sediment and bedrock are eroded simultaneously, especially if there is a significant erodibility contrast between the two, the behavior is not so easily predicted and will generally contain contributions from both detachment and transport limitations.”

Page 13, Line 9: add in reference to equation 11 here.

We have added the reference.

Page 13, Equation 29: I like the within-cell calculation of sediment flux!

Thank you!

Page 14, Line 1: If $Q_s = Q_s^{out}$, does this imply that all of the deposition happens at the downstream node of each model cell?

Good question. The local analytical solution for Q_s was designed to account for the fact that 1) rapid sediment entrainment should decline over a cell length as it depletes the available sediment, and 2) rapid deposition should decline over a cell length as Q_s gets smaller. Using $Q_s = Q_s^{out}$ allows us to achieve this outcome, whereas using $Q_s = Q_s^{in}$ would allow for over-erosion or over-deposition, depending on the value of Q_s^{in} .

To answer the reviewer's specific question: using $Q_s = Q_s^{out}$ allows us to correctly account for the sediment deposited within a cell, but that sediment is deposited over the whole length of the cell.

In response to this comment as well as one from the other reviewer, we have slightly altered this sentence to clarify why we equate Q_s and Q_s^{out} for the deposition term: "Because sediment deposition in a cell depends on both Q_s^{in} from upstream and sediment entrained from the cell itself, we can substitute Q_s^{out} for Q_s in the deposition term. Eq. (29) may then be solved to yield the local analytical solution for Q_s within a model cell:"

Figure 4: It would be useful to have a plot of a run where you vary the ratio of E_s to D_s to demonstrate how this could affect the sediment thickness as well as the plots where you vary the parameters independently.

We have added two panels to Figure 4 to address this comment. One shows the results of varying E_s and D_s simultaneously in order to vary the ratio between the two, as requested by the reviewer. The other shows the result of keeping a constant ratio of E_s to D_s while the magnitudes of the two parameters change. While the reviewer did not ask for this specific addition, we felt like the behavior (that lower values of E_s and D_s , even if their ratio is the same, result in a longer adjustment timescale for H) was worth pointing out.

Page 18, Line 9: Have you assessed the stability of the model to the timestep? How stable is the model at greater timesteps? 1 year seems like a very short timestep if you wanted to run the model over geological timescales.

The model is generally stable at timesteps greater than one year. The example in the code guide is stable at 10-year timesteps with the default parameterization, but becomes unstable at 50-year timesteps. We used a 1-year timestep in the text and

example code 1) to ensure high numerical accuracy for comparison with analytical solutions and 2) to allow readers/users to change parameters with a lower likelihood of making the model unstable. We have heuristically assessed model stability with respect to the timestep over different model parameterizations and grid resolutions, and found that in general, 10-year timesteps are stable in most common modeling scenarios. However, we are unaware of a Courant-Friedrichs-Levy-type criterion that could be formally defined for the numerical implementation of SPACE. The stability of SPACE depends strongly on the strength of the E_s and D_s terms. For example, when K_s and V are high such that sediment is easily entrained and deposited, the model is stable at a smaller timestep than it is when K_s and V are low (i.e., when the river is acting in a detachment-limited way).

A simple back-of-the-envelope calculation for a stability criterion is to assume a sediment-mantled bed of a given slope and calculate the time required for an upstream node to erode enough that its slope is lower than its downstream neighbor. For example, consider an end-member case of $H \gg H_$ in which two nodes separated by distance dx lie along a slope of 0.001 such that the vertical drop between them is 0.1 m. In this case, neglecting any entrainment threshold and assuming no sediment flux from upstream, $E_s = K_s q S^n$. The maximum timestep that will prevent the upstream node from becoming lower than the downstream node is 0.1 m divided by E_s . As such, the maximum stable timestep shrinks as K_s and q increase.*

In response to the reviewer’s question, we have added text to section 6 briefly making the point that the stability of SPACE is subject to its specific parameterization, but also that we have generally found it to be stable for 10-year timesteps. This new text reads: “While the SPACE 1.0 component is stable at 10-year timesteps under most conditions, we use a timestep of 1 year here to maximize numerical accuracy for comparison with analytical solutions.”

Section 6: Although testing of the model against the analytical solutions is useful in showing that the numerical implementation is working (and it’s really nice to see that it can replicate both detachment-limited and transport-limited behaviour), this does not evaluate the applicability of the method to real landscapes, especially as the analytical solutions are from the same framework as that of SPACE model (e.g. detachment-limited stream power and transport-limited eqns). What is really interesting is to know how we could validate the model predictions against real landscapes. I think the paper would be improved if the authors could provide some recommendations of how their model can be tested on real landscapes (either natural or experimental), maybe as a section in the discussion (I’m aware it’s a model description paper, so actually performing these validations is probably beyond the scope here).

This comment was echoed by the other reviewer as well, and we have added a section to the paper (section 9.1) to address how the model might be validated

against real landscapes. As the reviewer notes, we view performing such tests as beyond the scope of this model description paper, but we hope that our discussion will provide avenues for future model validation efforts. In section 9.1 we discuss 1) potential validation of the steady-state predictions that SPACE makes for channel slope and sediment thickness, and 2) potential validation of the transient predictions, including the transient differences in concavity between the sediment surface and the bedrock surface, as discussed in the reviewer's next comment.

Figure 8: This figure is really interesting. I wonder if it would be possible to compare the different concavities of the channel profiles predicted from the bedrock surface and that of the alluvial layer. Does the concavity of the profile through time give some indication of how detachment-limited or transport-limited the model is at that point? I wonder if in real landscapes this could give an indication of transience, or for the transition between detachment- and transport-limited conditions downstream along channels.

This is an interesting point and we have endeavored to briefly address it in the new section on comparing SPACE to field data (see response to comment above). One potential pitfall that would need further exploration is the role of discharge variability. When we measure something like sediment thickness (or the surface profile of a sediment layer) in the field, it is unclear whether that particular measurement is representative of the temporal mean, given that the most recent flow events can have a strong control on sediment thickness. To fully explore the benefits/problems of the comparison the reviewer suggests is a topic for another day, but we have added some text to section 9.1 to make readers aware of the potential opportunity:

“In the transient case, the relationship between the longitudinal profile of the bed sediment surface and that of the bedrock may be useful for validating SPACE model predictions. For example, Fig. 8 shows that for an uplifting landscape with zero initial sediment thickness, SPACE predicts bottom-to-top alluviation of the channel profile. In this case, the sediment surface does not reflect the steepened reach commonly associated with the propagation of transient signals up a river profile, while the bedrock beneath does. The prediction of SPACE is therefore that in a transient river profile with some amount of bed sediment, the concavity of the sediment surface is not expected to match that of the bedrock surface. The difference in concavity between the sediment surface and the bedrock surface should then decline as channels approach steady state, a prediction that is testable in a landscape where channels exist in different stages of transient adjustment. It is important to remember that the sediment thickness predicted by SPACE is a spatial average within a model cell. Further, using realistic (i.e., time-varying) flow distributions to force the model would result in temporal variability in sediment thickness (Lague et al., 2005; Lague, 2010), complicating the interpretation of

sediment thickness values from a specific field campaign. While testing the steady-state predictions of SPACE is likely feasible in well-constrained landscapes, the transient dynamics may be best explored in a laboratory setting.”

Code availability: I like the iPython notebook, it was really easy to use and gives a good idea of the model structure.

Thank you!

The SPACE 1.0 model: A Landlab component for 2-D calculation of sediment transport, bedrock erosion, and landscape evolution

Charles M. Shobe¹, Gregory E. Tucker¹, and Katherine R. Barnhart¹

¹CIRES and Department of Geological Sciences, University of Colorado

Correspondence to: Charles M. Shobe (charles.shobe@colorado.edu)

This is a “tracked-changes” manuscript. Deletions are struck through and additions are *italicized*.

Abstract. Models of landscape evolution by river erosion are often either transport-limited (sediment is always available, but may or may not be transportable) or detachment-limited (sediment must be detached from the bed, but is then always transportable). While several models incorporate elements of, or transition between, transport-limited and detachment-limited behavior, most require that either sediment or bedrock, but not both, are eroded at any given time. *Modeling landscape evolution over large spatial and temporal scales requires a model that can 1) transition freely between transport-limited and detachment-limited behavior; 2) simultaneously treat sediment transport and bedrock erosion, and 3) run in 2-D over large grids and be coupled with other surface process models.* We present SPACE (Stream Power with Alluvium Conservation and Entrainment) 1.0, a new model for simultaneous evolution of an alluvium layer and a bedrock bed based on conservation of sediment mass both on the bed and in the water column. The model calculates sediment transport and bedrock erosion simultaneously, embracing the reality that many rivers (even those commonly defined as “bedrock” rivers) flow over a partially alluviated bed. *SPACE improves on previous models of bedrock-alluvial rivers by explicitly calculating sediment erosion and deposition rather than relying on a flux divergence (Exner) approach.* The SPACE model is a component of the Landlab modeling toolkit, a Python-language library used to create models of earth surface processes. Landlab allows efficient coupling between the SPACE model and components simulating basin hydrology, hillslope evolution, weathering, lithospheric flexure, and other surface processes. Here, we first derive the governing equations of the SPACE model from existing sediment transport and bedrock erosion formulations and explore the behavior of local analytical solutions for sediment flux and alluvium thickness. We derive steady-state analytical solutions for channel slope, alluvium thickness, and sediment flux, and show that SPACE matches predicted behavior in detachment-limited, transport-limited, and mixed conditions. We provide an example of landscape evolution modeling in which SPACE is coupled with hillslope diffusion, and demonstrate that SPACE provides an effective framework for simultaneously modeling 2-D sediment transport and bedrock erosion.

1 Introduction

Rivers are the primary agents of land-surface lowering in non-glaciated landscapes (e.g., Whipple, 2004). ~~and Processes of~~ Erosion and sediment transport in rivers ~~influence~~ *affect* human river management (e.g., Graf et al., 2010), landscape mass balance (e.g., Armitage et al., 2011), and global biogeochemical cycling (e.g., Hilton, 2017). Interest in the effects of river

channel evolution *erosion* on landscape change over all spatial and temporal scales has led to the widespread proliferation of numerical models for channel evolution. Specifically within the landscape evolution community, many models have emerged to address the problem of river incision into sediment and bedrock over long timescales. River incision models fall between two end-members: transport-limited and detachment-limited models. Transport-limited models (e.g., Willgoose et al., 1991) 5 assume that erosion is limited by the capacity of a river to transport sediment or rock, but that an infinite supply of readily transportable material is available. *Transport-limited models do not explicitly incorporate a formulation for the mechanics of bed erosion, but assume that* In these models, elevation change in the channel is set by the divergence of sediment transport capacity (e.g., Paola and Voller, 2005). Detachment-limited models (e.g., Howard, 1994) assume that erosion is limited by a river's ability to remove sediment or rock from the bed, but that all detached material is transportable. *As such, they include* 10 *no statement of mass conservation (aside from the assumption that all eroded mass leaves the model domain) because all detached mass is assumed to be transported downstream. Transport capacity in transport-limited models and detachment rate in detachment-limited models are generally assumed to be some function of water quantity and slope (e.g., shear stress or stream power).*

Rivers are the primary agents of land-surface lowering in non-glaciated landscapes (e.g., Whipple, 2004), and processes of 15 erosion and sediment transport in rivers influence human river management (e.g., Graf et al., 2010), landscape mass balance (e.g., Armitage et al., 2011), and global biogeochemical cycling (e.g., Hilton, 2017). Interest in the effects of river channel evolution on landscape change over all spatial and temporal scales has led to the widespread proliferation of numerical models for channel evolution. Specifically within the landscape evolution community, many models have emerged to address the problem of river incision into sediment and bedrock over long timescales. River incision models fall into three broad categories. 20 Transport-limited models (e.g., Willgoose et al., 1991) assume that erosion is limited by the capacity of a river to transport sediment or rock, but that an infinite supply of readily transportable material is available. In these models, elevation change in the channel is set by the divergence of sediment transport capacity (e.g., Paola et al., 2005). Detachment-limited models assume that erosion is limited by a river's ability to remove sediment or rock from the bed, but that all detached material is transportable. While the underlying assumptions of these two end-member models differ, they produce identical steady-state longitudinal 25 profiles (Whipple and Tucker, 2002; Lague et al., 2003). Further, as noted by Davy and Lague (2009), the superiority of one model over the other in tests against real landscapes appears to depend on the characteristics of test sites and on the comparison methods (Stock and Montgomery, 1999; Snyder et al., 2003; Tomkin et al., 2003; van der Beek and Bishop, 2003; Valla et al., 2010; Hobbey et al., 2011). No simple detachment-limited or transport-limited model has been shown to agree with field data in a wide variety of natural settings, likely due in large part to the potential for both types of behavior to occur simultaneously. 30 The third class of river erosion models, referred to here as "hybrid" models, attempts to incorporate aspects of both transport- and detachment-limited systems in order to achieve better agreement with field data and natural landscapes.

In this paper, we briefly *discuss the problem of differentiating between these two end-member models, and how previous workers have attempted model validation in the field. We review existing models that fall between the two end-members, incorporate both sediment transport and bedrock erosion and argue that many models are fundamentally limited by an inability* 35 *to treat simultaneous sediment transport and bedrock erosion over landscape evolution timescales. simultaneously transport*

sediment and erode bedrock. We then describe the SPACE 1.0 model, a new *channel evolution model intended to simulate the long-term evolution of bedrock-alluvial channels at the landscape scale.* ~~framework for modeling sediment transport and bedrock erosion at landscape evolution timescales.~~ SPACE calculates sediment transport and bedrock erosion simultaneously by modeling the coupled evolution of an alluvial layer and a bedrock bed. ~~a capability not shared by many existing river erosion models.~~ We show that the SPACE model transitions smoothly between transport-limited, detachment-limited, and mixed behavior, and that it matches analytical solutions for channel slope, sediment layer thickness, and sediment flux. ~~Finally, We use the example of topographic evolution in response to unsteady rock uplift to show that as a component of the Landlab toolkit, SPACE may be coupled with other landscape evolution model components for simple, efficient modeling of to explore landscape change over long timescales. Finally, we discuss the potential for field validation of the SPACE model, the limitations~~
5 ~~of the model, and the similarities and differences between SPACE and previous channel evolution models.~~
10

2 The problem of model differentiation and applicability

While the underlying assumptions of these ~~two~~ *transport-limited and detachment-limited* end-member models differ, they produce identical steady-state longitudinal profiles (e.g., Whipple and Tucker, 2002; Lague et al., 2003). Further, as noted by Davy and Lague (2009), the superiority of one model over the other, *if superiority can be established in tests against real*
15 *landscapes,* appears to depend on the characteristics of test sites and on the comparison methods (e.g., Snyder et al., 2003; Tomkin et al., 2003; van der Beek and Bishop, 2003; Valla et al., 2010; Hobley et al., 2011). *Such tests generally consist of using models to match topographic variables such as erosion rate–channel steepness scaling (e.g., Snyder et al., 2003), matching steady-state model solutions to river profiles with evidence for steady-state behavior (e.g., Tomkin et al., 2003), using a well-constrained initial condition and present-day topography to compare river profile evolution between models and*
20 *the landscape (e.g., van der Beek and Bishop, 2003; Valla et al., 2010), or combining fluvial erosion depths with field model calibration to find an optimal model form (e.g., Hobley et al., 2011). An example of the difficulty in evaluating transport-limited vs. detachment-limited behavior in real landscapes is shown by the work of Valla et al. (2010) and Hobley et al. (2011). Both investigated the carving of postglacial gorges (in the Alps and the Himalaya, respectively) and both used gorge incision depth and other field measurements to validate transport-limited and detachment-limited incision models. Valla et al. (2010)*
25 *concluded that a transport-limited model was most appropriate for treating gorge incision at their study site, while Hobley et al. (2011) found that gorge evolution in the Himalaya was best replicated with a detachment-limited model. In addition to the difficulty of distinguishing between models, no simple detachment-limited or transport-limited or detachment-limited*
30 *model has been shown to agree with field data in a wide variety of natural settings, likely due in large part to the potential for both types of behavior to occur simultaneously. This has motivated the development of a wide variety of more sophisticated channel evolution models that exist in the space between the simplest transport-limited and detachment-limited models. Below we review some of these models, specifically focusing on those that treat both sediment transport and bedrock erosion.*

3 Overview of hybrid river incision models *Review of coupled sediment transport and bedrock erosion models*

Over the past two decades, new efforts to advance modeling of river channel evolution have focused on four main topics. First, the development of detachment-limited models with parameterizations describing how sediment flux influences bed erosion has resulted in a class of sediment-flux-dependent detachment-limited models. Second, the dynamics of reach-scale sediment cover on a bedrock bed have been explored by a series of cover models that explicitly treat sediment erosion and deposition but do not erode the bedrock bed. Third, models with mass conservation frameworks that incorporate both the bed and the sediment in transport allow dynamic transitions between transport-limited and detachment-limited behavior for a single substrate material. Finally, a recent family of models combines equations for sediment mass conservation on the bed and in the water column with rules for bedrock erosion mechanics, thus allowing dual modeling of sediment morphodynamics and bedrock bed erosion. Substantial advances have also been made in modeling the hydrodynamics that drive channel evolution, but we do not review that work here.

3.1 Sediment-flux-dependent bed cover and erosion models

Perhaps the simplest parameterization of the influence of sediment on bedrock erosion is found in sediment-flux-dependent river incision models. Sediment-flux-dependent models form a class of detachment-limited model in which the interaction of sediment flux with sediment transport capacity enhances or inhibits bedrock erosion (e.g., Sklar and Dietrich, 1998; Whipple and Tucker, 2002; Sklar and Dietrich, 2004; Gasparini et al., 2006, 2007; Turowski et al., 2007; Chatanantavet and Parker, 2009; Hobbey et al., 2011). True detachment-limited sediment-flux-dependent incision models do not incorporate explicit mass conservation of sediment, instead treating incision as a function of sediment flux relative to transport capacity. Depending on the specific model formulation used, sediment may act as “cover,” inhibiting bedrock erosion, or as “tools,” accelerating bedrock erosion (see review in Hobbey et al. (2011)). In most sediment-flux dependent models, erosion is influenced by a factor $f(q_s, q_c)$ ranging between 0 and 1, where q_s is sediment flux (either volume or mass flux per unit width) and q_c is sediment transport capacity. The value of $f(q_s, q_c)$ for any particular q_s and q_c depends on the choice of function f ; proposed forms include a linear decline ($f(q_s, q_c) = 1 - \frac{q_s}{q_c}$; Beaumont et al. (1992)), parabola (Sklar and Dietrich, 2004), near-parabola (Gasparini et al., 2006), and other similar shapes (Turowski et al., 2007). Turowski et al. (2007) showed that the fraction of exposed bed may decline exponentially with increasing q_s/q_c . Johnson (2014) made steady-state predictions for alluvial cover as a function of q_s/q_c on a non-erodible bedrock bed, and showed that bedrock roughness relative to sediment size is an important control on setting the influence of q_s/q_c on bed cover (his model assumes a stationary bedrock bed, but could be accompanied by a sediment-flux-dependent incision rule). The chief disadvantage of these sediment-flux-dependent incision models that do not also incorporate explicit sediment deposition mass conservation is that using $f(q_s, q_c)$ as a proxy for the sediment influence on bedrock erosion precludes modeling of fully alluviated reaches (i.e., the river bed is simply vertically immobile when $f(q_s, q_c) = 0$). Once the bed is fully covered, these models cannot adjust their slope in response to additional sediment inputs (because they cannot model deposition). Models of bed cover and sediment-flux-dependent incision models

therefore require additional *sediment mass conservation* ~~deposition~~ components to treat rivers that may periodically become fully alluviated, including most channels on Earth when considered over sufficiently long timescales.

3.2 *Reach-scale bed cover models with explicit sediment transport*

Incorporating conservation of sediment mass precludes needing to rely on the simple ratio of sediment flux to transport capacity, and leads to process-based descriptions of sediment cover on bedrock channel beds. The models of Hodge and Hoey (2012), Nelson and Seminara (2012), and Turowski and Hodge (2017) do not erode bedrock, but incorporate statements of sediment mass conservation to explore cover dynamics on a stationary bedrock bed. Hodge and Hoey (2012) used a cellular automaton model of alluvial cover evolution that allowed probabilistic entrainment and deposition of sediment on a non-eroding bedrock bed. They found that either a linear or exponential decline in bedrock exposure with increasing q_s/q_c could occur if all grains had equal entrainment probability, with the exponential decline occurring at low entrainment probabilities and the linear decline occurring at high entrainment probabilities. Additionally, they found that when isolated grains have a higher entrainment probability than clustered grains, bedrock exposure declines sigmoidally with increasing q_s/q_c and runaway alluviation can occur. Their results support the experimental results of Chatanantavet and Parker (2008) showing that both the linear decline in exposure with increasing q_s/q_c and the abrupt shift from fully exposed to fully alluviated bed are possible, with the former occurring at low slopes and high bed roughness, and the latter occurring at high slopes and low bed roughness. Nelson and Seminara (2012) coupled the 2-D quasi-steady St. Venant equations with a statement of sediment conservation to explore the areal distribution of sediment cover on a bedrock bed, using a dependence of local transport on sediment concentration and not distinguishing between sediment on the bed and sediment in transport. Turowski and Hodge (2017) explicitly tracked erosion and deposition governing transfer of particles between two mass reservoirs: the stationary particles on a non-erodible bedrock bed and the mobile particles in the water column. They showed that the relationship between bedrock exposure and q_s/q_c can take a wide range of forms depending on, among other factors, the probability of increasing bed cover for a given fraction of exposed bed.

3.3 *Erosion-deposition channel evolution models*

~~Two potential solutions to the inflexibility of sediment flux-dependent detachment-limited models have been proposed: “erosion-deposition models and models with layers for multiple substrates.~~ *Outside of the bedrock cover literature, there exists a class of erosion-deposition models that conserve mass on the bed and in the water column to treat simultaneous erosion and deposition of a single substrate (Beaumont et al., 1992; Braun and Sambridge, 1997; Coulthard et al., 2002; Davy and Lague, 2009; Carretier et al., 2016). Erosion-deposition models (or under-capacity models), which explicitly treat simultaneous erosion and deposition of a substrate (Beaumont et al., 1992; Braun and Sambridge, 1997; Coulthard et al., 2002; Davy and Lague, 2009), may dynamically transition between transport-limited and detachment-limited behavior (see discussion in Davy and Lague (2009)). Davy and Lague (2009) present such a model based on the relative influence of erosion from the bed into the water column (erosion flux) and deposition from the water column onto the bed (deposition flux). When the deposition flux is much smaller than the erosion flux and the sediment transport length scale, which can be thought of as the average travel distance of*

a grain from entrainment to re-deposition, is long, their model becomes equivalent to a basic detachment-limited model. When the deposition flux increases and the transport length scale is short, the model predicts transport-limited behavior in which sediment flux divergence controls the channel bed elevation. The erosion-deposition framework, validated *for alluvial rivers* by the laboratory experiments of Lajeunesse et al. (2017), is capable of matching transient and steady-state longitudinal profile predictions made by both detachment-limited and transport-limited models, and smoothly transitions between the two types of model behavior (Davy and Lague, 2009). The model of Davy and Lague (2009) improved on previous ~~under-capacity erosion-deposition~~ models (Beaumont et al., 1992) by using a sediment transport length scale that ~~sealed~~ *increases* with water discharge. ~~Importantly, models like the Erosion-deposition-type~~ models that transition between detachment-limited and transport-limited behavior allow the exploration of both types of models, and intermediate cases, with simple parameter changes rather than changes to the model structure. The major limitation of erosion-deposition models in their basic form is that they are derived for one material of constant erodibility, and thus are limited to eroding a single substrate (i.e., sediment or bedrock, but not both) at any given position and time. *While Carretier et al. (2016) presented a model in which the erosion-deposition framework is applied to cases in which a layer of sediment overlies bedrock, their model requires that one or the other material fully occupy the surface of a cell at a given time.* Without substantial modification, erosion-deposition models are therefore unable to ~~compute simultaneous entrainment and erosion~~ *simultaneously treat sediment morphodynamics and bedrock erosion* in mixed bedrock-alluvial systems.

3.4 Mixed bedrock-alluvial channel evolution models

A small subset of existing channel evolution models combine sediment mass conservation with equations for bedrock incision to treat bedrock-alluvial channels. For example, Lague (2010) explicitly tracked a layer of alluvium of thickness T_s with median grain size D_{50} moving over overlying a bedrock bed. He tested both the linear and the exponential form of the decline in bed exposure with increasing q_s/q_c , both expressed as a function of the ratio of T_s to D_{50} (his Fig. 3). The model of Lague (2010) partitions stresses between the channel bed and banks (Flintham and Carling, 1988) to allow dynamic channel width variations, but does not incorporate the tools effect of sediment on bedrock erosion. In his model, the bed is fully covered when $T_s/D_{50} > 1$, and bedrock is increasingly exposed (either linearly or exponentially) as T_s approaches zero. Fowler et al. (2007), following in the footsteps of Smith and Bretherton (1972), combined the St. Venant equations with an Exner equation for sediment mass conservation. Fowler et al. (2007) incorporated an equation for bed abrasion by bedload, assuming that abrasion rates should scale with the velocity of the bedload layer and should decline with increasing bedload layer thickness (yielding a form of the tools and cover effects). Several workers have adapted forms of the saltation-abrasion bedrock erosion model of Sklar and Dietrich (1998, 2004) in conjunction with sediment mass conservation to incorporate both the tools and cover effects into models of bedrock-alluvial river erosion (Turowski, 2009; Nelson and Seminara, 2011; Inoue et al., 2014, 2016, 2017). Turowski (2009) combined a stochastic erosion-deposition model with a saltation-abrasion-style incision rule and explored the sensitivity of bed cover and bedrock erosion rate to changes in sediment transport. Turowski (2009) showed an exponential decline in bed exposure with increasing numbers of sediment particles equivalent to the exponential decline in the deterministic model of Turowski et al. (2007). Nelson and Seminara (2011) coupled the cross-section channel flow model

of Kean and Smith (2004) with a simple parameterization for the formation and destruction of an alluvial layer on the channel bed. The thickness and lateral extent of the alluvial layer vary in response to the ratio of sediment flux to sediment transport capacity. Unlike most models described here, Nelson and Seminara (2011) explicitly resolved the shear stresses on the channel bed and banks and applied the saltation-abrasion model of bedrock erosion to exposed portions of the channel margin. Their model allows dynamic channel width, but is only solved at a single channel cross-section with a prescribed bed slope. This a-station approach precludes the development of alluvial cover by sediment derived from bedrock erosion. Inoue et al. (2014) presented a 1-D model of the co-evolution of an alluvial layer and a bedrock bed. They used a modified Exner equation for sediment mass conservation incorporating both mobile bedload and an alluvial layer, and a saltation-abrasion-style bedrock incision rule (Sklar and Dietrich, 2004; Chatanantavet and Parker, 2009). Inoue et al. (2016, 2017) presented 2-D models using similar sediment conservation and bedrock erosion formulations, allowing for spatial variability in alluvial thickness and bedrock erosion along both the channel length and width. Inoue et al. (2017) advanced the model of Inoue et al. (2016) by incorporating a simple parameterization for bedrock bank erosion to investigate meander bend migration. Zhang et al. (2015) presented a channel longitudinal profile model coupling local sediment transport dynamics with the saltation-abrasion incision rule of Sklar and Dietrich (2004). The model of Zhang et al. (2015) can capture transience driven by changes in q_s/q_c , or downstream propagation of changes in sediment supply. Their model tracks the thickness of a sediment layer compared to the macro-roughness of the bedrock surface such that alluvial thickness less than the macro-roughness length-scale results in exposed bedrock. Their geometric approach is similar to that of Lague (2010), but the Zhang et al. (2015) model incorporates both tools and cover effects due to its derivation from the saltation-abrasion model (Sklar and Dietrich, 2004). While Zhang et al. (2015) note that their model could incorporate downstream variations in channel width, it does not do so in the form they presented.

3.5 Reach-scale vs. landscape-scale approaches

The models reviewed above differ in their intended spatial and temporal scales of application. For example, the cross-section saltation-abrasion model of Nelson and Seminara (2011) resolves flow hydraulics and channel width variations with high fidelity, but cannot be feasibly applied at the landscape scale. Similarly, the bed cover evolution models of Turowski (2009), Hodge and Hoey (2012), Nelson and Seminara (2012), Johnson (2014), and Turowski and Hodge (2017) focus specifically on cover dynamics at the reach scale. While principles from these models could be incorporated into larger-scale landscape evolution models, several of the models (Hodge and Hoey, 2012; Nelson and Seminara, 2012; Johnson, 2014; Turowski and Hodge, 2017) do not evolve the bedrock bed, thus limiting their potential for application to problems of long-term landscape evolution. The 2-D mixed bedrock-alluvial models proposed by Inoue et al. (2016, 2017) could potentially be incorporated into existing landscape evolution model frameworks, but the feasibility of such an integration is unclear as the models have been tested over hourly to daily timescales, not geologic timescales. The models most suited to our stated goal of a landscape evolution model treating simultaneous sediment and bedrock evolution are those of Fowler et al. (2007), Lague (2010), Inoue et al. (2014), and Zhang et al. (2015). The Inoue et al. (2014) model realistically incorporates hydraulic roughness of both bedrock and alluvium, but is designed to handle a constant sediment supply rate, a constraint which is unlikely to be satisfied

in landscape evolution modeling applications. The model of Fowler et al. (2007) is not formulated for mixed bedrock and alluvial cases, and thus assumes no supply limitation on sediment flux. The two existing models that most closely match our goal of treating bedrock-alluvial channel dynamics over landscape evolution space and time scales are those of Lague (2010) and Zhang et al. (2015). We advance on these models by moving beyond an Exner-type approach and incorporating explicit
5 expressions for the entrainment and deposition of sediment as well as the erosion of bedrock.

3.6 The SPACE model

We present a new model for simultaneous sediment and bedrock evolution that extends from the approaches of Davy and Lague (2009), Lague (2010), and Zhang et al. (2015), as well as from the foundation laid by the other models reviewed above. The Stream Power with Alluvium Conservation and Entrainment (SPACE) model conserves sediment in two reservoirs, the bed
10 and the water column, in the style of Davy and Lague (2009). It is therefore an erosion-deposition model in its treatment of sediment. *SPACE also calculates bedrock erosion, incorporating progressive bedrock exposure with thinning of an alluvial layer in a similar way to Lague (2010) and Zhang et al. (2015) such that evolution of the alluvium and the bedrock may be simultaneously calculated.* SPACE is unique in that it employs local analytical solutions for sediment flux changes in space and alluvium thickness changes in time. *These local analytical solutions are derived* made possible by combining expressions
15 for conservation of sediment in the water column (e.g., Davy and Lague, 2009), conservation of sediment on the channel bed, and conservation of mass of bedrock. Our new model is a significant advance over sediment-flux-dependent bedrock incision models in which sediment transport and storage is *are* not treated explicitly, as well as over previous erosion-deposition models assumed to be eroding a single substrate. The SPACE model is designed to run over large spatial and temporal scales in two dimensions, and can be easily coupled to many other surface process models as part of the Landlab modeling toolkit.

20 To maintain ease of model coupling and a relatively low level of complexity, we neglect some processes treated in previous models. Because sediment cover and transport are averaged across a model cell, we do not explicitly model the spatial distribution of sediment cover within a cell, or the entrainment and deposition of individual sediment grains (e.g., Turowski, 2009; Hodge et al., 2011; Hodge and Hoey, 2012; Hodge, 2017). We do not employ dynamic channel width variations as in the models of Davy and Lague (2009), Lague (2010), Nelson and Seminara (2011), and Coulthard et al. (2013), instead relying
25 on empirical parameterizations of channel width as a function of drainage area or discharge. SPACE does not contain independent descriptions of the roughness of bedrock and sediment, and does not distinguish between the case in which bedrock is rougher than sediment and the one in which sediment is rougher than bedrock (e.g., Inoue et al., 2014; Johnson, 2014). We also do not model the potential driving of bedrock erosion by bedload sediment (the tools effect), as used in Sklar and Dietrich (2004), Chatanantavet and Parker (2009), Turowski (2009), Inoue et al. (2014, 2016, 2017), Zhang et al. (2015), and
30 other saltation-abrasion type models. Both width dynamics and bedload abrasion could be incorporated without changing the underlying model structure, but have been omitted in order to facilitate numerical model comparison to analytical solutions.

The SPACE model is intended to model river channel evolution over long timescales while honoring the reality that channels may transition between alluviated, bedrock, and mixed bedrock-alluvial states over geologic time. Below we develop the SPACE model, verify our numerical solutions against analytical solutions, and show that SPACE can transition naturally

between transport-limited and detachment-limited behavior. We briefly describe the Landlab modeling toolkit, and show an example landscape evolution model in which SPACE is coupled to other surface process models. The SPACE model marks a significant improvement on “tools and cover” and “sediment flux-dependent” river incision models in that bed sediment thickness is explicitly incorporated as a state variable, rather than relying on a cover fraction factor that is cast as a function of the relationship between sediment flux and sediment transport capacity. The model also improves upon previous models that include bedrock and alluvium layers, as it incorporates the reality that sediment entrainment, deposition, and bedrock erosion often happen simultaneously in mixed bedrock-alluvial channels.

To circumvent the single-substrate limitation discussed above, many models use a layer system in which an alluvium layer overlies bedrock in the channel (Tucker et al., 2001). The alluvium layer is generally treated with transport-limited rules, while the bedrock layer is treated as detachment-limited. Alternatively, (Carretier et al., 2016) showed that a single erosion-deposition formulation may be applied for two or more distinct layers by varying the relevant erodibility parameter between layers (i.e., different erodibility for sediment than for bedrock) and explicitly partitioning the model timestep such that any time used to erode an overlying layer is not used to erode the next layer down. The fundamental limitation of such layer-based models is that they do not allow simultaneous evolution of the sediment layer and the underlying bedrock, making the implicit assumption that any small quantity of sediment fully covers the bed and inhibits bedrock erosion. Layer-based models, even when using the flexible erosion-deposition framework, are limited to eroding and depositing a single substrate at any given time. This is a significant simplification given the ubiquity of bedrock-alluvial channels on earth (Lague, 2010) and the frequently-observed transition between exposed bedrock in channel headwaters and sediment-mantled lowland reaches.

At least two models exist that have circumvented the problem of conventional layer-based models and allow simultaneous sediment and bedrock evolution. (Lague, 2010) explicitly tracked a layer of alluvium of thickness T_s with median grain size D_{50} . In his model, the bed is fully covered when $T_s/D_{50} > 1$, and bedrock is increasingly exposed (either linearly or exponentially) as T_s approaches zero. (Zhang et al., 2015) followed a similar approach, expanding the saltation-abrasion model of Sklar and Dietrich (2004) to explicitly include local sediment transport dynamics rather than using a sediment-flux-dependent parameterization. (Zhang et al., 2015) tracked the thickness of a sediment layer and compared it to the macro-roughness of the bedrock surface such that alluvial thickness less than the macro-roughness length-scale results in exposed bedrock. Their geometric approach follows that of Lague (2010), but the Zhang et al. (2015) model incorporates both tools and cover effects due to its derivation from the saltation-abrasion model (Sklar and Dietrich, 2004).

4 SPACE model development

The SPACE model, like other erosion-deposition models, arises from sediment mass conservation in the water column (e.g., Davy and Lague, 2009) and on the channel bed. We consider a river bed that may vary dynamically in its *relative proportion of alluvial cover and exposed bedrock* degree of alluvial cover versus exposed bedrock, with a bedrock surface of height R , bed sediment of mean thickness H (the channel bed elevation η is therefore $R + H$), and water of mean flow depth h (Fig. 1).

We use the term “SPACE model” to refer to the model equations, and “SPACE 1.0 component” to refer specifically to the numerical implementation of the SPACE model as a Landlab component.

4.1 Conservation of sediment in the water column

Davy and Lague (2009) showed that the rate of change in the volume of sediment in the water column per unit area of river bed $\frac{\partial(c_s h)}{\partial t}$ may be written as:

$$\frac{\partial(c_s h)}{\partial t} = E_s - D_s - \frac{\partial(Q_s/w)}{\partial x}, \quad (1)$$

where c_s is the concentration of sediment in the water column calculated by Q_s/Q (where Q is volumetric water discharge), E_s is the volumetric erosion flux of sediment per unit bed area, D_s is the volumetric deposition flux of sediment per unit bed area, Q_s is sediment flux in units of L^3/T , and w is channel width. Eq. (1) is sufficient when considering a channel bed on which only a single material (i.e., sediment) is exposed. Yet many channels are partially alluviated, indicating that sediment and bedrock may be eroded and entrained into the water column simultaneously. Such a scenario requires an addition to Eq. (1) to account for entrainment of bedrock material into the water column:

$$\frac{\partial(c_s h)}{\partial t} = E_s + (1 - F_f) E_r - D_s - \frac{\partial(Q_s/w)}{\partial x}. \quad (2)$$

E_r is the volumetric erosion flux of bedrock per unit bed area. F_f is a unitless fraction of fine sediment. F_f represents the volumetric fraction of bedrock that breaks into sediment small enough to be considered permanently in suspension, for which no further treatment of bed–water column interactions is needed. For bedrock that breaks only into sand and gravel fractions, F_f would be zero. Therefore, bed sediment thickness H and sediment flux Q_s only include sediment coarse enough that it does not enter permanent suspension. Assuming that $\frac{\partial(c_s h)}{\partial t} = 0$ (an important model assumption that potentially restricts applicability to hydrograph-scale modeling), the spatial gradient in sediment flux is a balance between sediment entrainment, rock erosion, and sediment deposition:

$$\frac{d(Q_s/w)}{dx} = E_s + (1 - F_f) E_r - D_s. \quad (3)$$

4.2 Conservation of sediment and rock on the channel bed

Change of channel bed elevation with time is the sum of changes in rock height and sediment thickness:

$$\frac{\partial \eta}{\partial t} = \frac{\partial R}{\partial t} + \frac{\partial H}{\partial t}. \quad (4)$$

Following Eq. (4) and Davy and Lague (2009), conservation of sediment on the channel bed with sediment thickness H may be written as

$$\frac{\partial H}{\partial t} = \frac{D_s - E_s}{1 - \phi}, \quad (5)$$

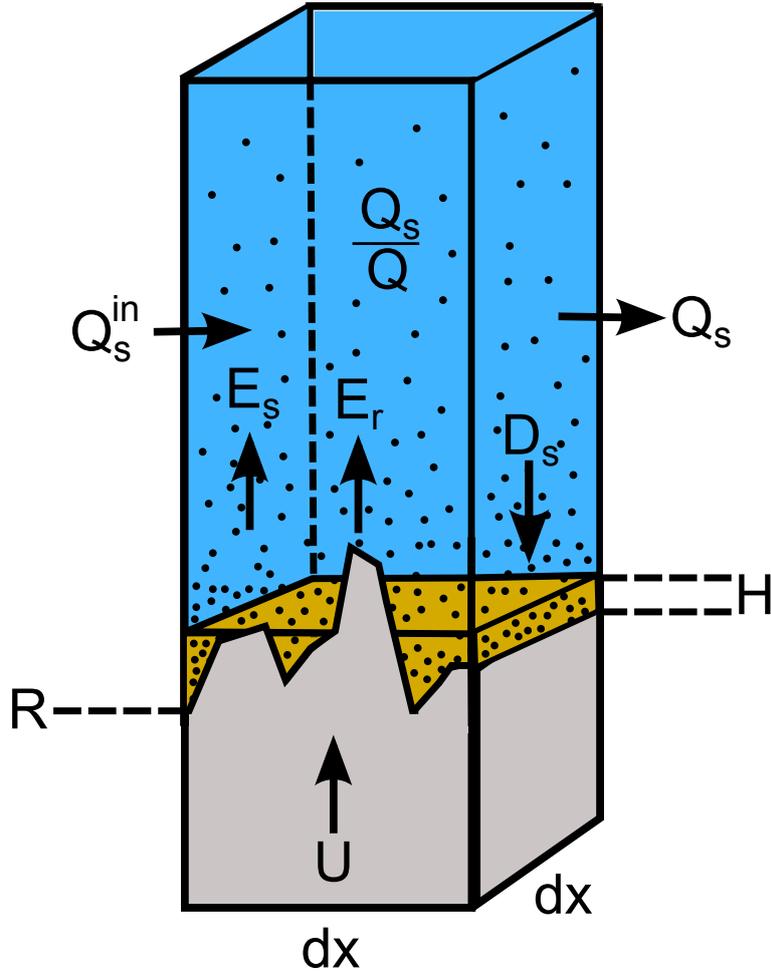


Figure 1. Conceptual sketch of a single model cell and definition of variables. Rock surface elevation R is defined as the elevation of the lowest point on the bedrock surface, and is also used as the lower boundary for the thickness H of the alluvial layer.

where ϕ is the porosity of the bed sediment. Because there is no deposition of bedrock, the rate of change of bedrock elevation R over time is

$$\frac{\partial R}{\partial t} = U - E_r \quad (6)$$

where U is the rock uplift rate relative to baselevel. For simplicity we assume that the porosity of rock is zero, but rock porosity could easily be added to Eq. (6). Steady sediment thickness requires equal erosion and deposition of sediment ($D_s = E_s$) and steady bedrock elevation requires that erosion of rock is balanced by rock uplift relative to baselevel ($U = E_r$). Figure 1 shows a schematic of a model cell and defines relevant variables.

4.3 Erosion and entrainment of bed sediment and bedrock

As discussed in Davy and Lague (2009), any number of accepted expressions for entrainment of bed sediment and erosion of bedrock could be used for E_s and E_r , respectively. We consider here the unit stream power formulation in which entrainment and erosion are functions of water flux and slope (Howard, 1994; Whipple and Tucker, 1999). We add to the unit stream power model a means by which the flow may simultaneously entrain sediment and erode bedrock, and by which the bed may smoothly transition from fully alluviated to bare bedrock. Consider that the volumetric entrainment rate per unit bed area of bed sediment depends on unit stream power, but is also influenced by sediment thickness H relative to a reach-scale bedrock roughness length scale H_* . At low H/H_* , the lower points on the bedrock bed are mantled with sediment, but high points on the bedrock surface are still exposed. At high H/H_* , all areas of the bed are covered with sediment. Further, E_s must be zero when H is zero and no sediment is available to be entrained, and E_s must reach a maximum (for a given stream power) when there is enough sediment to fully cover the bed (Fig. 2). This approach is conceptually similar to the models of Turowski *et al.* (2007), Lague (2010) (his exponential model), and Zhang *et al.* (2015), and similarly eliminates the need to explicitly track bedrock exposure. Given the conceptual model described above, the entrainment rate of sediment E_s may be written as:

$$E_s = (K_s q S^n - \omega_{cs}) \left(1 - e^{-H/H_*}\right), \quad (7)$$

where K_s is the sediment erodibility parameter, S is channel-bed slope, and n is a scaling exponent. q is water discharge per unit channel width, and may be calculated by any number of methods, the simplest being $q = A^m$ where A is drainage area and m is a scaling exponent (generally ≈ 0.5) designed to reflect downstream width changes (Leopold and Maddock, 1953; Wohl and David, 2008). Using $q = A^m$ results in K_s and rock erodibility parameter K_r having dimensions of $[T^{-1}]$, but dimensions vary based on which parameterization for q is used (in the general case of q being volumetric water flux per unit width, K_s and K_r have dimensions of $[L^{-1}]$). ω_{cs} is a threshold stream power required for sediment entrainment. In very simple cases ω_{cs} may be neglected, but the ability to include a threshold term is important in any river evolution model as threshold effects have been shown to significantly alter model outcomes (Snyder *et al.*, 2003; Tucker, 2004; Lague *et al.*, 2005; DiBiase and Whipple, 2011). *While we employ a simple closure for channel width in which width scales as the square root of water discharge (e.g., Leopold and Maddock, 1953; Wohl and David, 2008), it may be desirable for some applications to add dynamic channel width adjustments to the model, as previous work has suggested that width trades off with slope in transient channels (e.g., Finnegan *et al.*, 2005; Turowski *et al.*, 2006; Wobus *et al.*, 2006; Whittaker *et al.*, 2007; Attal *et al.*, 2008; Lague, 2010; Yanites and Tucker, 2010). One option for incorporating dynamic width is to calculate or approximate shear-stress distributions across channel cross-sections (e.g., Kean and Smith, 2004; Wobus *et al.*, 2006, 2008; Turowski *et al.*, 2009). A simpler dynamic width rule can be obtained by partitioning erosive power between the bed and banks under a trapezoidal channel assumption (Flintham and Carling, 1988) as detailed in Lague (2010). Different approaches have different numbers of parameters and computational costs, and further work will be necessary to elucidate which advances beyond the standard empirical width closure are tractable within the SPACE landscape evolution model framework.*

If sediment entrainment declines with decreasing sediment thickness as a result of increased bedrock exposure, bedrock erosion should follow an inverse but conceptually similar pattern (Fig. 2). Assuming that increasing mean sediment thickness

leads to higher proportions of bedrock covered by sediment and that sediment cover inhibits erosion (e.g., Beaumont et al., 1992; Whipple and Tucker, 2002; Sklar and Dietrich, 2004; Gasparini et al., 2006, 2007; Turowski et al., 2007; Hobley et al., 2011), the volumetric erosion rate of bedrock per unit bed area may be written as

$$E_r = (K_r q S^n - \omega_{cr}) e^{-H/H_*}. \quad (8)$$

5 Here, K_r is the bedrock erodibility parameter, which is generally expected to be substantially lower than K_s . ω_{cr} is the threshold stream power for detachment of bedrock, which may vary significantly depending on the relative dominance of plucking or abrasion (e.g., Hancock et al., 1998; Whipple et al., 2000) as well as the weathered state of the bedrock (Hancock et al., 2011; Johnson and Finnegan, 2015; Small et al., 2015; Murphy et al., 2016; Shobe et al., 2017). *Howard (1998), Hancock and Anderson (2002), Turowski et al. (2007), and Lague (2010) employed a similar exponential decline in rock erosion rate*

10 *with increasing sediment thickness.* Eq. (8) falls into the category of “cover” models, which treat erosion reduction by sediment shielding the bed without incorporating the potential erosive effects of mobile sediment (e.g., Beaumont et al., 1992; Lague, 2010; Shobe et al., 2016). The smooth transitions between bare-bedrock, bedrock-alluvial, and fully alluviated channels given by Eq. (7 and 8) are both more stable and more realistic than models in which the existence of any alluvium fully covers

15 the bedrock (implying a perfectly smooth, planar bedrock surface). Figure 2 shows the pattern of sediment entrainment and bedrock erosion over different values of H/H_* . $f(H/H_*)$ in Fig. 2 is the dimensionless exposure term that modifies stream power entrainment and erosion in Eq. (7 and 8) (i.e., e^{-H/H_*} or $(1 - e^{-H/H_*})$). Perhaps the most significant simplification in our model is that we do not include explicit treatment of the erosive effects of grains in transport (e.g., Sklar and Dietrich, 1998, 2001, 2004; Gasparini et al., 2006; Turowski et al., 2007; Lamb et al., 2008; Cook et al., 2013). Such an effect could enhance sediment entrainment if grains in saltation hit resting grains and enabled their entrainment, and could enhance bedrock erosion

20 if sediment-rich water were flowing over well-exposed bedrock. *The “tools effect” on bedrock erosion could be incorporated into the model by assuming that E_r at a given H/H_* increases with Q_s until Q_s reaches transport capacity (which is Q_s when $E_s + E_r = D_s$). Because increases in H/H_* already account for the “cover effect,” the E_r dependence on Q_s need only be positive and not decline with increasing Q_s (e.g., Sklar and Dietrich, 2001, 2004; Gasparini et al., 2006; Turowski et al., 2007).* We assume for the purposes of model validation against analytical solutions that these effects are negligible relative to

25 changes in unit stream power and bed cover.

The major advantages of the exponential entrainment and erosion approach outlined here are that 1) sediment and bedrock may be simultaneously entrained/eroded into the water column, 2) the presence of sediment does not completely inhibit bedrock erosion at low values of H/H_* , which is supported by modeling and observations of mixed bedrock-alluvial channels (Johnson et al., 2009; Johnson, 2014; Ferguson et al., 2017; Hodge, 2017) and 3) model stability is improved because sediment thickness

30 gradually approaches zero, preventing a sudden transition from sediment entrainment to bedrock erosion. Many different rules for sediment entrainment and bedrock erosion could be used in this model framework in place of stream-power type equations. No matter how erosive power is calculated, the SPACE approach allows both erodibility and entrainment/detachment thresholds to be chosen independently for sediment and bedrock, unlike in strict detachment/transport limited models or the basic form of erosion-deposition models. This enables the treatment of systems with multiple erosion thresholds, such as a river for

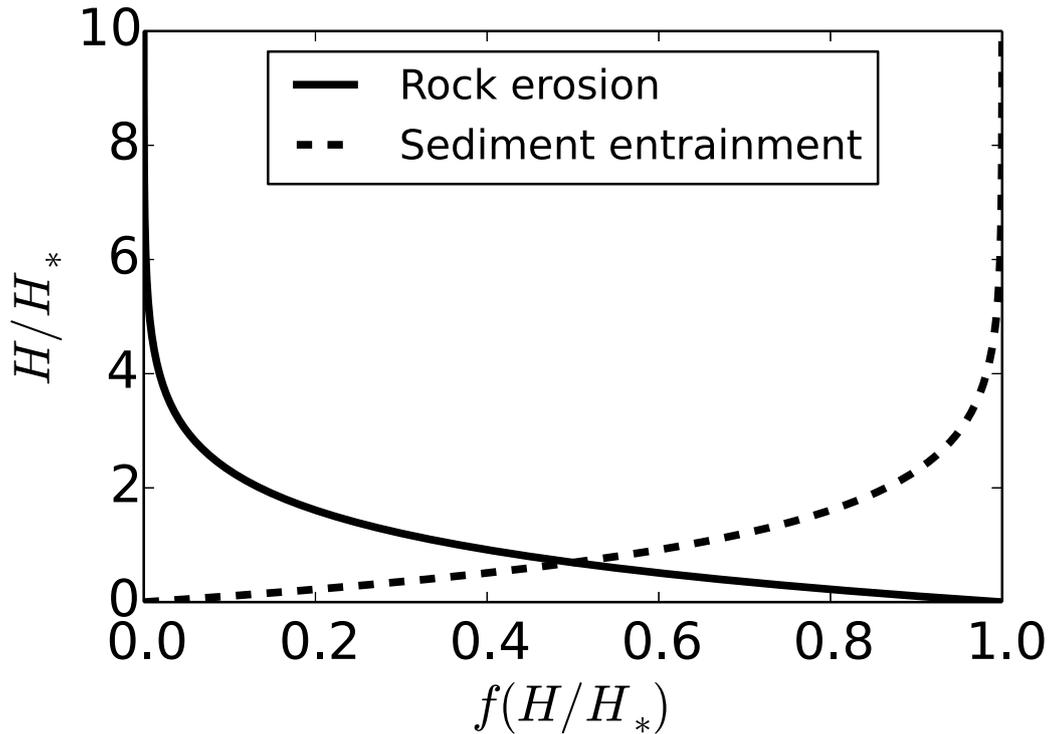


Figure 2. Dimensionless efficiency of erosion and deposition ($f(H/H_*)$) for different values of H/H_* . Erosive power is multiplied by $f(H/H_*)$ in the model to account for the relative exposure of sediment and bedrock. Such a formulation accounts for the fact that bedrock beds are rough, and low points may become sediment-mantled while high points remain exposed (e.g., Johnson, 2014; Zhang et al., 2015). H_* is therefore a length scale representing reach-scale bedrock roughness. Sediment entrainment for a given stream power increases with increasing H/H_* , while bedrock erosion declines as a response to sediment mantling of the bed. At values of $H/H_* \approx 6$, all bed lowering is driven by sediment entrainment and bedrock erosion is negligible. This heuristic representation of mixed alluvial-bedrock channel dynamics is conceptually similar to the approaches taken by Lague (2010) and Zhang et al. (2015).

which bedrock erosion requires both mobilization of an alluvial cover (described by ω_{cs}) and the plucking of bedrock blocks (described by ω_{cr}).

4.3.1 Optional smoothing of entrainment/erosion thresholds

The approach outlined above allows for the incorporation of an entrainment threshold for sediment and an erosion threshold for bedrock such that entrainment/erosion is zero when stream power is below the chosen threshold(s). Erosion thresholds representing a sharp transition between no erosion (below threshold) and erosion (above threshold) have a long history in fluvial erosion modeling (e.g., Snyder et al., 2003; Tucker, 2004; Lague et al., 2005; DiBiase and Whipple, 2011). With a sharp or discontinuous erosion threshold, the transition from no erosion to erosion is abrupt. *However, the sediment transport*

literature suggests that sediment entrainment is often better-represented by a distribution of entrainment thresholds than a single threshold value (Kirchner et al., 1990; Wilcock and McArdell, 1997; McEwan and Heald, 2001). Using a distribution of entrainment thresholds helps to account for the observation that incipient sediment motion does not begin at the same threshold value for all particles (e.g., Buffington and Montgomery, 1997). Variability in the threshold for motion is thought to

5 be a function of grain size and shape variations (Kirchner et al., 1990; Wilcock and McArdell, 1997; Prancevic and Lamb, 2015), grain hiding and protrusion effects (Kirchner et al., 1990; Parker, 1990; Wilcock and McArdell, 1997; McEwan and Heald, 2001), bed sorting (Nelson et al., 2009), sediment flux (Johnson, 2016), and flow history (Masteller and Finnegan, 2017). Similarly, the threshold for bedrock erosion can depend on sub-reach scale mineralogy, joint spacing and orientation, and the weathered state of the bedrock. Given that the SPACE model operates on too large a scale to treat such processes

10 explicitly, we develop a formulation for entrainment and erosion thresholds that reflects the variability in the threshold. If a distribution of thresholds exists, erosion should decline to zero not exactly when available stream power drops below the user-defined threshold as would be the case for a standard threshold model, but when available stream power is significantly below the defined threshold. As available stream power becomes larger than the defined threshold, entrainment and erosion should increase smoothly as a greater portion of the distribution of thresholds is exceeded. In the limit where available stream

15 power is many times greater than the user-defined threshold, available stream power should simply be reduced by the user-defined threshold. An exponential function describing the increase in entrainment/erosion as available stream power increases relative to threshold stream power satisfies these requirements without adding any model parameters. However, recent work has shown that entrainment thresholds for sediment may be a state function of grain size distribution, bed sorting, sediment flux, hydraulic conditions, and flow history (see review in Johnson (2016), and that bedrock erodibility can depend on the rock

20 inundation history and therefore the historic hydrograph (Hancock et al., 2011; Small et al., 2015; Shobe et al., 2017). Further, in numerical modeling in general, the use of strict single-value thresholds can introduce discontinuities into model response functions, hindering sensitivity analysis and optimization procedures (Clark and Kavetski, 2010; Kavetski and Clark, 2010).

While we do not attempt to treat the specific processes responsible for altering entrainment and erosion thresholds, We include an optional exponential expression for threshold stream power such that entrainment/erosion does not go *immediately*

25 to zero when stream power ω equals the threshold value ω_c , but declines exponentially as ω/ω_c declines. The threshold stream power is expected to be different for rock than for sediment, with ω_{cr} likely being larger in most cases than ω_{cs} . In this formulation, the expressions for sediment entrainment and bedrock erosion (Eq. (7 and 8)) become:

$$E_s = \left(K_s q S^n - \omega_{cs} \left(1 - e^{-\omega/\omega_{cs}} \right) \right) \left(1 - e^{-H/H_*} \right) \quad (9)$$

and

30
$$E_r = \left(K_r q S^n - \omega_{cr} \left(1 - e^{-\omega/\omega_{cr}} \right) \right) e^{-H/H_*}. \quad (10)$$

Inspection of Eq. (9 and 10) reveals that when $\omega \gg \omega_c$, the threshold term approaches ω_c , yielding behavior identical to single-value threshold models. When $\omega = \omega_c$, approximately 63% ($1 - e^{-1}$) of available stream power is in excess of the threshold, rather than 100% in the basic threshold approach. When $\omega \ll \omega_c$, the threshold term approaches ω and the entrainment or

erosion rate approaches zero. We chose an exponential function because it allows for smoothing of entrainment and erosion thresholds, and therefore honors the reality that such thresholds tend to be distributions of values rather than a single value, without adding any model parameters. Evaluation of the full behavior of models using an exponentially declining threshold is beyond the scope of this paper, and the use of Eq. (9 and 10) is optional in the SPACE model. The smoothly declining threshold is recommended for applications involving analysis of the model response surface, or other situations in which sharp discontinuities in model responses could hinder analysis (Clark and Kavetski, 2010; Kavetski and Clark, 2010).

4.4 Deposition of sediment

The flux of sediment from the water column onto the bed is the product of sediment concentration averaged over the depth of the water column and effective sediment settling velocity V (Davy and Lague, 2009):

$$D_s = c_s V = \frac{Q_s}{Q} V. \quad (11)$$

V is not the still-water particle settling velocity, but is the net effective settling velocity after accounting for the upward effects of turbulence. V also incorporates the vertical gradient in sediment concentration through the water column (d^* in Davy and Lague (2009)). In an equivalent formulation, Davy and Lague (2009) treated the sediment deposition rate as $D_s = d^* c_s V$, where d^* is a dimensionless number that relates sediment concentration near the bed to mean sediment concentration in the water column. Eq. (11) assumes that sediment and water move at the same speed such that all changes in $\frac{Q_s}{Q}$ are driven by erosion and deposition.

4.5 Steady-state analytical solutions

We develop steady-state analytical solutions for sediment flux Q_s , channel slope S , and bed sediment thickness H , all of which are steady when $\frac{\partial(c_s h)}{\partial t} = 0$. We assume for the purposes of this derivation that there are no entrainment or erosion thresholds, and that F_f and ϕ are both negligible, assumptions that are easily relaxed. We define steady state in this system as a state of time-invariant bedrock elevation and topographic elevation (which also implies time-invariant sediment thickness). This occurs when two conditions are satisfied. First, rock uplift must be balanced by bedrock erosion such that

$$\frac{\partial R}{\partial t} = 0 = U - K_r q S^n e^{-H/H_*}. \quad (12)$$

Second, sediment entrainment and deposition must balance each other such that sediment thickness H is unchanging in time:

$$\frac{\partial H}{\partial t} = 0 = V \frac{Q_s}{Q} - K_s q S^n \left(1 - e^{-H/H_*}\right). \quad (13)$$

At steady state, the volumetric sediment flux Q_s at any point along the channel must balance the volume of newly uplifted rock in the area draining to that point:

$$Q_s = U A. \quad (14)$$

To find steady state channel slope, we begin by rearranging Eq. (13) and combining with Eq. (14):

$$K_s q S^n \left(1 - e^{-H/H_*}\right) = V \frac{UA}{Q}. \quad (15)$$

Recognizing that $Q = Ar$ where r is a runoff rate per unit area:

$$K_s q S^n \left(1 - e^{-H/H_*}\right) = \frac{VU}{r}. \quad (16)$$

5 We rearrange Eq. (16) to isolate e^{-H/H_*} , substitute into Eq. (12) and solve for S to yield:

$$S = \left[\frac{UV}{K_s q r} + \frac{U}{K_r q} \right]^{1/n}, \quad (17)$$

or if $q = A^m$ as in the simple stream power formulation,

$$S = \left[\frac{UV}{K_s A^m r} + \frac{U}{K_r A^m} \right]^{1/n}. \quad (18)$$

When $n = 1$, the second term on the right-hand side is the slope predicted by a detachment-limited incision model in which
 10 slope increases with faster rock uplift, lower rock erodibility, or less water discharge (or drainage area). The first term on the right-hand side describes the additional component of slope required to transport sediment. That component of slope must increase with increasing settling velocity, lower sediment erodibility, and lower water discharge. Davy and Lague (2009) derived a similar expression for slope-discharge scaling for their erosion-deposition model. The major difference between our result and theirs is that their expression is for slope of a single bed material with a single bed erodibility when erosion
 15 balances rock uplift, whereas Eq. (18) incorporates equilibrium in both sediment thickness and bedrock height. *Eq. (18) may be rearranged to show that SPACE predicts a standard stream power slope-area relationship modulated by $\frac{V}{r}$ as well as sediment and bedrock erodibility:*

$$S = \left[\frac{V}{K_s r} + \frac{1}{K_r} \right]^{1/n} U^{1/n} A^{-m/n}. \quad (19)$$

*The ratio between the effective settling velocity V and the runoff rate r controls the relative importance of the bedrock and
 20 alluvial components of the steady-state channel slope. In the simplified case of $K_s = K_r$, a ratio of $\frac{V}{r} = 1$ would indicate equal contributions from the two regimes. Quantifying $\frac{V}{r}$ for natural systems could therefore give a valuable indication of process dynamics in natural channels.*

Solving Eq. (16) for H gives steady state bed sediment thickness as a function of channel slope:

$$H = -H_* \ln \left[1 - \frac{VU}{r K_s q S^n} \right]. \quad (20)$$

25 To obtain a slope-independent solution for H , we can combine Eq. (18 and 20) and simplify:

$$H = -H_* \ln \left[1 - \frac{V}{\frac{K_s r}{K_r} + V} \right]. \quad (21)$$

The SPACE model therefore predicts constant sediment thickness along the channel at steady state as long as all parameters in Eq. (21) are constant in space. As settling velocity becomes larger, $\frac{V}{\frac{K_s r}{K_r} + V}$ approaches one and H becomes large. As K_s increases and sediment is more easily entrained from the bed, $\frac{V}{\frac{K_s r}{K_r} + V}$ and therefore H both approach zero. Increasing bedrock
 30 erodibility K_r causes an increase in steady state H as more sediment is created from detached bedrock.

4.6 Dimensional analysis

We present a nondimensionalization of the model described above. For simplicity, we assume that sediment entrainment and bedrock erosion thresholds are negligible, though the model allows independent entrainment and erosion thresholds as shown above. The model contains three independent variables, Q_s , H , and R , the latter two of which are summed to give land surface elevation. Each of these variables requires a scale for nondimensionalization. We begin by nondimensionalizing sediment flux:

$$Q'_s = \frac{Q_s V}{K_s q^2 S w}. \quad (22)$$

Sediment thickness H and bedrock elevation R may both be scaled by the sediment layer length-scale H_* :

$$H' = H/H_*. \quad (23)$$

10 and

$$R' = R/H_*, \quad (24)$$

and downstream distance x by the length scale q/V (noted by Davy and Lague (2009) and found to govern the transition between detachment-limited and transport-limited behavior):

$$x' = xV/q. \quad (25)$$

15 Finally, time t is nondimensionalized by:

$$t' = tV/H_*. \quad (26)$$

Replacing the dimensionless variables into the governing equations yields the following equations for dimensionless sediment flux, sediment thickness, and rock elevation, which are applicable for negligible erosion thresholds:

$$\frac{dQ'_s}{dx'} = S \left(1 - e^{-H'}\right) + (1 - F_f) \left[\frac{K_r}{K_s}\right] S e^{-H'} - Q'_s \quad (27)$$

20

$$\frac{\partial H'}{\partial t'} = \left[\frac{K_s q}{V}\right] \left(Q'_s - S \left(1 - e^{-H'}\right)\right) \quad (28)$$

$$\frac{\partial R'}{\partial t'} = \left[\frac{U}{V}\right] - \left[\frac{K_r}{K_s}\right] \left[\frac{K_s q}{V}\right] S e^{-H'}. \quad (29)$$

Three dimensionless parameters appear in Eq. (27–29): a normalized rock uplift rate, a ratio of erodibilities $\left[\frac{K_r}{K_s}\right]$, and a sediment entrainment ratio $\left[\frac{K_s q}{V}\right]$, and a normalized rock uplift rate $\left[\frac{U}{V}\right]$. The normalized rock uplift rate shows the relative

importance of rock uplift and grain settling velocity, with increases in both driving increased channel slope. The erodibility ratio reflects the relative ease of eroding bedrock and entraining sediment, and is influenced in natural systems by bedrock and sediment lithology, grain size, and grain sorting on the channel bed. The sediment entrainment ratio encompasses competition between sediment entrainment, which is driven by high water discharge and high sediment erodibility, and sediment deposition, driven by high grain settling velocity. Notably, the sediment entrainment ratio contains the q/V length scale described by Davy and Lague (2009). The model predicts detachment-limited behavior when q/V , and therefore our entrainment ratio, are large, and transport-limited behavior when they are small. Specifically, following Davy and Lague (2009), we can define a dimensionless number $\frac{V}{r}$ that governs the transition between detachment-limited and transport-limited dynamics. In the sediment-only case (when $H \gg H_*$), or in the bedrock-only case ($H = 0$), $\frac{V}{r} > 1$ gives transport-limited behavior and $\frac{V}{r} < 1$ results in detachment-limited behavior (Davy and Lague, 2009). In cases where sediment and bedrock are eroded simultaneously, especially if there is a significant erodibility contrast between the two, the behavior is not so easily predicted and will generally contain contributions from both detachment and transport limitations. The normalized rock uplift rate shows the relative importance of rock uplift and grain settling velocity, with increases in both driving increased channel slope.

5 Numerical implementation and local analytical solutions

In this section we describe the forward-time numerical solution of the SPACE model in two dimensions. The solution to the model equations in each timestep consists of three conceptual steps. First, sediment flux is calculated with a local analytical solution, described below, at every node working in order from upstream to downstream. Second, sediment thickness is calculated at every node using a local analytical solution for $H(t)$, which we develop below. Third, bedrock erosion is calculated for each node.

5.1 Calculation of sediment flux

As shown in Eq. (3), the x -directed rate of change in sediment flux depends on sediment entrainment, bedrock erosion, and sediment deposition. The dependence of deposition rate on $\frac{Q_s}{Q}$ means that the deposition flux, and therefore the change in sediment flux, at a given node depends on the sediment flux entering that node from upstream (Eq. 11). It is therefore critical to order nodes in upstream to downstream order and calculate sediment flux iteratively from upstream to downstream. This approach unfortunately precludes simultaneous calculation of sediment flux at all nodes. Landlab's flow routing capabilities order all nodes into a "stack" following the methodology of Braun and Willett (2013). Because our sediment flux calculations must progress from upstream to downstream, we use their "inverted stack order" in which nodes are ordered from upstream to downstream, allowing the SPACE algorithm to efficiently sum water and sediment fluxes at tributary junctions. In addition, the downstream sediment flux calculation is written and compiled using the Cython library, giving it significant performance improvements over the same loop in pure Python.

Numerical integrations of sediment entrainment and deposition are often significant sources of model inaccuracy and instability due to the spatial extrapolation of linear entrainment and deposition equations. Consider a river reach of length dx with

clear water entering the reach at the upstream end. The initial sediment entrainment rate is $E_s = K_s q S^n - \omega_{cs}$ and the initial deposition rate is zero because $Q_s = 0$. However, two natural processes make the linear extrapolation of these initial entrainment and deposition rates over cell length dx inappropriate. First, sediment entrainment rate may decline over x as sediment thickness H declines if H is not much greater than H_* . Second, as sediment is entrained over distance dx , Q_s increases, which drives a progressive increase in deposition rate. Simply numerically integrating Eq. (3) to calculate sediment flux does not account for either the progressive decline in available sediment or the progressive saturation of the water column and increase in deposition flux. We have therefore developed a local analytical solution to account for such effects. This approach prevents severe overestimation of sediment entrainment into the water column, making SPACE more stable than models that do not account for within-cell changes in Q_s . Our local analytical solution for sediment flux accounts for the fact that sediment flux from upstream Q_s^{in} and any net erosion (or deposition) in a model cell of area dx^2 contribute to Q_s , which drives deposition. Let Q_s^{out} represent the sum of sediment influx, erosion, and deposition such that Q_s^{out} is the net erosion rate in the cell multiplied by the cell area:

$$Q_s^{\text{out}} = Q_s^{\text{in}} + (1 - \phi) E_s dx^2 + (1 - F_f) E_r dx^2 - V \frac{Q_s}{rA}. \quad (30)$$

If we use $Q_s = Q_s^{\text{out}}$ for Q_s in the deposition term. Because sediment deposition in a cell depends on both Q_s^{in} from upstream and sediment entrained from the cell itself, we can substitute Q_s^{out} for Q_s in the deposition term. (last term on the right hand side), Eq. (30) may then be solved to yield the local analytical solution for Q_s to yield the local analytical solution for Q_s within a model cell:

$$Q_s^{\text{out}} = \frac{Q_s^{\text{in}} + (1 - \phi) E_s dx^2 + (1 - F_f) E_r dx^2}{1 + V dx^2 / (rA)}. \quad (31)$$

Eq. (31) breaks down where $rA = 0$, which is acceptable because Q_s will always be zero where $rA = 0$. Figure 3 shows Q_s as a function of some of the relevant variables in Eq. (31).

5.2 Calculation of sediment thickness

After calculation of Q_s at every node, sediment thickness $H(t)$ is calculated according to Eq. (5). Similar to the solution of the sediment flux equation, solution of $H(t)$ is subject to numerical inaccuracies and instabilities driven by the dependence of E_s on H . Extrapolating $\frac{dH}{dt}$ over a full timestep using H_0 (H at the beginning of the timestep) causes overestimation of sediment entrainment, especially at larger timesteps. We therefore develop a local analytical solution for $H(t)$ for a small time interval over which variations in H are important but D_s , $K_s q$, and S (as well as any entrainment threshold) may be considered steady. We find the analytical solution for $H(t)$ by integrating Eq. (5) with respect to time with the knowledge that H has some initial value H_0 at the beginning of a timestep ($t = 0$):

$$H(t) = H_* \ln \left[\frac{1}{(D_s / (1 - \phi)) / \hat{E}_s - 1} \left(e^{(D_s / (1 - \phi) - \hat{E}_s) t / H_*} \left(\left(\frac{(D_s / (1 - \phi))}{\hat{E}_s} - 1 \right) e^{H_0 / H_*} + 1 \right) - 1 \right) \right], \quad (32)$$

where

$$\hat{E}_s = K_s q S^n - \omega_{cs}. \quad (33)$$

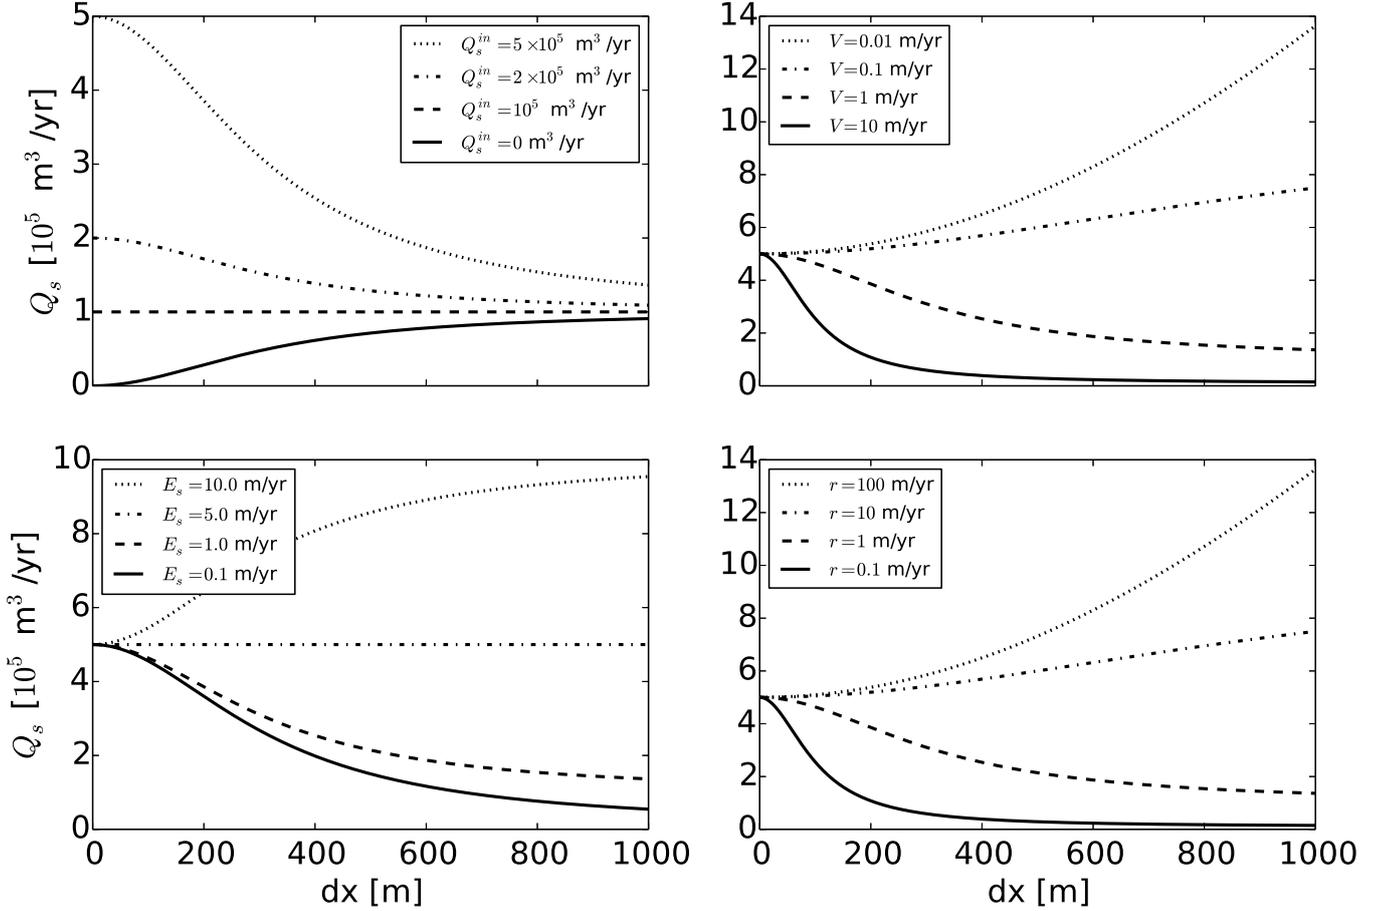


Figure 3. Sediment flux Q_s as a function of distance dx as calculated by the local analytical solution (Eq. (31)) at a given drainage area ($A = 10^5 \text{ m}^2$). In each panel, one parameter is varied while all others are held constant. The sediment flux coming in from upstream is an important control on Q_s at short length scales, but declines in importance as dx approaches 1000 m. High values of settling velocity cause low Q_s and vice versa. High sediment entrainment rates lead to high Q_s as do high runoff rates. Parameter values (except where changed in the four panels) are: $Q_s^{in} = 50,000 \text{ m}^3/\text{yr}$, $V = 1.0 \text{ m/yr}$, $E_s = 1.0 \text{ m/yr}$, and $r = 1.0 \text{ m/yr}$. $E_r = 0$ and $\phi = 0$ for simplicity in this case.

Inspection of Eq. (32) reveals that $H(t)$ may become undefined in two physically realistic situations. The first is where $(D_s/(1-\phi))/\widehat{E}_s = 1$ and the second is where $\widehat{E}_s = 0$. Eq. (32) is therefore only applied at nodes with $D_s/(1-\phi) \neq \widehat{E}_s$ and $\widehat{E}_s > 0$. When $D_s/(1-\phi) = \widehat{E}_s$, the change in alluvium thickness with time becomes $\frac{dH}{dt} = e^{-H/H_*}$. Integrating with respect to time and applying $H = H_0$ at $t = 0$ gives the solution for $H(t)$ when $D_s/(1-\phi) = \widehat{E}_s$:

$$5 \quad H(t) = H_* \ln \left[\frac{K_s q S^n - \omega_{cs} t + e^{H_0/H_*}}{H_*} \right]. \quad (34)$$

When $\widehat{E}_s \leq 0$, no entrainment of sediment occurs and any changes in $H(t)$ are driven by deposition. In this case, changes in H are computed with a simple forward numerical solution:

$$H(t) = H_0 + \frac{D_s}{1 - \phi} dt. \quad (35)$$

In all cases, the relevant equation for $H(t)$ is solved each timestep using $t = dt$ where dt is the model timestep length. Unlike for Q_s , H may be simultaneously calculated at every node, allowing efficient solution of Eq. (32–35) over the entire model domain. Figure 4 shows $H(t)$ as a function of some of the relevant variables in Eq. (32).

5.3 Calculation of change in bedrock height

Bedrock erosion is calculated by combining Eq. (6 and 8) and solving forward in time from a previous rock elevation R_0 :

$$R = R_0 + \left(U - (K_r q S^n - \omega_{cr}) e^{-H/H_*} \right) dt. \quad (36)$$

The simple forward numerical solution employed in Eq. (36) becomes inappropriate at very large timesteps, as H may change significantly, influencing channel slopes and therefore bedrock erosion. However, because bedrock erosion is generally a much slower process than sediment entrainment in most cases, Eq. (36) is unlikely to introduce substantial instability.

6 Implementing SPACE in Landlab

6.1 Landlab modeling toolkit

Landlab is a flexible, open-source modeling framework written in Python that allows efficient model building and hypothesis testing across many subdisciplines in Earth system science (Hobley et al., 2017). Landlab is a plug-and-play environment in which users can easily build two-dimensional numerical models consisting of any number of well-vetted components (e.g., Tucker et al., 2016; Adams et al., 2017) along with user-specific equations and functionality. The greatest advantages of using Landlab are 1) its built-in gridding engine, which creates model grids, efficiently stores spatially distributed variables, and handles boundary conditions, and 2) the ability to easily couple different components into a single model sharing a single grid. Landlab allows efficient coupling of components representing fluvial erosion, hillslope processes, basin hydrology (Adams et al., 2017), geodynamics, vegetation, and many other processes into novel surface dynamics models.

Landlab’s gridding engine supports grids consisting of square and rectangular grids (“raster grids”), hexagonal grids, and Voronoi–Delaunay interlocked meshes (Hobley et al., 2017). Every Landlab grid is made up of nodes, cells, and links. Nodes are points in (x, y) space. Cells are polygons surrounding all non-boundary (interior) nodes that may be rectangular, hexagonal, or defined by Voronoi polygons depending on the chosen grid type. Links connect adjacent pairs of nodes and are directional. Rectangular grids have four links per node, hexagonal grids have six, and Voronoi grids have a number of links per node equivalent to the number of faces on each Voronoi polygon. Links have default directionality, but this directionality does not determine the directions of fluxes in Landlab models, which are set by gradients along links. In this paper, we focus

for simplicity on a square ($\Delta x = \Delta y$) raster grid, which is currently the only grid type supported by the SPACE model. A diagram of a generic raster grid is shown in Fig. 5. Nodes, cells, and links may all store model data in the form of NumPy arrays associated with one of the three grid elements. Each data field is defined by a keyword in a dictionary data structure attached to a certain grid element. The SPACE model, for example, tracks sediment depth at all grid nodes, a field that may be accessed by any component (this field is called “soil depth” in Landlab to keep terminology standard between hillslope and fluvial components). An array of sediment depths at all grid nodes could be found by typing: `grid.at_node["soil_depth"]`. The treatment of boundary conditions in Landlab grids is described thoroughly by Hobley et al. (2017) and Adams et al. (2017). In short, nodes may be set as “boundary” nodes and then defined as open, fixed-gradient, or closed boundaries. Non-boundary nodes are set as “core” nodes.

7 Verification and evaluation: Comparison to analytical solutions for detachment-limited, transport-limited, and mixed cases

As discussed above, the SPACE model equations are capable of replicating both detachment-limited (when there is no sediment and $F_f = 1$) and transport-limited (when $H \gg H_*$) model behavior. In this section we compare the behavior of the SPACE 1.0 Landlab component (the numerical implementation of the SPACE model equations presented above) to steady-state analytical solutions for standard detachment-limited and transport-limited models to assess whether our numerical implementation of the SPACE algorithm can replicate these two end-member cases. In addition, we test the performance of the SPACE component against steady-state analytical solutions for a mixed case where both bedrock erosion and sediment transport influence channel evolution. For the three test cases we use a simple 20 x 20 node square raster grid with $dx = 100$ m, for a 2 km x 2 km model domain. The initial topography of the domain is a plane tilted to the lower-left (southwest) corner with random microscale roughness to force flow convergence. The lower-left corner is the only open boundary, and is therefore the basin outlet in all cases. Such a setup results in a model domain that drains to the single open boundary node, allowing predictable drainage network development. The random seed is held constant so that all runs start from the same initial topography. For simplicity in these test cases, there are no other surface process models (e.g., hillslope models) coupled to the SPACE component. *While the SPACE 1.0 component is stable at 10-year timesteps under most conditions, we use a timestep of 1 year here to maximize numerical accuracy for comparison with analytical solutions.* We run the model for 100,000 years for the detachment and transport limited comparisons, and 200,000 years for the mixed bedrock-alluvial comparison (see table 1). We define steady state as having been achieved when every interior (non-boundary) node is lowering at the same rate as the baselevel node to within 10^{-6} m/yr precision, but allow the model to run for the full imposed run time even after steady state has been achieved.

7.1 Detachment-limited comparison

With no sediment ($H = 0$ and $c_s = 0$) and $F_f = 1$ (all bedrock eroded becomes wash load and is not included in model calculations), all changes in bed elevation are driven by changes in bedrock elevation:

$$\frac{\partial \eta}{\partial t} = \frac{\partial R}{\partial t} \tag{37}$$

where

$$\frac{\partial R}{\partial t} = U - K_r q S^n - \omega_{cr}. \quad (38)$$

When $\omega_{cr} = 0$, Eq. (38) is the simple stream power model (Whipple and Tucker, 1999). At topographic steady state when $\frac{\partial R}{\partial t} = 0$ and $U = K_r q S^n$, the slope at every point in the channel is

$$5 \quad S = \left(\frac{U}{K_r q} \right)^{1/n}. \quad (39)$$

Because we use a simple stream power formulation where $q = A^m$ for our test case, the slope-discharge relationship may be re-written to yield a slope-area relationship:

$$S = \left(\frac{U}{K_r A^m} \right)^{1/n}. \quad (40)$$

We test whether the SPACE component can replicate steady-state detachment-limited behavior by comparing slope-area relationships predicted by Eq. (40) with those calculated by the SPACE component. See table 1 for the parameter values used.

Figure 6 shows the results after the test model domain has achieved topographic steady state. The top panel of Fig. 6 shows the longitudinal profile of the longest drainage path in the model domain. As predicted by the theory described above, slope and drainage area trade off such that the outcome is a concave-up longitudinal profile with constant concavity. The lower panel of Fig. 6 compares the slope-area relationship predicted by Eq. (40) (gray dashed line) to the slope-area relationship in the steady-state model landscape (black dots). All core nodes from the model domain are shown, and every node obeys the predicted detachment-limited slope-area scaling. The slope of the slope-area power-law scaling relationship (Fig. 6) is the channel concavity, thus confirming that the channel concavity observed in the longitudinal profile is constant, and the SPACE component agrees with theoretical predictions for detachment-limited rivers at steady state.

7.2 Transport-limited comparison

20 When sediment thickness H is large relative to H_* , changes in bed elevation are driven entirely by changes in sediment bed elevation, which is set by the balance between sediment erosion, deposition, and rock uplift:

$$\frac{\partial \eta}{\partial t} = \frac{\partial H}{\partial t} = U + D_s - E_s. \quad (41)$$

At steady state, $\frac{\partial \eta}{\partial t} = 0$ and $E_s - D_s = U$. Substituting in the equations derived above for sediment erosion and deposition and assuming for simplicity that sediment porosity ϕ and the sediment erosion threshold ω_{cs} are negligible,

$$25 \quad K_s q^m S^n - V \frac{Q_s}{Q} = U. \quad (42)$$

Applying the steady-state mass conservation relationship $Q_s = UA$, recalling that $Q = rA$, and solving for S gives an expression for steady state channel slope:

$$S = \left[\frac{UV}{K_s q r} + \frac{U}{K_s q} \right]^{1/n}. \quad (43)$$

Table 1. Parameter values for SPACE model test cases.

	Detachment Limited	Transport Limited	Mixed	Coupled
Number of rows (-)	20	20	20	50
Number of columns (-)	20	20	20	50
Node spacing (m)	100	100	100	100
Timestep (yr)	1	1	1	1
Run time (kyr)	100	100	200	300
Initial H (m)	0	100	0	0
U (m/yr)	0.0001	0.0001	0.0001	see text
K_r (yr ⁻¹)	0.001	0.0001	0.005	0.0001
K_s (yr ⁻¹)	0.01	0.01	0.01	0.0005
m (-)	0.5	0.5	0.5	0.5
n (-)	1.0	1.0	1.0	1.0
ω_{cr} (m/yr)	0	*	0	0
ω_{cs} (m/yr)	0	0	0	0
H_* (m)	1.0	1.0	1.0	1.0
ϕ (-)	0	0	0	0
F_f (-)	1	0	0	0
V (m/yr)	1.0	5.0	5.0	2.0

Not all parameters will influence the model outcome in all cases. For example, the value of V is irrelevant for the detachment-limited case when all eroded bedrock passes out of the model domain as permanently suspended fine sediment ($F_f = 1$).

If $q = A^m$ as in our test case, the resulting slope-area relationship is then:

$$S = \left[\frac{UV}{K_s A^{m_r}} + \frac{U}{K_s A^m} \right]^{1/n}. \quad (44)$$

Eq. (44) nicely distinguishes the contributions of sediment deposition (first term on the right side) and sediment entrainment (second term on the right side) to steady state channel slope. If effective settling velocity is negligible, erosion is only limited by the efficiency of sediment entrainment and Eq. (44) gives the detachment-limited steady state slope (though importantly the bed is still entirely composed of sediment). If entrainment and deposition of sediment are rapid enough that erosion is limited by transport capacity (i.e., the river has enough energy to erode more sediment but the water column is saturated), the system is transport-limited and the left hand term in Eq. (44) dominates in setting the steady state slope. Note the subtle difference between Eq. (44) and Eq. (18); when $H \gg H_*$ and all surface lowering is accomplished by sediment entrainment, both terms on the right hand side of Eq. (44) reflect erosion of sediment (i.e., K_s is used in both). This occurs because when $H \gg H_*$, change in bedrock elevation over time is not zero as in true complete steady-state, but is equal to the uplift rate. Therefore, for topographic steady state to be achieved, both the transport and detachment terms of Eq. (44) must be accomplished through

erosion of sediment. Eq. (44) may be re-written to show that it predicts a standard stream power slope-area relationship that is modified by the ratio of settling velocity to effective runoff:

$$S = \left[\frac{V}{r} + 1 \right]^{1/n} \left[\frac{U}{K_s} \right]^{1/n} A^{-m/n}. \quad (45)$$

We compare the slope-area relationships predicted by Eq. (44) with those extracted from the SPACE model. In order to achieve conditions in which the transport term in Eq. (44) dominates, we set initial soil depth to 100 m everywhere on our test grid so that $H \gg H_*$. See Table 1 for all parameter values.

Figure 7 shows the results of the transport-limited model experiment. The top panel shows the longitudinal profile of the longest channel, and shows that the SPACE component produces concave-up longitudinal profiles at steady state under transport-limited conditions. The appearance of constant concavity in the longitudinal profile is verified by the constant slope in log-log space of the slope-area data shown in the middle panel of Fig. 7. The bottom panel compares the theoretical slope-area relationship (Eq. (44), gray dashed line in Fig. 2) with data from the model run (black dots). All core nodes from the model domain are included, and all agree well with the theoretical prediction. In addition to matching the analytical prediction for channel slope, the model also matches the expected steady-state sediment flux relationship, $Q_s = UA$ (Fig. 2, bottom panel). This indicates that the SPACE component is successfully matching expected transport-limited model behavior for both slope and sediment flux at steady state.

7.3 Mixed bedrock-alluvial comparison

One major advantage of SPACE over many existing fluvial erosion models is its ability to simultaneously compute the evolution of an alluvial layer and a bedrock surface. True steady state in the mixed bedrock-alluvial case occurs when the thickness of the alluvial layer H and the bedrock height R are both unchanging in time ($\frac{\partial H}{\partial t} = 0$ and $\frac{\partial R}{\partial t} = 0$). In such a scenario, $E_s = D_s$ and $U = E_r$. As described in Sect. 4.5, steady-state analytical solutions exist for channel slope, sediment thickness, and sediment flux (here again we use $q = A^m$ and keep $\phi = 0$ and $F_f = 0$):

$$S = \left[\frac{UV}{K_s A^m r} + \frac{U}{K_r A^m} \right]^{1/n}, \quad (46)$$

$$H = -H_* \ln \left[1 - \frac{V}{\frac{K_s r}{K_r} + V} \right], \quad (47)$$

and

$$Q_s = UA. \quad (48)$$

Running the SPACE component to complete steady state in a case where both sediment entrainment and bedrock erosion contribute to setting channel slope should therefore result in a concave-up channel profile with a sediment layer of constant thickness, and sediment flux equal to the product of the rock uplift rate and drainage area. We use the same tilted plane initial

model domain as described in Sect. 7 to test whether the model can replicate the expected behavior in the bedrock-alluvial case. Matching the steady state analytical solutions requires both erosion of bedrock to generate the concave-up profile, and accumulation of sediment to a constant thickness over the landscape. We begin the numerical experiment with zero sediment thickness at all nodes. Table 1 shows all parameter values used. The driver script used for this model experiment is included in the code guide for this paper.

Figure 8 shows the evolution of the longitudinal bedrock profile and alluvial cover layer in the longest channel over several model timeslices. Beginning from a low-slope tilted plane, the channel incises bedrock and begins to build up a layer of alluvium on the channel bed. As model time progresses, the channel profile increases in concavity and the layer of alluvium thickens. Alluvial thickening progresses from downstream to upstream. By the final timeslice, the alluvial layer has reached its equilibrium value, the channel profile has equilibrated to the imposed uplift rate, and the bedrock surface, alluvium thickness, and topographic surface are all at steady state. Figure 9 shows the final channel profile (top panel) when the topographic surface, sediment thickness, and bedrock height are all at steady state. The topographic surface (top of the sediment layer) is everywhere parallel to the bedrock surface, and the bed sediment layer is 1.25 m thick at every point along the channel profile. Given $V = 5 \text{ m/s m/yr}$, $K_s = 0.01 \text{ yr}^{-1}$, and $K_r = 0.005 \text{ yr}^{-1}$, as used in the model, the steady state sediment thickness of $H = 1.25 \text{ m}$ calculated by the model matches the analytical prediction of Eq. (21). The middle panel compares the theoretical prediction for slope-area scaling given by Eq. (46) (gray dashed line) with the model results (black dots). As in the detachment-limited and transport-limited cases, the model matches the analytical prediction. The bottom panel of Fig. 9 compares the theoretical steady state relationship between drainage area and sediment flux ($Q_s = UA$) with modeled sediment flux, and shows that the model shows the predicted linear increase in Q_s with drainage area. The ability of the SPACE component to treat both the detachment-limited and transport-limited end members of fluvial systems as well as the mixed bedrock-alluvial case confirms that the model equations are being solved correctly, and importantly that our use of stabilizing, local analytical solutions does not compromise the ability of the model to replicate expected behavior. The results of the three tests presented above indicate that the SPACE component is useful for modeling river evolution across a wide variety of natural settings. Below, we show how the SPACE component may be efficiently coupled with other surface processes models in the Landlab modeling framework to provide insight into landscape evolution.

8 Application to landscape evolution modeling: Coupling SPACE with hillslope diffusion to model topographic growth and decay

One frequent application of landscape evolution modeling is the exploration of landscape response to tectonic perturbations. Understanding the growth and decay of topography has significant implications for interpretation of the stratigraphic record, which is composed of sediment that is detached and transported from upland landscapes. In this section we show how the SPACE component can be coupled with a hillslope diffusion model in the Landlab modeling toolkit to simulate landscape response to changing rock uplift rates. In addition to computing topographic change that incorporates both sediment and

bedrock surface evolution, we show the capability of the SPACE component to provide information about sediment fluxes delivered from the model catchment over time.

8.1 Model setup

We use a Landlab raster model grid composed of 2500 nodes (50 x 50 grid). We use a node spacing (dx) of 100 m, resulting in a 25 km² area grid. As with the model verification experiments described above, we close all model domain boundaries except for a single open outlet in the lower-left (southwest) corner. The use of a single outlet means that the entire model domain will be a single watershed draining to the outlet, and the sediment flux leaving the outlet is the integrated sediment flux from the entire basin. Our landscape initial condition is a plane tilted slightly (initial regional slope of $\approx 1.4 \times 10^{-5}$) towards the basin outlet. The tilted plane has initial, random sub-millimeter scale surface roughness to initiate the formation of drainage pathways.

For simplicity we use the simple stream power form of the SPACE model ($m = 0.5$, $n = 1$, $q = A^m$) and keep $\phi = 0$ and $F_f = 0$. We do not incorporate sediment entrainment and bedrock erosion thresholds. See Table 1 for all SPACE parameter values used in this example. We couple this parameterization of the SPACE component with Landlab's linear diffusion component, which computes the topographic-gradient-driven movement of mass at every node by the equation

$$\frac{\partial \eta}{\partial t} = \kappa \frac{\partial^2 \eta}{\partial x^2} \quad (49)$$

where κ is a diffusivity in units of [L²/T] (we use $\kappa = 0.005$ m²/yr). Programmatically, we incorporate Eq. (49) simply by running Landlab's linear diffusion component immediately after running the SPACE component in each model timestep. One simplification made by simple linear diffusion models is that the entire landscape is made of the same material (i.e., no distinction between rock and soil). To realistically couple linear diffusion with our fluvial erosion model that explicitly separates the dynamics of sediment and bedrock, we assume that any material diffused from one model node onto another is sediment. Such an assumption is realistic given the purpose and limitations of the linear diffusion model, which has been shown to apply primarily to soil-mantled hillslopes.

We ran our coupled model with a 1 year timestep for 300,000 years. Because our goal is to use SPACE and linear diffusion to explore topographic growth and decay, we used a rock uplift rate U relative to baselevel that was unsteady in time. We simulated a "pulse" of rapid rock uplift preceded and followed by periods of slower rock uplift. U was set to 0.0001 m/yr for the first 100 kyr, increased to 0.0005 m/yr for the second 100 kyr, and returned to 0.0001 m/yr for the final 100 kyr. Two variables of broad interest that generally vary in response to changing rock uplift rates are topographic relief and total sediment flux out of the model catchment. We predict under such a scenario that topographic relief and sediment flux will increase as surface erosion responds to rock uplift for the first 200 kyr, and that relief and sediment flux will reach their maximum when the rock uplift rate is at its highest value. We then expect decays in relief and sediment flux as the high points in the landscape erode and topographic gradients shrink in response to a return to the lower rock uplift rate. We recorded the topographic elevation at all model nodes, along with relief and sediment flux from the domain, at 1 kyr intervals.

8.2 Results of coupled model experiment

Figure 10 shows several timeslices of model topography showing the response to imposed rock uplift, and Fig. 11 shows sediment depth over the model domain at the same timeslices. Over the first 100 kyr, bedrock incision into the initially non-alluviated domain dominates adjustment to rock uplift. However, because the rock uplift rate is low and topographic gradients are being lowered by fluvial erosion and hillslope diffusion, the landscape has < 10 m of relief after 100 kyr. Sediment is first produced on the hillslopes (the products of diffusion are considered to be sediment) but not stored in the channels for the first 50 kyr as the channels incise into bedrock to accommodate the onset of rock uplift. By 100 kyr, the landscape is nearly equilibrated to the rock uplift rate, and alluviation has occurred in the channels as sediment thickness approaches its equilibrium value everywhere. Between 100 and 200 kyr, during which the rock uplift rate is five times its initial value, the network progressively develops higher and higher relief (up to ≈ 50 m) until the rock uplift rate is reduced again at 200 kyr. During this period, the channels initially strip their alluvial cover and incise bedrock to match the increased rock uplift rate. However, as in the first 100 kyr, as the landscape begins to equilibrate to the new rock uplift rate by 200 kyr, alluvium thickness again increases towards its equilibrium condition. Once the rock uplift rate is reduced, diffusion of material from the hillslopes into the channels results in sediment mantling of the channels and significant reduction of the rate of bedrock incision. By 300 kyr, the lowering of high points by diffusion, together with the inability of low-gradient, sediment-mantled rivers to effectively incise bedrock, has resulted in reductions in landscape relief such that the landscape at 300 kyr nearly mirror the 100 kyr timeslice (≈ 10 m of relief). At this point, the reduction in topographic gradients has reduced sediment delivery to the channels, which begin to strip their alluvial cover down to its equilibrium thickness.

The patterns observed in Fig. 10 and Fig. 11 are quantified in Fig. 12. Relief and sediment flux out of the model domain increase initially as the landscape is adjusting, through bedrock incision, from its initial condition to become equilibrated with the imposed rock uplift rate. The rates of increase in both relief and sediment flux increase substantially as the rock uplift rate quintuples at 100 kyr, and while neither reaches its equilibrium value (i.e., steady in time), both relief and sediment flux begin to asymptote towards those equilibrium values. At 200 kyr when the rock uplift rate is reduced to its initial value, diffusion rapidly reduces topographic gradients and alluviates channels, and channels become less erosive. Thus both relief and sediment flux decline over the final 100 kyr of the experiment, again approaching, but not fully reaching, their steady state values. The simple experiment performed here shows that the SPACE component may be easily coupled with other models of earth surface processes in Landlab to explore any number of questions relating to landscape evolution. While 1-D models of river longitudinal profile evolution have proliferated widely over the past decades, 2-D models that explicitly incorporate sediment morphodynamics and bedrock erosion simultaneously are rare, and those that are easily coupled with other models are even rarer. The SPACE algorithm and component fill an important gap in the quantitative geomorphologists's toolkit, and it is our hope that future users will apply it, potentially in conjunction with other Landlab components, to solve diverse geomorphological problems.

9 Discussion

In this section, we first explore the possibilities for testing the SPACE model against real and experimental landscapes. We then summarize the limitations of the model, and compare SPACE with existing models of bedrock-alluvial channel evolution.

9.1 Potential for model validation against real landscapes

5 *Models of river erosion are notoriously difficult to test against field data. Uncertainties in initial and boundary conditions, as well as spatial and temporal heterogeneity in rock type and sediment size, introduce substantial complexity into model verification exercises. Nevertheless, studies exploiting natural experiments, or landscapes where initial conditions, boundary conditions, and/or parameter values are particularly well-constrained (Tucker, 2009), have met with some success in validating models (e.g., Stock and Montgomery, 1999; Tomkin et al., 2003; van der Beek and Bishop, 2003; Valla et al., 2010; Hobley*
10 *et al., 2011). The SPACE model makes predictions for steady-state channel slope and sediment thickness that could be validated by field or experimental studies. In addition, the co-evolution of the bedrock surface and sediment layer thickness could be used to validate the SPACE model in transient cases.*

Previous studies have addressed the validation of the detachment-limited and transport-limited end-members of fluvial erosion models (e.g., Stock and Montgomery, 1999; Tomkin et al., 2003; van der Beek and Bishop, 2003; Valla et al., 2010;
15 *Hobley et al., 2011), so we focus here on the potential for evaluating the predictions of SPACE for the mixed bedrock-alluvial case. The SPACE model predicts that both sediment entrainment and bedrock erosion will contribute to setting the steady-state slope-area relationship (Eq. 46), and that the relative importance of the two components will be set by the ratio $\frac{V}{r}$ and the relative erodibility of sediment and bedrock. The steady-state sediment layer thickness (Eq. 47) is also governed by $\frac{V}{r}$ and the ratio of erodibilities. As $\frac{V}{r}$ or $\frac{K_r}{K_s}$ increases, the channel slope is dominated by sediment erosion and the steady-state allu-*
20 *vial layer thickness increases. If the SPACE model is valid for natural settings, it should be possible to find (or create in the laboratory) steady-state channels with an alluvial layer with constant thickness along the channel. Further, across a gradient of rock and/or sediment erodibilities (e.g., a sequence of changing metamorphic grade or a spatial gradient of grain sizes), both the steady-state channel slope and steady-state alluvial thickness should show predictable changes as a function of $\frac{K_r}{K_s}$. Finally, an intriguing prediction of SPACE is that the steady-state alluvial thickness is independent of the rock uplift rate while*
25 *the slope-area relationship is not. Field investigations across a range of rock uplift rates with consistent lithology, climate, and sediment properties should show constant steady-state sediment thickness imposed on rock-uplift-dependent slope-area scaling.*

In the transient case, the relationship between the longitudinal profile of the bed sediment surface and that of the bedrock may be useful for validating SPACE model predictions. For example, Fig. 8 shows that for an uplifting landscape with zero
30 *initial sediment thickness, SPACE predicts bottom-to-top alluviation of the channel profile. In this case, the sediment surface does not reflect the steepened reach commonly associated with the propagation of transient signals up a river profile, while the bedrock beneath does. The prediction of SPACE is therefore that in a transient river profile with some amount of bed sediment, the concavity of the sediment surface is not expected to match that of the bedrock surface. The difference in concavity*

between the sediment surface and the bedrock surface should then decline as channels approach steady state, a prediction that is testable in a landscape where channels exist in different stages of transient adjustment. It is important to remember that the sediment thickness predicted by SPACE is a spatial average within a model cell. Further, using realistic (i.e., time-varying) flow distributions to force the model would result in temporal variability in sediment thickness (Lague et al., 2005; Lague, 2010), complicating the interpretation of sediment thickness values from a specific field campaign. While testing the steady-state predictions of SPACE is likely feasible in well-constrained landscapes, the transient dynamics may be best explored in a laboratory setting.

9.2 Limitations of the SPACE model

The SPACE model is intended to provide a simple, extensible, easy-to-use tool to expand the set of questions that can be addressed with numerical models of river channel evolution. We have consolidated recent advances in the treatment of sediment erosion and deposition (Davy and Lague, 2009) as well as simultaneous evolution of sediment and bedrock layers (Lague, 2010; Zhang et al., 2015) into a single model that has the additional advantages of being 2-D effective for modeling over large grids on landscape evolution timescales, easily accessible, and easily coupled to other surface processes models in the Landlab modeling toolkit. As such, our model encompasses some of the same limitations as the previous work from which it is derived, including a lack of dynamic channel width and a lack of treatment of the tools effect.

To allow efficient solution of the SPACE model over large model grids and timescales, we do not incorporate the hydrodynamic calculations (i.e., explicit computation of stresses on the bed and banks) required to allow channel width to evolve freely (e.g., Kean and Smith, 2004; Stark, 2006; Wobus et al., 2006; Davy and Lague, 2009; Turowski et al., 2009; Lague, 2010; Nelson and Seminara, 2011; Coulthard et al., 2013). Instead, we employ a common parameterization for channel width as a function of drainage area or discharge. In the examples in this paper we used a width scaling of $w = Q^{0.5}$, which results in $q = Q^{0.5}$ or $q = A^{0.5}$ if drainage area is used as a surrogate for discharge. The width scaling exponent m , which we held equal to 0.5 in the examples discussed here, is a user-defined parameter. The use of an empirical width scaling means that 1) any given point along the channel occupies a single grid cell regardless of whether width is less than, equal to, or greater than grid cell size, and 2) SPACE does not capture temporal channel width variations in response to rock uplift, sediment flux, and discharge changes. In some cases, channel width may respond more significantly than channel slope to such forcings (e.g., Amos and Burbank, 2007; Turowski et al., 2009). While our use of a downstream width relationship enables us to test the SPACE model against known analytical solutions and eliminates the need for hydrodynamic calculations, the future addition of dynamic width would allow exploration of the relative importance of slope and width adjustment.

The SPACE model as presented here follows previous models in treating reduction of bedrock erosion by sediment cover (e.g., Beaumont et al., 1992; Lague, 2010; Shobe et al., 2016), but does not include the enhancement of bedrock erosion by the presence of mobile bedload tools (e.g., Sklar and Dietrich, 2004; Gasparini et al., 2006; Turowski et al., 2007; Zhang et al., 2015). Such a simplification keeps expected model behavior conceptually simple and allows comparison of model results to known analytical solutions for the purposes of model validation. However, there is substantial field evidence indicating that mobilized bedload can be an important erosive agent, especially where bedrock is too widely jointed to permit plucking of

bedrock blocks (Hancock et al., 1998; Cook et al., 2013; Beer et al., 2016). The major effect of excluding this effect from the SPACE model is that bedrock erosion will be underpredicted at low to moderate sediment fluxes, where there is enough bedload to frequently abrade the bed, but not enough to form a deep layer of alluvial cover. Adding the tools effect to the SPACE model could be accomplished by changing the form of the bedrock erosion function to increase with increasing Q_s .
5 mimic the parabolic (Sklar and Dietrich, 2004), almost parabolic (Gasparini et al., 2006), or similar (Turowski et al., 2007) dependence of erosion efficiency on Q_s or H/H_* .

9.3 Comparison to previous channel evolution models

The SPACE model borrows and combines concepts from models for sediment-flux-dependent bedrock incision, bed cover evolution, sediment transport, and prior models of mixed bedrock-alluvial channels. Here we briefly highlight the similarities and differences between our model and previous models. SPACE relaxes the traditional assumptions governing detachment-limited and transport-limited erosion models by incorporating both mass conservation of sediment and an incision rule for bedrock. Our model, like other recent models for bedrock-alluvial channels, explicitly incorporates sediment transport to move beyond the assumption that bed exposure depends on the ratio of sediment flux to transport capacity used in sediment-flux-dependent bedrock incision models (e.g., Sklar and Dietrich, 2004; Gasparini et al., 2006; Turowski et al., 2007; Chatanantavet and Parker, 2009). In doing this, our model follows a substantial number of previous contributions. Specifically, Hodge and Hoey (2012), Nelson and Seminara (2012), and Turowski and Hodge (2017) used explicit treatments of sediment morphodynamics to explore spatial and temporal changes in bed cover on a non-erodible bedrock bed in response to different forcings. Turowski (2009) used a stochastic sediment erosion and deposition framework in conjunction with the saltation-abrasion model for bedrock erosion to explore both cover variation and its influence on bedrock erosion rates. Their models are formulated at the reach scale and focus on cover dynamics rather than landscape evolution. Unlike SPACE however, their models allow different forms for the dependence of exposed bed fraction on sediment transport to arise dynamically, while we use a simple exponential decline in bed exposure with increasing sediment thickness. Nelson and Seminara (2011) coupled sediment transport saltation-abrasion rules in a model of channel cross-section evolution. Our model assumes a planar channel bed and parameterized channel width for application to landscape evolution problems, and does not dynamically evolve channel cross-section shape as in Nelson and Seminara (2011). Sediment transport in the SPACE model is computed with the erosion-deposition framework, using an approach almost exactly following Davy and Lague (2009). The major difference between SPACE and the models of Davy and Lague (2009) and Carretier et al. (2016) is that SPACE applies the erosion-deposition framework to the simultaneous erosion of sediment and bedrock. This allows the model to transition not only between transport-limited and detachment-limited behavior, as in those models, but also between fully alluviated, mixed bedrock-alluvial, and pure bedrock states. This is also the key difference between SPACE and the Fowler et al. (2007) model, which used Exner-based sediment conservation and bed abrasion under an assumption of infinite sediment supply.

Inoue et al. (2014, 2016, 2017) formulated three insightful models for the evolution of mixed bedrock-alluvial channels. There are several areas in which these models incorporate more physical realism in fluvial erosion processes than does SPACE. For example, Inoue et al. (2014) incorporated the roughness of both the bedrock surface and the alluvial layer; their model

is therefore able to treat both the case where the alluvial layer is rougher than the bedrock bed and vice versa. SPACE does not currently have the ability to alter flow resistance based on the relative exposure of sediment and bedrock. While more advanced representations of the roughness of both bedrock and alluvium are possible, they are not currently incorporated in our model. However, the erosion-deposition treatment of sediment dynamics in SPACE means that it can move beyond the constant sediment supply assumption of Inoue et al. (2014). The models of Inoue et al. (2016) and Inoue et al. (2017) contain substantially more reach-scale complexity than SPACE in that the flow and sediment transport equations are solved in 2-D, resulting in their model being able to resolve changes to alluvial thickness and bedrock elevation in the downstream and cross-stream directions. Inoue et al. (2017) also added a simple parameterization for bank erosion. The SPACE model treats bedrock elevation and alluvial thickness as cell-averaged quantities, and channel width is empirically parameterized and therefore may at any point be smaller than, equal to, or greater than a cell width. As such, SPACE resolves downstream changes in sediment thickness and bedrock elevation, but not cross-stream changes. On the other hand, the simplicity of treating the problem in 1-D allows SPACE to be applied to orogen-scale grids over landscape evolution timescales, whereas the models of Inoue et al. (2014, 2016, 2017) have primarily been applied at the reach to kilometer scale.

SPACE is most similar to, and most based upon, the models of Lague (2010) and Zhang et al. (2015), both of which model the full transition between bedrock, bedrock-alluvial, and fully alluvial channels over full channel profile scales. All three models contain similar treatments of the progressive exposure of bedrock with thinning of the alluvial layer. Lague (2010) compared alluvial layer thickness to the median grain size, Zhang et al. (2015) compared alluvial thickness to the macro-roughness of the bedrock surface, and SPACE similarly computes bedrock exposure based on the ratio of alluvial thickness to a bedrock roughness length scale. The three models differ primarily in that SPACE uses the erosion-deposition framework of Davy and Lague (2009) to explicitly calculate sediment transport morphodynamics, while Lague (2010) and Zhang et al. (2015) use Exner-based sediment conservation approaches. The other differences among the three models are driven by which processes are included and which are neglected. The model of Lague (2010) incorporates dynamic channel width by partitioning shear stresses between the bed and banks, while both the model of Zhang et al. (2015) and SPACE do not incorporate dynamic channel width, but use empirical width scaling parameterizations. Zhang et al. (2015) use a saltation-abrasion rule for bedrock incision in their model such that they capture both the tools and cover effects. Both the model of Lague (2010) and the SPACE model incorporate bed cover as a function of increasing alluvial layer thickness, but do not include a dependence of bedrock erosion on sediment flux (the tools effect). Both dynamic width and the tools effect could be incorporated in future versions of the SPACE model.

10 Conclusions

We have developed and presented a new model for sediment transport and river incision into bedrock. The SPACE model takes inspiration from sediment-flux-dependent bedrock incision models (e.g., Sklar and Dietrich, 2004; Gasparini et al., 2006; Turowski et al., 2007), models of alluvial cover on bedrock beds (e.g., Turowski, 2009; Hodge and Hoey, 2012; Nelson and Seminara, 2011, 2012; Turowski and Hodge, 2017), erosion-deposition sediment transport models (e.g., Beaumont et al., 1992;

Davy and Lague, 2009), and existing models of bedrock-alluvial river evolution (e.g., Lague, 2010; Inoue et al., 2014; Zhang et al., 2015; Inoue et al., 2016, 2017). SPACE incorporates explicit sediment erosion and deposition and simultaneously evolves a sediment layer and a bedrock bed, with the necessary simplifications (e.g., parameterized width) necessary to make solutions tractable over landscape evolution spatial and temporal scales. The SPACE model is a significant advance over standard sediment flux-dependent river incision models because it explicitly treats sediment morphodynamics rather than relying on a parameterized relationship between sediment flux and transport capacity. SPACE is based on the erosion-deposition framework outlined by (Davy and Lague, 2009), and is able to transition between detachment-limited, transport-limited, and mixed cases. Further, in contrast to the erosion-deposition model, our model simultaneously evolves a sediment layer and the underlying bedrock surface. In this regard, our model is similar to those proposed by Lague (2010) and Zhang et al. (2015). We make some simplifications relative to those models, excluding dynamic width variation (e.g., Lague, 2010) and “tools” effects (e.g., Zhang et al., 2015) from our modeling framework.

We developed steady-state analytical solutions for channel slope, sediment thickness, and sediment flux in Sect. 4.5 based on the model governing equations. We then showed three experiments in section 5 demonstrating that the numerical implementation of SPACE, which uses local analytical solutions for stable calculation of sediment flux and sediment thickness, matches the analytical predictions at steady state in the detachment-limited, transport-limited, and mixed bedrock-alluvial cases.

The foremost advantage of SPACE over other similar models is its ease of use for modeling landscape evolution in two dimensions. The SPACE 1.0 component is implemented in 2-D as part of the freely available Landlab modeling toolkit, and may be readily coupled to other models of earth surface processes. We showed in an example application how the SPACE component may be coupled to a linear diffusion hillslope evolution model to investigate the growth and decay of topography in response to temporally variable rock uplift. The unique ability of SPACE to separately evolve bedrock topography and sediment thickness makes it well-suited to a suite of possible applications that are out of reach for simpler, *single-substrate bedrock-only or sediment-flux-dependent river incision* models. For example, the SPACE component would be effective for modeling the depositional filling of flexural depressions, downthrown fault blocks, and landslide-dammed rivers. In situations where temporal variability in sediment flux is a variable of interest, the ability of SPACE to store sediment in the form of an alluvial layer could yield more realistic results than simple detachment- or transport-limited models. Finally, the SPACE modeling framework is flexible in that the stream-power based entrainment and erosion equations (Eq. (7 and 8)) may be replaced with other formulations better tailored to individual model applications.

The SPACE 1.0 component enables 2-D calculation of sediment transport, bedrock erosion, and landscape evolution within the Landlab modeling toolkit. The model’s ability to simultaneously transport sediment and erode bedrock opens up a wide variety of potential *landscape evolution* applications beyond the limits of simpler models. SPACE may be easily coupled to other models in Landlab to address novel questions in geomorphology.

11 Code availability

The SPACE 1.0 Landlab component as well as all other Landlab components used in this paper are part of Landlab version 1.0.2. Source code for the Landlab project is housed on GitHub: <http://github.com/landlab/landlab>. Documentation, installation instructions, and software dependencies for the entire Landlab project can be found at <http://landlab.github.io/>. A detailed user manual with an accompanying Jupyter notebook and a driver script for the mixed bedrock-alluvial example illustrated in this paper can be found at https://github.com/cmshobe/pub_shobe_et_al_GMD (Shobe, 2017, GitHub Repository). The Landlab project is tested on recent-generation Mac, Linux, and Windows platforms using Python versions 2.7, 3.4, and 3.5. The Landlab modeling framework is distributed under a MIT open-source license.

Author contributions. GET developed the algorithm *with help from CMS*. CMS implemented the algorithm, wrote the Landlab component with help from KRB, verified and evaluated the model solutions, and wrote the paper with contributions from GET and KRB.

Competing interests. The authors declare that they have no conflicts of interest.

Acknowledgements. This work was supported by National Science Foundation grants ACI-1147454 (PI: Gregory E. Tucker) and ACI-1450409 (PI: Gregory E. Tucker), and a National Defense Science and Engineering Graduate fellowship (*to CMS*), and a University of Colorado Chancellor's fellowship (*to CMS*). ~~to Charles M. Shobe.~~ Thanks to Jordan Adams, Alexandra Carriere, Rachel Glade, Harrison Gray, Sarah Harbert, Aaron Hurst, Kelly Kochanski, Caroline Le Bouteiller, Matt Rossi, and Ronald van Balen for helpful discussions. We thank Fiona Clubb and Jens Turowski for insightful and constructive reviews.

References

- Adams, J. M., Gasparini, N. M., Hobley, D. E. J., Tucker, G. E., Hutton, W. E. H., Nudurupati, S. S., and Istanbuloglu, E.: The Landlab v1.0 OverlandFlow component: a Python tool for computing shallow-water flow across watersheds, *Geosci. Mod. Dev.*, 10, 1645-1663, doi:10.5194/gmd-10-1645-2017, 2017.
- 5 Amos, C. B., and Burbank, D. W.: Channel width response to differential uplift, *J. Geophys. Res.*, 112, F02010, doi:10.1029/2006JF000672, 2007.
- Armitage, J. J., Duller, R. A., Whittaker, A. C., and Allen, P. A.: Transformation of tectonic and climatic signals from source to sedimentary archive, *Nature Geoscience*, 4, 231-235, doi:10.1038/NGEO1087, 2011.
- Attal, M., Tucker, G. E., Whittaker, A. C., Cowie, P. A., and Roberts, G. P.: *Modeling fluvial incision and transient landscape evolution: Influence of dynamic channel adjustment*, *J. Geophys. Res.*, 113, F03013, doi:10.1029/2007JF000893, 2008.
- 10 Beaumont, C., Fullsack, P., and Hamilton, J.: Erosional control of active compressional orogens, in *Thrust Tectonics*, edited by K. R. McClay, 1-18, 1992.
- Beer, A. R., Turowski, J. M., and Kirchner, J. W.: Spatial patterns of erosion in a bedrock gorge, *J. Geophys. Res. Earth Surf.*, 122, doi:10.1002/2016JF003850, 2016.
- 15 Braun, J. and Sambridge, M.: Modeling landscape evolution on geological time scales: A new method based on irregular spatial discretization, *Basin Research*, 9, 27-52, 1997.
- Braun, J. and Willett, S. D.: A very efficient, $O(n)$, implicit and parallel method to solve the stream power equation governing fluvial incision and landscape evolution, *Geomorphology*, 180-181, 170-179, doi:10.1016/j.geomorph.2012.10.008, 2013.
- Buffington, J. M. and Montgomery, D. R.: *A systematic analysis of eight decades of incipient motion studies, with special reference to gravel-bedded rivers*, *Water Resour. Res.*, 33, 1993-2029, doi:10.1029/97wr03190, 1997.
- 20 Carretier, S., Martinod, P., Reich, M., and Godderis, Y.: Modelling sediment clasts transport during landscape evolution, *Earth Surf. Dynam.*, 4, 237-251, doi:10.5194/esurf-4-237-2016, 2016.
- Chatanantavet, P. and Parker, G.: *Physically based modeling of bedrock incision by abrasion, plucking, and macroabrasion*, *J. Geophys. Res.*, 114, F04018, doi:10.1029/2008JF001044, 2009.
- 25 Chatanantavet, P. and Parker, G.: *Experimental study of bedrock channel alleviation under varied sediment supply and hydraulic conditions*, *Water Resour. Res.*, 44, W12446, doi:10.1029/2007WR006581, 2008.
- Clark, M. P. and Kavetski, D.: *Ancient numerical daemons of conceptual hydrological modeling: 1. Fidelity and efficiency of time stepping schemes*, *Water Resour. Res.*, 46(10), W10510, doi:10.1029/2009WR008894, 2010.
- Cook, K. L., Turowski, J. M., and Hovius, N.: A demonstration of the importance of bedload transport for fluvial bedrock erosion and knickpoint propagation, *Earth Surf. Proc. Land.*, 38, 683-695, doi:10.1002/esp.3313, 2013.
- 30 Coulthard, T. J., Macklin, M. G., and Kirkby, M. J.: A cellular model of Holocene upland river basin and alluvial fan evolution, *Earth Surf. Proc. Land.*, 27, 269-288, doi:10.1002/esp.318, 2002.
- Coulthard, T. J., Neal, J. C., Bates, P. D., Ramirez, J., de Almeida, G. A. M., and Hancock, G. R.: Integrating the LISFLOOD-FP 2D hydrodynamic model with the CAESAR model: implications for modelling landscape evolution, *Earth Surf. Proc. Land.*, 38(15), 1897-1906, doi:10.1002/esp.3478, 2013.
- 35 Davy, P. and Lague, D.: Fluvial erosion/transport equation of landscape evolution models revisited, *J. Geophys. Res.-Earth*, 114, F03007, doi:10.1029/2008JF001146, 2009.

- DiBiase, R. A. and Whipple, K. X.: The influence of erosion thresholds and runoff variability on the relationships among topography, climate, and erosion rate, *J. Geophys. Res.*, 116, F04036, doi:10.1029/2011JF002095, 2011.
- Ferguson, R. I., Sharma, B. P., Hardy, R. J., Hodge, R. A., and Warburton, J.: Flow resistance and hydraulic geometry in contrasting reaches of a bedrock channel, *Water Resour. Res.*, 53, 2278-2293, doi:10.1002/2016WR020233, 2017.
- 5 Finnegan, N. J., Roe, G., Montgomery, D. R., and Hallet, B.: Controls on the channel width of rivers: Implications for modeling fluvial incision of bedrock, *Geology*, 33(3), 229-232, doi:10.1130/G21171.1, 2005.
- Flintham, T. P., and Carling, P. A.: The prediction of mean bed and wall boundary shear in uniform and compositely rough channels, in *International Conference on River Regime, 18-20 May, 1988*, edited by W. R. White, pp. 267-287, John Wiley, New York, 1988.
- Fowler, A. C., Kopteva, N., and Oakley, C.: The formation of river channels, *SIAM J. Appl. Math.*, 67(4), 1016-1040, doi:10.1137/050629264,
10 2007.
- Gasparini, N. M., Bras, R. L., and Whipple, K. X.: Numerical modeling of non-steady-state river profile evolution using a sediment-flux-dependent incision model, *Geol. Soc. Am. Spec. Pap.*, 398, 127-141, 2006.
- Gasparini, N. M., Whipple, K. X., and Bras, R. L.: Predictions of steady state and transient landscape morphology using sediment-flux-dependent river incision models, *J. Geophys. Res.*, 112, F03S09, doi:10.1029/2006JF000567, 2007.
- 15 Graf, W. L., Wohl, E., Sinha, T., and Sabo, J. L.: Sedimentation and sustainability of western American reservoirs, *Water Resour. Res.*, 46, W12535, doi:10.1029/2009WR008836, 2010.
- Hancock, G. S., Anderson, R. S., and Whipple, K. X.: Beyond power: Bedrock river process and form, in *Rivers Over Rock: Fluvial Processes in Bedrock Channels*, *Geophys. Monogr. Ser.*, vol. 107, edited by K. J. Tinkler and E. E. Wohl, 35-60, 1998.
- Hancock, G. S. and Anderson, R. S.: Numerical modeling of fluvial strath-terrace formation in response to oscillating climate, *Geol. Soc. Am. Bull.*, 114(9), 1131-1142, 2002.
- 20 Hancock, G. S., Small, E. E., and Wobus, C. W.: Modeling the effects of weathering on bedrock-floored channel geometry, *J. Geophys. Res.*, 116, F03018, doi:10.1029/2010JF001908, 2011.
- Hilton, R. G.: Climate regulates the erosional carbon export from the terrestrial biosphere, *Geomorphology*, 277, 118-132, doi:10.1016/j.geomorph.2016.03.028, 2017.
- 25 Hobbey, D. E. J., Sinclair, H. D., Mudd, S. M., and Cowie, P. A.: Field calibration of sediment flux dependent river incision, *J. Geophys. Res.*, 116, F04017, doi:10.1029/2010JF001935, 2011.
- Hobbey, D. E. J., Adams, J. M., Nudurupati, S. S., Hutton, E. W. H., Gasparini, N. M., Istanbuluoglu, E., and Tucker, G. E.: Creative computing with Landlab: an open-source toolkit for building, coupling, and exploring two-dimensional numerical models of Earth-surface dynamics, *Earth Surf. Dynam.*, 5, 21-46, doi:10.5194/esurf-5-21-2017, 2017.
- 30 Hodge, R. A., Hoey, T. B., and Sklar, L. S.: Bed load transport in bedrock rivers: The role of sediment cover in grain entrainment, translation, and deposition, *J. Geophys. Res.*, 116, F04028, doi:10.1029/2011JF002032, 2011.
- Hodge, R. A. and Hoey, T. B.: Upscaling from grain-scale processes to alluviation in bedrock channels using a cellular automaton model, *J. Geophys. Res.*, 117, F01017, doi:10.1029/2011JF002145, 2012.
- Hodge, R. A.: Sediment processes in bedrock-alluvial rivers: Research since 2010 and modeling the impact of fluctuating sediment supply
35 on sediment cover, in: *Gravel-bed Rivers: Gravel Bed Rivers and Disasters*, 2017.
- Howard, A. D.: A detachment-limited model of drainage-basin evolution, *Water Resour. Res.*, 30, 2261-2285, doi:10.1029/94wr00757, 1994.

- Howard, A. D.: Long profile development of bedrock channels: Interaction of weathering, mass wasting, bed erosion, and sediment transport, in *Rivers Over Rock: Fluvial Processes in Bedrock Channels*, *Geophys. Monogr. Ser.*, vol. 107, edited by K. J. Tinkler and E. E. Wohl, 297-319, 1998.
- Inoue, T., Izumi, N., Shimizu, Y., and Parker, G.: Interaction among alluvial cover, bed roughness, and incision rate in purely bedrock and alluvial-bedrock channel, *J. Geophys. Res. Earth Surf.*, 119, 2123-2146, doi:10.1002/2014JF003133, 2014.
- Inoue, T., Iwasaki, T., Parker, G., Shimizu, Y., Izumi, N., Stark, C. P., and Funaki, J.: Numerical simulation of effects of sediment supply on bedrock channel morphology, *J. Hydraul. Eng.*, 142(7), doi:10.1061/(ASCE)HY.1943-7900.0001124, 2016.
- Inoue, T., Parker, G., and Stark, C. P.: Morphodynamics of a bedrock-alluvial meander bend that incises as it migrates outward: Approximate solution of permanent form, *Earth Surf. Proc. Land.*, 42, 1342-1354, 2017.
- Johnson, J. P. L., Whipple, K. X., Sklar, L. S., and Hanks, T. C.: Transport slopes, sediment cover, and bedrock channel incision in the Henry Mountains, Utah, *J. Geophys. Res.*, 114, F02014, doi:10.1029/2007JF000862, 2009.
- Johnson, J. P. L.: A surface roughness model for predicting alluvial cover and bed load transport rate in bedrock channels, *J. Geophys. Res. Earth Surf.*, 119, 2147-2173, doi:10.1002/2013JF003000, 2014.
- Johnson, J. P. L.: Gravel threshold of motion: A state function of sediment transport disequilibrium? *Earth Surf. Dynam.*, 4, 685-703, doi:10.5194/esurf-4-685-2016, 2016.
- Johnson, K. N. and Finnegan, N. J.: A lithologic control on active meandering in bedrock channels, *Geol. Soc. Am. Bull.*, 127, 11/12, 1766-1776, doi:10.1130/B31184.1, 2015.
- Kavetski, D. and Clark, M. P.: Ancient numerical daemons of conceptual hydrological modeling: 2. Impact of time stepping schemes on model analysis and prediction, *Water Resour. Res.*, 46(10), W10511, doi:10.1029/2009WR008896, 2010.
- Kean, J. W. and Smith, J. D.: Flow and boundary shear stress in channels with woody bank vegetation, in *Riparian Vegetation and Fluvial Geomorphology*, *Water Science and Application*, vol. 8, edited by S. J. Bennett and A. Simon, 237-252, 2004.
- Kirchner, J. W., Dietrich, W. E., Iseya, F., and Ikeda, H.: The variability of critical shear-stress, friction angle, and grain protrusion in water-worked sediments, *Sedimentology*, 37, 647-672, doi:10.1111/j.1365-3091.1990.tb00627.x, 1990.
- Lague, D., Crave, A., and Davy, P.: Laboratory experiments simulating the geomorphic response to tectonic uplift, *J. Geophys. Res.*, 108, B1, 2008, doi:10.1029/2002JB001785, 2003.
- Lague, D., Hovius, N., and Davy, P.: Discharge, discharge variability, and the bedrock channel profile, *J. Geophys. Res.*, 110, F04006, doi:10.1029/2004JF000259, 2005.
- Lague, D.: Reduction of long-term bedrock incision efficiency by short-term alluvial cover intermittency, *J. Geophys. Res.*, 115, F02011, doi:10.1029/2008JF001210, 2010.
- Lajeunesse, E., Devauchelle, O., Lachaussée, F., and Claudin, P.: Bedload transport in laboratory rivers: The erosion-deposition model, in: *Gravel-bed Rivers: Gravel Bed Rivers and Disasters*, 2017.
- Lamb, M. P., Dietrich, W. E., and Sklar, L. S.: A model for fluvial bedrock incision by impacting suspended and bed load sediment, *J. Geophys. Res.*, 113, F03025, doi:10.1029/2007JF000915, 2008.
- Leopold, L. B. and Maddock, T.: The hydraulic geometry of stream channels and some physiographic implications, *U.S. Geol. Surv. Prof. Pap.*, 252, 1953.
- Masteller, C. C. and Finnegan, N. J.: Interplay between grain protrusion and sediment entrainment in an experimental flume, *J. Geophys. Res. Earth Surf.*, 122, 274-289, doi:10.1002/2016JF003943, 2017.

- McEwan, I. and Heald, J.: *Discrete particle modeling of entrainment from flat uniformly sized sediment beds*, *J. Hydraul. Eng.*, 127(7), 588-597, doi:10.1061/(ASCE)0733-9429(2001)127:7(588), 2001.
- Murphy, B. P., Johnson, J. P. L., Gasparini, N. M., and Sklar, L. S.: Chemical weathering as a mechanism for the climatic control of bedrock river incision, *Nature*, 532, doi:10.1038/nature17449, 2016.
- 5 Nelson, P. A., Venditti, J. G., Dietrich, W. E., Kirchner, J. W., Ikeda, H., Iseya, F., and Sklar, L. S.: *Response of bed surface patchiness to reductions in sediment supply*, *J. Geophys. Res. Earth Surf.*, 114, F02005, doi:10.1029/2008jf001144, 2009.
- Nelson, P. A. and Seminara, G.: *Modeling the evolution of bedrock channel shape with erosion from saluting bed load*, *Geophys. Res. Lett.*, 38, L17406, doi:10.1029/2011GL048628, 2011.
- Nelson, P. A. and Seminara, G.: *A theoretical framework for the morphodynamics of bedrock channels*, *Geophys. Res. Lett.*, 39, L06408, doi:10.1029/2011GL050806, 2012.
- 10 Paola, C. and Voller, V. R.: A generalized Exner equation for sediment mass balance, *J. Geophys. Res.*, 110, F04014, doi:10.1029/2004JF000274, 2005.
- Parker, G.: *Surface-based bedload transport relation for gravel rivers*, *J. Hydraul. Res.*, 28, 417-436, doi:10.1080/00221689009499058, 1990.
- 15 Prancevic, J. P. and Lamb, M. P.: *Unraveling bed slope from relative roughness in initial sediment motion*, *J. Geophys. Res. Earth Surf.*, 120, 474-489, doi:10.1002/2014jf003323, 2015.
- Shobe, C. M., Tucker, G. E., and Anderson, R. S.: Hillslope-derived blocks retard river incision, *Geophys. Res. Lett.*, 43, 10, 5070-5078, doi:10.1002/2016GL069262, 2016.
- Shobe, C. M.: GitHub Repository: SPACE example drivers and documentation, doi:10.6084m9.figshare.5193478.v1, 2017.
- 20 Shobe, C. M., Hancock, G. S., Eppes, M. C., and Small, E. E.: Field evidence for the influence of weathering on rock erodibility and channel form in bedrock rivers, *Earth Surf. Proc. Land.*, 42, 1997-2012, doi:10.1002/esp.4163, 2017.
- Sklar, L. S. and Dietrich, W. E.: River longitudinal profiles and bedrock incision models: Stream power and the influence of sediment supply, in *Rivers Over Rock: Fluvial Processes in Bedrock Channels*, *Geophys. Monger. Ser.*, vol. 107, edited by K. J. Tinkler and E. E. Wohl, 237-260, 1998.
- 25 Sklar, L. S. and Dietrich, W. E.: Sediment and rock strength controls on river incision into bedrock, *Geology*, 29, 12, 1087-1090, 2001.
- Sklar, L. S. and Dietrich, W. E.: A mechanistic model for river incision into bedrock by saltating bed load, *Water Resour. Res.*, 40, W06301, 2004.
- Small, E. E., Blom, T., Hancock, G. S., Hynek, B. M., and Wobus, C. W.: Variability of rock erodibility in bedrock-floored stream channels based on abrasion mill experiments, *J. Geophys. Res. Earth Surf.*, 120, 1455-1469, doi:10.1002/2015JF003506, 2015.
- 30 Smith, T. R. and Bretherton, F. P.: *Stability and the conservation of mass in drainage basin evolution*, *Water Resour. Res.*, 8(6), 1506-1529, 1972.
- Snyder, N. P., Whipple, K. X., Tucker, G. E., and Merritts, D. J.: Importance of a stochastic distribution of floods and erosion thresholds in the bedrock river incision problem, *J. Geophys. Res.*, 108, B2, 2117, doi:10.1029/2001JB001655, 2003.
- Stark, C. P.: A self-regulating model of bedrock river channel geometry, *Geophys. Res. Lett.*, 33, L04402, doi:10.1029/2005GL023193, 2006.
- 35 Stock, J. D. and Montgomery, D. R.: Geologic constraints on bedrock river incision using the stream power law, *J. Geophys. Res.*, 104, B3, 4983-4993, 1999.
- Tomkin, J. H., Brandon, M. T., Pazzaglia, F. J., Barbour, J. R., Willett, S. D.: Quantitative testing of bedrock incision models for the Clearwater River, NW Washington State, *J. Geophys. Res.*, 108, B6, 2308, doi:10.1029/2001JB000862, 2003.

- Tucker, G. E.: Drainage basin sensitivity to tectonic and climatic forcing: Implications of a stochastic model for the role of entrainment and erosion thresholds, *Earth Surf. Proc. Land.*, 29, 185-205, 2004.
- Tucker, G. E.: *Natural experiments in landscape evolution*, *Earth Surf. Proc. Land.*, 34, 1450-1460, doi:10.1002/esp.1833, 2009.
- Tucker, G. E., Lancaster, S. T., Gasparini, N. M., and Bras, R. L.: The Channel-Hillslope Integrated Landscape Development (CHILD) model, in *Landscape Erosion and Evolution Modeling*, edited by R. S. Harmon and W. W. Doe III, 349-388, 2001.
- 5 Tucker, G. E., Hobbey, D. E. J., Hutton, E., Gasparini, N. M., Istanbuluoglu, E., Adams, J. M., and Nudurupati, S. S.: CellLab-CTS 2015: continuous-time stochastic cellular automaton modeling using Landlab, *Geosci. Model Dev.*, 9, 823-839, doi:10.5194/gmd-9-823-2016, 2016.
- Turowski, J. M., Lague, D., Crave, A., and Hovius, N.: *Experimental channel response to tectonic uplift*, *J. Geophys. Res.*, 111, F03008, doi:10.1029/2005JF000306, 2006.
- 10 Turowski, J. M., Lague, D., and Hovius, N.: Cover effect in bedrock abrasion: A new derivation and its implications for the modeling of bedrock channel morphology, *J. Geophys. Res.*, 112, F04006, doi:10.1029/2006JF000697, 2007.
- Turowski, J. M.: *Stochastic modeling of the cover effect and bedrock erosion*, *Water Resour. Res.*, 45, W03422, doi:10.1029/2008WR007252, 2009.
- 15 Turowski, J. M., Lague, D., and Hovius, N.: Response of bedrock channel width to tectonic forcing: Insights from a numerical model, theoretical considerations, and comparison with field data, *J. Geophys. Res.*, 114, F03016, doi:10.1029/2008JF001133, 2009.
- Turowski, J. M. and Hodge, R.: *A probabilistic framework for the cover effect in bedrock erosion*, *Earth Surf. Dyn.*, 5, 311-330, doi:10.5194/esurf-5-311-2017, 2017.
- Valla, P. G., van der Beek, P. A., and Lague, D.: Fluvial incision into bedrock: Insights from morphometric analysis and numerical modeling of gorges incising glacial hanging valleys (Western Alps, France), *J. Geophys. Res. Earth Surf.*, 115, F2, doi:10.1029/2008JF001079, 2010.
- 20 van der Beek, P. and Bishop, P.: Cenozoic river profile development in the Upper Lachlan catchment (SE Australia) as a test of quantitative fluvial incision models, *J. Geophys. Res.*, 108, B6, 2309, doi:10.1029/2002JB002125, 2003.
- Whipple, K. X.: Bedrock rivers and the geomorphology of active orogens, *Annu. Rev. Earth Planet. Sci.*, 32, 151-185, doi:10.1146/annurev.earth.32.101802.120356, 2004.
- 25 Whipple, K. X. and Tucker, G. E.: Dynamics of the stream-power river incision model: Implications for height limits of mountain ranges, landscape response timescales, and research needs, *J. Geophys. Res.*, 104(B8), 17,661-17,674, doi:10.1029/1999JB900120, 1999.
- Whipple, K. X., Hancock, G. S., and Anderson, R. S.: River incision into bedrock: Mechanics and relative efficacy of plucking, abrasion, and cavitation, *Geol. Soc. Am. Bull.*, 112(3), 490-503, 2000.
- 30 Whipple, K. X. and Tucker, G. E.: Implications of sediment-flux-dependent river incision models for landscape evolution, *J. Geophys. Res.*, 107, B2, 2039, doi:10.1029/2000JB000044, 2002.
- Whittaker, A. C., Cowie, P. A., Attal, M., Tucker, G. E., and Roberts, G. P.: *Bedrock channel adjustment to tectonic forcing: Implications for predicting river incision rates*, *Geology*, 35(2), 103-106, doi:10.1130/G23106A.1, 2007.
- Wilcock, P. R. and McArdell, B. W.: *Partial transport of a sand/gravel sediment*, *Water Resour. Res.*, 33(1), 235-245, doi:10.1029/96WR02672, 1997.
- 35 Willgoose, G. R., Bras, R. L., and Rodriguez-Iturbe, I.: A physically based coupled network growth and hillslope evolution model: 1, Theory, *Water Resour. Res.*, 27, 1671-1684, 1991.

- Wobus, C. W., Tucker, G. E., and Anderson, R. S.: Self-formed bedrock channels, *Geophys. Res. Let.*, 33, L18408, doi:10.1029/2006GL027182, 2006.
- Wobus, C. W., Kean, J. W., Tucker, G. E., and Anderson, R. S.: *Modeling the evolution of channel shape: Balancing computational efficiency with hydraulic fidelity*, *J. Geophys. Res.*, 113, F02004, doi:10.1029/2007JF000914, 2008.
- 5 Wohl, E. and David, G. C. L.: *Consistency of scaling relations among bedrock and alluvial channels*, *J. Geophys. Res. Earth Surf.*, 113(F4), doi:10.1029/2008JF000989, 2008.
- Yanites, B. J. and Tucker, G. E.: *Controls and limits on bedrock channel geometry*, *J. Geophys. Res.*, 115, F04019, doi:10.1029/2009JF001601, 2010.
- Zhang, L., Parker, G., Stark, C. P., Inoue, T., Viparelli, E., Fu, X., and Izumi, N.: *Macro-roughness model of bedrock-alluvial river morpho-*
- 10 *dynamics*, *Earth Surf. Dynam.*, 3, 113-138, 2015.

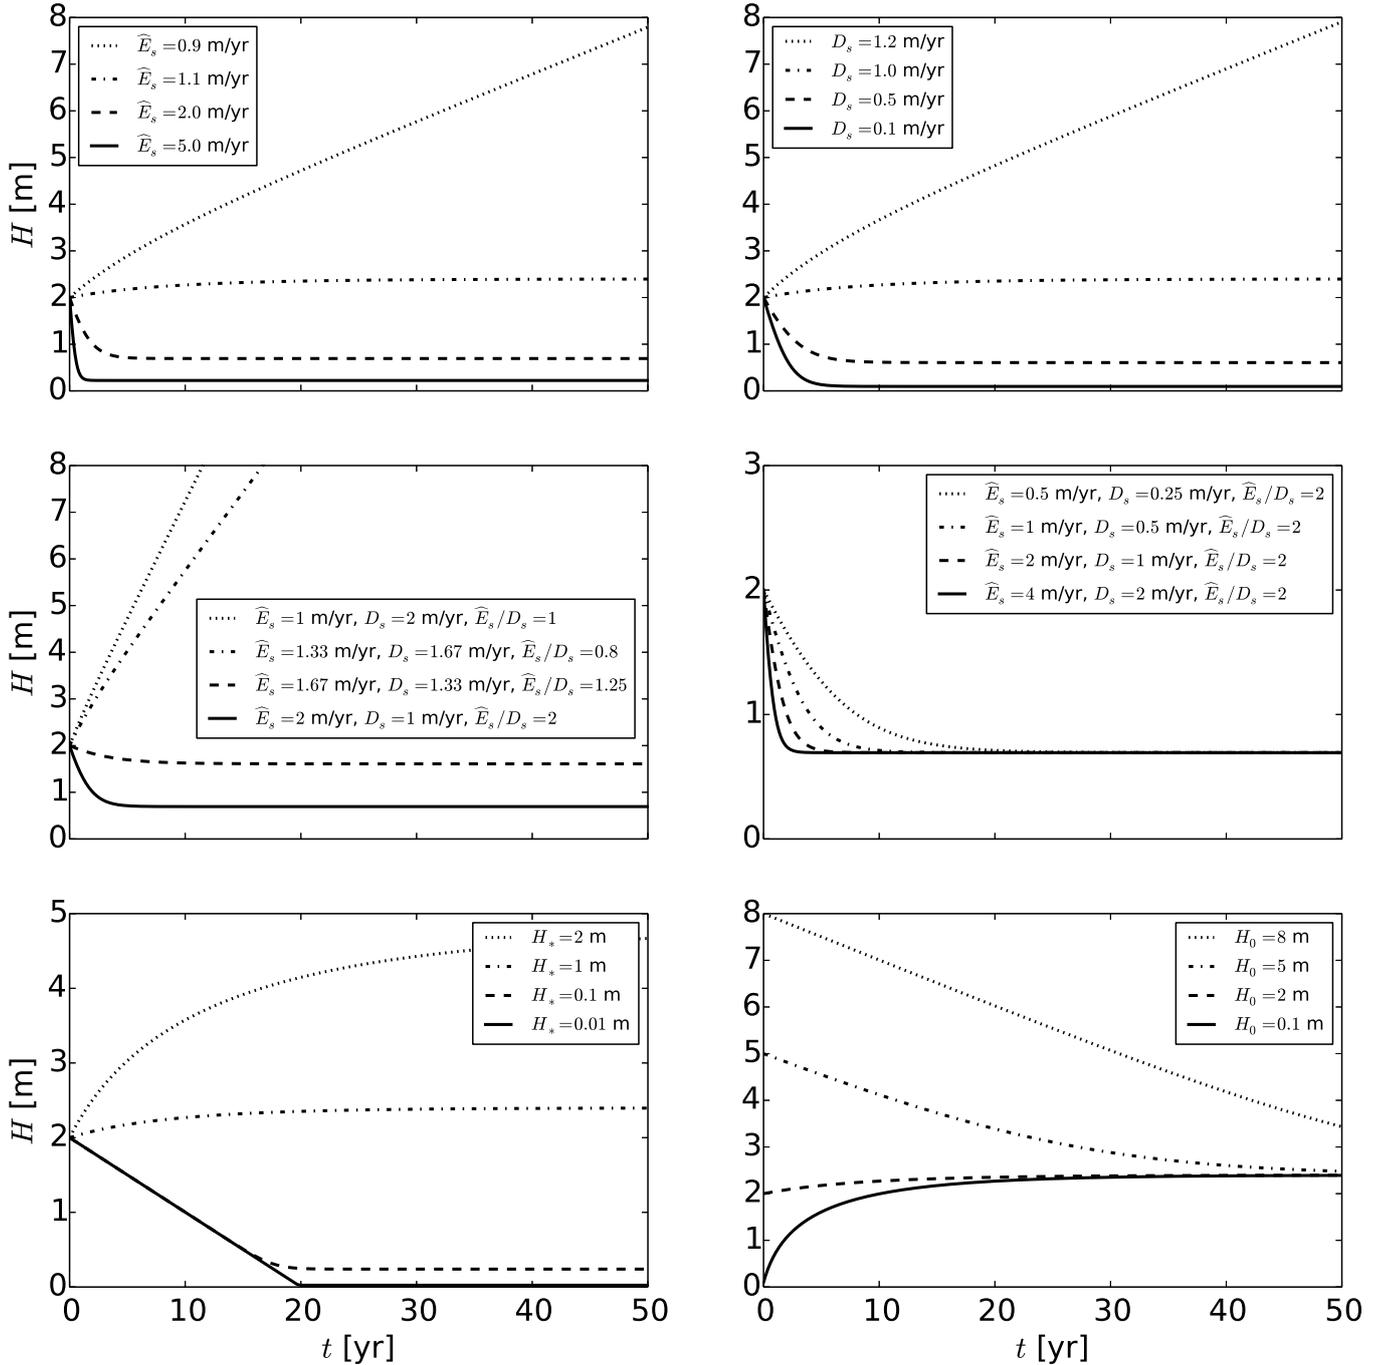


Figure 4. Bed sediment thickness H as a function of time as calculated by our local analytical solution (general case for $D_s/(1-\phi) \neq \widehat{E}_s$). In each panel, a single parameter (or set of parameters in the case of \widehat{E}_s/D_s) in Eq. (32) is varied while all others are held constant. H_0 , the initial sediment thickness, sets the initial value of the function. The value of H approached over long timescales is set by competition between the rates of sediment erosion and deposition, where higher sediment erosion rates drive bed sediment thickness down (lower upper left panel) and higher deposition rates result in greater bed sediment thickness (upper right panel). Except in cases where $D_s > E_s$, our local analytical solution converges on a constant value as $t \rightarrow \infty$. When $D_s > E_s$, the solution converges to a simple linear extrapolation of the deposition rate over time. Note that the adjustment time changes with different values of \widehat{E}_s and D_s even when \widehat{E}_s/D_s remains constant. Parameter values (except where changed in the four panels) are: $H_s = 1.0$ m, $D_s = 1.0$ m/yr, $\widehat{E}_s = 1.1$ m/yr (resulting in $E_s = 0.95$ m/yr

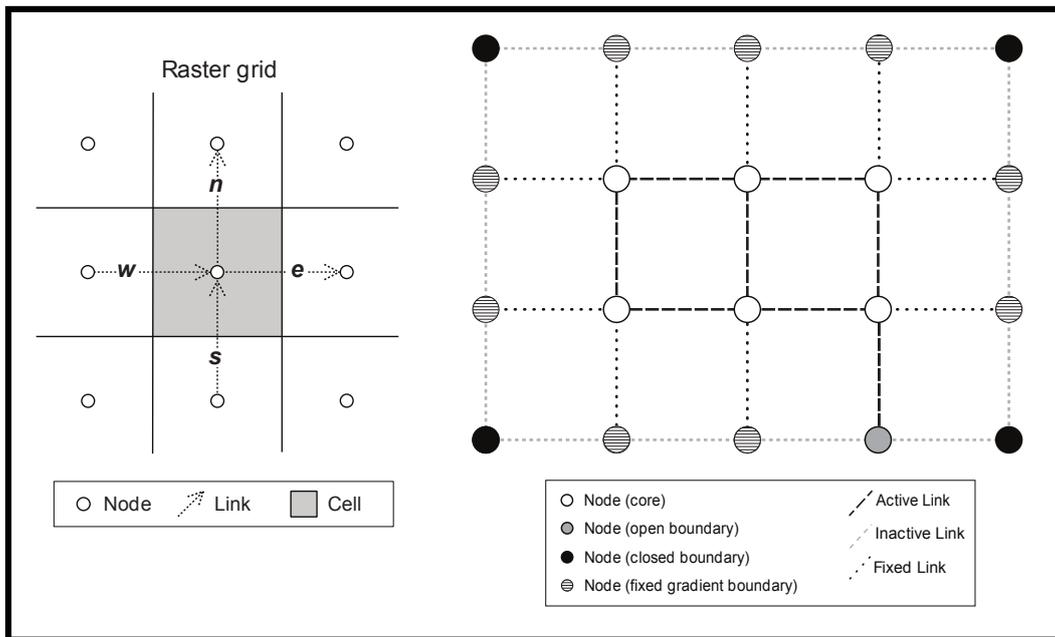


Figure 5. Left: the Landlab structured raster model grid, with definitions for major grid elements. State variables such as sediment depth and sediment flux are stored at grid nodes. While gradients such as topographic slope are calculated along links, the slope value representing the steepest descent from a node to its flow receiving neighbor is stored on the node itself. Link direction is topological; the direction of fluxes is set by gradients along links. Figure reproduced from Fig. 3 and 4 in Adams et al. (2017).

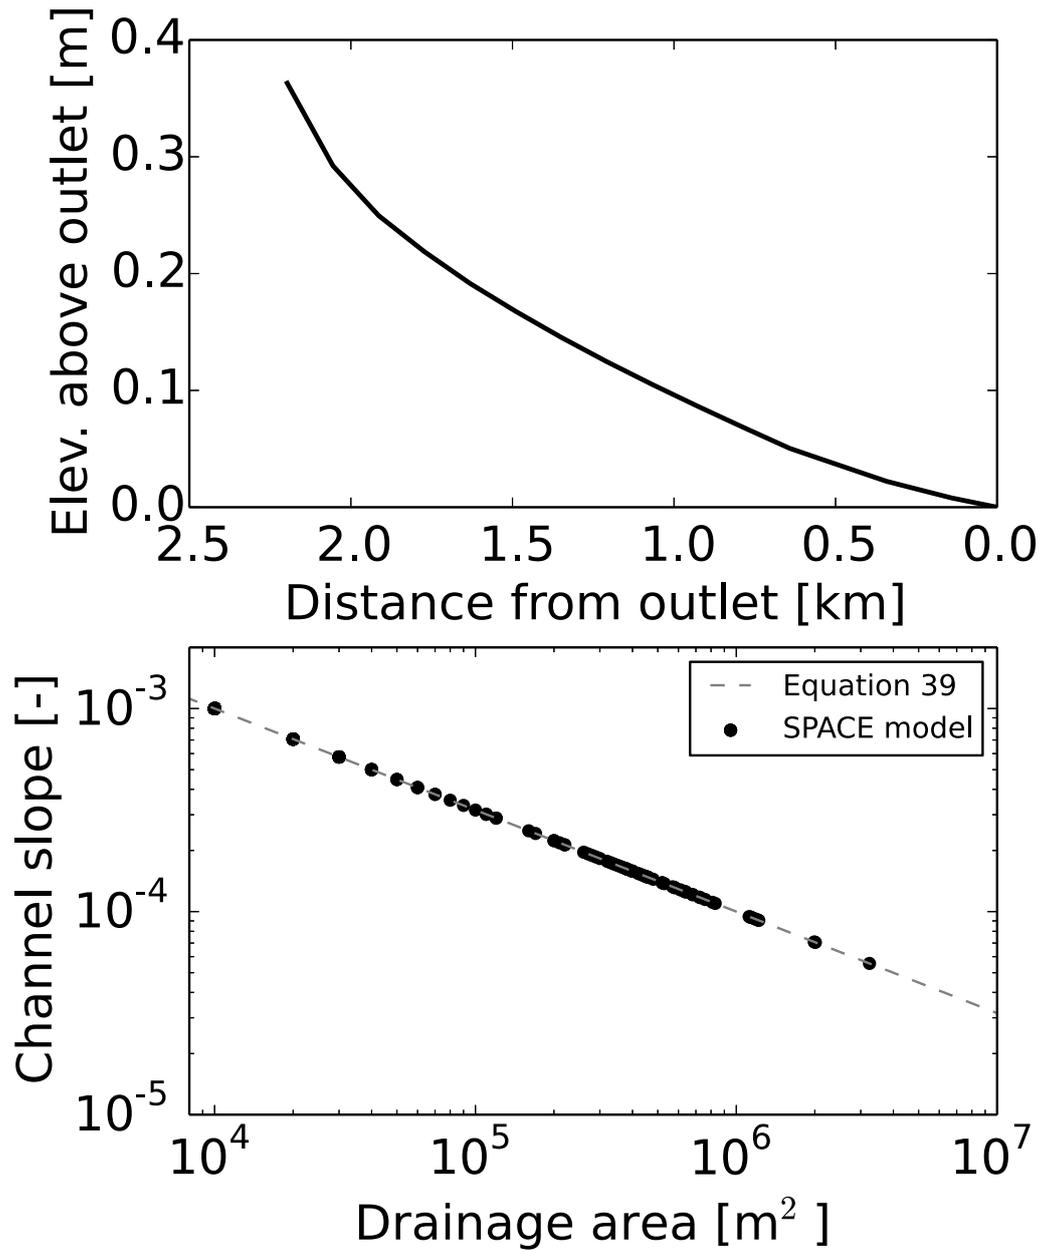


Figure 6. Top: longitudinal profile of the longest channel in the model domain under detachment-limited conditions, showing that the channel is in equilibrium with the imposed baselevel fall, and that the SPACE component yields concave-up longitudinal profiles at steady state. Bottom: comparison between the SPACE component and Eq. (40) (steady-state slope-area relationship under detachment-limited conditions). The numerical implementation of the SPACE component successfully replicates the predicted power-law slope-area relationship.

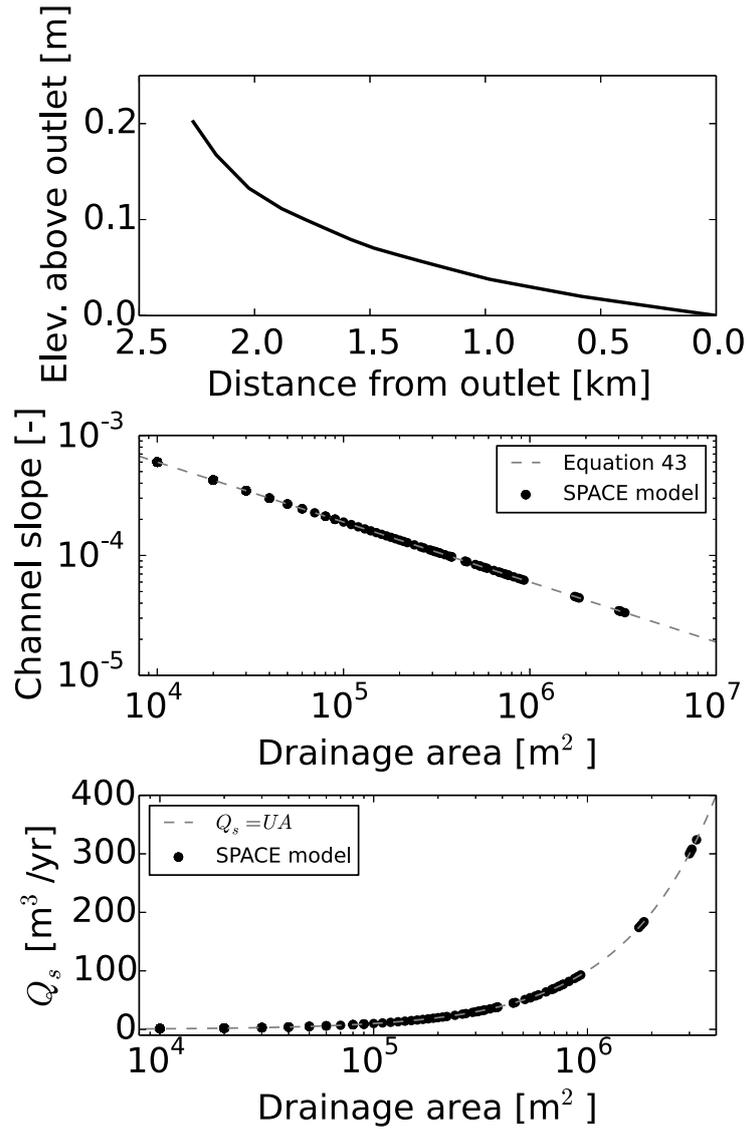


Figure 7. Top: longitudinal profile of the longest channel in the model domain under transport-limited conditions, showing that the channel is in equilibrium with the imposed baselevel fall, and that the SPACE component yields concave-up longitudinal profiles at steady state. Middle: comparison between the SPACE component and Eq. (44) (steady-state slope-area relationship under transport-limited conditions). The numerical implementation of the SPACE component successfully replicates the predicted power-law slope-area relationship. Bottom: Sediment flux Q_s as a function of drainage area. The model matches the predicted linear relationship $Q_s = UA$.

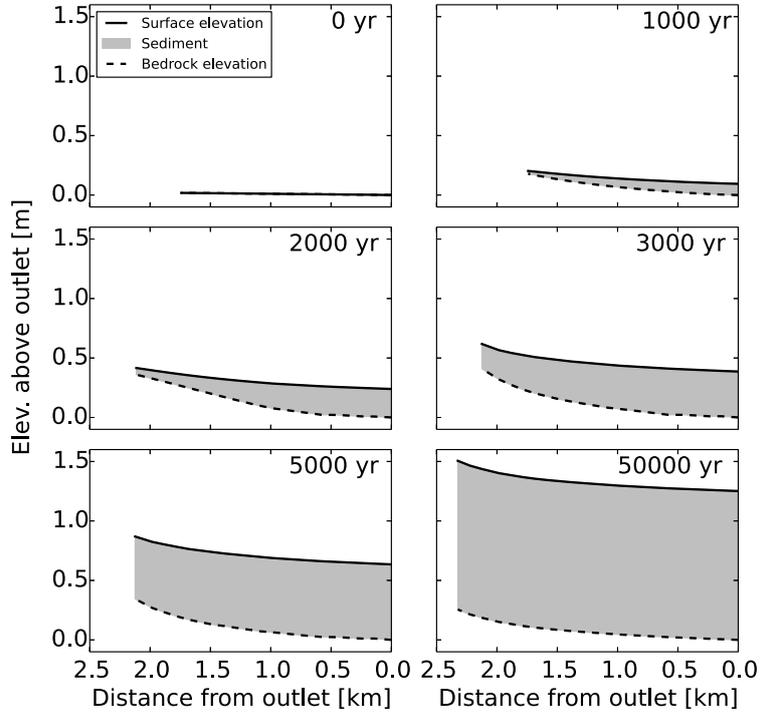


Figure 8. Time series of longitudinal profile evolution for the longest channel in the test model domain as the domain is uplifted relative to baselevel. Profile distance lengthens over time as the original tilted ramp is incised; horizontal scale on all plots is the same. Initially (0 yr), the channel topographic surface is effectively flat with zero sediment thickness. By 1000 yr, a slightly concave-up bedrock profile has developed, with a thin, downstream-thickening layer of bed sediment resulting in a surface profile that is less concave-up than the bedrock profile. Over the following three timeslices, continued rock uplift relative to baselevel causes increased concavity in the bedrock profile, as well as continued thickening of the sediment layer. The sediment layer thickness in a downstream to upstream progression. By 50,000 yr, the sediment layer has uniform thickness, resulting in a surface profile of equal concavity to the bedrock profile, and the alluvial layer thickness, topographic surface elevation, and bedrock surface elevation are all equilibrated to the imposed rock uplift rate and are therefore unchanging in time. Vertical exaggeration $\approx 1100\times$.

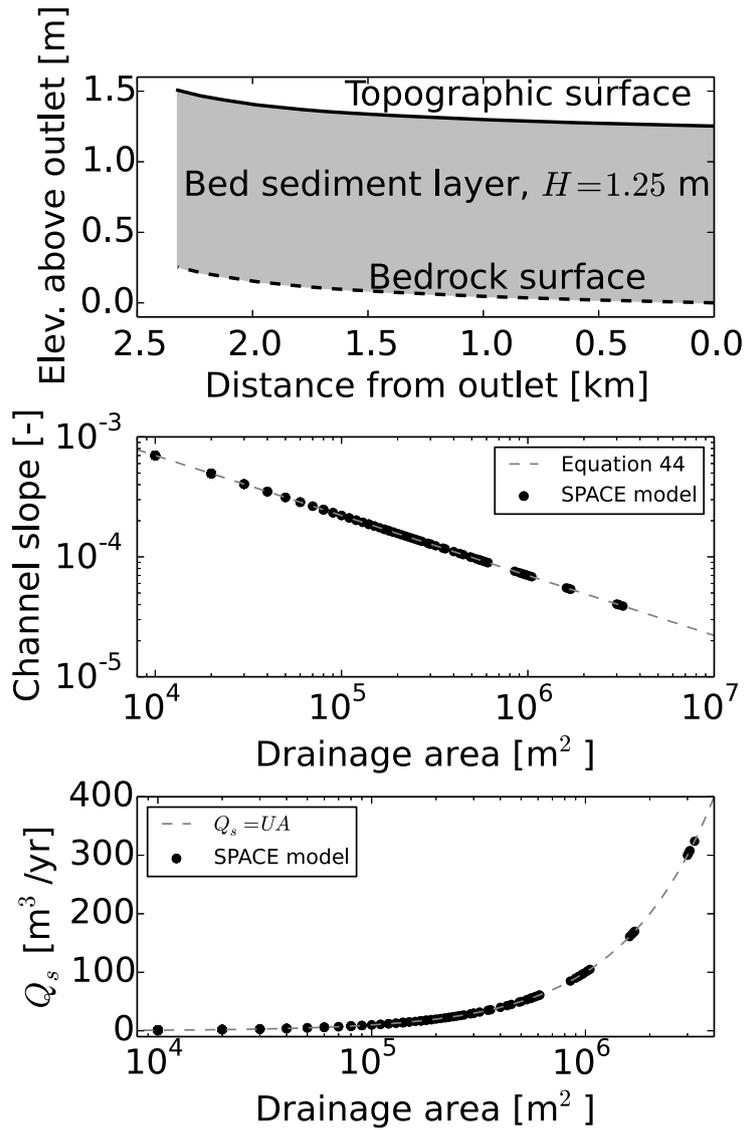


Figure 9. Top: longitudinal profile of the longest channel in the model domain after 200 kyr of model time during which the channel has evolved from an initial condition of zero sediment thickness to a constant, steady sediment thickness. Both the topographic surface (top of the sediment layer) and the bedrock surface are in equilibrium with the imposed baselevel fall, showing that the SPACE component yields parallel, concave-up longitudinal profiles in sediment and bedrock at steady state. The sediment thickness H matches the predicted sediment thickness for the parameters used in the model run. Middle: comparison between the SPACE component and Eq. (46) (steady-state slope-area relationship under bedrock-alluvial conditions). The numerical implementation of the SPACE component successfully replicates the predicted power-law slope-area relationship. Bottom: Sediment flux Q_s as a function of drainage area. The model matches the predicted linear relationship $Q_s = UA$.

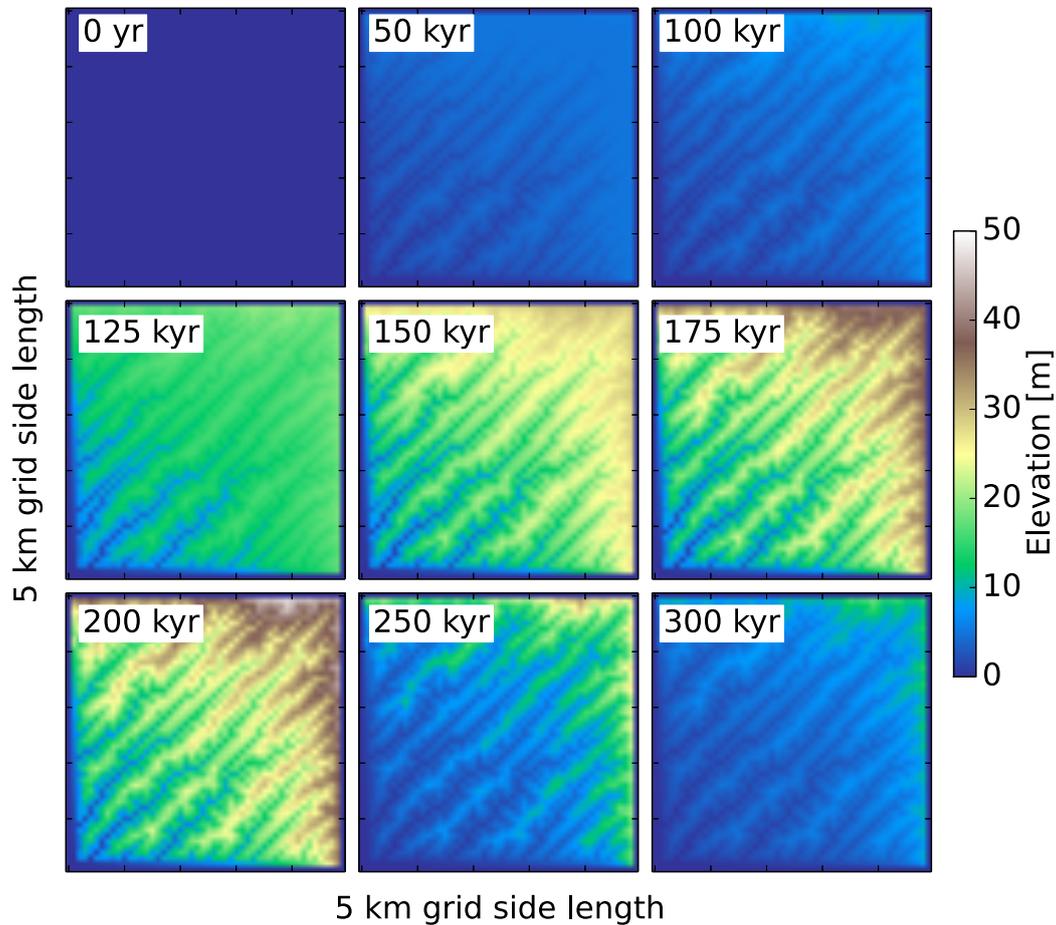


Figure 10. Snapshots of topography at nine times throughout the coupled SPACE and linear diffusion model experiment simulating the growth and decay of topography in response to changing rock uplift rates. The upper-left panel represents the model initial condition, a plane with initial micro-scale roughness slightly tilted towards the basin outlet. The outlet is located at the lower-left (southwest) corner of the model domain. The rock uplift rate is 0.0001 m/yr for the first 100 kyr, increases to 0.0005 m/yr for 100–200 kyr, then declines again to 0.0001 m/yr for 200–300 kyr. The model shows the growth of relief in response to rock uplift, with relief increasing slowly for the first 100 kyr and then more quickly for 100–200 kyr. After 200 kyr when the uplift rate declines to its initial value, relief declines as erosion of the high points on the landscape, driven by both fluvial erosion and linear diffusion, outpaces rock uplift.

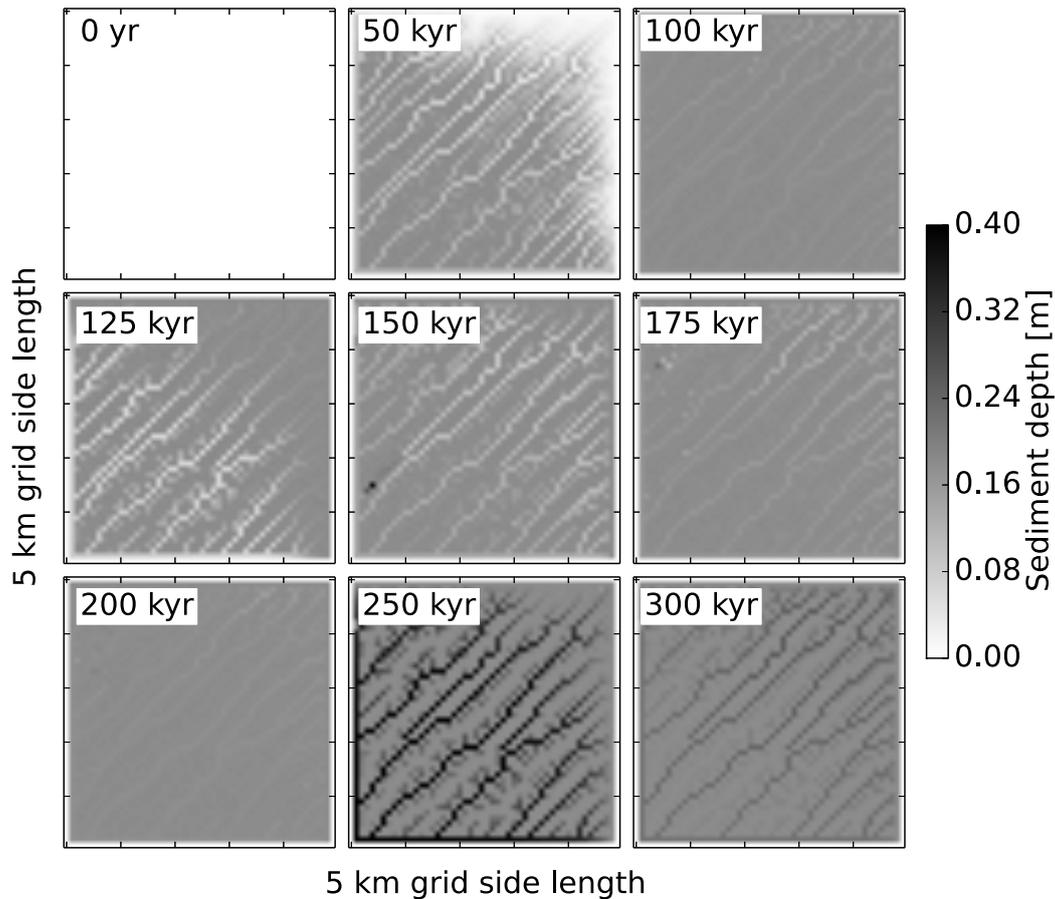


Figure 11. Snapshots of sediment thickness at nine times throughout the coupled SPACE and linear diffusion model experiment simulating the growth and decay of topography in response to changing rock uplift rates. The upper-left panel represents the model initial condition, a plane with initial micro-scale roughness slightly tilted towards the basin outlet. The outlet is located at the lower-left (southwest) corner of the model domain. The rock uplift rate is 0.0001 m/yr for the first 100 kyr, increases to 0.0005 m/yr for 100–200 kyr, then declines again to 0.0001 m/yr for 200–300 kyr. During the first 100 kyr, sediment depth increases on the hillslopes (because diffused material is considered sediment) but is absent in the channels as the channels incise into bedrock. By 100 kyr, the channels hold more sediment as incision and sediment thickness equilibrate to the rock uplift rate. As the rock uplift rate increases between 100 and 200 kyr, the same pattern occurs where sediment is evacuated from the channels during the initial response to rock uplift. The channels then re-alluviate as the landscape approaches equilibrium at 200 kyr. After 200 kyr, the decline in rock uplift causes initial alluviation in the channels as diffusion into the channels outpaces sediment erosion. Finally, sediment thickness declines in the channels as the pace of diffusion slows in response to relief reduction.

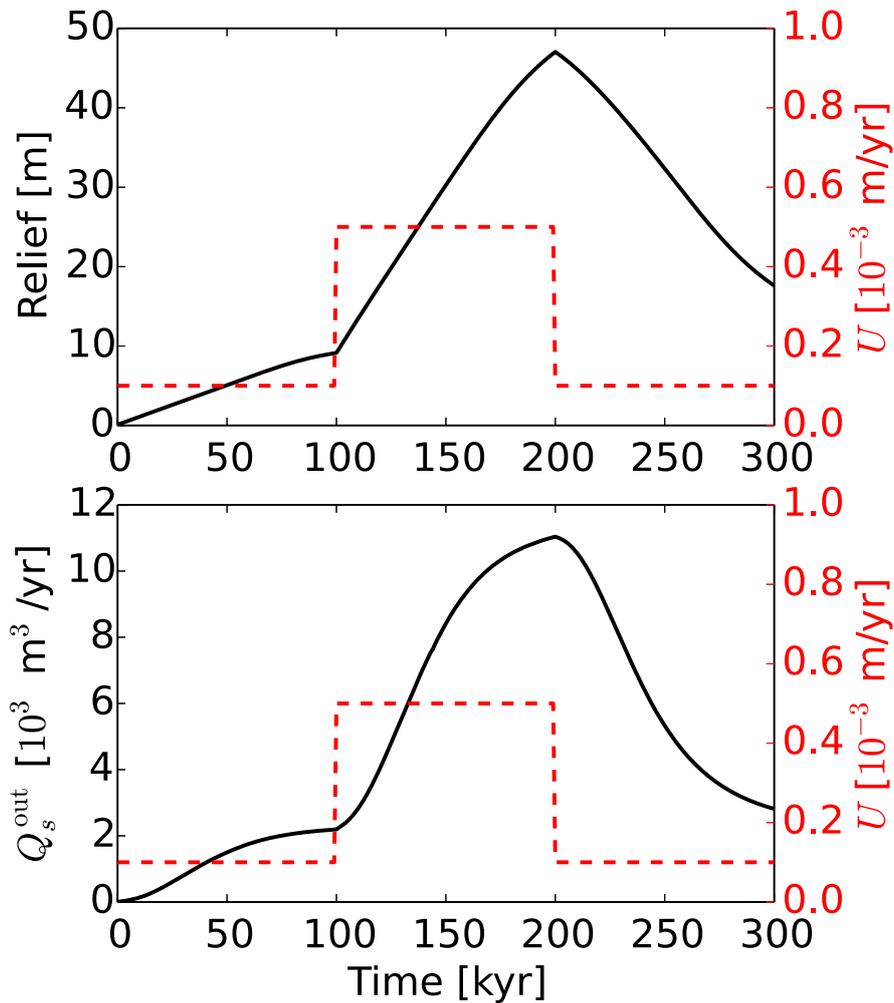


Figure 12. Time series of total relief in the model domain (top) and sediment flux out of the model domain (Q_s^{out} , bottom) shown with the imposed rock uplift rate U . Both relief and sediment flux increase slowly during the first 100 kyr in response to the imposed rock uplift rate of 0.0001 m/yr. By the end of the first 100 kyr, the rates of increase for both relief and sediment flux become slower, indicating that the landscape is approaching equilibrium with the rock uplift rate. Between 100 and 200 kyr, the rock uplift rate is increased by a factor of five and both relief and sediment flux increase by approximately the same factor. By the end of the 100 kyr period of high rock uplift rate, relief and sediment flux begin to equilibrate to the new, higher rock uplift rate. At 200 kyr, the rock uplift rate is reduced to its original value, and relief and sediment flux decline in response as erosion of high points on the topography outpaces rock uplift.