

Response to Topical editor. *Implementation of an Immersed Boundary Method in the Meso-NH model: Applications to an idealized urban-like environment.*

F. Auguste¹, G. Réa¹, R. Paoli¹, C. Lac², V. Masson², and D. Cariolle^{1,2}

¹CECI, CNRS, CERFACS, Toulouse, France

²CNRM, CNRS, Météo-France, Toulouse, France

Correspondence to: Franck Auguste (franck.auguste@cerfacs.fr)

Introduction

We thank the Topical Editor for his interest in our work and we are glad that the Topical Editor gives some suggestions to improve the manuscript, especially on inaccuracies in the use of the English language; we kindly revise the manuscript accordingly. A point-by-point reply to the comments is done in the next section. The reply is supported by the revised and marked-up
5 manuscript versions. The red (resp. blue) color is used in the marked-up manuscript version to highlight the corrections due to the Topical Editor (resp. other native English speaker) comments. Note that, in the previous manuscript version, the introduction was corrected by a native English speaker and the conclusion by a professional translator.

1 Point-by-point reply

p02-l01: space after the comma: ...cal effects), their p... The correction is inserted.

10

p02-l05 revise the English language: ... fine-scale flow fluctuations can possibly trigger important nonlinear physicochemical processes and should then be captured by the simulations. We propose: "Furthermore, fine-scale flow fluctuations influence nonlinear physicochemical processes."

15 *p02-l15: is Moriwaki and Kanda, 2004) the right reference for COSMO project? This paper refers to fluxes of heat and CO2 in a suburban area of Tokyo.* The research groups of the COSMO scale model project had conducted continuous tower measurements called Kugahara Project in a densely built up residential area in Japan. This project had been enhanced by the Moriwaki and Kanda (2004). We propose : "COSMO (Comprehensive Outdoor Scale Model Experiment for Urban Climate) and Kugahara projects (Moriwaki and Kanda, 2004)"

20

p02-121 Please cut the phrase: "Covering all possible cases is obviously impossible but from a fluid mechanics standpoint one can invoke the persistence of flow behaviors whatever the 25 scales allowing for example to observe von Kármán streets in the wake of a centimeter-scale cylinder as well as in the cloud layout behind an island." is too long. We propose: Covering all possible cases is obviously impossible. From a fluid mechanics standpoint one can invoke the persistence of flow behaviors
5 whatever the scales. For example, the von Kármán streets are observed in the wake of a centimeter-scale cylinder as well as in the cloud layout behind an island.

p02-126 urban cities sounds repetitive, urban areas or cities. The "urban areas" formulation is inserted.

10 p03-104 clarify "This approach can suffer from the time step restriction." The non-moving boundary approach is obtained by Goldstein(1994) with a moving boundary approach. A strong wall stiffness is modeled inducing a time step limitation. We propose to add: "(spring and damper model with large stiffness value)"

p03-122 future mesoscale application, > future mesoscale applications, The correction is inserted.

15

p03-123 unresolved obstacles such as vegetations > unresolved obstacles such as vegetation. The correction is inserted.

p04-101 resolution is ranging from the > resolution ranges from the The correction is inserted.

20 p04-114 Please do not start a phrase with a symbol (ρ). I suggest to introduce them later, after used the first time. The density and the potential temperature of the reference state are introduced later.

p04-116 clarify the meaning of "law" We propose to add: "(partial differential equations, continuum mechanics)"

25 p04-118 There is no resp. for the unresolved part. Please rewrite. You're right. We propose: "into a resolved part and unresolved one".

p04-126 transport is not to be used in plural in this phrase. Use "the transport for each... The correction is inserted.

30 p04-129 same: scalar transport The correction is inserted.

p05-106: clarify the meaning of n in the Courant number We propose to add: "(n , the time step index)".

p05-113: meaning of $n+1$ in the continuity equation The previous insertion defines n .

35

p05-113: It seems you n define as the time step index in P7 Yes.

p05-121: The mathematical operator to inverse > The mathematical operator to invert? You're right. The correction is inserted.

5

p06-115: only the turbulent friction is claimed. > only the turbulent friction is used.? The correction is inserted.

p06-121: terms is neglected? > "terms are neglected" or "term is neglected" The correction "term is neglected" is inserted.

10 p06-124: "acting; a" better use and instead of semicolon. The correction "acting and a" is inserted.

p06-127: "LSF LevelSet Function: in general, please use parenthesis when introducing acronyms Parenthesis are inserted.

15 p07-106: "An intensive study had been done to verify the ability of the LSF spatial derivatives to recover the vector normal to the interface and the local curvature (Auguste et al., Submitted)." Check the English language, and cite only the finally published version of the reference. The reference is not currently published (under review). Therefore, the reference disappears. We rephrase the sentence: "An intensive study had been done to estimate the well-modelling of the vector normal to the interface and the local curvature using LSF."

20 p08-106: had also been tested please check the tense use. "tested" is replaced by "implemented".

p08-Figure 2 caption: please use parenthesis when defining a symbol e.g. ghost (G), etc. The corrections are inserted.

25 p08-111: please revise equations within the phrase. Do not start a phrase with an equation. Leave spaces after points. The phrase " $\phi(i, j) \cdot \phi(i, [j - k_l : j + k_l]) > 0$ and $\phi(i, j) \cdot \phi([i - k_l : i + k_l], j) > 0$ (k_l an integer, 2D case). $k_l = 1$ (resp. $k_l = 2$) allows..." is re-written: ". For a 2D case, the sign of $\phi(i, j) \cdot \phi(i, [j - k_l : j + k_l])$ and $\phi(i, j) \cdot \phi([i - k_l : i + k_l], j)$ is estimated. The integer value $k_l = 1$ (resp. $k_l = 2$) allows..."

30 p08-112: What to you mean with: Such mage-ghost distance... "mage-ghost distance" is replaced by "ghost layer".

p08-114: Please clarify the meaning of the condition. We propose to insert: "The stencil of the numerical schemes modelling the interface defines the k_l value. Therefore and to limit this overhead,..."

35 p09-102: Please do not start a phrase with a symbol. "| IB | ..." is rephrased by: "The | IB | distance.."

p09-104: *The physical information at I is directly related to the interfaces one which can itself be dependent on the fluid information Please revise English language, especially the use of the possessive.* p09-105: *Revise also (as its done in the wall models used in LES). Replace its We propose to insert "leading to a not well pose condition"*

5 p09-Please revise the whole paragraph: *it is important because it explains the need of and justifies the new development.*

We propose to insert more details in this paragraph:" To overcome this problem, another way is to define image points (noted I_1 and I_2 in Fig. ??-a, merely renamed images) having a distance to the interface Δ -dependent and not ϕ_G -dependent: $\mathbf{GI}_1 = l\Delta + \phi_G \mathbf{n}$ with $l = (1;2)$. Figure ??-a shows the images for one ghost. The new approach enforces a large enough value of the $|\mathbf{I}_1\mathbf{B}|$ distance. Figure ??-b (resp. c) illustrates the classical (resp. original) GCT for several ghosts. Figure ??-b
10 shows some mirror points associated with ghost of the first layer in the vicinity of the interface. Whatever the ghost location, Figure ??-c shows the new approach ensuring the image points to be embedded in the fluid region. The definition of several images per ghost allows to build a profile of the $\bar{\psi}$ fluid information normal to the interface. $\bar{\psi}(I)$ is therefore recovered by a quadratic reconstruction f using the (B, I_1, I_2) points. "

"The accuracy of an interpolation is depending on the $\bar{\psi}$ -profile. For example, a logarithmic evolution of $\bar{\psi}$ the tangent velocity
15 is expected in LES. Otherwise when the viscous layer is modelled, a linear evolution is expected. To compare the ability of each quadratic interpolation to approach a wide variety of profiles, the recover of power laws such as $\psi = \phi^{3/2}$ (Figure ??-a) and $\psi = \phi^{1/4}$ (Fig. ??-b) is studied. As it illustrates, PLI^a fits better the two analytical solutions and is therefore adopted."

p11-105: *This yields induce: revise* The phrase is replaced by: "The cotangent direction is defined such as:".

20

p11-eq 20: *use text font in equation mode.* The text font is used.

p14-111: *to an unwell posed system > use not well pose instead.* The correction is inserted.

25 p17-105: *It will raise in the future issues on the validity of the log-law near a singularity (sharp edges or corners). please revise.* We propose: "Note that the use of a log-law model near a singularity such as sharp edges and corners could be called into question."

p17-124: *The RICH Richardson and the RESI Residual Conjugate Gradient Please use parenthesis when defining symbols.*

30 Parenthesis are inserted.

p17-127: *Please do not start a phrase with an equation or symbol.* "The slope coefficient" is inserted.

35 *p17-Fig 10 please provide a higher quality image.* The old resolution of the picture was 1000*490 pixels (png format). The new resolution is 1420*700 pixels (png format).

p22-102: had provided check tense. We propose to replace this by "had collected".

5 *p22-115: Please do not start a phrase with a symbol. E.g. The stream-wise (resp. span-wise) direction is x* The proposition is inserted.

p23-106: Please revise English language: The literatures LES give the We propose to replace this by "The LES reference results".

10 *p23-103: Please revise English language: and as the literature mentions, it presents* We propose to replace this by "and as the LES reference results mention, it presents".

p26-114: The towers location is > The locations of the towers are The correction is inserted.

15 *p27-111: What do you mean by comforted by?* We propose to replace this by "close to".

p28-103: (numerical confinement, under investigations). > (numerical confinement, under investigation). The correction is inserted.

20 *p28-115: two times greater > two times larger* The correction is inserted.

p28-116: Do not use the dot as multiplication symbol in the units. The correction is inserted.

25 *p29-108: of ongoing works in > of ongoing work in* The correction is inserted.

p30-106 of the GCT Ghost-Cell etc. Please use parenthesis when defining an acronym. The parenthesis are inserted.

30 *p30-119-22: long Phrase, consider rearranging in more sub-phrases.* We propose: "These tests validate the proposed GCT 'three images/ghost points' using an inverse distance weighting (resp. trilinear) interpolation near (resp. far from) the interface. The modelling of the advection term near the fluid-solid interface is ensured by a 2nd-order centered scheme associated with an artificial viscosity. The artificial viscosity is calibrated after comparisons with a 3rd-order WENO scheme."

p30-128: Future works. > Future work. The correction is inserted.

35 *p30-131: high-curvatures bodies > high-curvature bodies* The correction is inserted.

p30- non-flat grounds. > non-flat ground. The correction is inserted.

p30-134: with works dedicated with work dedicated The correction is inserted.

5

p31-103: compliances with > compliance with The correction is inserted.

p31-103: Such compliances > Such compliance The correction is inserted.

p31-103: Table ?? Please fix missing ref A bracket was missing. Thanks.

References

- 5 Auguste, F., Paoli, R., Lac, C., Masson, V., and Cariolle, D. (submitted to Atmospheric Environment), Large eddy simulations devoted to the health impact of pollutant dispersions in cities: the case of the NO₂ plume due to the AZF explosion in Toulouse (21/09/01).
- 175 Réa, G., Rochoux, M. C., Auguste, F., Vermorel, O., Lopez Gascon, A., and Cariolle, D., Model intercomparison in micro-scale meteorology and pollutant dispersion: large eddy simulations of the MUST experiment.

Implementation of an Immersed Boundary Method in the Meso-NH v5.2 model: Applications to an idealized urban environment.

Franck Auguste¹, Géraldine Réa¹, Roberto Paoli^{3,4}, Christine Lac², Valery Masson², and Daniel Cariolle^{1,2}

¹CECI, CNRS, CERFACS, Toulouse, France

²CNRM, CNRS, Météo-France, Toulouse, France

³University of Illinois at Chicago, Department of Mechanical and Industrial Engineering, Chicago, USA

⁴Argonne National Laboratory, Argonne, USA

Correspondence to: Franck Auguste (franck.auguste@cerfacs.fr)

Abstract.

This study describes the numerical implementation, verification and validation of an Immersed Boundary Method (IBM) in the atmospheric solver Meso-NH for applications to urban flow modelling. The IBM represents the fluid-solid interface by means of a LevelSet Function and models the obstacles as part of the resolved scales.

5 The IBM is implemented ~~with~~by means of a three-steps procedure: first, an explicit-in-time forcing is developed based on a novel Ghost-Cell Technique that uses ~~several~~multiple image points instead of the classical ~~single~~ mirror point. The second step consists in an implicit step projection where the right-hand side of the Poisson equation is modified by means of a Cut-Cell Technique to satisfy the incompressibility constraint. The condition of non-permeability is achieved at the embedded fluid-solid interface by an iterative procedure applied on ~~sueh~~the modified Poisson equation. In the final step, the turbulent fluxes and the
10 wall model used for Large-Eddy-Simulations (LES) are corrected and a wall model is proposed to ensure consistency of the subgrid scales with the IBM treatment.

In the second part of the paper, the IBM is verified and validated for several analytical and benchmark test cases of flows around single bluff bodies with increasing level of complexity. The analysis showed that MNH-IBM reproduces the expected physical features of the flow, which are also found in the atmosphere at much larger scales. Finally the IBM is validated in the
15 LES mode against the Mock Urban Setting (MUST) field experiment, which is characterized by strong roughness caused by the presence of a set of obstacles placed in the atmospheric boundary layer in nearly-neutral stability conditions. The Meso-NH IBM-LES reproduces with reasonable accuracy both the mean flow and turbulent fluctuations observed in this idealized urban environment.

1 Introduction

20 Urbanization impacts the physical and dynamical structure of the atmospheric boundary layer, influencing both the local weather and the concentration and residence time of pollutants in the atmosphere, which in turn impact air quality. While the physical mechanisms driving these interactions and their connections to climate change are well understood (the Urban Heat

Island effect, anthropical effects), their precise quantification remains a major modelling challenge. Accurate predictions of these interactions require modelling and simulating the underlying fluid mechanics processes to resolve the complex terrain featured in large urban areas, including buildings of different sizes, street canyons, parks, etc. For example, it is well known that pollution originates from traffic and industry in and around cities, but the actual dispersion mechanisms are driven by the local weather. Furthermore, fine-scale flow fluctuations ~~can possibly trigger important influence~~ nonlinear physicochemical processes ~~and should then be captured by the simulations~~. The present study addresses these issues focusing on the numerical aspects of the problem.

With the progress in metrology, it is now possible to obtain reliable measurements of the atmospheric conditions over a city. For example, during the Joint Urban experiment (JU2003), scalar dispersion was measured experimentally over the streets of Oklahoma City (Clawson et al., 2005; Liu et al., 2006). Similarly, the CAPITOUL experiment (2004-2005) conducted in Toulouse, analyzed the turbulent boundary layer developed over the urban topography and evaluated the energy exchanges between surface and atmosphere (Masson et al., 2008; Hidalgo et al., 2008). More recently, the multiscale field study by Allwine et al. (2012) provided meteorological observations and tracer concentrations data in Salt Lake City. Other studies analyzed reduced-scale and/or idealized models to understand urban climate features as in the COSMO (Comprehensive Outdoor Scale Model Experiment for Urban Climate) ~~and Kugahara~~ projects (Moriwaki and Kanda, 2004). For example, Kanda et al. (2007) and Wang et al. (2015) used, respectively, an array of cubic bodies and stones fields as small-scale models.

In order to use in the future these experimental data for model validation, the numerical models need first to be verified for academic test cases and simplified scenarios representative of atmospheric turbulent boundary layer flows. In particular, the flow interaction with buildings or any generic obstacles plays a crucial role in urban flow modelling. The range of scales of objects acting as obstacles is ~~virtually infinite~~ in urban setting, encompassing large buildings and small vegetation scales and so is the range of the corresponding flow-obstacles interactions. Covering all possible cases is obviously impossible ~~but we can rely on the invariance of certain flow characteristics at different scales. From a fluid mechanics standpoint one can invoke the persistence of flow behaviors whatever the scales allowing f~~For example, ~~to observe~~ the von Kármán streets are observed in the wake of a centimeter-scale cylinder as well as in the cloud layout behind an island. Following this, a wide selection of benchmark flows can be analyzed to verify and validate the numerical treatment of fluid-obstacle interaction with a view to atmospheric applications.

The physical application ~~in our mind~~ ~~considered in this work~~ is the atmospheric mesoscale reaction to perturbations induced by urban ~~cities~~ areas and the more the obstacles are considered as a part of the scales numerically resolved the more the results accuracy is. To access this resolution, this study presents the development, implementation, verification and validation of an Immersed Boundary Method IBM (Mittal and Iaccarino, 2005) in the Meso-NH model MNH (Lafore et al., 1998; Lac et al., 2018) for applications to urban flow modelling¹. This choice was dictated by the fact that numerical solvers in MNH enforce conservation on structured grids and hence cannot handle body fitted grids with steep topological gradients. The main idea behind IBM is the detection of an interface separating a fluid region (where conservations laws hold) from a solid region (corresponding to the obstacle volume) using different techniques (e.g. markers, LevelSet functions, local volume fraction, etc).

¹Meso-NH scientific documentation: <http://mesonh.aero.obs-mip.fr/mesonh52/BooksAndGuides>

Two main classes of IBM exist based on the continuous and discrete forcing approaches, respectively. The continuous forcing approach was developed by Peskin (1972) for biomechanics applications and consists in the addition of a continuous artificial force (acceleration indeed) in the momentum conservation equation that mimic the effect of the obstacles (heart linings) and drive the flow to relax to no-slip conditions at the wall of the obstacles. This approach and its variant developed by Goldstein et al. (1993) for a rigid interface can suffer from the lack of stiffness (fluid-solid interface is generally spread over few cells) and the time step restriction (**spring and damper model with large stiffness value**). Nevertheless, the continuous forcing approaches are very successful in many applications (penalization method as in Angot et al. (1999), fictitious domain method, etc). In the second IBM class, the discrete approach, the boundary conditions are specified at the immersed interface. To simulate flows around non moving and rigid bodies, two sub-classes of discrete approaches can be defined as in Mittal and Iaccarino (2005): direct or indirect approaches, depending on the forcing location (Pierson, 2015). Many types of discrete forcing exist and a non exhaustive list can be: direct forcing in the fluid region near the interface as in Mohd-Yusof (1997), immersed interface method (Leveque and Li, 1994), Cartesian grid method (Clarke et al., 1986). Depending on how to resolve the partial differential equations, Cartesian grid methods (Ye et al., 1999) are written for finite-volume discretizations (Cut-Cell Technique, CCT) and for finite-difference discretizations (Ghost-Cell Technique, GCT) as in Tseng and Ferziger (2003). CCT reshapes the cell cut by the interface to preserve mass, momentum and energy. Using GCT, the local spatial reconstruction is done inside the solid region. Note that the latter technique has been successfully implemented in Weather Research and Forecasting WRF model (Lundquist et al., 2010, 2012).

In this study, a discrete forcing approach is adopted where the fluid-solid interface is modelled by means of a LevelSet function (Sussman et al., 1994). The motivation behind this choice is that we are primarily interested in modelling explicitly rigid and non-moving bodies in a turbulent flow, and with sufficiently fine resolution to avoid the large dissipation inherent to the presumed spread interface. An argument in favor of GCT is that it does not introduce source terms in the conservation equations so that boundary conditions are imposed at the interface and/or in the solid region, the only corrections to the physical model come from subgrid turbulent parameterizations, and boundary condition is imposed at the interface and/or in the solid region. The idea is that in future mesoscale applications, IBM will be used to resolve large obstacles (in the solid region) such as buildings but also mountains, whereas a subgrid drag model will be used to handle unresolved obstacles such as vegetations (Aumond et al., 2013).

The paper is organized as follows. Section 2 briefly describes the general features of MNH. Section 3 details the numerical implementation of the IBM. Inspired by the works of Bredberg (2000), Piomelli and Balaras (2002), Craft et al. (2002) and to close the turbulence problem, an immersed wall model is proposed in Section 3.3. Sections 4.1 and 4.2 describe the validation of the method for academic flows, respectively potential (Lamb, 1932; Batchelor, 2000) and viscous flows. Finally, Sections 5.1 and 5.2 discuss the results of turbulent flows simulations and comparisons with data from field experiments. Conclusions are drawn in Section 6. Additional tests and validations on potential and inviscid flows are respectively documented in the Appendix A and B. The study of a viscous and thermodynamic case (Straka et al., 1993) is given in *supplementary materials*.

2 The Meso-NH code at a glance

MNH is an atmospheric non hydrostatic research model. Its spatio-temporal resolution ~~is ranging~~ ranges from the large meso-alpha scale (hundred of kilometers and days) down to the micro-scale (meters and seconds). It is massively parallel on nested and structured grids, adapted on most of international hosting computer platforms. Several parametrizations are available: radiation, turbulence, microphysics, moist convection with phase change, chemical reactions, electric scheme, externalized surface scheme. In the present study, only two subgrid parametrizations are approached: turbulence and surface schemes.

2.1 The conservation laws

The spatial discretization \mathbf{x} is based on the terrain-following coordinates (Gal-Chen and Somerville, 1975). The staggered mesh is regular $\Delta x = \Delta y = \Delta$ in the horizontal directions and a transformation of the vertical one is available in order to fit a non-plane surface. The release of the vertical space step is available where a fine resolution is unnecessary. In the current study, only flat problems are considered with a $\Delta z = \Delta$ restriction for altitudes in presence of immersed obstacles.

The core of the MNH dynamic in its dry version is based on the resolution of the Euler and thermodynamic equations (energy preserving). The anelastic approximation (Lipps and Hemler, 1982; Durran, 1989) is assumed; the reference state is stratified and the density deviation to the hydrostatic case in the buoyancy term is considered. ~~$\rho_r(z)$ and $\theta_r(z)$ are the vertical profiles of the density and potential temperature of the reference state.~~ The system can be simplified into the Boussinesq approximation when considering an uniform reference state. ~~The tendencies of each prognostic variable ψ satisfying the usual conservation laws in MHN are expressed as $\frac{\partial \psi}{\partial t} \Big|_{csl}$ where subscript *csl* is used to distinguish these tendencies from those arising from the application of the IBM procedure (Sect. 3.1). give the tendencies $\frac{\partial}{\partial t} \Big|_{law}$.~~ The prognostic variables are the resolved momentum, the potential temperature and if necessary an arbitrary passive scalar. The prognostic variable is decomposed into a resolved (~~resp. unresolved~~) part component, $\bar{\psi}$, and an unresolved component, ψ' ($\psi' = 0$ in a Direct Numerical Simulation, DNS). An additional prognostic equation on the subgrid turbulent kinetic energy is solved for a Large Eddy Simulation (LES, Sect. 2.3). The potential temperature is defined through the Exner function Π and the absolute temperature $T = P/(\rho_r R_d) = \theta(P/P_{r0})^{R_d/C_p} = \theta\Pi$ where ρ_r is the density of the reference state, P is the local pressure, P_{r0} the reference ground level pressure, R_d the gas constant and C_p the specific heat capacity at pressure constant for dry air. The thermodynamic equations and an additional passive scalar equation are:

$$\frac{\partial(\rho_r \bar{\theta})}{\partial t} \Big|_{csl} = -\nabla \cdot (\rho_r \bar{\theta} \bar{\mathbf{u}}) - \nabla \cdot (\rho_r \bar{\theta}' \bar{\mathbf{u}}') + \rho_r \bar{\mathbf{F}}_{\theta}^{\Pi} \quad (1)$$

$$\frac{\partial(\rho_r \bar{s})}{\partial t} \Big|_{csl} = -\nabla \cdot (\rho_r \bar{s} \bar{\mathbf{u}}) - \nabla \cdot (\rho_r \bar{s}' \bar{\mathbf{u}}') \quad (2)$$

where ~~r corresponds to the subscript of the reference state,~~ \bar{F}^{Π} to pressure effects. The transports of each prognostic scalar in Equations (1), (2) and (6) ~~are~~ is made by a Piecewise-Parabolic Method (PPM) with undershoots and overshoots limitation

(Colella and Woodward, 1984; Lin and Rood, 1996). The temporal algorithm of the advection term in these scalar transports is a forward-in-time scheme (noted FT). The momentum equations are:

$$\left. \frac{\partial(\rho_r \bar{\mathbf{u}})}{\partial t} \right|_{csl} = -\nabla \cdot (\rho_r \bar{\mathbf{u}} \otimes \bar{\mathbf{u}}) + \nabla \cdot (\mu_f \nabla \bar{\mathbf{u}}) - \nabla \cdot (\rho_r \overline{\mathbf{u}' \otimes \mathbf{u}'}) + \rho_r \bar{\mathbf{F}}_u^\Pi + \rho_r \mathbf{g} \frac{\bar{\theta} - \theta_r}{\theta_r} \quad (3)$$

5 where $\bar{\mathbf{u}}$ is the resolved wind, \mathbf{g} the acceleration due to the gravity appearing in the buoyancy term, θ_r is the potential temperature of the reference state, μ_f the dynamic viscosity, $\nabla \cdot (\rho_r \overline{\mathbf{u}' \otimes \mathbf{u}'})$ the Reynolds stresses. The spatial discretization of $\nabla \cdot (\rho_r \bar{\mathbf{u}} \otimes \bar{\mathbf{u}})$ in Equation (3) can be done by either second- or fourth-order centered schemes, by either third- or fifth-order Weighted-Essentially-Non-Oscillatory schemes (Jiang and Shu, 1996). The temporal evolution of the resolved wind is achieved by a fourth-order ERK Explicit Runge-Kutta algorithm (Shu and Osher, 1989; Lunet et al., 2017). In the present study

10 Δt is fixed to respect the Courant number $\frac{|\bar{\mathbf{u}}^n| \Delta t}{\Delta} < 1$ (n , the time step index) and no additional time splitting is implied. The temporal viscous stability condition $\mathcal{O}(\nu_f / \Delta^2)$ (ν_f the kinematic viscosity) imposes an additional restriction when viscous term is explicitly resolved in time.

The bottom, lateral wall and top surfaces take a free-slip, impermeable and adiabatic behaviours without the call of an externalized surface scheme. The open boundary condition is a Sommerfeld equation defined as a wave-radiation (Carpenter,

15 1982) to enforce the large scales and allow the reflection wave damping.

2.2 The incompressibility condition

The wind of the resolved scales has to satisfy the continuity equation $\nabla \cdot (\rho_r \bar{\mathbf{u}}^{n+1}) = 0$. The method consists in the projection of the predicted velocity field $\bar{\mathbf{u}}^*$ (solution of Eq. (3) without the pressure term) into the null-divergence subspace. This projection estimates the irrotational correction to apply to $\bar{\mathbf{u}}^*$ through a potential scalar Ψ^* :

$$20 \quad \bar{\mathbf{u}}^{n+1} = \bar{\mathbf{u}}^* - \frac{\Delta t}{\rho_r} \nabla \Psi^* \quad (4)$$

Ψ^* is obtained with the resolution of the pseudo-Poisson equation written as:

$$\nabla \cdot (\rho_r^{-1} \nabla \Psi^*) = \Delta t^{-1} \nabla \cdot \bar{\mathbf{u}}^* \quad (5)$$

25 The horizontal part of the operator to invert in the elliptic problem is treated in the Fourier space (Schumann and Sweet, 1988) and its vertical part brings to the classical tridiagonal matrix. The mathematical operator to inverse $\nabla \cdot (\nabla)$ is exact for flat problems (Bernadet, 1995). When the mesh is built with a terrain-following coordinates over a flat surface, the solution of the pressure problem becomes inaccurate. In this orography-presence case, an iterative procedure is employed such as a Richardson, a Conjugate-Gradient (Young and Jea, 1980) or a Residual Conjugate-Gradient (Skamarock et al., 1997)

30 algorithms.

2.3 The turbulent subgrid scales

To execute LES, the Reynolds stresses $\nabla \cdot (\rho_r \overline{\mathbf{u}' \otimes \mathbf{u}'})$ appearing in Equation (3) are estimated. The LES closure is done by an eddy-diffusivity approach called 1.5TKE with a 1.5 order closure scheme (Cuxart et al., 2000). The isotropic part of the subgrid turbulence is given by the prognosis of the subgrid turbulent kinetic energy $e = \frac{1}{2}(\overline{u'^2} + \overline{v'^2} + \overline{w'^2})$:

$$5 \quad \left. \frac{\partial(\rho_r e)}{\partial t} \right|_{csl} = -\nabla \cdot (\rho_r e \overline{\mathbf{u}}) - \rho_r \mathbf{g} \frac{\overline{\theta' \mathbf{u}'}}{\overline{\theta}} - \rho_r \overline{\mathbf{u}' \otimes \mathbf{u}'} \cdot \nabla \overline{\mathbf{u}} + \nabla \cdot (\rho_r K_e l_m \sqrt{e} \nabla e) - \rho_r K_\epsilon e^{3/2} / l_\epsilon \quad (6)$$

where K_e and K_ϵ are constants prescribed in the turbulence scheme, l_m and l_ϵ the length scales defining the turbulent viscosity. The dissipation term is directly estimated from e and l_ϵ (the left-hand term in Equation 6). The anisotropic part of the subgrid turbulence is diagnosed from the $\overline{\psi}$ gradient and e . The diagnosis of the anisotropic part of the subgrid turbulence
10 is obtained using $\overline{\psi}$ and e :

$$\overline{u'_i u'_j} = +(2/3)\delta_{ij}e - (1/15)l_m \sqrt{e} \left(\frac{\partial \overline{u}_i}{\partial x_j} + \frac{\partial \overline{u}_j}{\partial x_i} - (2/3)\delta_{ij} \frac{\partial \overline{u}_m}{\partial x_m} \right) \quad (7)$$

$$\overline{\theta' u'_i} = -(1/6)l_m \sqrt{e} \frac{\partial \overline{\theta}}{\partial x_i} \Phi_i \quad (8)$$

$$15 \quad \overline{\theta'^2} = +(5/36)l_m^2 \frac{\partial \overline{\theta}}{\partial x_m} \frac{\partial \overline{\theta}}{\partial x_m} \Phi_m \quad (9)$$

where Einstein summation convention is applied and $\Phi_{i,m}$ are atmospheric stability functions (Redelsperger and Sommeria, 1981). The ground condition can be modelled by the externalized surface scheme SURFEX (Masson et al., 2013). In the dry-version of MNH and with the hypothesis of a zero thermal flux at the ground and buildings, only the turbulent friction
20 is **claimed**. To compute the non-zero values of $\overline{u'w'}$ and $\overline{v'w'}$ at the ground, the SURFEX call employed in this paper consists in a simple activation of a dynamic wall model related to the Prandtl theory (eddy viscosity concept). The form of the surface turbulent fluxes are $\overline{u'_i w'} \Big|_{surf} \approx -l_m^2 \Big| \frac{d\overline{u}_i}{dz} \Big| \frac{d\overline{u}_i}{dz}$. Defining a friction velocity u^* proportional to the turbulent wall shear and a roughness length z_0 , the vertical gradient of $\overline{\mathbf{u}}$ is recovered by specifying a logarithmic profile (Kármán, 1930) as
25 $\overline{u}(z) = \frac{u^*}{k} \ln(1 + \frac{z}{z_0})$ (note that the atmospheric stability conditions are neutral or near-neutral in this manuscript, therefore the additional Monin and Obukhov (1954) terms is neglected and Businger et al. (1971) functions do not appear in the previous formulation). SURFEX is employed in Sect. 5.2.

3 The IBM forcing in the Meso-NH code

The numerical domain is divided in two regions:

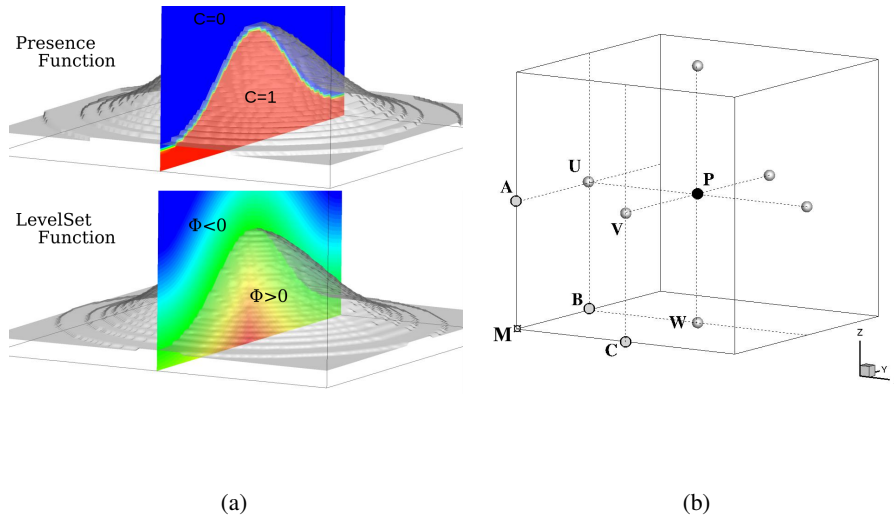


Figure 1. (a) Illustration of two ways to model a fluid-solid interface: the color code indicates the isocontours of the presence function C and the LevelSet function ϕ ; (b) Definition of the points type per cell: M the geometric/mesh point, P the mass point, $U/V/W$ the velocity nodes and $A/B/C$ the vorticity nodes.

the equations of continuum mechanics hold and a solid region embedding the obstacle where they do not. After comparing the methods (Fig. 1-a) based on a local volume fraction function and the (LSF) LevelSet Function (Sussman et al., 1994; Kempe and Fröhlich, 2012), it was decided to use the LSF as it was able to capture the interface between the fluid and solid regions more accurately :a fluid-region where the continuum mechanic equations are acting; a solid-region of volume similar to this of the embedded obstacles where these rules become meaningless (Fig. 1-a). After an intensive comparison with the interface modelling by a local volume fraction function (Fig. 1-a), the interface between the fluid and solid regions is modelled by a LSF LevelSet Function $|\phi|$ informs about the minimal distance to the fluid-solid interface and the ϕ -sign about the region nature: $\text{sgn}(\phi) > 0$ for the solid one; otherwise $\text{sgn}(\phi) < 0$. The vector \mathbf{n} normal to the interface and its local curvature σ are defined such as $\mathbf{n} = \frac{\nabla\phi}{|\nabla\phi|}$ and $\sigma = -\nabla \cdot \mathbf{n}$. Fig. 1-a illustrates the continuous variation of LSF for an arbitrary bell shape interface. The LSF is estimated at the seven available points type per cell to limit the discretization errors (Fig. 1-b): at the mass point P where prognostic scalar variables are localized, at the three velocity nodes $U/V/W$ where are characterized each projection $\bar{\mathbf{u}}$, at the $A/B/C$ vorticity nodes employed by turbulent variables. The points of the solid region acts as external points of the computational grid (as acts external points in a boundary-fitted method at the grid limit). ~~An intensive study had been done to verify the ability of the LSF spatial derivatives to recover the vector normal to the interface and the local curvature (?)~~ An intensive study had been done to estimate the well-modelling of the vector normal to the interface and the local curvature using LSF. The forcing based on a GCT Ghost-Cell Technique (resp. CCT Cut-Cell Technique) is applied to the explicit-in-time schemes (resp. the pressure solver) and detailed in Sect. 3.1 (resp. Sect. 3.2).

3.1 Ghost-Cell Technique and explicit-in-time schemes

The prognostic variable ψ is decomposed into a resolved (resp. unresolved) part $\bar{\psi}$ (resp. ψ'). $\psi' = 0$ in a Direct Numerical Simulation (DNS). ψ^n is the value at the time $n\Delta t$ (Δt , the time step). The tendencies of the prognostic variables $\bar{\psi} = [\bar{u}, \bar{\theta}, \bar{s}, (e)]$ (Sect. 2.1) can not be deduced from the conservation laws in the solid region. Expecting a correction due to IBM where $\phi \geq 0$, a general formulation of the tendencies is written as:

$$\frac{\partial}{\partial t} = \frac{\partial}{\partial t} \Big|_{csl} + \frac{\partial}{\partial t} \Big|_{ibm} \quad (10)$$

The RHS first term of Equation (10) is given by the conservation laws (Sect. 2.1). $\frac{\partial}{\partial t} \Big|_{ibm}$ is the correction of the tendencies due to the GCT in the solid region and near the immersed interface satisfying the $\bar{\psi}$ desired boundary conditions at $\phi = 0$:

$$10 \quad \frac{\partial \bar{\psi}}{\partial t} \Big|_{ibm} = - \frac{\partial \bar{\psi}}{\partial t} \Big|_{csl} + \frac{\bar{\psi}^{n+1} - \bar{\psi}^n}{\Delta t} \quad (11)$$

Note that $\frac{\partial \bar{u}}{\partial t} \Big|_{ibm}$ is taken into account in the Explicit-Runge-Kutta (ERK) temporal algorithm. The freeze of the immersed wind conditions in the ERK algorithm had also been **tested/implemented**; it had shown a more unstable behaviour for large Courant number.

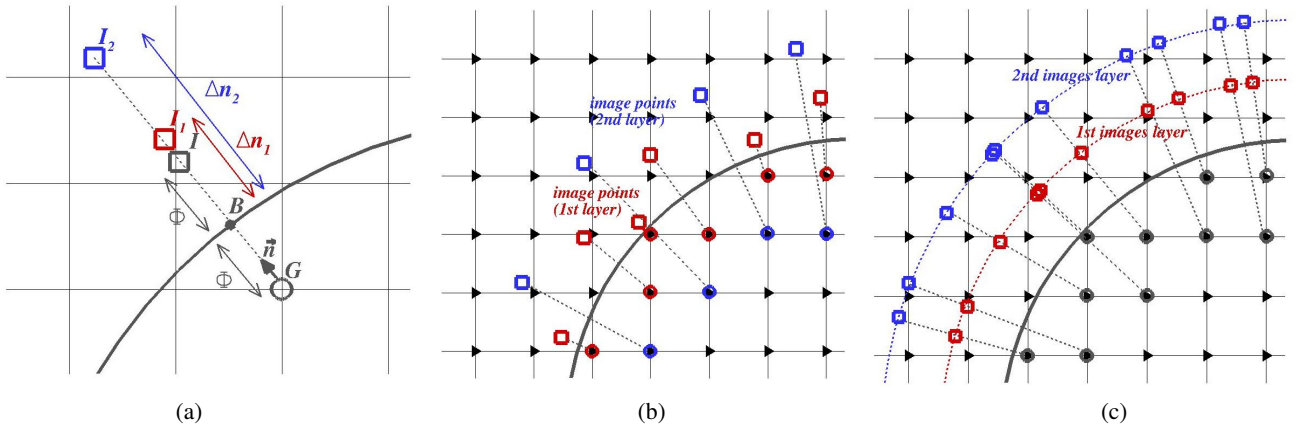


Figure 2. (a) Node definitions acting in the Ghost-Cell Technique : the G ghost (G), B interface (B), \mathbf{n} normal vector (\mathbf{n}), I mirror (I) and (I_1, I_2) images (I_1, I_2). (b) resp. (c) Illustration of the classical (resp. **original/new**) GCT using the mirror (resp. images). Triangles correspond to one of the node types (see Fig. 1-b).

15 The forced points are called ghost points and merely renamed ghosts. To estimate the variable $\bar{\psi}$ and for each ghost, the physical information is extracted near the interface and from the fluid region. The extension (grid stencil) of the forcing zone depends on the spatial accuracy of the numerical scheme. For example, Figures 2b-c show the case of a two-layers stencil

in a two-dimensional grid. The characterization of the layer is done by a conditional loop applied direction by direction on the LSF: $\phi(i, j) \cdot \phi(i, [j - k_l : j + k_l]) > 0$ and $\phi(i, j) \cdot \phi([i - k_l : i + k_l], j) > 0$ (k_l an integer, 2D case). $k_l = 1$ (resp. $k_l = 2$) allows. For a 2D case, the sign of $\phi(i, j) \cdot \phi(i, [j - k_l : j + k_l])$ and $\phi(i, j) \cdot \phi([i - k_l : i + k_l], j)$ is estimated. The integer value k_l determines the cells truncated by the interface: $k_l = 1$ (resp. $k_l = 2$) defines the first (resp. second) layer. The calculation of these ghost layers has a computational overhead due to data exchange among processors. Such image-ghost distance induces a computational time overhead during processors exchanges in parallel simulations. The stencil of the numerical schemes modelling the interface defines the k_l value. In order to limit this overhead, a low-order version of centered explicit-in-time scheme (Sect. 2.1) is employed when $\phi > -\Delta$. The CPU cost of the 'hybrid' advection scheme is largely compensated by the decrease of the ghosts number and parallel exchanges. Appendix B reports a comparison analysis between third-order WENO and second-order centered schemes used in the vicinity of the interface; the studied case is the inviscid flow around a circular cylinder.

In the classical GCT (Tseng and Ferziger, 2003) the fluid information is obtained at a mirror point (noted I , merely renamed mirror) found in the normal direction to the interface in such a way that the interface node B is equidistant to I and G . Figure 2-a shows the characterization of one ghost G (of LSF value ϕ_G), its associated mirror I (of LSF value ϕ_I) and the interface node B ($\mathbf{GI} = 2\phi_G\mathbf{n}$). Figure 2-b illustrates several ghosts and mirrors. The $|\mathbf{IB}|$ distance depends on the forcing stencil and a problematic case regularly met in the mirror interpolation is the vicinity of ghosts with the interface ($\phi_G = -\phi_I \ll \Delta$, with Δ the space step) leading to a not well pose condition. The physical information at I is directly related to the interface's one which can itself be dependent on the fluid information (as it's done in the wall models used in LES).

20

The new GCT. To overcome this problem, another way is to define image points (noted I_1 and I_2 in Fig. 2-a, merely renamed images) having a distance to the interface Δ -dependent and not ϕ_G -dependent: $\mathbf{GI}_l = l\Delta + \phi_G\mathbf{n}$ with $l = (1; 2)$. Figure 2-a shows the images for one ghost and Figure 2-c illustrates this original GCT. The definition of several images per ghost allows to build a normal profile of the $\bar{\psi}$ fluid information. $\bar{\psi}(I)$ is recovered by a quadratic reconstruction f using the (B, I_1, I_2) points. Two distinct calculations of $f(\bar{\psi}(B), \bar{\psi}(I_1), \bar{\psi}(I_2))$ noted PLI^a and PLI^b are tested to build the Lagrange interpolation. To overcome this problem, we define image points (noted I_1 and I_2 in Fig. 2-a, merely renamed images) having a distance to the interface that depends only on the grid spacing: $\mathbf{GI}_l = l\Delta + \phi_G\mathbf{n}$ with $l = (1; 2)$. Figure 2-a shows the images for one ghost. The new approach enforces a large enough value of the $|\mathbf{I}_l\mathbf{B}|$ distance. Figure 2-b (resp. c) illustrates the classical (resp. new) GCT for several ghosts. Figure 2-b shows some mirror points associated with ghosts of the first layer in the vicinity of the interface. Figure 2-c shows the new approach ensures the image points are always located in the fluid region, irrespective of the ghost location. The definition of several images per ghost allows to build a profile of the $\bar{\psi}$ fluid information normal to the interface. $\bar{\psi}(I)$ is therefore recovered by a quadratic reconstruction f using the (B, I_1, I_2) points. Two distinct calculations of $f(\bar{\psi}(B), \bar{\psi}(I_1), \bar{\psi}(I_2))$ noted PLI^a and PLI^b are tested, to build the Lagrange interpolation:

$$\bar{\psi}^a(I) = [2L_G^a(I)\bar{\psi}(B) + L_{I_1}^a(I)\bar{\psi}(I_1) + L_{I_2}^a(I)\bar{\psi}(I_2)][1 + L_G^a(I)]^{-1} \quad (12)$$

35

$$\bar{\psi}^b(I) = L_B^b(I)\bar{\psi}(B) + L_{I_1}^b(I)\bar{\psi}(I_1) + L_{I_2}^b(I)\bar{\psi}(I_2) \quad (13)$$

where $L^a(I)$ and $L^b(I)$ are the Lagrange polynomials:

$$L_{I_1}^a(I) = \left(\frac{2\Delta - \phi}{\Delta}\right) \left(\frac{2\phi}{\Delta + \phi}\right) ; \quad L_{I_2}^a(I) = \left(\frac{\phi - \Delta}{\Delta}\right) \left(\frac{2\phi}{2\Delta + \phi}\right) ; \quad L_G^a(I) = \left(\frac{\phi - \Delta}{\phi + \Delta}\right) \left(\frac{\phi - 2\Delta}{\phi + 2\Delta}\right) \quad (14)$$

$$L_{I_1}^b(I) = \left(\frac{2\Delta - \phi}{\Delta}\right) \left(\frac{\phi}{\Delta}\right) ; \quad L_{I_2}^b(I) = \left(\frac{\phi - \Delta}{\Delta}\right) \left(\frac{\phi}{2\Delta}\right) ; \quad L_B^b(I) = \left(\frac{\phi}{\Delta}\right) \left(\frac{\phi - 2\Delta}{2\Delta}\right) \quad (15)$$

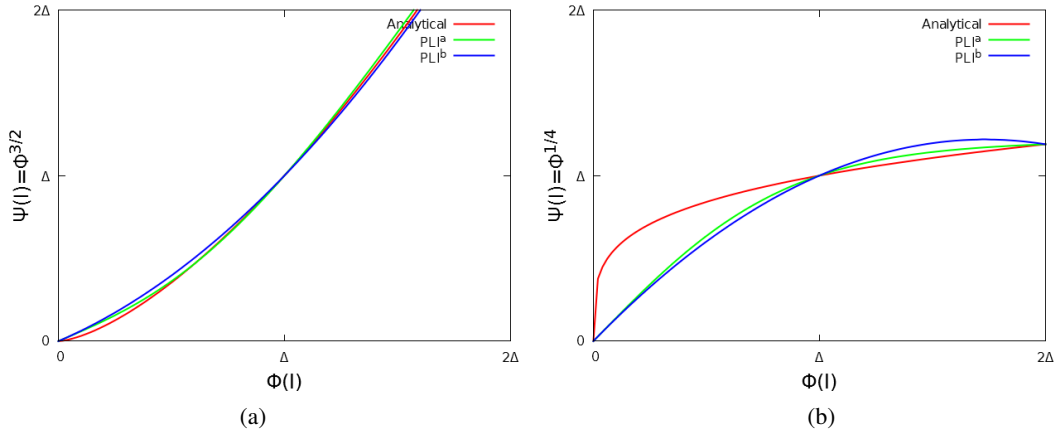


Figure 3. Quadratic interpolations of two analytical profiles $\bar{\psi} = \phi^n$ (red lines) using two images points at $\phi = -[1;2]\Delta$ and the interface node. Green (resp. blue) color corresponds to L^a (resp. L^b) polynomials results.

The behaviour of each quadratic interpolation and their abilities to approach a power law such $\psi = \phi^{3/2}$ (resp. $\psi = \phi^{1/4}$) are illustrated in Figure 3-a (resp. Fig. 3-b). PLI^a fits better the analytical solutions and is adopted. The accuracy of an interpolation depends on the $\bar{\psi}$ -profile. For example, a logarithmic evolution of the tangent velocity is expected in LES. Otherwise when the viscous layer is modelled, a linear evolution is expected. To compare the ability of each quadratic interpolation to approach a wide variety of profiles, the recover of power laws such as $\psi = \phi^{3/2}$ (Figure 3-a) and $\psi = \phi^{1/4}$ (Fig. 3-b) is studied. As it illustrates, PLI^a fits better the two analytical solutions and is therefore adopted.

~~An intensive comparison of the classical and new GCTs had been done~~ The classical and new GCTs have been compared thoroughly and part of this analysis is deferred to the Appendix. The interpolated field of the potential flow around a single cylinder or a sphere was compared to the theoretical solution; the sensitivity of the inviscid flow around the same bodies (Appendix B) to the type of GCTs had been studied. The new GCT had given the best results, especially in the symmetry preservation in the inviscid flow cases. Note that these results are also dependent to the 3D interpolations choice detailed in a following paragraph. The proposed GCT is employed in the rest of this study. The GCT implementation is divided in four

main steps: the fluid information recovery, the interface basis change, the interface condition and the ghost value.

- 5 **The fluid information recovery.** $\bar{\psi}_{I_l}$ for the images contained in a pure fluid cell (all corner nodes are in the fluid region) is recovered by a trilinear interpolation based on Lagrange Polynomials (LP):

$$L_i^{LP}(x_l) = \prod_{p=1, p \neq i}^N \frac{x_l - x_p}{x_i - x_p} ; \quad L_j^{LP}(y_l) = \prod_{p=1, p \neq j}^N \frac{y_l - y_p}{y_j - y_p} ; \quad L_k^{LP}(z_l) = \prod_{p=1, p \neq k}^N \frac{z_l - z_p}{z_k - z_p} \quad (16)$$

$$\bar{\psi}(x_l, y_l, z_l) = \sum_{i=1}^N \sum_{j=1}^N \sum_{k=1}^N L_i^{LP}(x_l) L_j^{LP}(y_l) L_k^{LP}(z_l) \cdot \bar{\psi}(x_i, y_j, z_k) \quad (17)$$

10

For truncated cells (at least one corner node is in the solid region), $\bar{\psi}_{I_l}$ is recovered using an inverse Distance Weighting (DW) interpolation:

$$\bar{\psi}(x_l) = \frac{\sum_{i=1}^N L_i^{DW}(x_l) \cdot \bar{\psi}(x_i)}{\sum_{i=1}^N L_i^{DW}(x_l)} ; \quad |\mathbf{x}_l - \mathbf{x}_i| = \sqrt{(x_l - x_i)^2 + (y_l - y_i)^2 + (z_l - z_i)^2} \quad (18)$$

- 15 where $L_i^{DW}(x) = |x_l - x_i|^{-\alpha}$ ($\alpha = 1$). This formulation diverges when $x_i \rightarrow x_l$ and it is commonly adopted to impose $\bar{\psi}(x_l) = \bar{\psi}(x_i)$ when $\exists (x_i - x_l) \leq \epsilon$ (ϵ is an arbitrary parameter depending on the mesh discretization, $\epsilon \ll \Delta$). The 3D extension is direct with $|\mathbf{x}_l - \mathbf{x}_i| = \sqrt{(x_l - x_i)^2 + (y_l - y_i)^2 + (z_l - z_i)^2}$. The use of these interpolations was decided after comparisons with Barycentric Lagrange and Modified Distance Weighting interpolations (Franke, 1982) and tests on the α coefficient. As the boundary condition is expressed in the interface frame and the grid is staggered, the non-collocation of the $\bar{\mathbf{u}}$ components implies firstly to interpolate three different classes of cells (with $U/V/W$ corners, Fig. 1-b) for each $U/V/W$ ghosts, secondly to build the change of frame matrix for which the proposed GCT presents an interest during the characteriza-
- 20 tion of the direction tangent to the interface.

The interface basis change. Velocity vector $\bar{\mathbf{u}}$ known in the Cartesian mesh basis at the images I_l ($\Delta n_1 = \Delta$ and $\Delta n_2 = 2\Delta$ in Fig. 2-a) is projected in the basis of the interface ($\mathbf{n}(B), \mathbf{t}(B), \mathbf{c}(B)$) in which the boundary conditions on each vector component are imposed. Computing the LSF gradient, the normal direction is defined. Otherwise, (\mathbf{t}, \mathbf{c}) are two arbitrary tangent directions. The tangent direction \mathbf{t} is considered as the predominant tangent direction of the flow along the fluid-solid interface depending on the images values and defining the velocity vector such as $\bar{\mathbf{u}}(I_l) = \bar{u}_n(I_l) \mathbf{n} + \bar{u}_t(I_l) \mathbf{t}(I_l)$. **This yields**

indueeThe cotangent direction is defined such as:

$$30 \quad \mathbf{c}(I_l) = \frac{\mathbf{n} \otimes \bar{\mathbf{u}}(I_l)}{\|\mathbf{n} \otimes \bar{\mathbf{u}}(I_l)\|} ; \quad \mathbf{t}(I_l) = \mathbf{c}(I_l) \otimes \mathbf{n} \quad (19)$$

The $(\mathbf{n}, \mathbf{t}, \mathbf{c})$ basis at the interface is defined by considering or not the rotation of the tangent velocity with the distance to the interface:

$$\mathbf{t}(B) = \mathbf{t}(I_1) \text{ if no rotation} \quad ; \quad \mathbf{e}_t(B) = 2\mathbf{e}_t(I_1) - \mathbf{e}_t(I_2) \text{ if linear evolution} \quad (20)$$

5 Finally, the third component is $\mathbf{c}(B) = \mathbf{n} \otimes \mathbf{e}_t(B)$ and (inverse) projection is known.

The interface condition. Let $\bar{\psi}_B$ and $\Delta \frac{\partial \bar{\psi}}{\partial n} \Big|_B$ the Dirichlet and Neumann conditions on $\bar{\psi}$. The general formulation of the boundary condition $\bar{\psi}(\phi = 0)$ is written as a Robin condition: $\bar{\psi}(\phi = 0) = k_r \bar{\psi}_B + (1 - k_r) \cdot (\bar{\psi}(\phi = -l\Delta) - l\Delta \frac{\partial \bar{\psi}}{\partial n} \Big|_B)$. The switch between the Dirichlet condition and the Neumann condition is done through the coefficient $k_r \in [0 : 1]$. To give some
 10 examples of Dirichlet condition, $(k_r; \bar{\psi}_B) = (1; 0)$ is imposed: on the $\bar{\mathbf{u}} \cdot \mathbf{n}$ velocity component normal to the interface arising from the impermeability hypothesis, on the $\bar{\mathbf{u}} \cdot \mathbf{t}$ component tangent to the interface for a no-slip hypothesis. To give some examples of Neumann condition imposed by $(k_r; \frac{\partial \bar{\psi}}{\partial n} \Big|_B) = (0; 0)$: no flux condition on the potential temperature (as well on a passive scalar, subgrid kinetic energy), free-slip case applied to $\bar{\mathbf{u}} \cdot \mathbf{t}$. Note the $\frac{l\phi}{2}$ -approximation in the location of the derivative term and the Neumann condition depending on the chosen image (in practice the selected image I_l is the closest one to the
 15 interface).

An interface condition depending on the characteristics of the surrounding fluid such as $\bar{\psi}(\phi = 0) = F(\bar{\psi}_{I_l}; \frac{\partial \bar{\psi}}{\partial n} \Big|_{I_l})$ is a wall model. Using two (resp. three) images, simple wall models such as the constant (resp. linear) extrapolation of the $\bar{\psi}$ gradient is reached by the $\frac{\partial^2 \bar{\psi}}{\partial n^2} \Big|_{I_l} = 0$ (resp. $\frac{\partial^3 \bar{\psi}}{\partial n^3} \Big|_{I_l} = 0$) computation. The consistency between the tangent component to the interface of the resolved wind and the subgrid turbulence is the subject of Section 2.3.

20

The ghost value. Knowing $\bar{\psi}(\phi = 0)$ and $\bar{\psi}_{I_l} = \bar{\psi}(\phi = -l\Delta)$, $\psi(G)$ for a Dirichlet (resp. Neumann) condition is written such as :

$$\psi(G) = 2\psi(B) - \psi(I) \quad (\text{Dirichlet}) \quad ; \quad \psi(G) = 2\phi \frac{d\psi}{dn} \Big|_B + \psi(I) \quad (\text{Neuman}) \quad (21)$$

25 In practice, three I_l images are defined for which the location are $\phi_{I_l} = -l\Delta$ with $l = [1/2; 1; 2]$. The choice of the images distance to the interface affects the results. To approach at best the expected solution, two quadratic interpolations depending on the used images and one combination of this quadratic interpolations are tested. Figure 4-a and Figure 4-b illustrate these interpolations by considering two analytical profiles (red lines): the quadratic interpolation QI_1 (resp. QI_2) is based on the images values located at $\phi = 1/2\Delta$ and $\phi = \Delta$ and plotted in green symbols (resp. at $\phi = \Delta$ and $\phi = 2\Delta$ plotted in blue symbols). Depending on the analytical profile, Figure 4 shows the influence of the images location choice. As expected,
 30 QI_1 (resp. QI_2) appears to be less accurate than QI_2 (resp. QI_1) for $\bar{\psi}(\phi \in [-2\Delta : -\Delta])$ (resp. for $\bar{\psi}(\phi \in [-\Delta : 0])$). QI_C is the combination of QI_1 and QI_2 (purple line). QI_C preserves the advantage of each quadratic interpolation and when

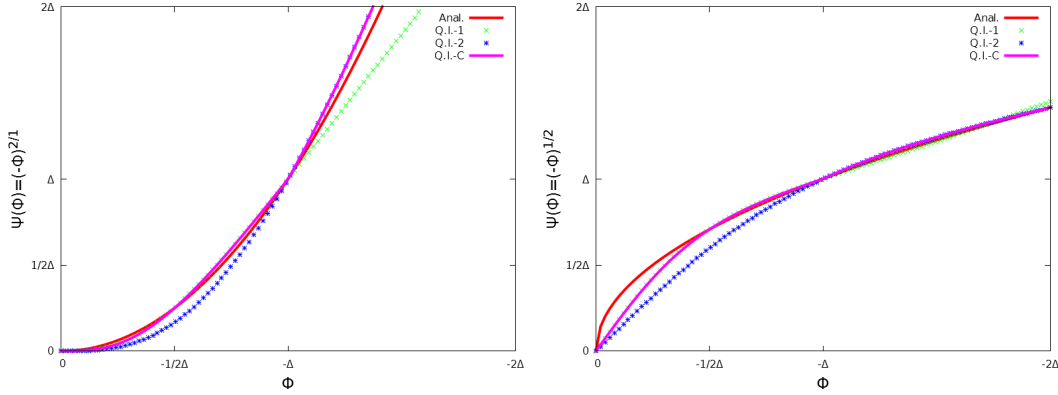


Figure 4. Profile normal to the interface of two fluid informations $\bar{\psi}$: analytical solution (red lines), quadratic interpolation QI_1 using $\bar{\psi}_{-\phi=[1/2;1]\Delta}$ (green symbols), QI_2 using $\bar{\psi}_{-\phi=[1;2]\Delta}$ (blue symbols), QI_C as a combination of QI_1 and QI_2 (purple lines).

$\phi_G < \Delta$ (resp. $\phi_G > \Delta$), QI_1 (resp. QI_2) is used in the rest of the study. Knowing $\bar{\psi}^{n+1}(\phi^-)$ at the end of the MNH temporal loop with QI_C , the $\bar{\psi}^{n+1}(\phi^+)$ profile is extrapolated from the fluid region to the solid region by applying an anti-symmetry $\bar{\psi}^{n+1}(\phi^+) = 2\bar{\psi}^{n+1}(0) - \bar{\psi}^{n+1}(\phi^-)$. The ghost value is estimated and the $\bar{\psi}$ -gradient at the interface is also recovered.

5 3.2 Cut-Cell Technique and pressure solver

First looking at the RHS of (5), the $\frac{\partial(\rho_r \bar{\mathbf{u}}^*)}{\partial t}|_{csl}$ coming from the resolution of the explicit-in-time schemes near the interface and in the solid regions badly affects the $\nabla \cdot \bar{\mathbf{u}}^*$ computation (note that the GCT operates after the step projection). Therefore the fictive wind of the solid region can spread errors in the fluid region during the pressure resolution. To avoid it, a correction of the pressure solver is proposed.

10 The elliptic problem (5) is re-written as a resolution of the linear system $\mathcal{P} \cdot \Psi^* = \mathcal{Q}$. In the standard MNH version, $\nabla \cdot \bar{\mathbf{u}}^* = \mathcal{Q}$ is estimated using a finite difference approach. To uncouple the solid region from the fluid region our revisited version enforces a null-divergence for pure solid cells and estimates the balance of momentum fluxes by a finite volume approach for truncated cells (noted \mathcal{Q}_{cct}):

$$\mathcal{V} \nabla \cdot \bar{\mathbf{u}}^* = \int_{\mathcal{V}_f} \nabla \cdot \bar{\mathbf{u}}^* d\mathcal{V} + \int_{\mathcal{V}_s} \nabla \bar{\mathbf{u}}^* d\mathcal{V} = \sum \pm \bar{u}_i^* \cdot \mathcal{S}_i = \sum \pm \widetilde{\Delta^2 \bar{u}_i^*} \quad (22)$$

15

where $\mathcal{V} = \Delta^3$ is the cell volume, \mathcal{V}_f (resp. \mathcal{V}_s) the fluid (resp. solid) part of \mathcal{V} , \mathcal{S}_i the cell surfaces where i is the index of each surface orientation [e,w,n,s,b,f] as it illustrates in Figure 5-a.

According to the Green-Ostrogradski theorem, the $\bar{u}_i^* \mathcal{S}_i$ calculation is the classical way of a CCT Cut-Cell Technique (Yang et al., 1997; Kim et al., 2001) to estimate the velocity divergence. A similar approach is here performed re-building the flux $\widetilde{\Delta^2 \bar{\mathbf{u}}^*}$ for truncated and solid cells.

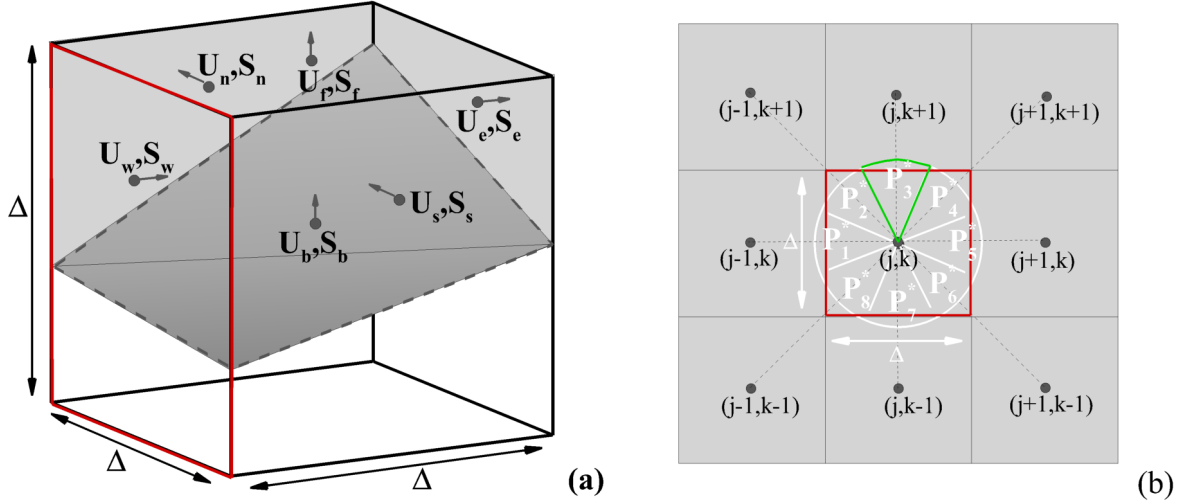


Figure 5. (a) Momentum fluxes balance for an arbitrary truncated cell of volume \mathcal{V} where the \overline{u}_i^* velocities (U_i in the figure, $i = [e, w, n, s, b, f]$) are supported by the S_i surfaces in grey colour; the transparent volume is a part of the solid body. (b) Segmentation of the S_w arbitrary surface (red border) in eight P_p^* pieces of cake (the border of P_3^* is indicated in green).

The $\pm \Delta^2 \widetilde{u}_i^*$ calculation consists in a weighting of the out-fluxes and in-fluxes function of the fluid and cell surfaces ratio (Fig. 5-a). Figure 5-b gives an example of the west surface ($i = w$, red border) where $\Delta^2 \widetilde{u}_w^*(j, k)$ is calculated using the LSF value $\phi = \phi_w$ and the ones of the eight adjacent nodes $\phi_p(j \pm 1, k \pm 1)$. A disk of radius $-\sqrt{\pi}\Delta$ is split in eight 'piece of cake' segments P_p^* ($p = [1 : 8]$). A LSF linear interpolation detects or not the interface location. In presence of an interface, its distance from the studied node is $0 < \delta_p < -\sqrt{\pi}\Delta$. Knowing δ_p , the momentum fluxes balance is formulated for a non-moving body as (p is the index of the 'piece of cake' and i the index of the cell surface):

$$\Delta^2 \widetilde{u}_i^* = \frac{\Delta^2}{8} \left[\sum_{p=1}^8 \mathcal{H}(-\phi_p) \mathcal{H}(-\phi_i) \overline{\mathbf{u}}_i^* + \sum_{p=1}^8 \mathcal{H}(-\phi_p \phi_i) \cdot |\mathcal{H}(-\phi_p) - \pi \left(\frac{\delta_p}{\Delta}\right)^2| \cdot (\mathcal{H}(-\phi_p) \overline{\mathbf{u}}_p^* + \mathcal{H}(-\phi_i) \overline{\mathbf{u}}_i^*) \right] \quad (23)$$

The four encountered cases correspond to a pure fluid cell $\Delta^2 \widetilde{u}_i^* = \frac{\Delta^2}{8} \sum_{p=1}^8 \overline{\mathbf{u}}_i^*$ when $\phi_p < 0$ and $\phi_i < 0$ (Fig. 6-a); a pure solid cell $\Delta^2 \widetilde{u}_i^* = 0$ when $\phi_p > 0$ and $\phi_i > 0$ (Fig. 6-b); two types of truncated cells depending on the fluid/solid nature of the main node for which $\phi_p \cdot \phi_i < 0$ (Fig. 6-c/d). Using Eq. (23), Equations (22) are solved and lead to the RHS computation of (5).

Knowing \mathcal{Q}_{cct} , the reflection concerns now the \mathcal{P} matrix to inverse. The classical interface condition on the potential Ψ^* is a homogeneous Neumann condition $\frac{\partial \Psi^*}{\partial \phi} = 0$. Using a Boundary Fitted Method (BFM), the interface condition of the moving or non-moving body (Auguste, 2010) appears only on the border of a numerical domain. Using an IBM and without any impact of this interface condition on the \mathcal{P} -coefficients, the impermeability character of solid obstacles is not achieved. Due to the inversion of the horizontal part of \mathcal{P} by a Fast Fourier Transform (Schumann and Sweet, 1988), the solution of calculating

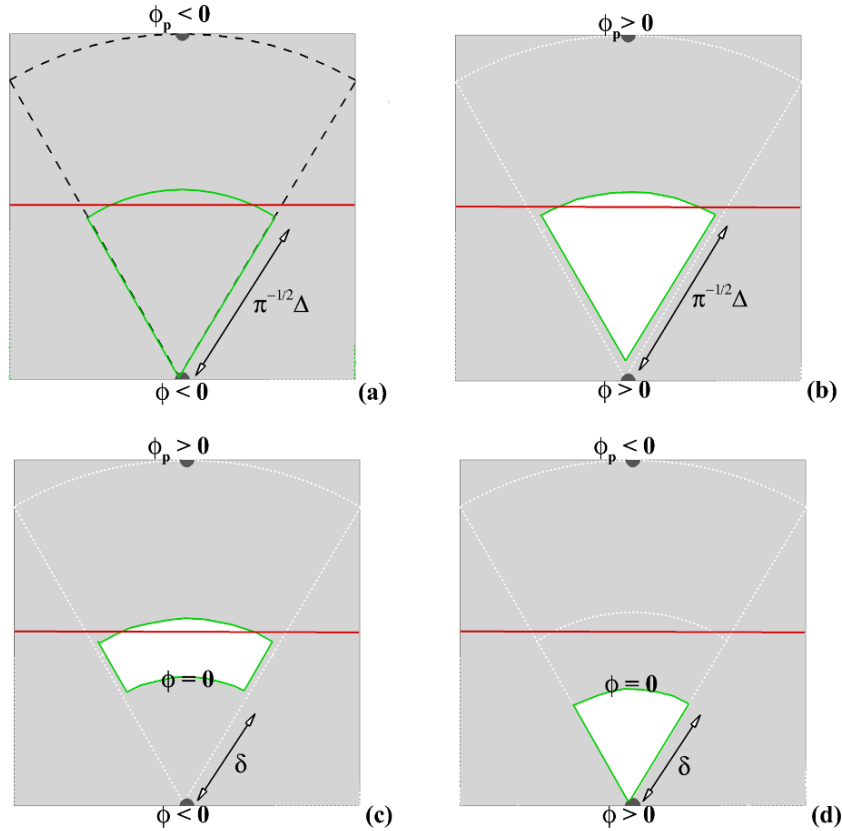


Figure 6. $\pm \Delta^2 \widetilde{u}_i^*$ calculations depending on the signs of $\phi_i = (\phi)$ and ϕ_p on an arbitrary piece of cake. The white (resp. grey) region corresponds to the solid (resp. fluid) one of P_p^* (same colour code as in Fig. 5).

\mathcal{P}_{cct} appears to be problematic. The adopted solution consists in an iterative procedure as used in MNH for non-flat problems. The non-respect of the Ψ^* -condition in \mathcal{P} leads to an **unwell-poseda not well pose** system and the iterative procedure goes to spread to the entire fluid domain the enforcement of the null-divergence imposed on solid cells. The resolution of the pseudo-
5 Poisson equation (5) brings to $\Psi^* \rightarrow \Psi^{*M} = \sum_{m=1}^M \mathcal{P}^{-1} \cdot Q_{cct}^m$ where M is the number of iterations. This number is limited by a convergence criterion (compromise between incompressibility satisfaction and CPU cost). Many iterative procedures are available in MNH and originally developed for non Cartesian grids. A Richardson and a Preconditioned Conjugate-Residual algorithms had been here adapted to the obstacles immersion. The newly modified pressure solver is tested and validated in Sect. 4.1.

10 3.3 Consistency with the turbulence scheme

It is known that the $\frac{l_m}{l_\epsilon} \rightarrow 1$ is a reasonable approximation in non-homogeneous, non-isotropic turbulence such as in the near-wall region. This approximation is indeed retained in the present IBM implementation, which assumes $l_m = l_\epsilon$ (hereafter noted l_m and called the mixing length). The Redelsperger et al. (2001) corrections near the ground is to match the similarity laws and the free-stream models constants are not activated. l_m is equal to the numerical cut-off space scale sufficiently far from the ground bringing to a $\Delta\sqrt{e}$ turbulent viscosity. Near the ground and following the Prandtl idea consisting in the assumption of the linear variation of l_m in the near-wall region, the upper limit of the mixing length is $\min(kz, \Delta)$ (k is the von Kármán constant and z is the altitude).

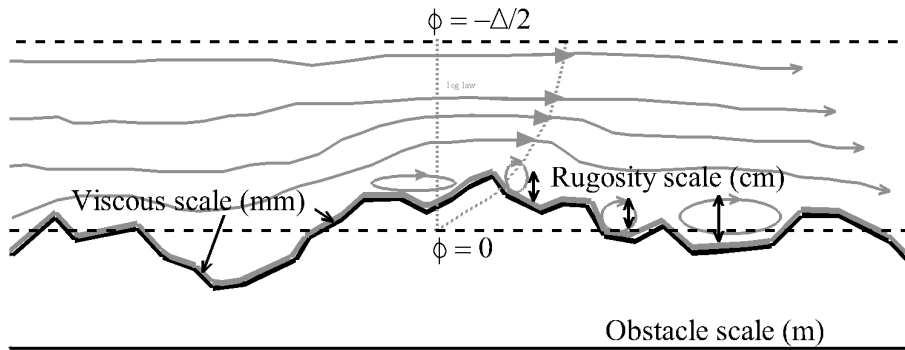


Figure 7. Illustration of the unresolved physical processes near a non-idealized solid wall (black line) in an atmospheric context: the length scale based on the viscous effects (grey line) is drastically smaller than the roughness length. The roughness length approaches the scale of smallest eddies and governs the log-law profile.

The turbulent characteristics are highly affected by a surface interaction. As a consequence and for LES, the subgrid turbulence scheme (Sect. 2.3) is modified in presence of immersed obstacles on the subgrid turbulent kinetic energy equation (Eq. (6)), mixing length computation and Reynolds stresses diagnosis (Eq. (7), (8) and (9)).

10

The Subgrid Turbulent Kinetic Energy condition. The explicit-in-time resolution of Eq.(6) claims a GCT forcing and an interface condition on the STKE e . Commonly, the STKE profile is considered parabolically in the viscous sublayer (Craft et al., 2002; Bredberg, 2000) and constant in the inertial and wake/outer layers (Kalitzin et al., 2005; Capizzano, 2011). Due to the high turbulent Reynolds number $Re_t \approx \mathcal{O}(10^4 - 10^5)$ encountered, a homogeneous Neumann condition is applied at the immersed interface. The equilibrium between production and dissipation of STKE could be discussed and controverted; this choice acts as a first stage in the IBM development.

15

The near-wall correction of the mixing length. The von Kármán limitation due to immersed walls acts through the LSF and the upper limit on the mixing length l_m near interface becomes $\min(kz, -\phi, \Delta)$ with a banning of negative values in the solid region. Whatever the production of Subgrid Turbulent Kinetic Energy e (STKE) and the turbulent shear, the lower limit $l_m(-\phi \leq 0)$ induces a null value of the diagnosed surface fluxes. In addition, a singularity appears in the dissipative term $\rho_r K_\epsilon e^{3/2} l_m^{-1}$. By a pragmatic reasoning, the singularity due to $l_m^{-1}(\phi \rightarrow 0^-) \rightarrow \infty$ amounts to say that modelled length scales are smaller than the Kolmogorov scale $(\nu^3 \epsilon^{-1})^{1/4}$. Considering the Kolmogorov scale as modeled, the turbulence should
5 vanish which is in contradiction with the dissipative term. In order to overcome this ill-posed problem, a l_m lower limit has to be specified. In the study of atmospheric flows around buildings, a characteristic thickness of the viscous layer H/\sqrt{Re} can be defined around a H bluff body for a Reynolds number based on the obstacle scale: $H \approx \mathcal{O}(10m)$; $Re \approx \mathcal{O}(10^7)$. This thickness estimate is also proportional to $E\nu/u^*$ ($E \approx 9.8$ is commonly employed) where the friction velocity u^* is about the centimeter per second. Following these estimates, the length scale due to the viscous effects z_ν^{ib} belongs to the millimetres
10 domain in the expected atmospheric cases. Looking after a building surface and its large heterogeneity (door, windows, surface characteristics), its roughness length z_0^{ib} is at least in the decimeter domain and $z_0^{ib} > z_\nu^{ib}$ (Illustration in Fig. 7). For low Re and smooth surfaces, $z_\nu^{ib} > z_0^{ib}$ could be encountered. Therefore, we assume $z^{ib} = \max(z_0^{ib}, z_\nu^{ib})$ and that z^{ib} is related to the size of smallest unresolved eddies near walls (i.e. dissipative scale). The mixing length near wall is $z^{ib} < l_m < \min(kz, -\phi, \Delta)$.

The turbulent fluxes correction. The $\bar{\psi}$ -gradient and the turbulent diffusion $\mathcal{O}(z^{ib}\sqrt{e})$ prescribe the turbulent fluxes at the immersed interfaces (Eq. (7), (8) and (9)). As a first step in the MNH-IBM implementation, no-flux condition on the mean potential temperature is imposed bringing to a zero-value of the sensible heat flux. Writing the mean velocity field at B such as $\bar{\mathbf{u}} = \bar{u}_t \mathbf{t}$, $\bar{u}_t(B)$ is needed to recover a gradient consistent with the turbulent shear. Considering the Prandtl (1925) or Kármán (1930) theories, the logarithmic profile is assumed in the vicinity of the wall according to $\bar{u}_t(z) = \frac{u^*}{k} \ln(1 + \frac{z}{z^{ib}})$. Considering
20 Δ as the limit of the resolved scales, most of the turbulent kinetic energy $\frac{1}{2}(\overline{u'^2} + \overline{v'^2} + \overline{w'^2})$ is contained in the subgrid one when $-\phi < \Delta$ and such as $K_{tke}\sqrt{e}$ with a constant $K_{tke} \gtrsim 1$. This assumption is reinforced by the homogeneous Neumann condition applied on e . This approach derives from the RANS (Reynolds-Averaged Navier Stokes) approaches and the velocity friction is formulated as $u^* = K_{tke} \sqrt[4]{C_\mu} \sqrt{e}$ where C_μ is a constant evolving between 0.03 (atmospheric applications) and 0.09 (fluid mechanics applications). Adding a damping function for the viscous cases (low turbulent Reynolds number, $Re_t < 20$),
25 the tangent wall velocity at the interface is written such as:

$$\bar{u}_t(B) = \frac{K_{tke} \sqrt[4]{C_\mu} \sqrt{e(\phi = -\Delta/2)}}{k} \ln \left(1 + \frac{\Delta}{z^{ib}} \left[1 - e^{-20z^{ib}\Delta^{-1}} \right] \right) \quad (24)$$

Finally the pragmatic limitation $\bar{u}_t(B) \leq \bar{u}_t(\phi = -\Delta/2)$ operates if the STKE value is too high. The proposed dynamic wall-model evolves between the no-slip and free-slip conditions. If the subgrid turbulence is weak or if the physical problem is fully
30 resolved, the viscous layer is well-modelled and $\bar{u}_t(B) \rightarrow 0$. Otherwise for an intense subgrid turbulence or a fully unresolved problem, the shear due to the wall presence is not perceived and $\frac{d\bar{u}_t}{dn} \Big|_B \rightarrow 0$. The wall-model establishes an equilibrium between the production of STKE and the mean parietal friction. ~~It will raise in the future issues on the validity of the log-law near a~~

singularity (sharp edges or corners) Note that the use of a log-law model near a singularity such as sharp edges and corners could be called into question. Nevertheless, Sections 5.1 and 5.2 show LES results employing this proposition. After numerical investigations done during the single cube study, $K_{tke} \sqrt[4]{C_\mu} \approx 1$ appears as a suitable choice.

4 Flows around a circular cylinder

4.1 Potential flow

Isolated from the rest of the code, the resolution of the pseudo-Poisson equation (5) leads to potential solutions (Sect. 2.2).

5 Theoretical ones are available for flow developed around a non-deformable obstacle such as an infinite cylinder or a sphere (Milne-Thomson, 1968; Batchelor, 2000). The two bodies are here investigated. The flow around the infinite cylinder is predominantly presented.

Figure 8 illustrates the cylinder case. The fluid density is considered as constant in time and in space. The flow is initially imposed as spatially homogeneous with a constant module of velocity U_∞ and parallel streamlines (Fig. 8-a). This initialization does not respect the conservation of the momentum flux and the irrotational correction of the projection method goes to recover this conservation. In the same time, the impermeability of the cylinder of diameter $D_{cyl} = 2R_{cyl}$ is achieved. Figure 8-b shows the streamlines obtained with the MNH pressure solver modified to take into account the presence of immersed obstacles (Sect. 3.2). Defining \mathbf{x} as the direction parallel to the initial streamlines and \mathbf{y} as the perpendicular one, the expected solution is $\mathbf{u} \cdot U_\infty^{-1} = \cos\alpha(1 - \frac{R_{cyl}^2}{r^2})\mathbf{x} - \sin\alpha(1 + \frac{R_{cyl}^2}{r^2})\mathbf{y}$ (single and non-confined body, $(\alpha; r)$ cylindrical coordinates). The numerical confinement is comment hereafter, characterized by $L = L_{cyl}/R_{cyl}$ where L_{cyl} is the distance separating the lateral domain surfaces (Fig. 8-a).

The **RICH** Richardson (**RICH**) and the **RESI** Residual Conjugate Gradient iterative (**RESI**) methods are tested (Sect. 3.2). Figure 9-a plots the evolution of the dimensionless residue $R(k)$ (based on a characteristic divergence U_∞/Δ) with the iterations number k and obtained with the confinement $L = 16$. The two algorithms converge with a weak dependence to the spatial discretizations ($N = [4(\text{red}); 8(\text{green}); 16(\text{blue}); 32(\text{purple})]$ nodes per R_{cyl}). The slope coefficient $\frac{dR(k)}{dk}(\text{RESI}) \lesssim 3\frac{dR(k)}{dk}(\text{RICH})$, so RESI demonstrates its highest velocity convergence. Even if RICH is about 20% faster per iteration than RESI, the global CPU cost of the last one is lowest for a same solver residue $R(k)$. For this reason and due to an a priori higher radius convergence, RESI is adopted. Note that the momentum flux computed after the solver convergence at the x_{cyl} location (Fig. 8-a) shows a good mass preserving with a relative error of $[0.48\%(N = 4); 0.20\%(N = 8); 0.18\%(N = 16); 0.14\%(N = 32)]$ in regard of the incoming flux localized by its x_{inlet} longitudinal coordinate. Similar results had been obtained with a spherical body (not shown here).

With a change of Galilean reference frame, this study corresponds to an uniform body acceleration \mathbf{a}_b in a fluid initially at rest. However a possible viscous term, the hydrodynamic force exerted on the body, is reduced to the added mass effect $\mathcal{A}m_f\mathbf{a}_b = \int_{V_s} \frac{\partial \rho_f \mathbf{u}}{\partial t} dV$ for $\Delta t \rightarrow 0$. \mathcal{A} is the dimensionless coefficient and m_f the displaced fluid mass. \mathcal{A}_{cyl} theoretically

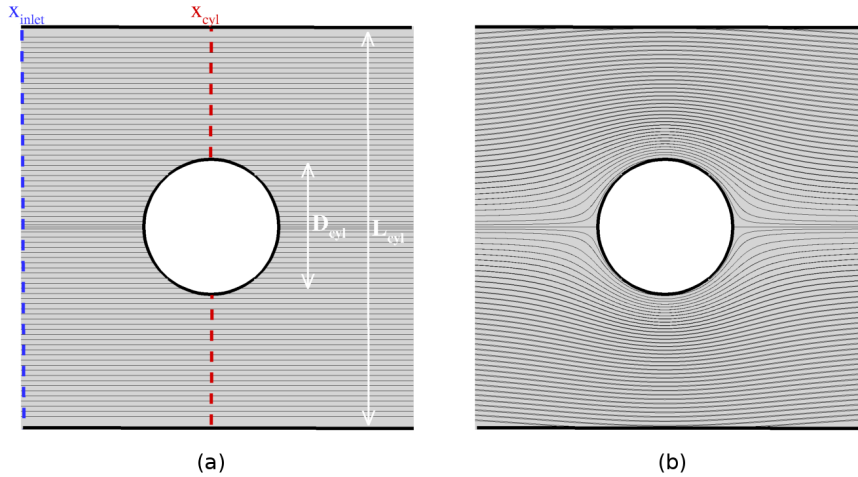


Figure 8. Potential flow around a cylinder: (a) initial state around the body of diameter $D_{cyl} = 2R_{cyl}$; (b) streamlines obtained after the Poisson equation resolution. The confinement is defined as $L = L_{cyl}/R_{cyl}$.

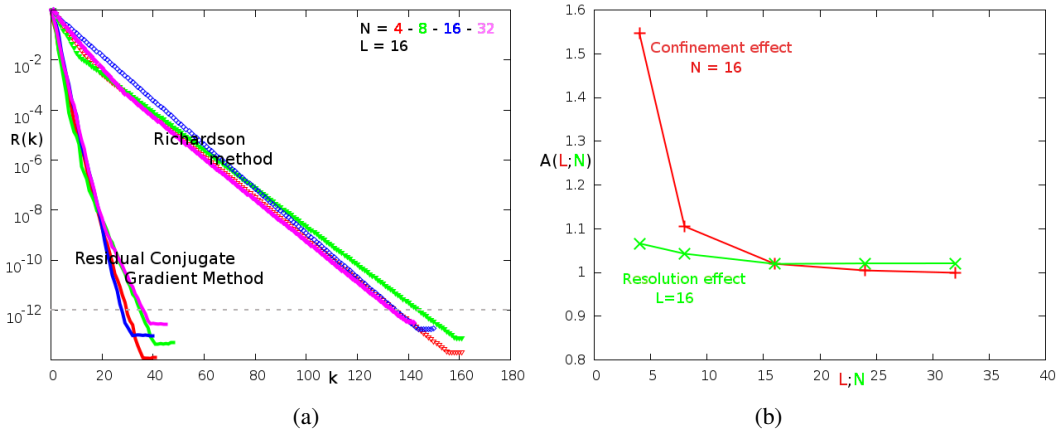


Figure 9. Potential flow around a cylinder: (a) Velocity convergence of two iterative methods (Residual Conjugate Gradient, Richardson) for different spatial resolutions $N = [4 : 32](L = 16)$; (b) Evolution of the added mass coefficient $A(N; L)$ with the confinement $L = L_{cyl}/R_{cyl}$ ($N = 16$) and with the nodes number per radius cylinder N ($L = 16$). The confinement is defined in Fig. 9-a.

equals 1 in the non-confined cylinder case (Lamb, 1932). The red curve of Figure 9-b illustrates the effect of the confinement L on \mathcal{A}_{cyl} for a $N = 16$ resolution. Unsurprisingly \mathcal{A}_{cyl} increases with the confinement (Brennen, 1982). The weak dependence of \mathcal{A}_{cyl} with $L > 16$ allows to consider the body as isolated for $L \sim 16$. The green curve of Figure 9-b shows the impact of the space resolution for $L = 16$. The numerical added mass coefficient is in good agreement with the theoretical one presenting a relative error of about 2% for $N > 16$. It induces a well-respect of the impermeability hypothesis at the immersed interface.

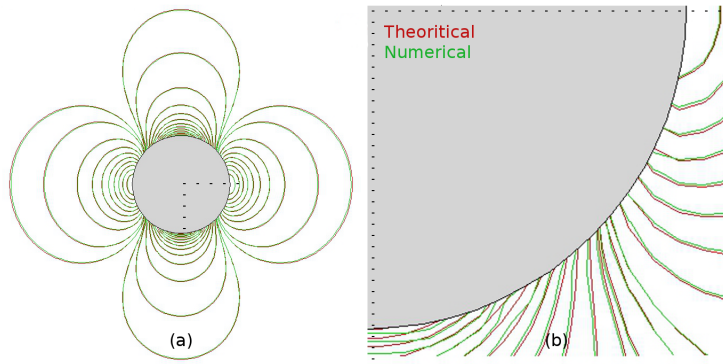


Figure 10. Potential solution around a sphere: (a) kinetic energy in an arbitrary symmetry plane; (b) zoom.

A similar study for a spherical body gives $\mathcal{A}_{sph} = \frac{1}{2} + 0.4\%$. Figure 10 illustrates the contours of the kinetic energy around the sphere in an arbitrary symmetry plane. The green contours (numerical solutions) fit well with the red contours (theoretical solutions). Convergence study of the pressure solver is discussed in Appendix A.

4.2 Viscous flow

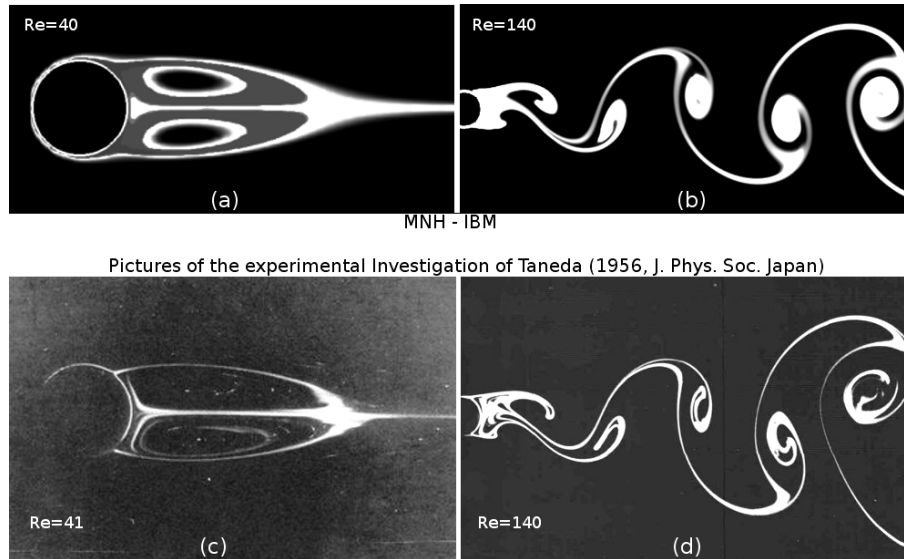


Figure 11. Eddies structure in a viscous fluid: Steady (left, $Re \approx 40$) and unsteady (right, $Re \approx 140$) solutions obtained by the current numerical investigation (top, MNH-IBM and $30pts/D_{cyl}$) and by the famous experimental Taneda (1956) investigation experiments (bottom). The visualization is due to the presence of passive tracer injected on the body surface and transported by the flow.

A pure dynamic and well-documented case which naturally follows the previous ones is studied here. This physical case is the wake past a circular cylinder (non-stratified flow) at two moderate Reynolds numbers $Re = (40; 140)$. One of the forerunners is Taneda (1956) who experimentally studied the nature of the eddies structure.

Taneda (1956) found a regular Hopf bifurcation at a critical Reynolds number $Re_c = \frac{U_\infty D_{cyl}}{\nu_f} \approx 45$. Below Re_c and above $Re > 5$, a boundary layer separation brings to a steady recirculating region in the near-wake (Fig. 11-c). Above $Re_c \approx 45$, an unsteady mode breaks the planar symmetry and the body wake presents an alternate vortex shedding (Fig. 11-d). The standing eddy (resp. the von Kármán street) obtained by MNH-IBM at $Re = 40$ (resp. 140) is visualized in Figure 11-a (resp. b) by the injection of a passive tracer on the body surface.

The standing eddies at $Re < Re_c$ are commonly described with a θ_d detachment angle, l_r recirculating length and $(a; b)$ location of the vortex core (Fig. 12). The limit of the numerical domain is $10D_{cyl}$ upstream the obstacle for the inlet condition (U_∞ , the uniform incoming velocity) and lateral condition (slip condition), $15D_{cyl}$ for the outlet condition allowing the vorticity evacuation. As Cai et al. (2017) mention, this domain can induce a low numerical confinement effect. Three regular Cartesian meshes are built with $10/20/30$ nodes per D_{cyl} .

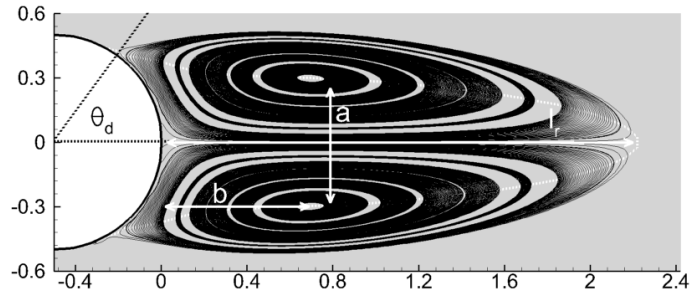


Figure 12. Recirculating region at $Re = 40$ (MNH-IBM, $20pts/D_{cyl}$): definition of the θ_d (°) separation angle, l_r recirculating length and $(a; b)$ vortex core location. The distance are dimensionless by D_{cyl} .

The $20pts/D_{cyl}$ and $30pts/D_{cyl}$ meshes present a good spatial convergence and weak differences at $Re = 40$. $\theta_d \sim 53^\circ \pm 2^\circ$ and the recirculation length $l_r/D_{cyl} \sim 2.2 \pm 0.05$. The $10pts/D_{cyl}$ mesh shows more discrepancies which are attributable to the non-ability of the coarsest resolution to capture the viscous boundary layer for which the thickness evolves in $D_{cyl} \sqrt[3]{Re}$. Note that the impact of the low-order (centered or WENO) modeling the advection at the immersed interface is weak for this viscous case (Sect. 3.1). Table 1 compares the $20pts/D_{cyl}$ results with a part of the results literature collected in Gautier et al. (2013).

The focus is on the unsteady mode at $Re = 140$. The ratio between the characteristic time of inertial effects D_{cyl}/U_∞ and the one related to the vortex shedding $1/f$ defines the Strouhal number $St = \frac{fD}{U_\infty}$. Brazza et al. (1986), Park et al. (1998) and Stalberg et al. (2006) comfort the equation $St(Re) = -3,3265/Re + 0,1816 + 1,6 \cdot 10^{-4}/Re$ proposed by Williamson (1989). MNH-IBM obtains $St(Re = 140) \in [0.177 : 0.179]$ and an absolute maximum relative error lower than 2% in regard of the

Authors	θ_d ($^\circ$)	l_r/D_{cyl}	b/D_{cyl}	a/D_{cyl}
Coutanceau and Bouard (1977)	53.8	2.13	0.76	0.59
Linnick and Fasel (2005)	53.6	2.28	0.72	0.60
Taira and Colonius (2007)	53.7	2.30	0.73	0.60
Bouchon et al. (2012)	53.4	2.26	0.71	0.60
Gautier et al. (2013)	53.6	2.24	0.71	0.59
Cai et al. (2017)	54.5	2.34	0.76	0.62
MNH-IBM $30pts/D_{cyl}$	≈ 54	≈ 2.2	≈ 0.7	≈ 0.6

Table 1. Description of the standing eddies in the wake of the solid cylinder ($Re = 40$): comparison of the separation angle θ_d ($^\circ$), recirculating length l_r (m) and vortex core location ($a; b$) between the literature and MNH-IBM.

Williamson (1989) formulation with the two finer resolutions. Our results are in good agreement with the those presented in the above mentioned and more extensive studies. Details of DNS validation in a viscous buoyancy-driven flow are also presented in *supplementary materials*.

5 Turbulent flows around parallelepiped(s)

This section is devoted to turbulent flows approaching our perspective: the simulation of an atmospheric flow over a city. The turbulent flows around a cubic body vertically confined in a channel and over an urban-like roughness (set of obstacles) are here described. MNH-IBM is explicitly compared to experimental investigations in the two cases. The comparisons to other LES of the literature will be mentioned.

Common hypothesis and methods. The fluid is considered as neutrally stratified. The Coriolis term is negligible due to the addressed space and time scales. The turbulent diffusion is modelled by the subgrid TKE1.5 scheme transported by PPM (Sect. 2.3). All surfaces are considered as non-permeable and the IBM wall-model (Sect. 3.3) is activated. A (x, y, z) reference frame is defined (z , vertical direction) and the velocity vector is written as $\mathbf{u}(\mathbf{t}) = u(t)\mathbf{x} + v(t)\mathbf{y} + w(t)\mathbf{z}$. A time simulation is needed after to establish the turbulence state (not shown here). The over-line notation refers to the mean value in time in this section.

5.1 Flow over a surface mounted-cube

Using static pressure measurements, laser-sheet and oil-film visualizations, Martinuzzi and Tropea (1993) and Hussein and Martinuzzi (1996) ~~had provided an important data bank contribution describing the dynamic developed~~ generated a large data set for the study of flows around a cubic body placed in a channel (Fig. 13-a). RANS and LES had explored in detail this physical case (Breuer et al., 1996; Shah and Ferziger, 1997; Rodi et al., 1997; Frank, 1999; Krajnovic and Davidson, 2002; Farhadi and Rahnama, 2006).

Physical details. A cube (H side) is placed in a channel of $2H$ height. The channel is sufficiently large in the span-wise direction to consider the cube as single in that direction. Turbulent flow is generated in the channel upstream the cube with a mean bulk velocity U_b . Defining the dimensionless wall coordinate $z^+ = u^* \cdot z / \nu_f$, the stream-wise upstream velocity corresponds to a log-law for smooth walls $\bar{u}(z^+) \cdot u^{*-1} = 5.54 + \frac{1}{\kappa} \log(z^+)$ as described in Hussein and Martinuzzi (1996). The Reynolds number defined by the mean bulk velocity, the cube height and the molecular diffusion is $Re \approx 40000$.

The mean flow around the cube presents a set of five recirculating regions (Fig. 13-b). Each cube surface is associated with one of these regions: the A/B vortex separations in front of the cube which spread laterally in a horseshoe D , two vortices near side-walls E , one F on the roof and main arch vortex G downstream.

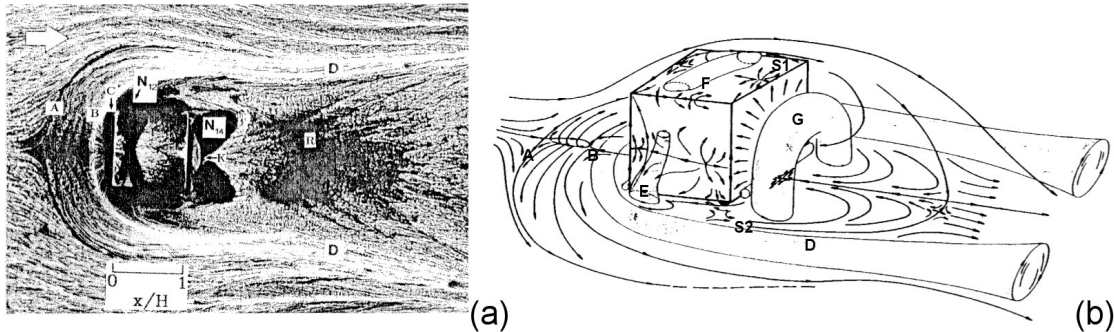


Figure 13. (a) Top visualization of the flow around a cube (Hussein and Martinuzzi, 1996); (b) Schematic representation of the time-average vortex structure around a cube (Martinuzzi and Tropea, 1993) and index of the recirculating regions.

Numerical details. The top and bottom surfaces, the cubic body are modelled by the IBM. A small value of the roughness length $z_0/H \approx 10^{-6}$ is imposed (low value to model a smooth interface, viscous scale intervention in the z^+ calculation). x (resp. y) is the stream-wise (resp. span-wise) direction. The stream-wise (resp. span-wise) direction is x (resp. y). The size of the grid is set as $(x, y, z) = (-24H : 8H, -4H : 4H, 0H : 2H)$ with a location of the cube center at $(\frac{H}{2}; \frac{H}{2}; \frac{H}{2})$. Three regular Cartesian meshes are employed with a respective space step $H/\Delta = [10; 20; 40]$. $x/H \in [-24; -4]$ is a region employed to model the fully turbulent character of the incoming flow. The incoming turbulent state is obtained by the IBM and a pseudo-recycling method inspired from the works of Lund (1998), Mayor et al. (2002) and Yang and Meneveau (2016) (not detailed here). The vertical profiles of the stream-wise velocity and turbulent intensity $\sqrt{u'^2}/U_b^2 \approx 2 \cdot 10^{-2}$ (Hussein and Martinuzzi, 1996) are recovered at $x/H \sim -4$. We mention that the turbulence generation should deserve more details but we prefer only to concentrate our comments in the cube wake.

Results. Figures 14-(a-b-c) show the time-average streamlines in the vertical symmetry plane of the cube obtained by MNH-IBM for the three space resolutions. The streamlines of the coarse, medium and fine resolution are respectively in red, green and blue colour. The discretization order of the fine resolution is close to that of most literature's LES except Shah and Ferziger (1997) who had used a far more precise grid near wall. The same figure obtained by the experimental investigation is given in Figure 14-d. The size of the front (resp. rear) region is characterized by the recirculating length x_f/H (resp. x_r/H).

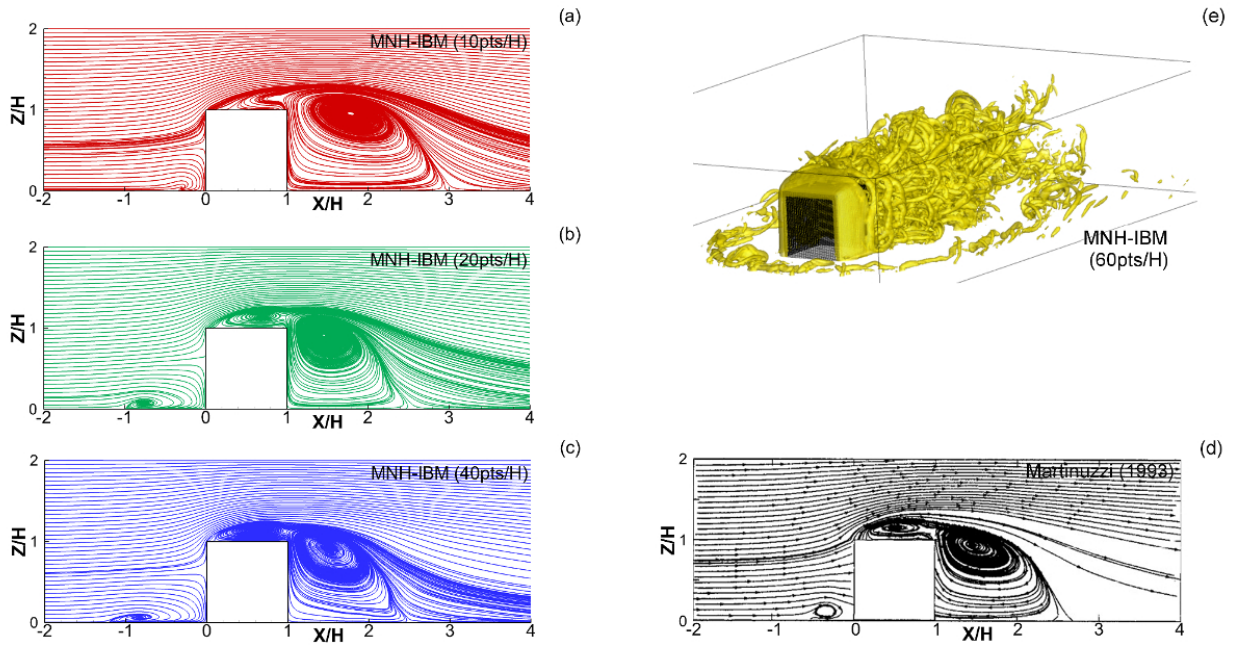


Figure 14. Vertical symmetry plane of the mean flow: (a-b-c) MNH-IBM time-average streamlines; (d) Streamlines observed by (Martinuzzi and Tropea, 1993); (e) MNH-IBM instantaneous visualization of the Q -criterion (Hunt et al., 1988).

x_r/H). The experiment gives $x_f/H \approx [1.04 : 1.05]$ and $x_r/H \approx [1.64 : 1.67]$. The literature's-LES reference results give the ranges $x_f/H \in [0.81 : 1.28]$ and $x_r/H \in [1.38 : 2.25]$. For the two finest resolutions (green and blue colour), the overall prediction of MNH-IBM recovers a consistent mean topologic structure. MNH-IBM obtains for the two finest resolutions $x_f/H \in [0.99 : 1.21]$ and $x_r/H \in [1.48 : 1.55]$. MNH-IBM does not capture as most of LES the two dividing lines A/B commented by Martinuzzi and Tropea (1993) but only captures a flattened vortex. However the bifurcation point near the rear edge and ground is not detected by MNH-IBM while this point was modelled in Rodi et al. (1997). This bifurcation point was also commented in Martinuzzi and Tropea (1993) even if their experimental uncertainty did not allow to visualize it in Fig. 14-d.

Figure 14-e shows an MNH-IBM instantaneous flow field with the Q -criterion (Hunt et al., 1988) and as the literatureLES reference results mentions, it presents a highly intermittent character clearly visible with the quasi-disappearance of the D horseshoe and G arch. A frequency f of vortex shedding dominates the highly-intermittent activity in the body wake bringing to the experimental Strouhal number $St = \frac{f \cdot H}{U_b} \approx 0.145$. A MNH-IBM energy spectrum (Discrete Fourier Transform of $w(t)$ in the body wake) find a peak $St \in [0.10 : 0.12]$ for all the studied resolutions and a $\sim -5/3$ energetic cascade slope for larger wave numbers (not shown). The St values obtained by MNH-IBM are slightly less than the experimental one but stays consistent with the $St \in [0.10 : 0.15]$ range of other LES.

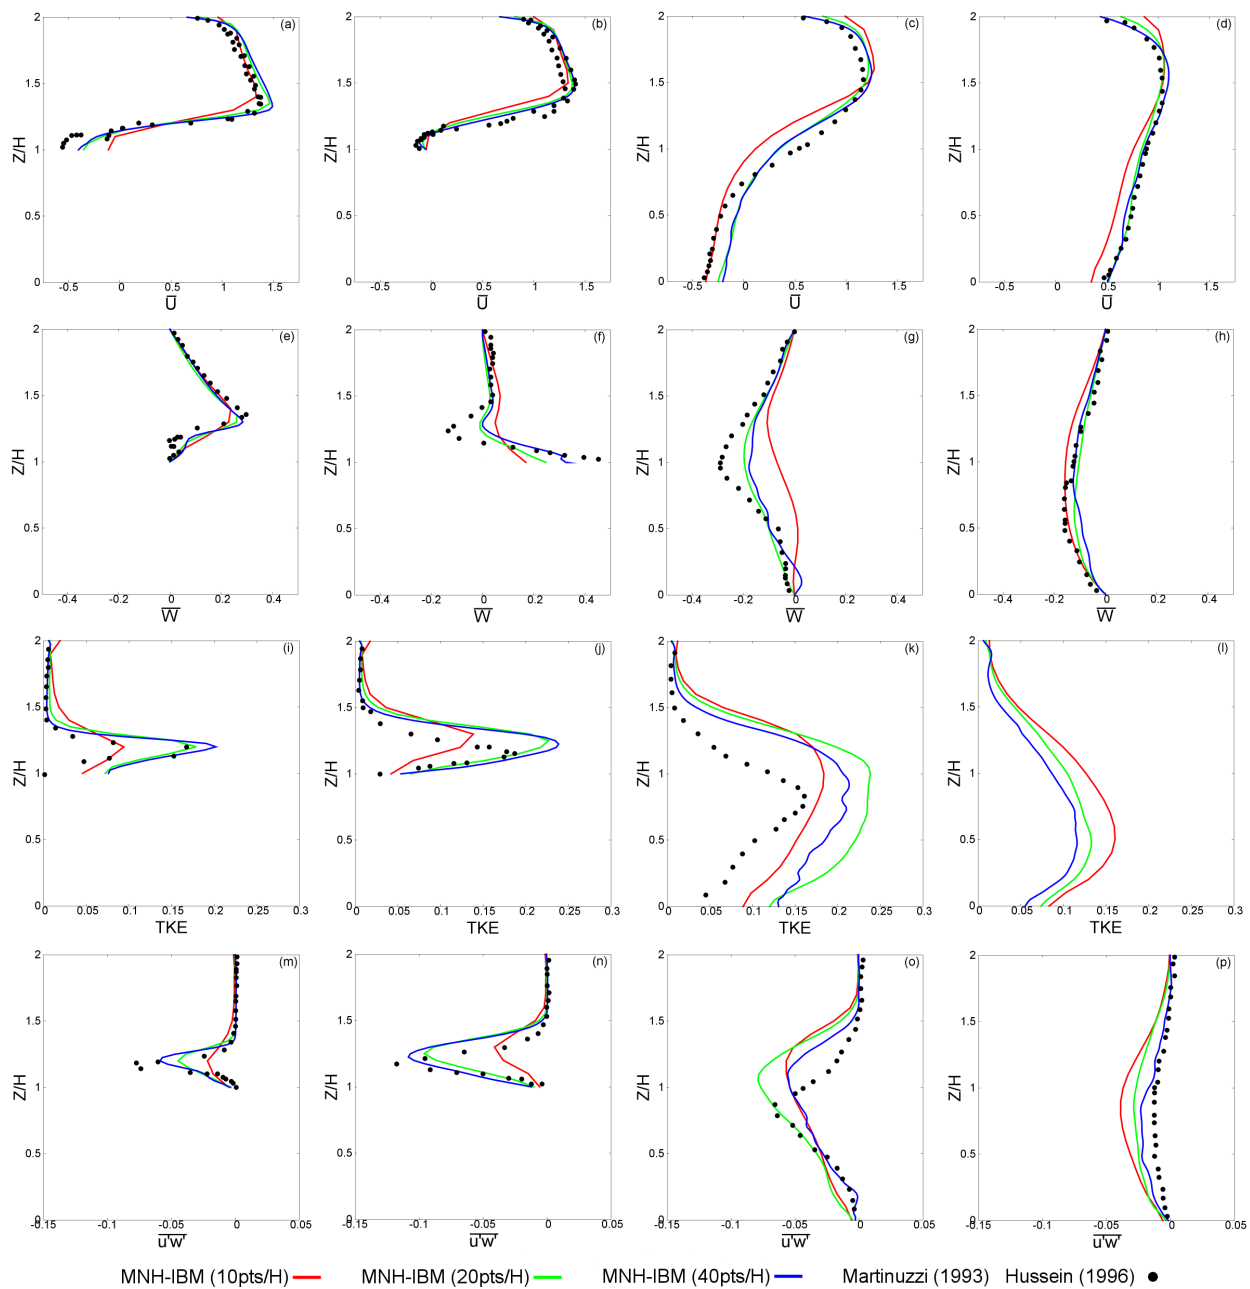


Figure 15. Mean vertical profiles of velocities (top), turbulent kinetic energy and Reynolds stress (bottom). The lines corresponds to the MNH-IBM results. The symbols are the Martinuzzi and Tropea (1993) data except for TKE (Hussein and Martinuzzi, 1996). The profiles are given at four longitudinal locations: (a-e-i-m) $x/H = 1/2$; (b-f-j-n) $x/H = 1$; (c-g-k-o) $x/H = 2$; (d-h-l-p) $x/H = 4$.

Still in the vertical symmetry plane of the mean flow, Figure 15 plots at four longitudinal positions $x/H = (1/2; 1; 2; 4)$ the vertical profiles of time-averaged quantities related to the steady (\bar{u} , \bar{w}) and unsteady (TKE, $\overline{u'w'}$) parts of the solution. The colour code corresponds to the spatial resolution ($10pts/H$ in red; $20pts/H$ in green; $40pts/H$ in blue). Note that the U_b bulk velocity was set to the unity and therefore presented variables in Figure 15 are dimensionless. In most of the sub-figures, the higher space resolution is the lower the gap with the experiment is. The top of Figure 15 brings to a similar conclusion with that of the literature's LES: the stream-wise velocity is well-recovered. The counterflow at the rear and roof of the cube near $(x/H; z/H) \approx (1; 1)$ informs about the existence of the bifurcation point $S1$ (Fig. 15-b). An underestimation appears on the counterflow at $(x/H; z/H) \approx (2; 0)$ and is frequently observed in the literature (Fig. 15-c). Some discrepancies are found on two \bar{w} -profiles (Fig. 15-f/g). Note that Shah and Ferziger (1997) and Krajnovic and Davidson (2002) highlight the difficulty to recover it. The turbulent kinetic energy and the Reynolds stress are correctly predicted at the cube roof (Fig. 15-i/j). The vertical profiles of TKE and $\overline{u'w'}$ downstream the cube show an overestimate tendency (Fig. 15-k/p/l). No experimental data is available on TKE at $x/H = 4$ (Fig. 15-l) but using the $\overline{u'^2}(x/H = 4)$ experimental value (not shown here) and the $\overline{u'^2}/\text{TKE}$ ratio obtained by MNH-IBM, we suspect that $\text{TKE}(x/H = 4)$ is still overestimated. This turbulence diagnosis are relatively similar to those of Farhadi and Rahnama (2006).

Sensitivity study. Some tests have shown a sensitivity of the solution with both the incoming turbulence and constants in the immersed wall-model. Indeed the existence of the small vortex near the saddle node $S1$ (Depardon et al., 2006) turns out to be strongly dependent of the inlet turbulence (the less the turbulent intensity is the bigger the size of this vortex is); the reattachment or not of the roof vortex F with the main arch G is also observed. This sensitivity follows the observations of Castro and Robins (1977) who studied the cube placed in a uniform or turbulent incoming flow. In the same way the existence of the vortex near the saddle node $S2$ (Frank, 1999) is dependent of the ground boundary condition. The $u^* \sqrt[3]{e} = K_{tke} \sqrt[4]{C_\mu}$ ratio and the z_0 roughness length fixed in the immersed wall-model (Sect. 3.3) impact the nature of the incoming turbulent state for which the surface shear plays an important role. To give a significant example and if a null-value of K_{tke} is applied on the channel surfaces (non-slip condition), x_f highly increases and the vortex at $S2$ appears. Otherwise K_{tke} and z_0 do not crucially affect the nature of the dynamic in the vicinity of the cube surfaces; the pressure gradient between front and back faces governs.

To conclude this section and despite the uncertainties of the inlet condition, MNH-IBM is in a good agreement with the experiments of Martinuzzi and Tropea (1993), Hussein and Martinuzzi (1996) and other LES using a resolution of about forty points per cube length. Even if the coarsest resolution loses a part of the expected physics, it maintains a suitable modelling of the largest structures of the flow. A parametric study on the inlet turbulence generation has led to fix $K_{tke} \approx 2$ in Equation (24).

5.2 The Mock Urban Setting Test experiment (MUST)

The MUST is an experimental campaign organized during the early Autumn 2001 in the Utah's West desert (Biltoft, 2001, 2002). Its objective was to quantify the dispersion of a passive tracer (propylene) in a dry atmospheric context over a topography reproducing a near-urban canopy. The main interest lies in the similitude between this experiment and a pollution episode due

to a toxic gas propagation over a city with high population densities. It provides extensive measurements of meteorological variables and scalar dispersion informations.

Physical details. The near-regular array is composed of 120 containers. Figure 16 gives a photograph and a picture of the topography. The containers are equivalent in volume and shape. Their spatial dimensions are $(L_x, L_y, L_z) = \sim (2.4, 12.2, 2.5)m$ and the horizontal distance between containers is $\mathcal{O}(10)m$. Following the table II in Yee and Bilotft (2004), the 2681829 case (the 25/09/2001 at 18h29) is selected. The Monin-Obukhov length is $L_{mo} \approx 28000m$ and the stability condition is supposed neutral; the buoyancy effects and the sensible heat flux are negligible in regard of the inertia effects and the turbulent shear. The incoming flow shows a mean horizontal angle with the containers layout (green arrow, Fig. 16-b). The MNH-IBM results are compared to the experimental measurements reachable at several altitudes (4m, 8m, 16m) at a S (South) tower and at the main T tower placed in the array centre. The ~~towers location is~~ locations of the towers are indicated in Fig. 16-b. A roughness length $z_0 = 0.045m$ is given by the experience and related to the surrounding desert vegetation.

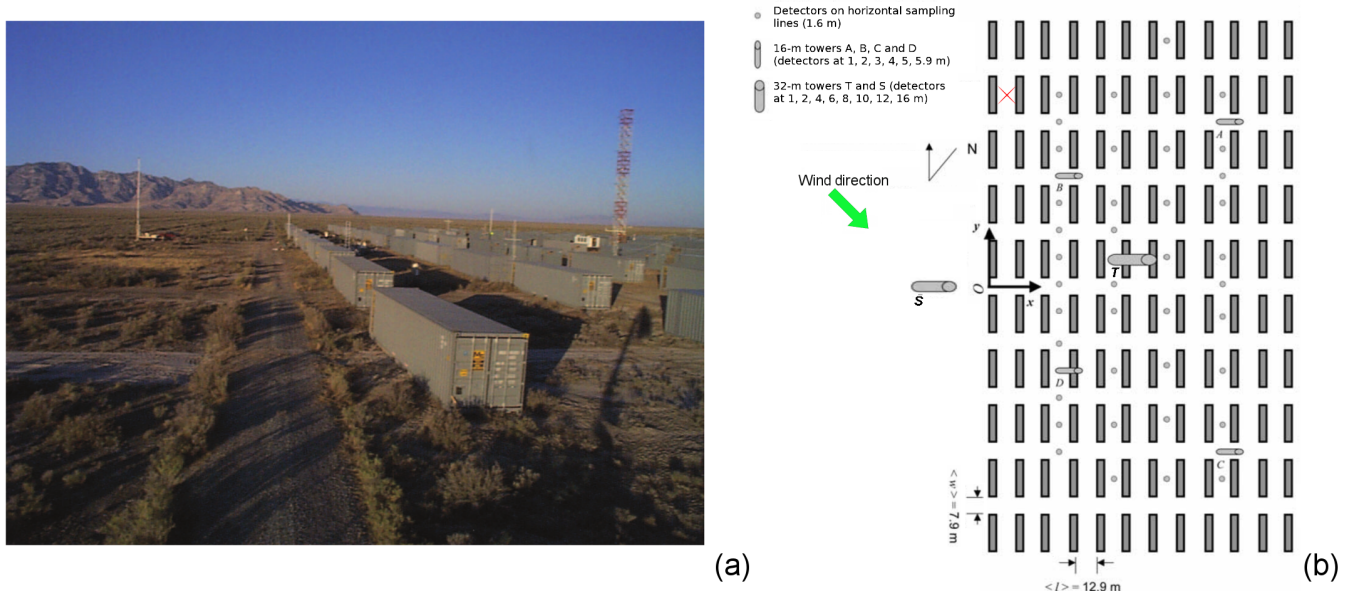


Figure 16. (a) Photograph of the MUST containers in the Utah's West desert; (b) Schematic representation of the containers layout. The location of the concentration (detectors) and wind sensors (S and T towers) are indicated, as well as the position (red cross) of the pollutant release and the direction of the incoming flow (green arrow) of the case 2681829. Source: Bilotft (2001) and Yee and Bilotft (2004).

10 *Numerical details.* The externalized scheme SURFEX (Masson et al., 2013) models the ground friction. LSF is generated to represent the topography and IBM is used to model the containers. The smallest characteristic container length is discretized by $\mathcal{O}(10)$ cells. The mesh is a Cartesian and regular grid for $z < 10m$ with a space step $\Delta = 0.2m$. Above ten meters, the vertical space step is released in geometric progression of 1.08 ratio. The altitude of the numerical domain top is about 8 times the container height.

15 The distance between the horizontal limit of the computational domain and the array is about 20 times the container height. The large scale flow is forced by an open boundary condition. A mean horizontal angle of -41° with the x direction is fixed for all altitudes; note that the low angle deviation and the turbulence observed upstream the containers in the experiment are not numerically considered. Following the experimental data given at the S tower (Fig. 17-a, blue symbols) and assuming a log-law $|\bar{\mathbf{u}}| = \frac{u^*}{\kappa} \log(1. + z/z_0)$, a least-square regression estimates a friction velocity $u^* = 0.71 m.s^{-1}$ and allows to build the vertical profile of the mean incoming flow (Fig. 17-a, blue line). This u^* value is ~~comforted by~~ close to the experimental one

5 $u_{exp}^* = 0.68 m.s^{-1}$ found by a sonic anemometer at the feet of the S tower. The same inlet condition is used in the numerical studies of Hanna et al. (2004), Milliez and Carissimo (2007) and Donnelly et al. (2009). Note that an additional term $\mathcal{O}(L_{mo}^{-1})$ appears in their formulation but is negligible in the 2681829 case.

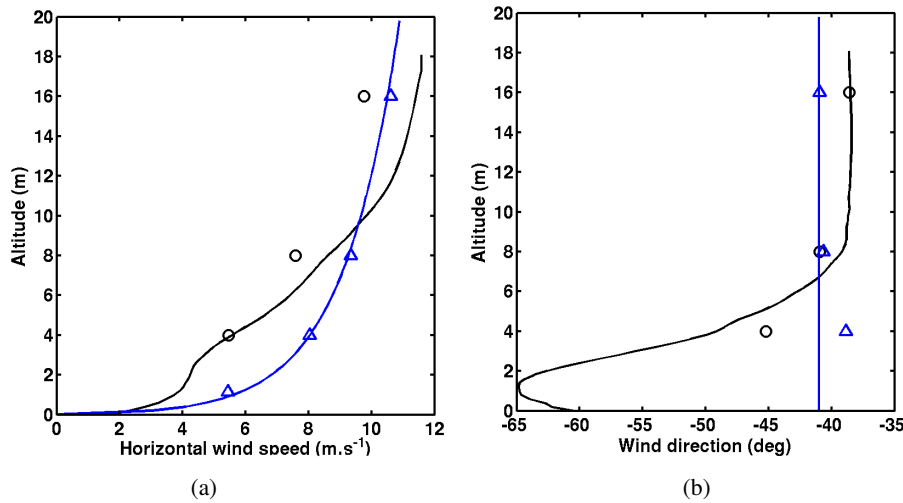


Figure 17. Mean vertical profiles in the MUST experiment: (a) $|\bar{\mathbf{u}}|$ horizontal velocity; (b) $\text{atan}(\bar{v}/\bar{u})$ wind direction at the S (blue) and T (black) towers. The symbols (resp. lines) are the Yee and Biltoft (2004) experimental measurements (resp. MNH-IBM results).

Results. The black line (MNH-IBM) and symbols (Yee and Biltoft, 2004) of Figure 17-a (resp -b) show the impact of the near-urban canopy on the vertical profile of the $|\bar{\mathbf{u}}|$ (resp. wind angle) in the core of the array (T tower). Not surprisingly the

10 canopy induces a global slowdown of $|\bar{\mathbf{u}}|$ near the ground and up to $z \lesssim 8m$. A decrease of the mean horizontal wind angle is found at the same altitudes. This deviation is related to the containers orientation which tends the flow to be aligned with the y direction. The same pattern is discussed in Milliez and Carissimo (2007). A wind acceleration and an increase of the wind angle are observed by MNH-IBM for $z \gtrsim 8m$ as in LES results of König (2013) and Dejoan et al. (2010) on similar MUST cases. This few degrees deviation is observed by the experiment but not the acceleration. A part of this acceleration

15 may be explained by a Venturi effect and a too closed top limit of the computational domain (numerical confinement, under investigation*).

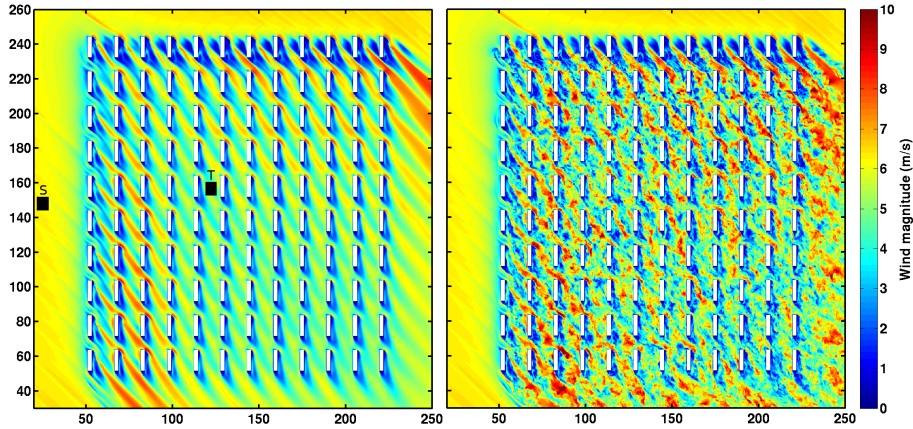


Figure 18. Wind at the horizontal cut at $z = 1.6m$: (a) Time-averaged on 200s; (b) Instantaneous at $t = 200s$. The black squares indicate the location of the T and S towers (MNH-IBM results)

Figure 18-a (resp. Fig. 18-b) illustrates the time-averaged horizontal wind field $|\bar{\mathbf{u}}|$ (resp. $|\mathbf{u}|$ at $t = 200s$) at the 1.6m altitude. These figures highlight the fact that the incoming flow is not turbulent in the simulation. This assumed gap constitutes a perspective (Camelli et al., 2005) not directly linked to IBM. It allows also to introduce here some comments on the turbulence state. The atmospheric turbulence is dependent of the roughness length (z_0 considered as constant due to the homogeneous and flat desert over few miles upstream). The first container rows are the scene of the boundary layer transition and act as a region of strong roughness change. The turbulence observed in the urban-like canopy has two origins: the incoming turbulence and that of induced by the containers presence. The contribution of both turbulence types varies in function of the altitude and distance to the first row.

The mean kinetic energy $E_k = \frac{1}{2}(\overline{u^2} + \overline{v^2} + \overline{w^2})$, friction velocity $u^* = \sqrt[4]{\overline{u'w'^2} + \overline{v'w'^2}}$ and turbulent kinetic energy $TK E = \frac{1}{2}(\overline{u'^2} + \overline{v'^2} + \overline{w'^2})$ are estimated at the T tower and indicated in Table 2. All the variables are in good agreement with the experiment at $z = 4m$ (about two times the container height). The friction velocity at $z(T) = 4m$ is at least two times greaterlarger than $u_{exp}^*(S) = 0.68m s^{-1}$ observed at the S tower feet. That increase is the signature of the turbulence developed by the urban-like canopy. Looking after the results at $z(T) = 8m$ and $z(T) = 16m$, the higher the altitude is the more discrepancies appear between the experimental and numerical results. The experimental measurement of the friction velocity at $z = 16m$ is closed to the upstream value.

The Discrete Fourier Transform of the u temporal evolution (Fig. 19) at $z(T) = (4; 8)m$ shows the coherence between the energetic cascade of the experimental investigations and that of the numerical ones. At $z(T) = 16m$, MNH-IBM underestimates the unsteady part of the solution for all wave numbers. The same behaviour is observed on v and w (not shown here).

The MNH-IBM results are consistent with the experimental observations below $z(T) \lesssim 10m$. This well-modelling induces that the turbulence is mostly due to the container wakes upstream the T tower and not to the incoming turbulence (not modelled in the simulation). The influence of the atmospheric turbulence grows with the altitude and MNH-IBM diverges with the

	$E_k(m^2.s^2)$		$TKE(m^2.s^2)$		$u^*(m.s^{-1})$	
	MNH-IBM	Yee and Bilitoft (2004)	MNH-IBM	Yee and Bilitoft (2004)	MNH-IBM	Yee and Bilitoft (2004)
z=04m	15.3	14.1	3.33	3.78	1.14	1.08
z=08m	36.7	29.7	1.70	3.28	0.68	0.83
z=16m	65.8	48.5	0.02	1.75	0.02	0.60

Table 2. Kinetic energy, turbulent kinetic energy and friction velocity obtained by the experimental (Yee and Bilitoft, 2004) and numerical (MNH-IBM) investigations at three altitudes of the tower T.

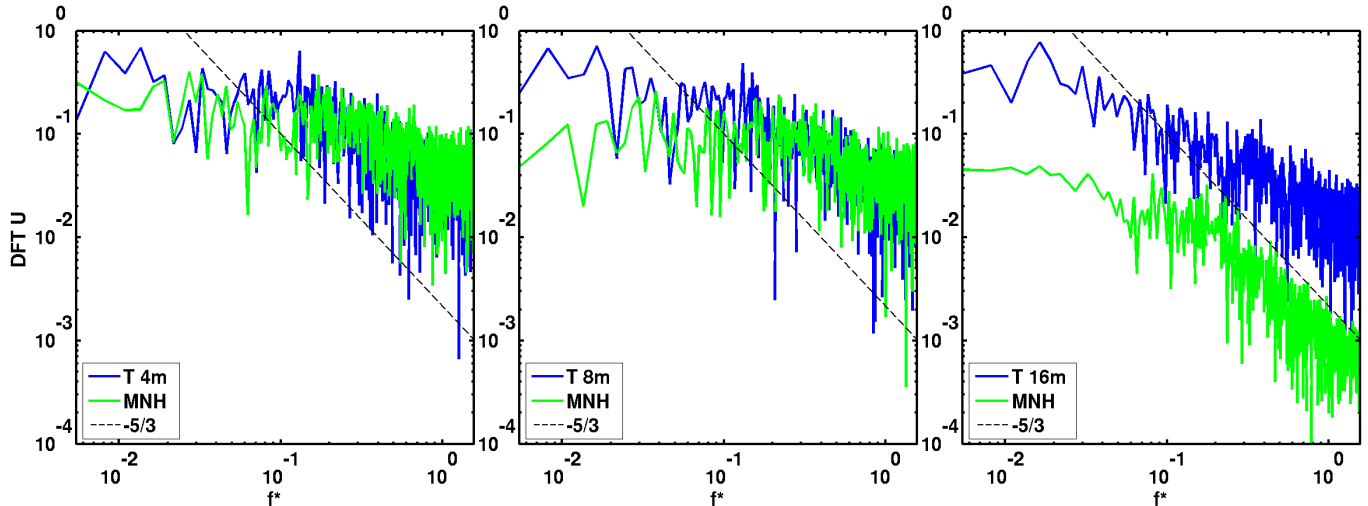


Figure 19. Spectrum of the measured (blue line) and modelled (green line) u wind component at the T tower at $z = (4; 8; 16)m$. f^* is dimensionless as a Strouhal number using $|\mathbf{u}|_{inlet}(z = 2.5m)$ and $z = 2.5m$ the container length.

experiment. This divergence for $z(T) \gtrsim 10m$ leads to think that the thickness of containers influence is about 4-5 times the height of the urban-like canopy. This MUST case is the subject of ongoing works in our team (?).

6 Conclusions and perspectives

This study details the first implementation of an immersed boundary method (IBM) in the atmospheric Meso-NH (MNH) model currently based on mathematical formulations written for structured grids. The MNH-IBM aim is to explicitly model the fluid-solid interaction in the surface boundary layer developed over grounds presenting complex topographies such as cities or industrial sites.

A LevelSet function (Sussman et al., 1994) characterizes the geometric properties of the fluid-solid interface. Two original approaches of the (GCT) Ghost-Cell (Tseng and Ferziger, 2003) and (CCT) Cut-Cell Techniques (Udaykumar and Shyy,

1995) are implemented to correct the MNH numerical schemes. A newly proposed GCT recovers the fluid information in several image points presenting a distance to the interface independent of the ghost's distance. The CCT consists of a new finite volume approach of fluxes balance near the immersed interface. The GCT is applied to the numerical schemes based on explicit time-integration and the CCT is employed in the implicit resolution of the Poisson equation satisfying the incompressibility hypothesis. The adaptation and use of iterative procedures solve the pressure problem without any modification to the inverted matrix. The turbulence problem is closed at the fluid-solid interface by a pragmatic LES-RANS formulation based on the subgrid turbulent kinetic energy and the length of the smallest energetic eddies.

The pressure solver, adapted to the IBM and isolated from the rest of MNH, is used to model potential flows around several obstacles. Compared to analytical and theoretical solutions, the numerical results demonstrate the ability of the IBM adaptation to ensure that the momentum is preserved and the continuity equation is respected. Non-dissipative flows are simulated to test the IBM forcing of the wind advection scheme (the impact of interpolations collected in Franke (1982), classical and novel GCT comparison and numerical diffusion near interface). ~~These tests validate the proposed GCT 'three images/ghost points', the use of an inverse distance weighting interpolation near the interface and a trilinear interpolation far from the interface and the modelling of the advection term near the fluid-solid interface by a 2nd-order centered scheme associated with an artificial viscosity calibrated after comparisons with a 3rd-order WENO scheme.~~ These tests validate the proposed GCT 'three images/ghost points' using an inverse distance weighting (resp. trilinear) interpolation near (resp. far from) the interface. The modelling of the advection term near the fluid-solid interface is ensured by a 2nd-order centered scheme associated with an artificial viscosity. The artificial viscosity is calibrated after comparisons with a 3rd-order WENO scheme. With these numerical choices, MNH-IBM demonstrates its ability to model wake instabilities past a circular cylinder placed in a viscous fluid. Then Large-Eddy-Simulations of turbulent flows around bodies with sharp edges and corners are executed (i.e. a cube placed in a channel (Martinuzzi and Tropea, 1993) and a near-neutral atmospheric application over an array of containers (Biltoft, 2001)). These two LES validate the proposed immersed wall-model, switching the characteristic space scale defining the turbulent Reynolds number between one obtained by either a viscous length scale (the cube case) or a roughness length (the containers case).

Future work. This study constitutes a first robust step towards a better understanding of the interactions between 'Weather and Cities' and better predictions of such interactions. The idealized character of the physical cases approached here offers some insights. One improvement would consist of a generalization of the IBM writing to terrain-following coordinates (Gal-Chen and Somerville, 1975) allowing for the simulation of high-curvature bodies in the presence of non-flat grounds. In the run-up of the resolution of multi-scales problems, the consistency with grid nesting (Stein et al., 2000) would be pertinent as well as the coupling to a drag model (Aumond et al., 2013). In the current paper, 'simple' bodies are investigated; the modelling of real houses and buildings with arbitrary shape in close proximity to each other is ongoing with works dedicated to a brief and intense pollutant episode due to a factory explosion in 2001 over Toulouse (?) assuming a dry neutral case with a non-reactive gas dispersion. Such hypotheses involve a broad range of physical phenomena requiring numerical compliances with IBM including the chemical reactions, phase changes and radiative effects. Such compliances would allow the access to a large variety of atmospheric situations.

7 Code availability

35 The immersed boundary method has been implemented in the 5.2 version of the Meso-NH code. This reference version is under the CeCILL-C license agreement and freely available at <http://mesonh.aero.obs-mip.fr/mesonh52>. The source files dedicated to IBM are currently accessible on a CERFACS server (contact the corresponding author). It will be integrated in a future Meso-NH version.

Acknowledgements. We thank for stimulating and fruitful discussions: J. Magnaudet (Institut de Mécanique des Fluides, IMFT, Toulouse),
5 Y. Hallez (Laboratoire de Génie Chimique de Toulouse, LGC, Toulouse), J.-L. Pierson (Institut Français [Pétrolier du Pétrole](#) 'Energies Nouvelles', IFPEN, Lyon), J.-L. Redelsperger (Laboratoire de Physique des Océans, IFREMER, Brest), J.-P. Pinty and J. Escobar (Laboratoire d'Aérodynamique, LA, Toulouse), O. Thouron, T. Lunet, L. Giraud, I. d'Ast and G. Dejean (Centre Européen de Recherche et Formation Avancée en Calcul Scientifique, CERFACS, Toulouse). The simulations were performed on the Neptune/Nemo-CERFACS supercomputers, on the Occigen-CINES Bull cluster (c2016017724 and a0010110079 GENCI projects). A part of this work was supported by the 'Région Midi-
10 Pyrénées' funding.

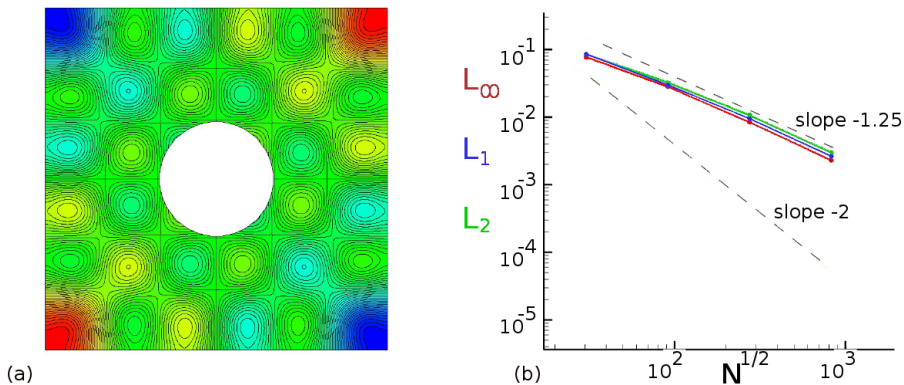


Figure 20. Taylor vortices around a cylinder: (a) illustration; (b) L_∞ , L_1 and L_2 norms function of the space resolution.

Appendix A: Space convergence of the pressure solver

Array of vortices. A Poisson equation solution is investigated (Fig. 20-a) imposing in the RHS of Equation (5) the divergence $\nabla \cdot (\bar{\mathbf{u}}^*) = -\pi(l^2 + m^2)\cos(\pi lx)\sin(\pi my)$ where $l = m = cste$. The error norms ($L_p = \sqrt[p]{\sum |P_n - P_t|^p}$ where P_n is the numerical pressure and P_t the theoretical one) are estimated in presence or not of an immersed cylindrical body (Fig. 20). The space second-order of the pressure solver is recovered without IBM. The order decreases with IBM and stays consistent regarding the $L_{p=(\infty;1;2)}$ slopes. Note that an immersed square or sphere give similar results.

5

Agnesi hill. The irrotational solution around two 2D bell shape interfaces is investigated with IBM and the Boundary-Fitted Method (BFM, terrain-following coordinates). The topography is characterized by a height h_a and a shape $h(x) = \frac{h_a}{1 + (\frac{k_a \cdot x}{h_a})^2}$ ($k_a = 4$, bell 1; $k_a = 8$, bell 2). The bells slope is here arbitrarily and respectively described as gentle or steep. Figure 21 shows the pressure contours obtained with IBM (left) and BFM (right) for a gentle (top) and a steep (bottom) shape. The minimal pressure value is localized at the top of each bell and goes to zero far from this location. The reference BFM and IBM simulations with the fine resolution ($N = 160$ nodes per h_a , red colour) show a good agreement for each hill. The blue (resp. green) colour corresponds to a coarser mesh employing $N/3$ (resp. $N/9$) nodes per h_a . Weak differences appear between the N and $N/3$ meshes for both IBM and BFM revealing a good space convergence (Fig. 21-a/b). Numerical errors are visible with IBM near the interface but the Venturi effect is well-modelled. Differences become more significant with the $N/9$ mesh especially with the BFM-BELL2 presenting the highest curvature value (Fig. 21-d). IBM appears less accurate than BFM when the ground presents low curvature in regard of the space resolution. Otherwise, IBM seems more pertinent than BFM to model high interfaces such as sharp edges or corners. The minimum pressure which could reach to $-\infty$ is smoothed by IBM and allows the pressure solver not to diverge. Note that Lundquist et al. (2010, 2012) using compressible WRF model observe similar behaviors.

15

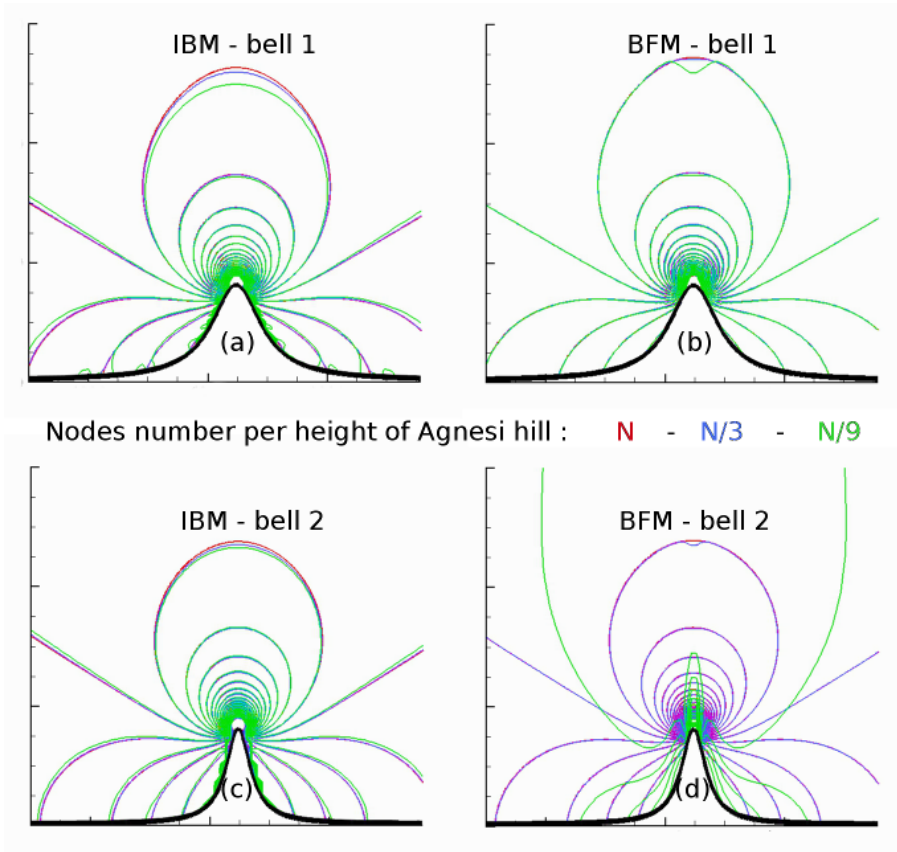


Figure 21. Potential flow function of the space resolution (colour code) plotting the pressure contours around two bells (top: BELL1, gentle slope; bottom: BELL2, steep slope) and obtained with IBM (left) and the boundary-fitted method (right).

	Advection scheme	Space order	Intervention location	Artificial diffusion
CEN4	centered	4	far from the interface	no
CEN2	centered	2	near the interface	yes
WEN3	WENO	3	near the interface	no

Table 3. Summary of the used mean wind advection scheme (WENO = Weight-Essential-Non-Oscillatory).

20 Appendix B: Inviscid flow around a circular cylinder

For most atmospheric applications, the region size where the fluid molecular viscosity ν_f influences the dynamic is sufficiently small to be considered as negligible (Sect. 2.3). Solving the Euler equations, the impact of the numerical diffusion could be significant especially near the fluid-solid interface. The adopted strategy with IBM is to model the advection term with a low-order scheme near the interface (Sect. 3). The order decrease in IBM is not essential but allows to limit the number of

5 ghosts in the solid region, limit the communications during a parallel computation. Indeed, the chosen implementation implies that the associated images and ghosts points have to be localized in the integration volume of each processor. The WEN3 third-order Weight-Essential-Non-Oscillatory and CEN2 second-order centered schemes are available in MNH. Far from the interface a CEN4 fourth-order centered scheme is employed. Table 3 summarizes the advection scheme nomenclature.

The vorticity equation for a 2D inviscid flow reveals no production in time. The numerical vorticity production at the immersed surface of a cylindrical body is here studied initializing the simulation with the potential solution. To fit as well
 5 the potential solution, a non-trivial condition is employed on the tangent velocity $\frac{\partial^3 \bar{u}_t}{\partial n^3} = 0$. Expecting a numerical vorticity sufficiently controlled to avoid the flow separation, the effect of the artificial diffusion $\nu_{art} \Delta \bar{\mathbf{u}}$ injected with CEN2 is compared to the WEN3 intrinsically diffusive behaviour. Furthermore this study had estimated the 3D interpolations impact (not detailed here).

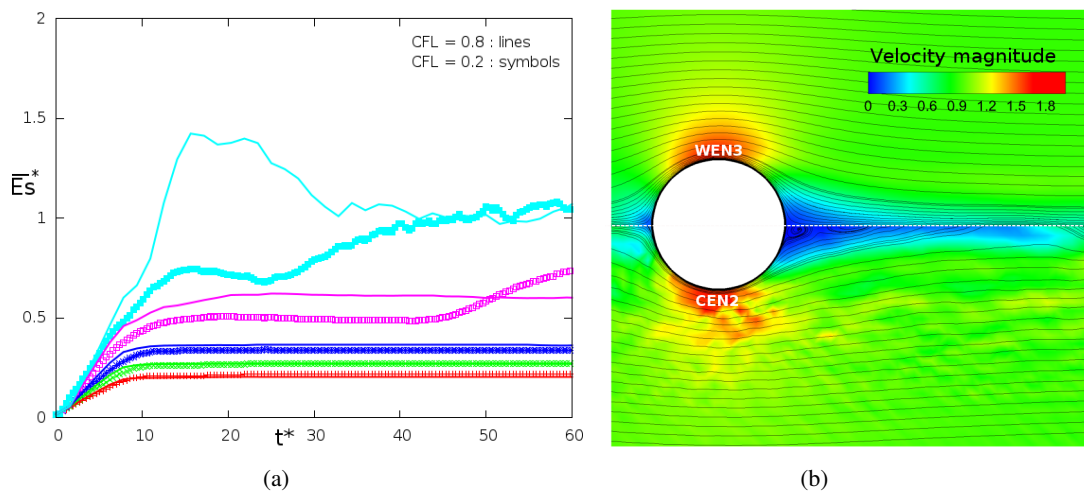


Figure 22. Solving the Euler equations: (a) Vorticity production $\bar{E}_s^*(t^*)$ influenced by the Courant number ($CFL=0.8$, line; $CFL=0.2$, symbol) and by the ν_{art} artificial viscosity ([red; green; blue; purple; cyan] respectively $\nu_{art} = \nu_{art}^{ref} [1; 2; 4; 16; 256]^{-1}$) using an advection CEN2 second-order centered scheme near the interface; (b) Velocity magnitude field obtained with a WEN3 third-order Weight-Essential-Non-Oscillatory scheme (top) and CEN2+ $\nu_{art}^{ref} 256^{-1}$ (bottom). CEN4 is the advection scheme used far from the interface. The mesh is the coarser one (MESH1).

Figure 22-a plots the evolution in time of the enstrophy $\bar{E}_s^*(t^*) = \frac{D_{cyl}}{U_\infty \mathcal{V}_f} \int_{\mathcal{V}_f} |\nabla \times \bar{\mathbf{u}}| d\mathcal{V}$ depending on the Δt time step and
 10 ν_{art} using CEN2 near the interface (U_∞ the velocity of the incoming flow, \mathcal{V}_f the integration volume in the fluid region). The enstrophy increases in time and reaches a mean value when the produced vorticity near the interface is evacuated from the numerical domain and in the body wake. Except the simulations with low artificial diffusion (symbols/curves in cyan/purple colours), the vorticity production is weakly dependent of the physical time and CFL Courant number (symbols/curves in red/green/blue colours). It induces ν_{art} proportional to $U_\infty \Delta x \approx \mathcal{O}(\frac{\Delta x^2 CFL}{\Delta t})$. A reference value of the artificial viscosity is
 15 also defined as $\nu_{art}^{ref} = \frac{\Delta x^2}{\Delta t} CFL$.

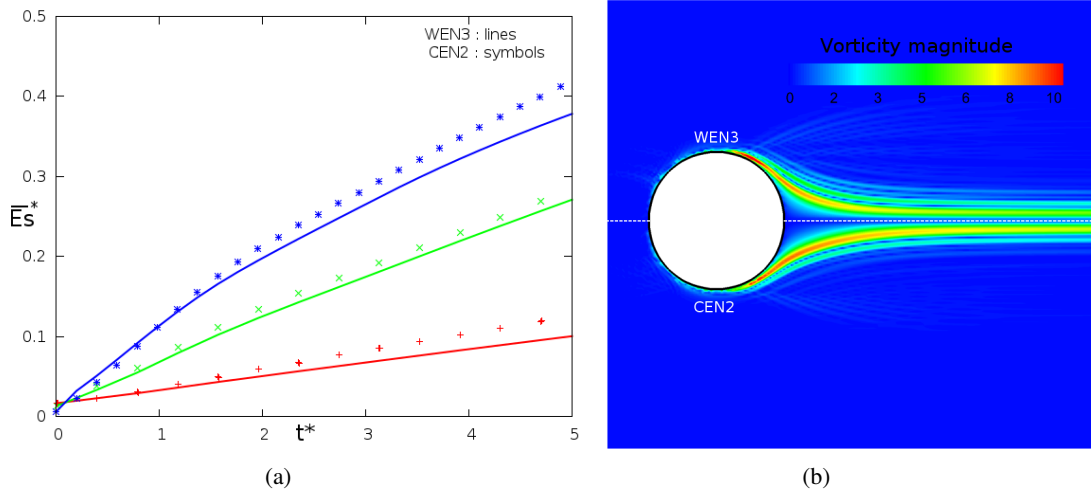


Figure 23. Solving the Euler equations: (a) Influence of the space resolution (red: MESH1; green: MESH2; blue: MESH3) on the vorticity production $\bar{E}_s^*(t^*)$ when the near-interface advection is modelled by WEN3 (line) and CEN2+ ν_{art}^{ref} (symbol); (b) Vorticity magnitude field obtained by WEN3 (top) and CEN2+ ν_{art}^{ref} (bottom).

Figure 22-b illustrates the vorticity field in the vicinity of the interface between the intrinsically diffusive WEN3 and CEN2+ ν_{art} with $\nu_{art} = \nu_{art}^{ref} 256^{-1}$. The streamlines are maintained without detachment near the interface with WEN3. Otherwise the CEN2 solution with low artificial diffusion presents numerical instabilities and vortex shedding.

Figure 23-a plots the enstrophy evolution for three meshes (colour code) for WEN3 (lines) and CEN2+ ν_{art} with $\nu_{art} = \nu_{art}^{ref}$ (symbols). MESH1 (10 nodes per D_{cyl}), MESH2 (20 nodes per D_{cyl}) and MESH3 (40 nodes per D_{cyl}) are respectively the coarse, intermediate and fine mesh. The border of the numerical domain is always distant from the cylinder of more than 5 $10R_{cyl}$. The CEN2+ ν_{art}^{ref} vorticity production appears fairly close to the WEN3's one for the three space resolutions. Figure 23-b corroborates the last comment presenting the vorticity contours dimensionless by $\frac{D}{U_\infty}$. A suitable ν_{art} combined with CEN2 choice is also in the range of the too diffusive WEN3 results and the growth of numerical instabilities. CEN2+ $\nu_{art}^{ref} 4^{-1}$ is retained as the advection scheme of the mean wind near an immersed interface.

References

- 10 Allwine, K. J., Shinn, J. H., Streit, G. E., Clawson, K. L., and Brown, M.: Overview of URBAN 2000: A multiscale field study of dispersion through an urban environment, *Bulletin of the American Meteorological Society*, 83(4), 521-536, 2002.
- Anderson, W.: An immersed boundary method wall model for high Reynolds number channel flow over complex topography, *International Journal for Numerical Methods in Fluids*, 71.12, 1588-1608, 2013.
- Angot, P., Bruneau, C. H., and Fabrie, P.: A penalization method to take into account obstacles in incompressible viscous flows, *Numerische Mathematik*, 81(4), 497-520, 1999.
- 5 Auguste, F.: *Instabilités de sillage et de trajectoire dans un fluide visqueux*, Ph.D. thesis, University of Toulouse, 2010.
- Aumond, P., Masson, V., Lac, C., Gauvreau, B., Dupont, S., and Berengier, M.: Including the drag effects of canopies: real case large-eddy simulation studies, *Bound.-lay. Met.*, 1-16, 2013.
- Batchelor, G. K.: *An introduction to fluid dynamics*, Cambridge university press, 2000.
- 10 Bernadet, P.: The pressure term in the anelastic model: A symmetric elliptic solver for an Arakawa C grid in generalized coordinates, *Mon. Wea. Rev.*, 123, 2474-2490, 1995.
- Biltoft, C. A.: Customer report for mock urban setting test, DPG Document Number 8-CO-160-000-052. Prepared for the Defence Threat Reduction Agency, 2001.
- Biltoft, C. A., Yee, E., and Jones, C. D.: Overview of the Mock Urban Setting Test (MUST), In *Proceedings of the Fourth Symposium on the Urban Environment* (pp. 20-24), 2002.
- 15 Bouchon, F., Dubois, T., and James, N.: A second-order cut-cell method for the numerical simulation of 2D flows past obstacles, *Computers and Fluids*, 65, 80-91, 2012.
- Braza, M., Chassaing, P., and Minh, H. H.: Numerical study and physical analysis of the pressure and velocity fields in the near wake of a circular cylinder, *J. Fluid Mech.*, 165, 79-130, 1986.
- 20 Bredberg, J.: On the wall boundary condition for turbulence models, Chalmers University of Technology, Department of Thermo and Fluid Dynamics. Internal Report 00/4. Goteborg, 2000.
- Brennen, C. E.: *A Review of Added Mass and Fluid Inertial Forces*, Naval Civil Engineering Laboratory, Port Hueneme, CA. CR 82.010, 1982.
- Breuer, M., Lakehal, D., and Rodi, W.: Flow around a surface mounted cubical obstacle: comparison of LES and RANS-results, *Computation of Three-Dimensional Complex Flows*, 22-30, 1996.
- 25 Businger, J. A., Wyngaard, J. C., Izumi, Y., and Bradley, E.: Flux profile relationship in the atmospheric surface layer, *J. Atmos. Sci.*, 28, 181189, 1971.
- Camelli, F., Lohner, R., and Hanna, S.: VLES study of MUST experiment, 43rd AIAA Aerospace Sciences Meeting and Exhibit (43rd), 2005.
- 30 Cai, S.-G., Ouahsine, A., Favier, J., and Hoarau, Y.: Moving immersed boundary method, *Int. J. Numer. Methods Fluids*, 85(5), 288-323, 2017.
- Capizzano, F.: Turbulent wall model for immersed boundary methods, *AIAA Journ.*, 49.11, 2367-2381, 2011.
- Carpenter, K. M.: Note on the paper "Radiation conditions for lateral boundaries of limited area numerical models, *Quart. J. Roy. Meteor. Soc.*, 110, 717-719M, 1982.

- 35 Carpenter Jr, R. L., Droegemeier, K. K., Woodward, P. R., and Hane, C. E.: Application of the piecewise parabolic method to meteorological modeling, *Mon. Wea. Rev.*, 118(3), 586-612, 1990.
- Castro, I. P., and Robins, A. G.: The flow around a surface-mounted cube in uniform and turbulent streams, *J. Fluid Mech.*, 79(02), 307-335, 1977.
- Clarke, D. K., Hassan, H. A. and Salas, M. D.: Euler calculations for multielement airfoils using Cartesian grids, Master's thesis, North Carolina State University, 1986.
- 5 Clawson, K. L., Carter, R. G., Lacroix, D. J., Biltoft, C. A., and others: Joint Urban 2003 (JU03) SF6 atmospheric tracer field tests, US Department of Commerce, National Oceanic and Atmospheric Administration, Air Resources Laboratory, 2005.
- Colella, P., and Woodward, P. R.: Application of the Piecewise Parabolic Method to meteorological modeling, *J. Comput. Phys.*, 54, 174-201, 1984.
- Coutanceau, M., and Bouard, R.: Experimental determination of the main features of the viscous flow in the wake of a circular cylinder in
10 uniform translation. Part I- Steady flow, *J. Fluid Mech.*, 79(02), 231-256, 1977.
- Craft, T., Gant, S., Gerasimov, A., Iacovides, H., and Launder, B.: Wall Functions Strategies for Use in Turbulent Flow CFD, *Heat transfer*, 1, 3-14, 2002.
- Cuxart, J., Bougeault, P., and Redelsperger, J.-L.: A turbulence scheme allowing for mesoscale and large-eddy simulations, *Quart. J. Roy. Meteor. Soc.*, 126(562), 1-30, 2000.
- 15 Dejoan, A., Santiago, J.-L., Martilli, A., Martin, F., and Pinelli, A.: Comparison between large-eddy simulation and Reynolds-averaged Navier-Stokes computations for the MUST field experiment. Part II: effects of incident wind angle deviation on the mean flow and plume dispersion, *Bound.-Lay. Met.*, 135(1), 133-150, 2010.
- Depardon, S., Lasserre, J. J., Brizzi, L. E., and Borée, J.: Instantaneous skin-friction pattern analysis using automated critical point detection on near-wall PIV data, *Measurement Science and Technology*, 17(7), 1659, 2006.
- 20 Donnelly, R. P., Lyons, T. J., and Flassak, T.: Evaluation of results of a numerical simulation of dispersion in an idealised urban area for emergency response modelling, *J. Atmos. Env.*, 43-29, 4416-4423, 2009.
- Durran, D. R.: Improving the anelastic approximation, *J. Atmos. Sci.*, 46, 1452-1461, 1989.
- Farhadi, M., and Rahnama, M.: Large eddy simulation of separated flow over a wall-mounted cube, *Scientia Iranica*, 13(2), 124-133, 2006.
- Frank, W.: Numerical Simulation And Verification Of The Flow Around A Surface Mounted Cubic Body Placed In A Fully Developed
25 Turbulent Channel Flow, *WIT Transactions on Modelling and Simulation*, 22, 10, 1999.
- Franke, R.: Scattered data interpolation, tests of some methods, *Mathematics of computation*, 38(157), 181-200, 1982.
- Gal-Chen, T., and Somerville, R. C.: On the use of a coordinate transformation of the Navier-Stokes equations, *J. Comput. Phys.*, 17, 209-228, 1975.
- Gautier, R., Biau, D., and Lamballais, E.: A reference solution of the flow over a circular cylinder at $Re= 40$, *Computers and Fluids*, 75,
30 103-111, 2013.
- Goldstein, D., Handler, R., and Sirovich, L.: Modeling a no-slip flow boundary with an external force field, *J. Comput. Phys.*, 105(2), 354-366, 1993.
- Hanna, S. R., Hansen, O. R., and Dharmavaram, S.: FLACS CFD air quality model performance evaluation with Kit Fox, MUST, Prairie Grass, and EMU observations, *J. Atmos. Env.*, 38-28, 4675-4687, 2004.
- 35 Hidalgo, J., Pigeon, G., and Masson, V.: Urban-breeze circulation during the CAPITOUX experiment: observational data analysis approach, *Meteorology and Atmospheric Physics*, 102(3), 223-241, 2008.

- Hunt, J. C. R., Abell, C. J., Peterka, J. A., and Woo, H.: Kinematical studies of the flows around free or surface-mounted obstacles; applying topology to flow visualization, *J. Fluid Mech.*, 86-1, 179-200, 1978.
- Hunt, J. C., Wray, A. A., and Moin, P.: Eddies, streams, and convergence zones in turbulent flows, Center for Turbulence Research Report CTR-S88, 1988.
- Hussein, H. J. A., and Martinuzzi, R. J.: Energy balance for turbulent flow around a surface mounted cube placed in a channel, *Phys. Fluids*, 8(3), 764-780, 1996.
- 5 Jiang, G.-S., and Shu, C.-W.: Efficient Implementation of Weighted ENO Schemes, *J. Comput. Phys.*, 126, 202-228, 1996.
- Kalitzin, G., Medic, G., Iaccarino, G., and Durbin, P.: Near-wall behavior of RANS turbulence models and implications for wall functions, *J. Comput. Phys.*, 204(1), 265-291, 2005.
- Kanda, M., Kanega, M., Kawai, T., Moriwaki, R., and Sugawara, H.: Roughness lengths for momentum and heat derived from outdoor urban scale models, *Journal of Applied Meteorology and Climatology*, 46(7), 1067-1079, 2007.
- 10 Kármán, T. von: Mechanische Ähnlichkeit und turbulenz, *Nachrichten von der Gesellschaft der Wissenschaften zu Göttingen, Mathematisch-Physikalische Klasse*, 58-76, 1930.
- Kempe, T., and Fröhlich, J.: An improved immersed boundary method with direct forcing for the simulation of particle laden flows, *Journal of Computational Physics*, 231(9), 3663-3684, 2012.
- Kim, J., Kim, D., and Choi, H.: An immersed-boundary finite-volume method for simulations of flow in complex geometries, *J. Comput.*
 15 *Phys.*, 171(1), 132-150, 2001.
- König, M.: Large-eddy simulation modelling for urban Scale, Ph.D. thesis, University of Leipzig, 2013.
- Krajnovic, S., and Davidson, L.: Development of large-eddy simulation for vehicle aerodynamics, *International Mechanical Engineering Congress and Exposition*, ASME, 2002.
- Kumar, P., Feiz, A. A., Ngae, P., Singh, S., and Issartel, J.-P.: CFD simulation of short-range plume dispersion from a point release in an
 20 urban like environment, *J. Atmos. Env.*, 122, 645-656, 2015.
- Lac, C., Chaboureau, J.-P., Masson, V., Pinty, J.-P., Tulet, P., Escobar, J., Leriche, M., and others: Overview of the Meso-NH model version 5.4 and its applications, *Geosci. Model Dev.*, 11, 1929-1969, 2018.
- Lafore, J. P., Stein, J., Asencio, N., Bougeault, P., Ducrocq, V., Duron, J., Fisher, C., Hèreil, P., Mascart, P., Masson, V., Pinty, J. P., Redelsperger, J.-L., Richard, E., and Vilà-Gueau de Arellano, J.: The Meso-NH Atmospheric Simulation System. Part I: adiabatic formulation
 25 and control simulations, *Scientific objectives and experimental design. Annales Geophysicae*, 16, 90-109, 1998.
- Lamb, H.: *Hydrodynamics*, Cambridge university press, 1932.
- Larousse, A., Martinuzzi, R., and Tropea, C.: Flow around surface-mounted, three-dimensional obstacles, *Turbulent Shear Flows*, 8, 127-139, 1993.
- Leveque, R. J., and Li, Z.: The immersed interface method for elliptic equations with discontinuous coefficients and singular sources, *SIAM*
 30 *Journal on Numerical Analysis*, 31(4), 1019-1044, 1994.
- Lin, S., and Rood, R. B.: Multidimensional Flux-Form Semi-Lagrangian Transport Schemes, *Mon. Wea. Rev.*, 124, 2046-2070, 1996.
- Linnick, M. N., and Fasel, H. F.: A high-order immersed interface method for simulating unsteady incompressible flows on irregular domains, *J. Comput. Phys.*, 204(1), 157-192, 2005.
- Lipps, F., and Hemler, R. S.: A scale analysis of deep moist convection and some related numerical calculations, *J. Atmos. Sci.*, 39, 2192-
 35 2210, 1982.

- Liu, Y., Chen, F., Warner, T., and Basara, J.: Verification of a mesoscale data-assimilation and forecasting system for the Oklahoma City area during the Joint Urban 2003 field project, *Journal of applied meteorology and climatology*, 45(7), 912-929, 2006.
- Lund, T. S.: Generation of Turbulent Inflow Data for Spatially-Developing Boundary Layer Simulations, *J. Comput. Phys.*, 140, 233258, 1998.
- Lundquist, K. A., Chow, F. K., and Lundquist, J. K.: An immersed boundary method for the Weather Research and Forecasting model, *Mon. Wea. Rev.*, 138(3), 796-817, 2010.
- 5 Lundquist, K. A., Chow, F. K., and Lundquist, J. K.: An immersed boundary method enabling large-eddy simulations of flow over complex terrain in the WRF model, *Mon. Wea. Rev.*, 140(12), 3936-3955, 2012.
- Lunet, T., Lac, C., Auguste, F., Visentin, F., Masson, V., and Escobar, J.: Combination of WENO and explicit Runge-Kutta methods for wind transport in Meso-NH model, *Mon. Wea. Rev.*, 145(9), 3817-3838, 2017.
- Martinuzzi, R., and Tropea, C.: The flow around surface-mounted, prismatic obstacles placed in a fully developed channel flow, *Journal Of Fluids Engineering (ASME)*, 115, 85-85, 1993.
- 10 Masson, V., Gomes, L., Pigeon, G., Lioussé, C., Pont, V., Lagouarde, J.-P., and others: The canopy and aerosol particles interactions in Toulouse urban layer (CAPITOUL) experiment, *Meteorology and atmospheric physics*, 102(3-4), 135, 2008.
- Masson, V., Le Moigne, P., Martin, E., Faroux, S., and others: The SURFEXv7. 2 land and ocean surface platform for coupled or offline simulation of Earth surface variables and fluxes, *Geosci. Model Dev.*, 6, 929-960, 2013.
- 15 Mayor S., Spalart P., and Tripoli, G. J.: Application of a Perturbation Recycling Method in the Large-Eddy Simulation of a Mesoscale Convective Internal Boundary Layer, *J. Atmos. Sci.*, 59-15, 2385-2395, 2002.
- Milliez, M., and Carissimo, B.: Numerical simulations of pollutant dispersion in an idealized urban area, for different meteorological conditions, *Bound.-Lay. Met.*, 122(2), 321-342, 2007.
- Milne-Thomson, L. M.: *Theoretical hydrodynamics*, Courier Corporation, 1968.
- 20 Mittal, R., and Iaccarino, G.: Immersed Boundary Methods, *Annu. Rev. Fluid Mechs*, 37:239-261, 2005.
- Mohd-Yusof, J.: For simulations of flow in complex geometries, *Annual Research Briefs*, 317, 1997.
- Monin, A. S., and Obukhov, A. M. F.: Basic laws of turbulent mixing in the surface layer of the atmosphere, *Contrib. Geophys. Inst. Acad. Sci. USSR*, 151(163), e187, 1954.
- Moriwaki, R., and Kanda, M.: Seasonal and diurnal fluxes of radiation, heat, water vapor, and carbon dioxide over a suburban area, *Journal of Applied Meteorology*, 43(11), 1700-1710, 2004.
- 25 Park, J., Kwon, K., and Choi, H.: Numerical solutions of flow past a circular cylinder at Reynolds numbers up to 160, *KSME international Journal*, 12(6), 1200-1205, 1998.
- Peskin, C. S.: Flow patterns around heart valves: a numerical method, *J. Comput. Phys.*, 10(2), 252-271, 1972.
- Pierson, J.-L.: *Traversée dune interface entre deux fluides par une sphère*, Ph.D. thesis, University of Toulouse, 2015.
- 30 Piomelli, U., and Balaras, E.: Wall-layer models for large-eddy simulations, *Annu. Rev. Fluid Mechs*, 34.1, 349-374, 2002.
- Prandtl, L.: Bericht über Untersuchungen zur ausgebildeten Turbulenz, *Z. Angew. Math, Meth.*, 5, 136-139, 1925.
- Redelsperger, J.-L., and Sommeria, G.: Methode de representation de la turbulence inferieure a la maille pour un modele tri-dimensionnel de convection nuageuse, *Bound.-Lay. Met.*, 21, 509-530, 1981.
- Redelsperger J.-L., Mahe, F., and Carlotti, P.: A simple and general subgrid model suitable both surface layer and free-stream turbulence, *Bound.-Lay. Met*, 101, 375-408, 2001.
- 35

- Rodi, W. , Ferziger, J. H., Breuer, M., and Pourquie, M.: Status of large eddy simulation: results of a workshop, *Journal Of Fluids Engineering (ASME)*, 119, 248-262, 1997.
- Schumann, U., and Sweet, R.: Fast Fourier Transforms for direct solution of Poisson's equations with staggered boundary conditions, *J. Comput. Phys.*, 75, 123-137, 1988.
- Shah, K. B., and Ferziger, J. H.: A fluid mechanics view of wind engineering: Large eddy simulation of flow past a cubic obstacle, *Journal of Wind Engineering and Industrial Aerodynamics*, 67, 211-224, 1997.
- 5 Shu, C.-W., and Osher, S.: Efficient implementation of essentially non-oscillatory shock capturing schemes, *J. Comput. Phys.*, 83, 32-78, 1989.
- Skamarock, W. C., Smolarkiewicz, P. K., and Klemp, J. B.: Preconditioned conjugate-residual solvers for Helmholtz equations in nonhydrostatic models, *Mon. Wea. Rev.*, 125, 587-599, 1997.
- Skamarock, W. C.: Positive-definite and monotonic limiters for unrestricted-time-step transport schemes, *Monthly Weather Review*, 134(8),
10 2241-2250, 2006.
- Stålberg, E., Brüger, A., Lötstedt, P., Johansson, A. V., and Henningson, D. S.: High order accurate solution of flow past a circular cylinder, *Journal of Scientific Computing*, 27(1), 431-441, 2006.
- Stein, J., Richard, E., Lafore, J.-P., Pinty, J.-P., Asencio, N., and Cosma, S.: High-resolution non-hydrostatic simulations of flash-flood episodes with grid-nesting and ice-phase parametrization, *Meteorol. Atmos. Phys.*, 72, 101-110, 2000.
- 15 Straka, JM, Wilhelmson, R. B., Wicker, L. J., Anderson, J. R., and Droegemeier, K. K.: Numerical solutions of a non-linear density current: A benchmark solution and comparisons, *Int. J. for Num. Methods in Fluids*, 17(1), 1-22, 1993.
- Sussman, M., Smereka, P., and Osher, S.: A level set approach for computing solutions to incompressible two-phase flow, *J. Comput. Phys.*, 114(1), 146-159, 1994.
- Taira, K., and Colonius, T.: The immersed boundary method: a projection approach, *J. Comput. Phys.*, 225(2), 2118-2137, 2007.
- 20 Taneda, S.: Experimental investigation of the wake behind a sphere at low Reynolds numbers, *Journal of the Physical Society of Japan*, 11(10), 1104-1108, 1956.
- Tseng, Y. H., and Ferziger, J. H.: A ghost-cell immersed boundary method for flow in complex geometry, *J. Comput. Phys.*, 192(2), 593-623, 2003.
- Udaykumar, H.S., and Shyy, W.: A grid-supported marker particle scheme for interface tracking, *Num. Heat Transf*, 27(2), 127, 1995.
- 25 Wang, K., Li, Y., Li, Y., and Yuan, M.: The stone forest as a small-scale field model for urban climate studies, 9th International Conference on Urban Climate, Toulouse, France, 2015.
- Williamson, C. H. K.: Oblique and parallel modes of vortex shedding in the wake of a circular cylinder at low Reynolds numbers, *J. Fluid Mech.*, 206, 579-627, 1989.
- Yang, G., Causon, D. M., Ingram, D. M., Saunders, R., and Batten, P.: A Cartesian cut cell method for compressible flows part A: Static body
30 problems, *Aeronautical Journal*, 101(1002), 47-56, 1997.
- Yang, X. I., and Meneveau, C.: Recycling inflow method for simulations of spatially evolving turbulent boundary layers over rough surfaces, *Journal of Turbulence*, 17-1,75-93, 2016.
- Ye, T., Mittal, R., Udaykumar, H. S., and Shyy, W.: An accurate Cartesian grid method for viscous incompressible flows with complex immersed boundaries, *J. Comput. Phys.*, 156(2), 209-240, 1999.
- 35 Yee, E., and Biltoft, C. A.: Concentration fluctuation measurements in a plume dispersing through a regular array of obstacles, *Bound.-Lay. Met.*, 111, 3, 363-415, 2004.

Young, D. M., and Jea, K. C.: Generalized conjugate-gradient acceleration of nonsymmetrizable iterative methods, *Linear Algebra and its applications*, 34, 159-194, 1980.