

May 11, 2020

Dear Dr. Yool,

We are pleased to submit our revised manuscript entitled “A multirate mass transfer model to represent the interaction of multicomponent biogeochemical processes between surface water and hyporheic zones (SWAT-MRMT-R 1.0)” for your consideration in Geoscientific Model Development.

We thank the two anonymous reviewers for their positive feedbacks and constructive comments that helped us clarify the important aspects of our work. We have addressed all the comments and revised the manuscript accordingly. Point-by-point responses are listed in the responses in blue. The line numbers shown in the response are for the tracked version of the revision attached to this response.

Thanks for your consideration and we look forward to hearing from you.

Sincerely,

Yilin Fang and Co-authors

Response to review comments


Anonymous Referee #1

The discussion paper “A multirate mass transfer model to represent the interaction of multicomponent biogeochemical processes between surface water and hyporheic zones (SWAT-MRMT-R 1.0)” introduces a newly-developed model, named SWATMRMT-R, to simulate the hydrological and biogeochemical interaction between surface water and hyporheic zones. Hyporheic zone is usually ignored in large-scale watershed models because of its complex processes. Therefore, I think adding the simulation of hyporheic zone processes and connection hyporheic zones and surface water has a good intention and is appreciated. I have some major comments for this manuscript:

Response: We thank the reviewer for acknowledging the value of our model and the encouragements. We considered every comment when revising our manuscript. The following are our detailed responses to each comment:

1.The manuscript description about SWAT-MRMT-R, the connection between SWAT and MRMT, the connection of SWAT code and PFLOTRAN is not very clear. There is abundance of model concepts, software, and codes involving in this work (SWAT, MRMT, PFLOTRAN, NEXSS, NHD plus V2), and the connection between them was mentioned in different places in the manuscript. But I want to put in in a figure/schematization, to make the readers clear about the role of each of them in the model. I recommend modifying figure 1 or having a separate figure showing the connection between these.

Response: We only modified the in-stream nutrient transformation module in SWAT for the purpose of this study. We made clarifications in the revision (**lines 90-94**). The stream water column and a hyporheic zone at a reach in a river network can be conceptualized as separate batch reactors gaining or losing mass due to hydrologic exchange. NEXSS is only a tool used to estimate the hydrologic exchange fluxes and residence times for discretized reaches for a river network (NHD plus V2 in this study). The results from NEXSS were provided to us from our collaborator, and we used them as input to the model developed in this study. NEXSS is not required as long as there is a way or model to estimate the hydrologic exchange fluxes and residence times. The following schematics shows the connections between different reactors. The storage zones do not communicate with each other. The reactions within these batch reactors and mass transfer between the in-stream reactor and hyporheic (storage) reactors are solved using PFLOTRAN.

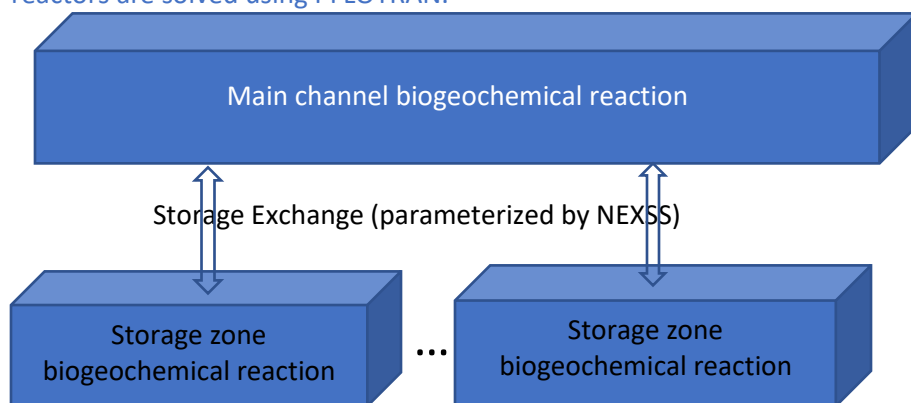

2. It is not very clear to me about the connection in hydrology between SWAT and MRMT. Does SWAT provide inflow of upland catchment to hyporheic zones which is represented by MRMT, and how the transmission losses through streambed calculated by SWAT affect the hyporheic zones? I think hydrological exchange between surface water and hyporheic zones is very important for the constituent exchange, so please make it clear.

Response: We agree that the hydrological exchange between surface water and hyporheic zones is very important for the constituent. MRMT is an extension of the commonly used transient storage model to represent riverine solute transport. It does not affect the hydrology part of SWAT. As SWAT solves solute and reactions using the operator splitting approach, we only modified the in-stream nutrient transformation module in SWAT for the purpose of this study, treating the hydrological exchange between the storage zone and stream as kinetic process or “kinetic reactions”. We made clarifications (lines 95-98) in the revision.

3. How many storage zones in your conceptualization of the hyporheic zones? Is the number of storage zones defined by the user in the setup? What is the maximum number of storage zones?

Response: The model is not limited by the number of hyporheic zones. The number of storage zones can be defined by the user in the setup. We added statement in the revision (lines 97-98).

4. Why can NEXSS not use the reach system generated by SWAT to calculate residence time and exchange flux?

Response: NEXSS can use different reach system as long as the values of bankfull channel width, discharge, median grain size, channel slope, sinuosity, and regional hydraulic head gradient along and across the reach are prescribed for each individual reach. We only used the NEXSS output from a previously generated model based on NHD river network through our collaborator and it is not our focus in this study. We made the clarifications in the revision (lines 92-93).

5. For matching the channel systems between NEXSS and SWAT, it seems that NEXSS reaches that do not overlap with those of SWAT are not considered. In the example in figure 2b, only reaches 386 and 380 contribute to SWAT reach 36. However, I think reach 374 also contributes to SWAT reach 36. If we change the threshold stream definition in SWAT, SWAT can generate a more detailed stream network and can overlap with all of the reaches from NEXSS.

Response: In the current configuration, NEXSS reaches that do not overlap with those of SWAT are not considered. We agree that a more detailed stream network can overlap with all of the reaches from NEXSS. We clarified it in the revision (lines 237-239, 244-245).

6. The paper shows several modelling experiments. But I wonder if the authors did compare the model predictions with field measurements. I did not see calibration/validation in this paper. I do think the comparison with measurements is very necessary for a modelling paper. So please add a session on this if data is available.

Response: We agree that the comparison with field measurements is necessary. We didn't compare with field measurements in this study as we don't have available data. But the comparison is planned when we have observations from field campaigns, which are ongoing. We pointed this out in the revision (lines 437-438).

7. Do you have a SWAT model application in this case study? Do you consider comparing SWAT-MRMT-R with SWAT to show the better prediction when hyporheic processes are included?

Response: We don't have model application yet. But it is planned in future study when field data are available. One of the advantages of the model is that it can be used to define the reaches that are biogeochemical hot spots before conducting the experiment and then combine the model with experiment data collected at those hot spots for a better mechanistic process understanding of river corridor functioning at the reach scale and model improvement (**lines 449-453**).

8. SWAT-MODFLOW coupling SWAT and MODFLOW models can represent hyporheic zones and its interaction with the stream. The author should add reference about SWAT-MODFLOW in the manuscript. What is the advantage of SWAT-MRMT-R compared to SWAT-MODFLOW? I suggest adding a section discussing about the strengths, weakness/limitations of the models, what cases the users should use SWAT-MRMT-R in the manuscript.

Response: We agree that a fully integrated model such as SWAT-MODFLOW can represent hyporheic zones, but it is computationally demanding when high resolution simulations are needed to capture the hyporheic zones that are highly variable in space and time. SWAT-MRMT-R we developed in this study is a simplified model that is easy to be adapted and is useful in providing insightful predictions of controls on time and locations of biogeochemical hot spots and river corridor functioning using physically derived parameters at the reach and watershed scales. We discussed the model strengths and limitations in the revision (**lines 37-41, lines 454-460**).

Anonymous Referee #2

The manuscript addresses the transport of nitrogen in river networks, and proposes an extension of the SWAT model that includes water exchange and biogeochemical reaction in the hyporheic zone. The model is applied to the watershed of the Columbia River. Proposing an extension of SWAT that includes the effect of hyporheic process is a valuable contribution to research in solute fate in catchments, as catchment-scale models usually do not encompass these processes. However, additional efforts are needed to clarify some methodological parts. The main issues are described below.

Response: We thank the reviewer for recognizing the value of our work and the constructive comments to improve our manuscript.

Main comments:

- ROLE OF GROUNDWATER: Vertical upwelling of groundwater through the hyporheic zone and to the stream seems not to be included (see detailed comments, line 205). The contribution of groundwater as lateral flow should be better explained (206). USE OF RESIDENCE TIME DISTRIBUTION: the authors explore the impact of using a distribution of residence time instead of an average value. This is a valuable attempt, but the way these distributions are chosen is unclear (251, 305).

Response: We apologize for the incomplete description of the boundary conditions and they will be addressed in the detailed comments below. Details for the boundary conditions are added in the revision (lines 218-222 and 223-230).

The details of how the residence times were chosen based on a given distribution is shown below:

we assume equal fraction for each sub-storage zone, i.e., a vertical or horizontal storage is evenly divided into N_s sub-storage zones.

To extract N_s residence times for the sub-storage zones in a given HZ with mean residence time τ_m , we use the exponential distribution ($P=1-e^{-\tau/\tau_m}$). We have one distribution for the vertical HZ and one for the lateral HZ, with means equal to the vertical and lateral residence time calculated from NEXSS. N_s discrete residence time values with their corresponding probability were then extracted from this distribution for both HZs. For example, if $N_s = 10$, the fraction of each sub-storage zone is 0.1. The average residence time of each sub-storage corresponds to a value with probability less than or equal to 0.05, 0.15, 0.25, 0.35, 0.45, 0.55, 0.65, 0.75, 0.85, and 0.95, respectively. The minimum and maximum residence time are discrete values that are less than or equal to the given probability of 0.05 and 0.95, respectively. The maximum residence is interpolated from equation $1-e^{-\tau/\tau_m}=0.95$. The other discrete residence times are similarly solved.

We added more details on how the discretized residence times were chosen in the revision (lines 303-313).

Detailed comments:

line 205 "the bottom boundary has a prescribed flux" -> how is it chosen? Is it equal to zero?

Response: The bottom boundary is defined as $q_u \approx 0.57K J_y$ (Boano et al., 2009), where J_y is the mean head gradient across the alluvial valley. The definition is added in the revision (lines 219-220).

Boano, F., Revelli, R. & Ridolfi, L. Quantifying the impact of groundwater discharge on the surface–subsurface exchange. Hydrol. Process. 23, 2108–2116 (2009)

206 "flow is solved by the vertically integrated groundwater flow equation with the Dupuit–Forchheimer assumption" -> for consistence, I suggest to briefly state boundary conditions also for determining lateral flow.


Response: We added the following in the revision (lines 223-230):

Following Gomez et al. (2012), the river is conceptualized as sinusoidal with wavelength λ [L] and amplitude α [L]. A prescribed hydraulic head $\psi_s(x) = \psi_0 + (J_x/\sigma)s(x)$ is assigned along the river stretch, where ψ_0 [L] is the elevation of the free surface elevation at the downstream end of the river above the horizontal bottom, $s(x)$ [L] is the arc length along the boundary, $\sigma = s(\lambda)/\lambda$ is sinuosity, J_x is the mean head gradient along the valley in the downstream direction. The boundary at a distance λ from the channel axis has a prescribed head $\psi(x, y = \lambda) = J_x x + J_y \lambda$, where J_y is the mean head gradient across the alluvial valley. The upgradient and downgradient boundaries of the domain along the reach are assumed periodic with a prescribed head drop $\psi(x = 0, y) = \psi(x = 2\lambda, y) - 2\lambda J_x$.

Gomez, J. D., J. L. Wilson, and M. B. Cardenas (2012), Residence time distributions in sinuosity-driven hyporheic zones and their biogeochemical effects, Water Resources Research, 48, W09533, doi:10.1029/2012WR012180.

230 "Compared to other reaches in the watershed, the Columbia River is characterized by relatively larger exchange flow" -> Fig. 3 shows exchange flow values up to the order of 100 m³/s (vertical flow) and 1 m³/s (lateral flow). These values are extremely high and deserve some explanation on why they are considered realistic. It is possibly that they occur only on very long reaches, but I would check this and verify the values of flux per unit area that provide values whose magnitude can be more easily assessed.

Response: The relatively larger exchange flow is mainly due to the large size of a reach. We replotted Fig. 3 c,d as the values of flux per unit area (shown below) for easy assessment.

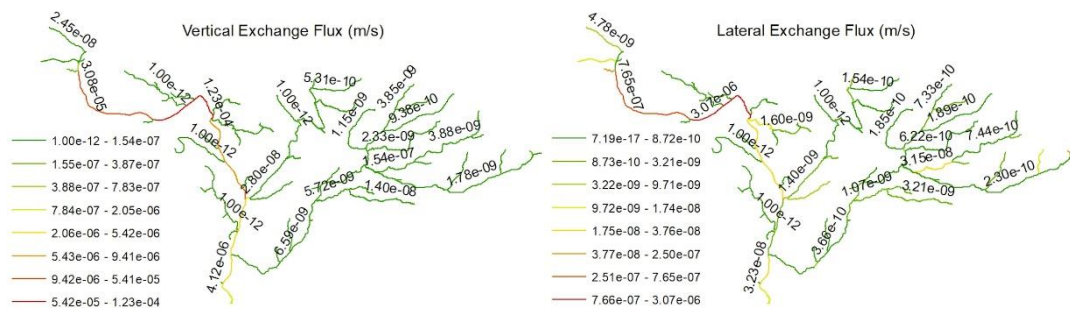

247 "only one exchange rate [...] for each zone" -> I would state more clearly that two zones are used to represent vertical and lateral exchange, as it comes out later.

Response: Modified as suggested (lines 273-274).

251 "1) replacing the residence time and exchange flux with those predicted by NEXSS using seasonal flow conditions; 2) replacing the single storage zone in vertical and lateral with sub-storage zones within a storage zone, assuming a distribution of residence time [...]" -> a few additional words would make easier to understand how these scenario have been built. Specifically, I recommend to specify 1) which "seasonal flow conditions" have been considered and 2) how the characteristics of the "distribution of residence time" have been determined. There is a mathematical explanation for it, but it is unclear how

the specific values of $\tau_{s,j}$ have been chosen. At present, some of (but not all) these information are provide in sections 4.3 and 4.4 of the Results' section, but they would better located here rather than among the Results. Alternatively, is should be at least anticipated that they are reported later.

Response: For the seasonal flow conditions, NEXSS model was run 12 times using mean monthly streamflow conditions. The exchange fluxes and residence times now change monthly instead of being constants throughout the whole simulation. We added the above in the revision (**lines 280-281**).

Please see the detailed description of how specific residence time have been determined in the response to the main comments above. We added more details as suggested and moved up those described in the results' section to where it is introduced (**lines 303-313**).

288 "It's not true [the fact that lateral HZ are in dynamic steady state] for RCH77 and RCH88 as their exchange flows are much smaller" -> why only these reaches? RCH67, 53, 93, 100 and 101 all exhibit the same behavior.

Response: Thanks for catching this. After careful checking, a bug was found and fixed in the code. The bug mainly affects the magnitude in the lateral HZ, not the overall observations in the original manuscript. We corrected the figure and the statement as follows (**lines 325-327**):

"They are also in dynamic steady state with the lateral HZ for reaches RCH27, RCH24, RCH28, and RCH20, RCH77 and RCH88 suggesting that lateral exchange can be important too. It's not true for RCH77 and RCH88 RCH53, RCH67, RCH93, RCH100, RCH101 as their residence times are much longer."

Line plots in Figures 4, 5C,D, 6, 8 are also corrected. Please find the updates at the end of the response.

Fig. 5, caption: it should specified that this is the MRMT scenario. Same for other figures.

Response: We specified MRMT as suggested in the caption for figures that apply.

305 "Using exponential residence time distribution and 20 sub-storage zones, we had multiple rates based on the mean residence time from NEXSS. Assuming the exchange flux from the NEXSS estimation is equally distributed in each sub-storage zone, the residence time for each sub-sotrage zone is calculated using Eq. 12." -> this explanation is unclear. How has each residence time estimated with NEXSS (denoted here as T) transformed into multiple (20) residence times? From this description I imagine that for each zone an expontial distribution with mean equal to T was defined, and then 20 values with their corresponding probability were extracted from this distribution. Anyway, this is not fully clear from the text, and in any case many details are missing (e.g., how was the maximum residence time chosen?). I strongly recommend to provide more details about this part as it is fundamental to obtain a representative distribution of residence times. As a further notice, the choice of equally distributed fluxes is simple but debatable, as it is known from the classic theory of Elliott and Brooks (1997) that exchange flowpaths with higher fluxes penetrate deeper in the streambed and are hence characterized by longer times. I am unsure if this would entail a significant difference, but if it is feasible I recommend verifying the impact of this assumption.

Response: We moved the description of how the residence times were chosen to section 3.5 in the revision and added more details (**lines 306-313**) and made changes accordingly in **lines 343-346**.

Thanks for the reference of Elliott and Brooks (1997). We ran another simulation assuming higher exchange fluxes are associated with longer residence times and compared the impact of flux distribution based on different assumptions on HZ nitrate removal (**lines 346-353, lines 423-426**). Nitrate removal

due to denitrification in the HZs can be significantly reduced if larger flux associated with longer time is assumed compared to that with the assumption of equally distributed fluxes. We replaced Fig. 7 with the spatial nitrate removal for better visualization and explanation.

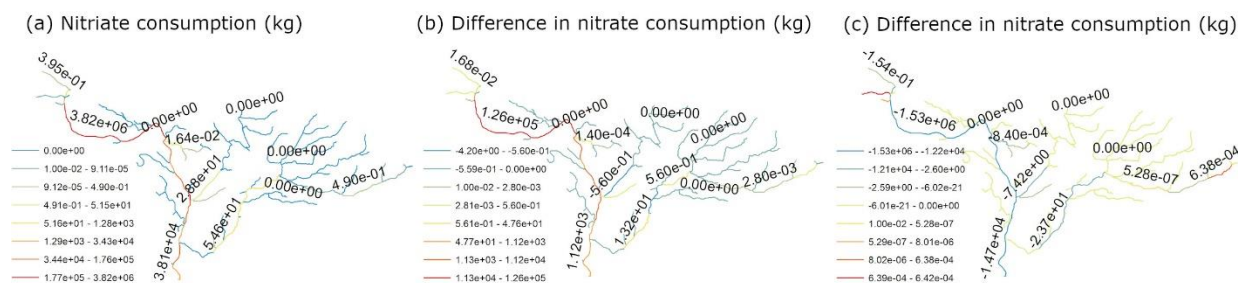


Figure 7. Total nitrate consumption through HZ denitrification at the end of simulation using a single storage zone in both vertical and lateral HZs (a), change in nitrate consumption with 10 sub-storage zones in both vertical and lateral HZs compared to the simulation with single storage zone using uniform exchange flux (b) and nonuniform exchange flux (c).

307 "sotrage" -> "storage"

[Response:](#) Corrected. Thanks!

307 "Simulation with multiple exchange rates within each storage zone showed less removal of nitrate in the stream through microbial respiration in the HZs compared to the single-rate simulation (Fig. 7)." -> as far as I can see by eye, the difference is rather small. If so, I would mention it.

[Response:](#) We removed the line plot in Fig. 7, replaced it with spatial nitrate consumption difference plots between scenarios (plot shown above), and pointed out the small difference between the single rate and MRMT with the assumption of equally distributed fluxes.

Fig. 6: because all these scenarios include biogeochemical reactions, I recommend labeling them coherently, i.e., MRMT+BGC, SEASONAL MRMT+BGC.

[Response:](#) Modified as suggested.

318 "high stream nitrate concentration than those shown in the bASE case can occur" -> is this a regular feature or has it only been observed occasionally?

[Response:](#) It seems to be a regular feature based on limited samples at a location close to the outlet.

319 "bASE" -> "BASE"

[Response:](#) Corrected.

325 "nitrate coming from these wasteways will exchange in the HZs in a short time and will not be expected to have a big impact on surface water quality" -> the link between residence time and impact on water quality is not so evident. What is clear from fig.10 is that in this reach HZ and river concentrations exhibit synchronous variations, as already expected from the previously shown results. I understand that if the residence time in the HZ is large enough then the increase in NO₃ concentration due to the point source can be buffered and possibly attenuated, but the comments here do not clarify this well enough.

Response: Shorter residence time results in faster nitrate exchange rate (which is the inverse of residence time) between the stream and HZ. Faster exchange rate drives more stream nitrate into the HZ if stream concentrations are high and increases the nitrate concentration in the HZ, which then increases the denitrification rate or nitrate consumption rate in the HZ. We replaced the line plot in Figure 10 with the difference in HZ nitrate consumption between the irrigation return flow case and the base case for a better explanation (**lines 375-387**). Denitrification in the HZs can remove more nitrate at RCH77 and RCH88 even though the nitrate loadings and HZ volumes are smaller compared to those at RCH100 because of the short residence time that promotes larger reaction extent in the HZs at those locations.

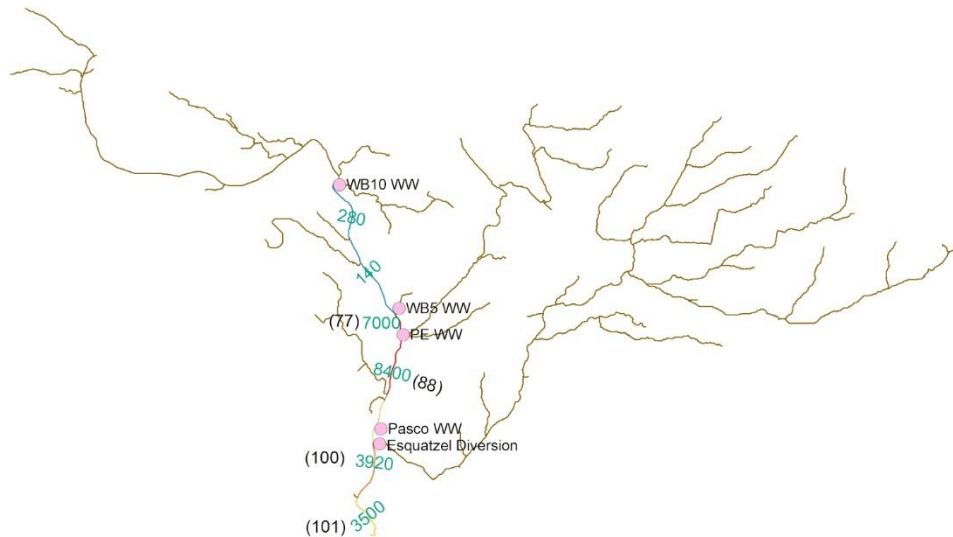


Figure 10. Increase of HZ nitrate consumption (kg) through denitrification due to irrigation return flow compared to case MRMT+BGC. Text in green shows the amount of nitrate consumption, pink solid circles are the locations of irrigation wasteways, and numbers in parentheses are reaches of interest.

341 "our simulations show that HZs can attenuate the peak nitrate concentrations in the stream" -> it would be useful to report a quantitative assessment (e.g., concentration reduction between xxx and yyy %) instead of just sending back the reader to fig.4.

Response: We added the following statement (**lines 398-399**): "our simulations show that HZs can attenuate the peak nitrate concentrations in the stream with mass transfer and biogeochemical reactions, with 11.6% of concentration reduction on average compared to the base case without MRMT."

375 "limations" -> "limitations"

Response: Corrected. Thanks!

Figure corrections:

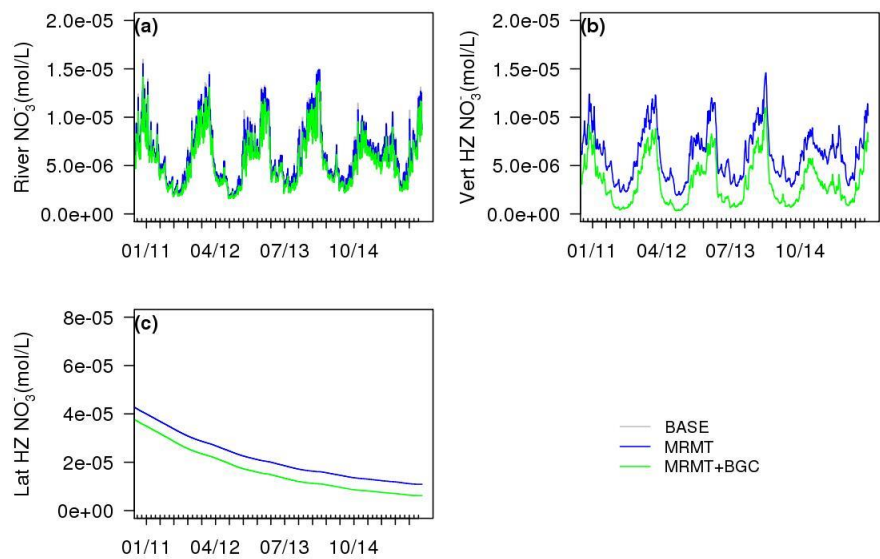


Figure 4.

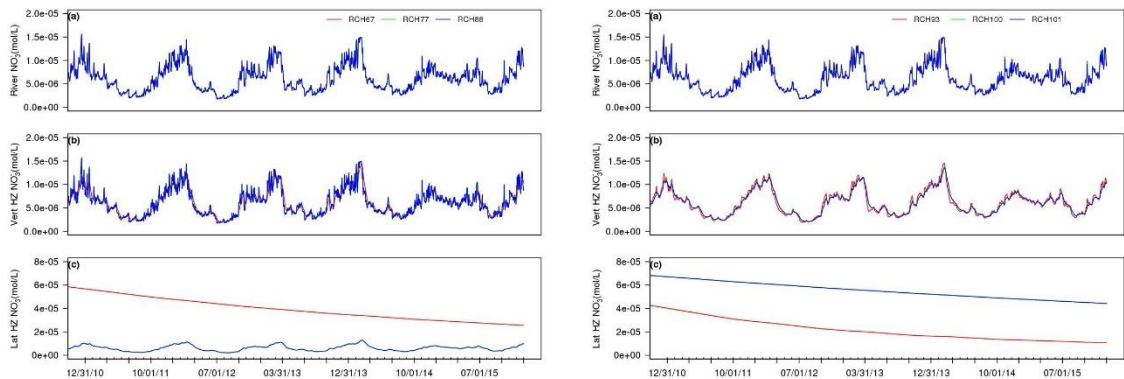


Figure 5C,D

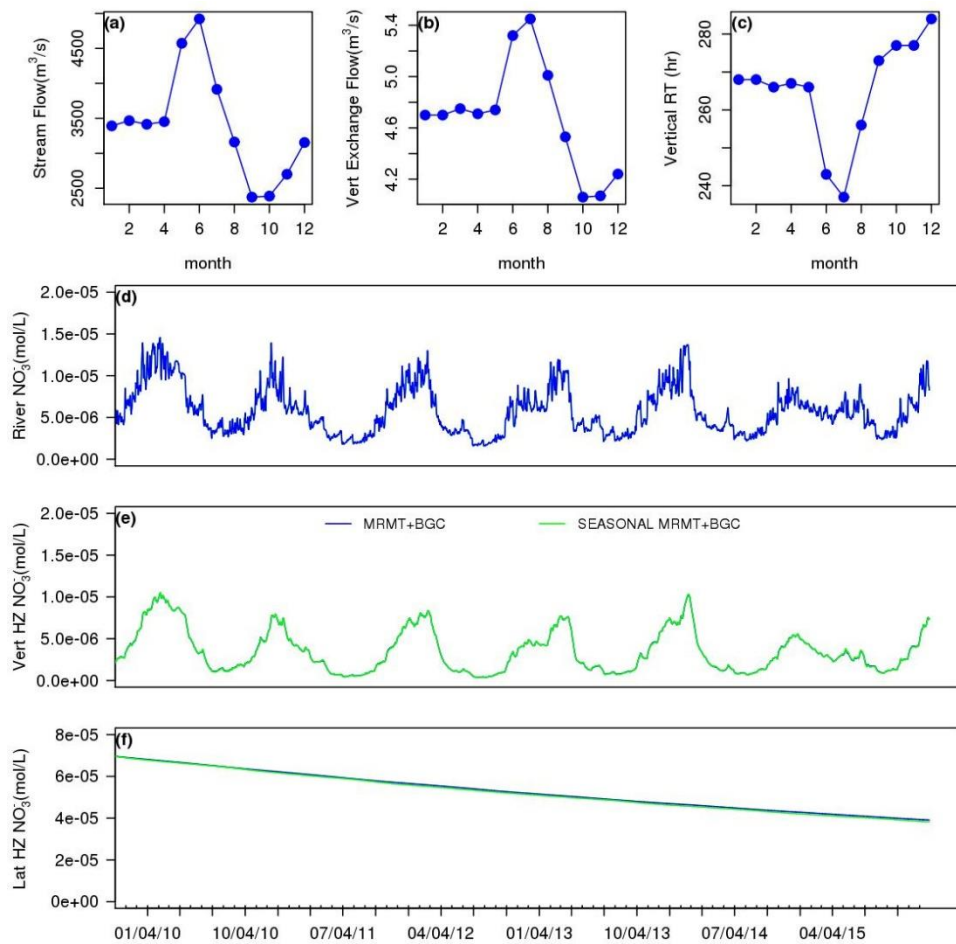


Figure 6

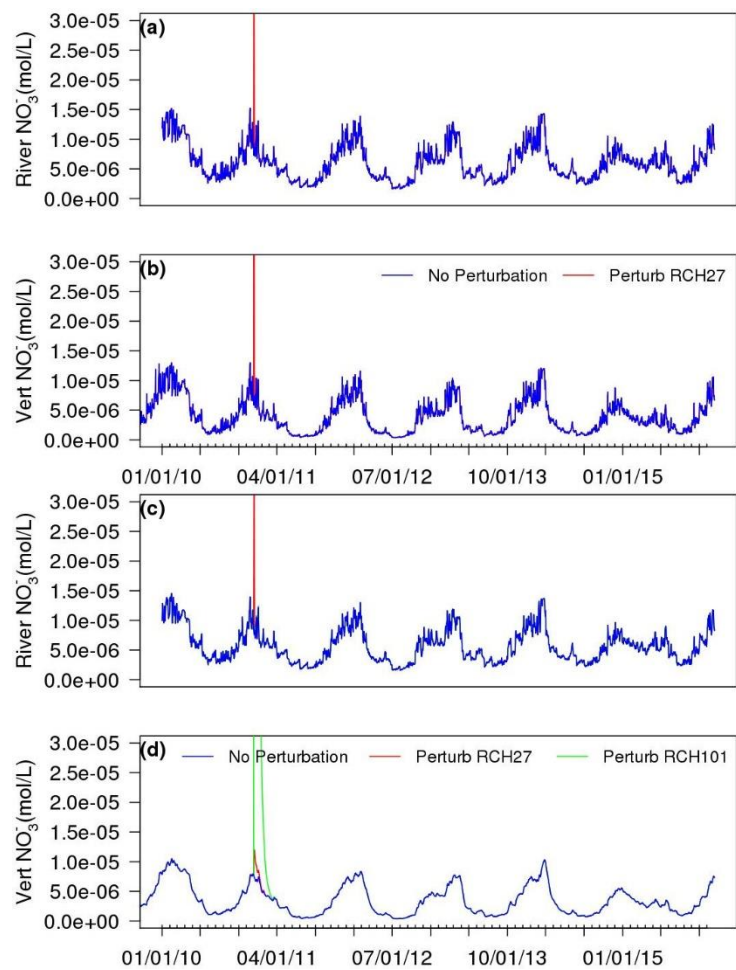


Figure 8

A multirate mass transfer model to represent the interaction of multicomponent biogeochemical processes between surface water and hyporheic zones (SWAT-MRMT-R 1.0)

Yilin Fang^{1,*}, Xingyuan Chen¹, Jesus Gomez velez², Xuesong Zhang³, Zhuoran Duan¹, Glenn E. Hammond⁴, Amy E. Goldman¹, Vanessa A. Garayburu-Caruso¹, and Emily B. Graham¹

¹Pacific Northwest National Laboratory, Richland, Washington, USA

²Vanderbilt University, Nashville, Tennessee, USA

³Joint Global Change Research Institute, Pacific Northwest National Laboratory, College Park, Maryland, USA

⁴Sandia National Laboratories, Albuquerque, New Mexico, USA

Correspondence: Yilin Fang (yilin.fang@pnnl.gov)

Abstract.

Surface water quality along river corridors can be modulated by hyporheic zones (HZs) that are ubiquitous and biogeochemically active. Watershed management practices often ignore the potentially important role of HZs as a natural reactor. To investigate the effect of hydrological exchange and biogeochemical processes on the fate of nutrients in surface water and HZs, a novel model, SWAT-MRMT-R, was developed coupling the Soil and Water Assessment Tool (SWAT) watershed model and the reaction module from a flow and reactive transport code (PFLOTRAN). SWAT-MRMT-R simulates concurrent non-linear multicomponent biogeochemical reactions in both the channel water and its surrounding HZs, connecting the channel water and HZs through hyporheic exchanges using multirate mass transfer (MRMT) representation. Within the model, HZs are conceptualized as transient storage zones with distinguished exchange rates and residence times. The biogeochemical processes within HZs are different from those in the channel water. Hyporheic exchanges are modeled as multiple first order mass transfers between the channel water and HZs. As a numerical example, SWAT-MRMT-R is applied to the Hanford Reach of the Columbia River, a large river in the United States, focusing on nitrate dynamics in the channel water. Major nitrate contaminants entering the Hanford Reach include those from the legacy waste, irrigation return flows (irrigation water that is not consumed by crops and runs off as point sources to the stream), and groundwater seepage resulted from irrigated agriculture. A two-step reactions for denitrification and an aerobic respiration reaction are assumed to represent the biogeochemical transformations taking place within the HZs. The spatially variable hyporheic exchange rates and residence times in this example are estimated with the basin-scale Networks with Exchange and Subsurface Storage (NEXSS) model. Our simulation results show that 1) ~~as the commonly used transient storage model for stream-HZ exchange of solutes uses a single residence time to parameterize the exchange coefficient, it may overestimate the nitrate attenuation role of HZs ignoring the contribution from HZs with low residence times~~ given a residence time distribution, how to approximate the exchange fluxes to HZs when using MRMT can significantly change the amount of nitrate consumption in HZs through denitrification; and 2) source locations of nitrate have different impact on surface water quality due to the spatially variable hyporheic exchanges.

1 Introduction

Broadly defined, the hyporheic zone (HZ) is the area of the stream bed and stream bank in which stream water mixes with shallow groundwater (Runkel et al., 2003), or through which subsurface pathways begin and end at the stream (Cardenas, 2015). The HZ has been recognized as a critical component of stream ecosystem (Boano et al., 2014; Boulton et al., 1998; Ward, 2016; Wondzell, 2011; Liao and Cirpka, 2011). It is a location of interacting physical, chemical, and biological systems (Ward, 2016). Biogeochemical gradients in HZs can significantly impact cycling of carbon and nitrogen (Claret and Boulton, 2009; Briggs et al., 2013). Most studies of HZ focused on low-order streams (e.g. Briggs et al., 2009; Harvey et al., 2013; Hoagland et al., 2017; Mulholland et al., 1997; Triska et al., 1989; Valett et al., 1996; Ward et al., 2016) because they are more logistically tractable. On the other hand, the role of HZ for large or higher order streams is not well understood due to inadequate or difficulty in direct measurements (Tank et al., 2008; Ye et al., 2017; Zarnetske et al., 2012), and the challenge to

scale up the process understanding from plot scale measurements to reach scale. For large rivers, numerical experiments may provide some insights on the role of HZs.

35 Hyporheic exchange and biogeochemical processes within HZs are largely absent in reach-scale models (Helton et al., 2010). We need a modeling framework that integrates the physical and biogeochemical processes in the surface water and HZs in order to bridge the gap in reach-scale models and answer questions of when and where HZs become important. [An integrated hydrologic model that couples land surface processes with spatially-explicit three-dimensional groundwater flow processes, such as SWAT-MODFLOW \(Bailey et al., 2016\), can explicitly simulate hyporheic processes. However, it is often](#)
40 [computationally demanding to capture the hyporheic zones that are highly variable in space and time, and requires more model parameters that are difficult to characterize \(Painter, 2018\). In reality, H](#)hydrologic exchange between surface water and groundwater was commonly modeled by the transient storage model [to investigate the physical processes governing riverine solute transport](#) (Bencala and Walters, 1983; Briggs et al., 2009; Boano et al., 2014; Runkel et al., 2003; Haggerty and Gorelick, 1995; Zaramella et al., 2003) [because it is simple, accessible, and adaptable \(Knapp and Kelleher, 2020\)](#). The transient storage
45 model is a lumped model representing first-order exchange between the main channel and well-mixed storage zones or dead zones, usually parameterized with conservative tracer test. The transport of solute between the storage zone and channel is simply determined by the solute concentration difference between the channel and storage zone and an exchange coefficient (Bencala and Walters, 1983). It has been modified to include various zones with one exchange coefficient within each zone (Briggs et al., 2010; Neilson et al., 2010), and to simulate reactive solute within the storage zones by coupling with a chemical
50 equilibrium model (Runkel et al., 1996); however, the transient storage model is not capable of representing the long solute tail observed in the stream (Cardenas, 2015; Painter, 2018). Coupled with a transient storage zone solute transport model, Ye et al. (2012) used a dynamic hydrologic network model to simulate dissolved nutrient retention processes during transient flow events at the channel network scale. They assumed a constant exchange rate and simple uptake of nutrient in the storage zone, but the interplay between mass exchange and biogeochemical processes as well as hydrological and geological control on mass
55 exchange rates were ignored.

In this study, to model the exchange between the channel and HZs, we [extended the transient storage model by using use](#) the multirate mass transfer (MRMT) formulation incorporating a spectrum of transition times that is commonly used to simulate the late-time solute and contaminant tails observed in porous media (e.g., Haggerty and Gorelick, 1995; Wang et al., 2005; Liu et al., 2008; Fernandez-Garcia and Sanchez-Vila, 2015). The MRMT formulation is a discrete equivalent to convolution-based
60 representations to model mass exchange, which can be solved in Lagrangian domain (Silva et al., 2009). Painter (2018) recently generalized the convolution-based model to include multicomponent reactive transport with general nonlinear reactions and tested the model using a single reach, assuming a steady state hyporheic flow field. It has not yet been integrated in watershed modeling. Here we generalized the MRMT model to include mass transfer between the stream channel and multiple storage zones according to a spectrum of rates within each storage zone. We developed an integrated model, referred to as SWAT-
65 MRMT-R, based on two open-source codes to simulate in-stream biogeochemical processes, mass transfer between the stream and HZ, and biogeochemical processes in HZs. These two codes are the Soil and Water Assessment Tool (SWAT) watershed model (Neitsch et al., 2011) and the subsurface flow and reactive transport code, PFLOTRAN (Lichtner et al., 2017). We

applied the integrated model to the Hanford reach of the Columbia river, a large river in the southern Washington State of the United States. At the simulated reach, major impacts to stream nutrients come from the contaminated groundwater, irrigation return flows, and groundwater seepage resulted from irrigated agriculture (Evans et al., 2000).

This paper starts with an overview of the components in the SWAT-MRMT-R modeling framework, followed by description of each component (Sect. 2). The model is then applied at the Hanford reach using the spatially variable hyporheic exchange rates and residence times estimated with the basin-scale Networks with Exchange and Subsurface Storage (NEXSS) model (Gomez-Velez and Harvey, 2014) (Sect. 3). We focus on the nitrate dynamics in the results (Sect. 4), varying modeled processes and parameters. Finally, model limitation and future work are discussed.

2 SWAT-MRMT-R Model Description

2.1 Modeling Framework

Our modeling framework is built within the in-stream nutrient submodel in SWAT, considering distinguished biogeochemical processing in both the water column and hyporheic zones. The SWAT model is developed by the U.S. Department of Agriculture to predict the impact of land management on water, nutrients, and sediments of large ungauged basins (Neitsch et al., 2011) and it is widely used worldwide. A schematic description of the modeling framework is shown in Fig. 1. At the top of Fig. 1A, the processes pointed to by the blue arrow are reactions related to the water column. The processes in the orange circle at the bottom of the figure are example reactions related to the hyporheic zones (shown as black rectangular prisms with orange streamlines) in the vertical and lateral directions. The orange streamlines represent the river water entering the vertical and lateral hyporheic zones and returning back to the river within the same reach over a distribution of travel times, i.e., each streamline carries a residence time (τ_s) and exchange flux (q_s). In this study, the residence time and exchange flux are estimated by NEXSS (Gomez-Velez and Harvey, 2014), which will be briefly described in Sect. 3.3. We use an MRMT model to represent solute mass transfer dynamics between the channel and storage zones, capturing the effect of hyporheic exchange in the fate and transport of solutes along the river corridor. In this model, all of the reactions and exchange processes shown in Fig. 1A are simply conceptualized as a series of hyporheic batch reactors connected to a stream batch reactor through mass exchange as shown in Fig. 1B. The hyporheic zones do not communicate with each other, but only with the stream water. The mass exchange between the hyporheic reactor and the stream reactor is provided by NEXSS through user input. In other words, we only use the NEXSS output and it is not part of the model development. The batch reactors in Fig. 1B are simulated simultaneously with the implicit time stepping through the Newton Raphson method in batch mode (i.e., no transport) of PFLOTRAN (Lichtner et al. (2017). In this study, we only modified the in-stream nutrient transformation module in SWAT and did not modify the hydrologic flow and solute transport by taking advantage of the operator-splitting approach for solute transport and reaction in SWAT. The model in this study is not limited by the number of storage zones. The user can provide the number of zones through the input file without having to modify the code. In the following, we describe each of these components and their coupling in detail.

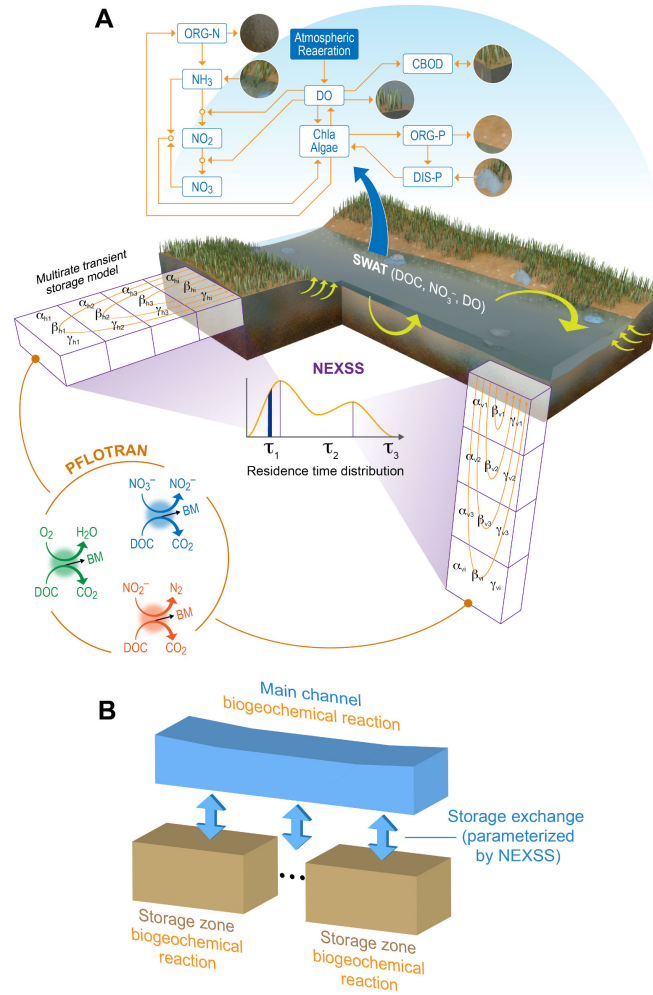


Figure 1. Schematics of coupling SWAT, MRMT, and microbial reactions in HZs. Top of the figure (A) shows reactions in the stream water column. In the circle are representative reactions in the HZs. Rectangular prisms are sub-storage zones. The orange curves in the rectangular prisms are streamlines. Residence time distributions for lateral and vertical HZs are estimated by NEXSS. α_i is the exchange rate corresponding to residence time τ_i in the sub-storage zone i . β_i and γ_i represent reaction rates for different reactions in the sub-storage zone i . Bottom figure (B) is the simplified conceptual model of (A). All chemical transformation processes shown are solved using PFLOTRAN.

100 2.2 Mass Exchange Processes between the Channel and Storage Zones

MRMT is commonly used to simulate the late-time solute and contaminant tails in porous media (e.g., Haggerty and Gorelick, 1995; Wang et al., 2005; Liu et al., 2008; Fernandez-Garcia and Sanchez-Vila, 2015). We use it here to simulate mass transfer between the stream channel and multiple storage zones according to a spectrum of rates within each storage zone. The mass

exchange rate of a solute component due to hyporheic exchange is:

$$m_{s,j} = (C_j - C_{s,j})q_s L, \quad (1)$$

where j is the solute component of interest (O_2 , NO_3^- , DOC, and NO_2^- etc.), $s = 1, \dots, N$ is the storage zone, $m_{s,j}$ is the mass exchange rate of the j -th component [MT^{-1}], C_j is the concentration in the main channel [ML^{-3}], $C_{s,j}$ is the concentration of the j -th component in the s -th storage zone [ML^{-3}], q_s is water exchange flux per reach length [$L^3 L^{-1} T^{-1}$], and L is the length of the reach.

2.3 Mass Balance Equations of the Coupled System

Considering the biogeochemical processes in the water column, storage zones, and hyporheic exchange, the final mass balance equations for dissolved components in the channel and storage zones are:

$$AL \frac{\partial C_j}{\partial t} + \sum_{s=1}^N m_{s,j} = AL \left(D \frac{\partial^2 C_j}{\partial x^2} - u \frac{\partial C_j}{\partial x} + \sum_{m=1}^M a_{m,j} r_m \right), \quad (2)$$

$$A_s L \frac{\partial C_{s,j}}{\partial t} = m_{s,j} + A_s L \sum_{ms=1}^{Ms} a_{ms,j} r_{ms}. \quad (3)$$

The area of the storage zones are calculated as a function of each storage zone's water exchange flux (q_s) and storage residence time (τ_s):

$$A_s = q_s \tau_s, \quad (4)$$

where A is the cross-sectional area of the channel [L^2], A_s is the cross-sectional area of the storage zone s [L^2], t is time [T], τ_s is storage residence time [T], r_m is the reaction rate of the m -th ($m = 1, \dots, M$) reaction in the channel water [$ML^{-3}T^{-1}$], $a_{m,j}$ is the stoichiometry of the j -th component in the m -th reaction i [-], r_{ms} is the reaction rate of the ms -th ($ms = 1, \dots, Ms$) reaction in the storage zone [$ML^{-3}T^{-1}$], $a_{ms,j}$ is the stoichiometry of the j -th component in the ms -th reaction i [-], D is longitudinal dispersion [L^2T^{-1}], and u is flow velocity in the channel [LT^{-1}]. The other variables are defined in Eq. (1).

Equations (1)-(4) are a parsimonious version of the general form of the MRMT model (e.g., Haggerty and Gorelick, 1995; Anderson and Phanikumar, 2011) where a discrete number of storage zones, each with different geometry, linear rate, and biogeochemical reactions, are considered.

2.4 Water Column Biogeochemical Processes

The in-stream submodel within SWAT is based on the QUAL2E (Brown and Barnwell, 1987) model. QUAL2E simulates major interactions of the nutrient cycle, atmospheric aeration, algae production, benthic oxygen demand, and carbonaceous oxygen


uptake (Fig. 1). Details of the processes and transformation rates can be found in Brown and Barnwell (1987) and Neitsch et al. (2011). Major processes shown in Fig. 1 in the channel water column are summarized below:

1. Algae growth and respiration. Algae grow via photosynthesis and die via respiration. As algae grow and die, they form an organic part of the in-stream nutrient cycle. Nutrient limitation factor is considered for algal growth.
2. Nitrogen cycle. The transformation from organic nitrogen to ammonia, to nitrite, and finally to nitrate is stepwise.
3. Phosphorus cycle. Organic phosphorus is mineralized to soluble phosphorus available for uptake by algae.
4. Transformation of dissolved oxygen (DO). Concentrations of DO can be changed due to atmospheric re-aeration, photosynthesis, plant respiration, benthic demand, biochemical oxygen demand, and nitrification.

Algae, organic nitrogen, and phosphorus can also be removed from the stream by settling. All of the reactions described above contribute to r_m in Eq. (2).

2.5 Storage Zone Biogeochemical Processes

Although any type of biogeochemical process of interest can be simulated by the model, we focus on the following reactions for aerobic respiration and denitrification in each storage zone:

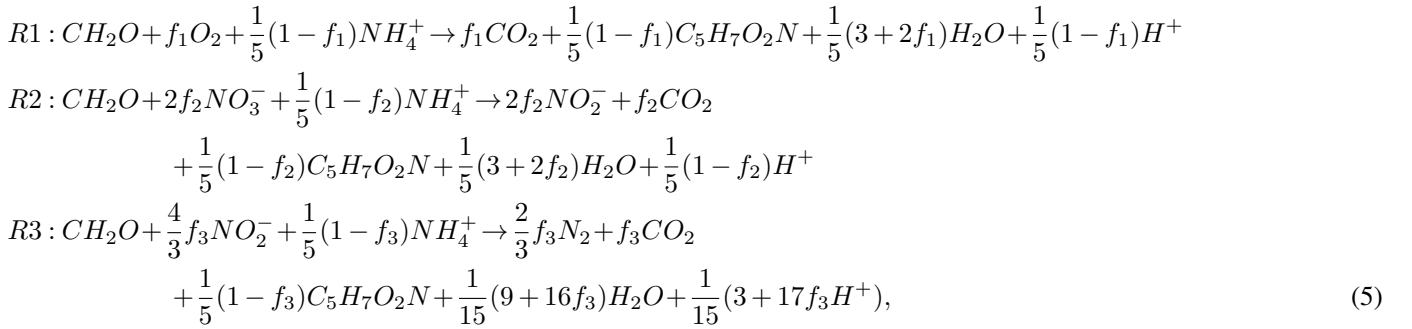

where the reactions R1, R2, and R3 are associated with the electron acceptors O_2 , NO_3^- , and NO_2^- , respectively, and f_1 , f_2 , and f_3 are the fractions of the electron equivalents in CH_2O used for energy production in each reaction. We used the approach proposed by Song et al. (2017) and Song et al. (2018) to model the reaction rates for $R1$, $R2$, and $R3$ (denoted as r_1 , r_2 , and r_3 , which contribute to r_{ms} in Eq. (3):

$$r_i = e_i r_i^{kin}, i = 1, 2, 3. \tag{6}$$

These reaction rates incorporate unregulated and regulated effects. In particular, the unregulated effect is represented by a Monod-type kinetics coefficient (r_i^{kin}) of the form

$$r_i^{kin} = k_i \frac{a_i}{K_{a_i} + a_i} \frac{d_i}{K_{d_i} + d_i} [BM], \quad (7)$$

where the k_i , $K_{a,i}$, and $K_{d,i}$ denote the reaction rate [$\text{mol mol}^{-1} \text{d}^{-1}$], half-saturation constants associated with the electron acceptors [mol L^{-1}], and half-saturation constants for donors [mol L^{-1}], respectively, a_i is the concentration of electron acceptor [mol L^{-1}], and d_i is the concentration of electron donor (mol L^{-1}), [BM] is the concentration of biomass [mol L^{-1}].

On the other hand, the regulated effect is dictated by the enzyme activity (e_i) and determined by the cybernetic control law (Young and Ramkrishna, 2007) as follows (Song et al., 2018):

$$e_i = \frac{r_i^{kin}}{\sum_i^3 r_i^{kin}}. \quad (8)$$

This approach associates a community's traits with functional enzymes without directly considering the dynamics of individual microbial species or their guilds that synthesize their enzymes (i.e., the entire microbial community is treated as a single organism) and allowed the estimation of reaction stoichiometries and rates for denitrification, as well as biomass degradation rate (Song et al., 2017). Rather than using empirical inhibition kinetics, the formulation in Eq. 8 enables the oxygen regulation of denitrification in response to environmental variation (Song et al., 2018).

2.6 Numerical Solution of the Nonlinear Reaction System

In SWAT, dissolved nutrients are transported with the water and those sorbed to sediments are allowed to be deposited with the sediments on the bed of the channel (Neitsch et al., 2011). Nutrient transport and reactions in SWAT are solved sequentially. We modified the explicit time-stepping algorithm in the original code for in-stream chemistry so the resulting nonlinear system of equations from the transformations taking place within the stream water and storage zones are simulated simultaneously with the implicit time stepping through the Newton Raphson method in batch mode (i.e., no transport) of the PFLOTRAN (Lichtner et al., 2017) model. PFLOTRAN is an open source, massively-parallel reactive multiphase flow and multicomponent transport code. It has well-established documentation (<https://www.pflotran.org/documentation/>).

During each time step, the initial condition in the water column was calculated using the following equation (Neitsch et al., 2011):

$$C_{j,i} = \frac{m_{j,wb} + m_{j,flowin}}{V_{stored} + V_{flowin}}, \quad (9)$$

where $C_{j,i}$ is the initial concentration of dissolved component j in the water [ML^{-3}] within reach i , $m_{j,wb}$ is the amount of component j in the water body at the beginning of time step [M], $m_{j,flowin}$ is the amount of component j added to the water

body with inflow at the end of time step [M], V_{stored} is the volume of water stored in the channel at the beginning of time step [L^3], and V_{flowin} is the volume of water entering the channel at the end of time step [L^3], calculated using the Muskingum routing method (Overton, 1966).

3 Numerical Experiment

3.1 Site Description

We tested our model in a ninth-order reach of the the Upper Columbia-Priest Rapids watershed located in southern Washington State (N46.23~46.86, W118.14~120.25). The selected reach is adjacent to the Hanford site downstream of the Priest Rapids Dam, representing a regulated river section with significant agricultural nutrient inputs. The Priest Rapids watershed has a semi-arid climate with a Mediterranean precipitation pattern. Winters are cold, with a mean temperature of ca. -2.2°C. Water is pumped from the river for irrigation and runoff is returned to the river through canal drains. This watershed is dominated by agricultural activities on irrigated land. The Columbia River is the primary source of surface water for irrigation. Major crops in the watershed include alfalfa, potatoes, spring barley, winter wheat, corn, and orchards. Sources of pollutants entering the Columbia River are irrigation return flows and groundwater seepage associated with irrigated agriculture. Dilution in the river results in contaminant concentrations that are below drinking water standards.

3.2 SWAT Model Configuration

We set up the SWAT model by combining a series of geospatial data. We derived topography information from the U.S. Geological Survey (USGS) National Elevation Dataset (<https://lta.cr.usgs.gov/NED>) with a spatial resolution of 30 meters. Land covers including shrubland, forestland, grassland, developed land, barren land, and cultivated land were derived from the US Department of Agriculture Cropland Data Layer (<https://nassgeodata.gmu.edu/CropScape/>) with a spatial resolution of 30 meters. Figure 2a shows the shapes of the reaches within the watershed. A reach is a section of stream between two defined points. Figure 2b compares the coarser reaches (green lines) generated for SWAT with those (black lines) defined in the National Hydrography Database (NHD Plus V2, <http://nhd.usgs.gov>) at a selected location. NHD Plus V2 is used by NEXSS for residence time and exchange flux estimations. Highlighted in cyan is the main channel of the Columbia River. Climate data for the period of 2001-2015 from North America Land Data Assimilation System (<https://ldas.gsfc.nasa.gov/nldas/NLDAS2forcing.php>) was used to obtain precipitation, temperature, relative humidity, solar radiation, and wind speed. Discharge of water and nitrate at the USGS 12472900 station near the Priest Rapids Dam were used as inputs. In addition, we obtained nitrogen and phosphorus fertilizer application rates (USDA-ERS, 2018), tillage intensity (CTIC, 2008), and planting and harvesting (USDA, 2010) for crop management (Qiu and Malek, 2019).

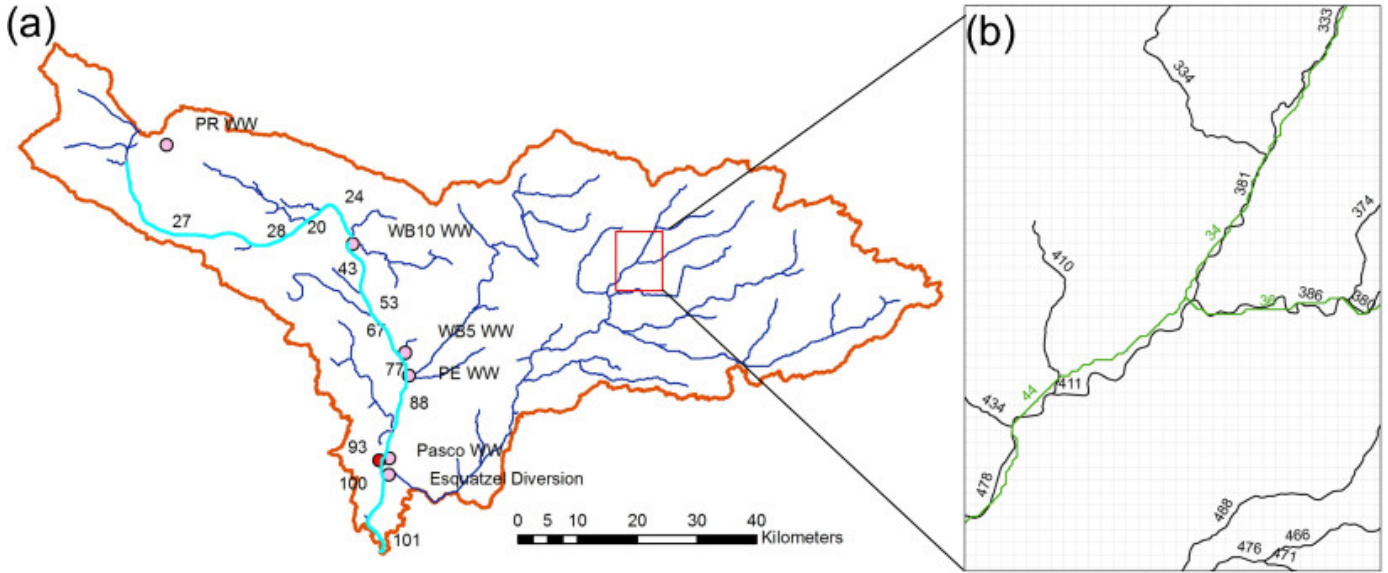


Figure 2. Reaches created by SWAT, highlighted in cyan is the main channel of the Columbia River (a). Numbers identify the individual reaches, the red circle is the area where field samples for dissolved organic carbon were collected, pink circles are the main wasteways carrying irrigation return flow water from farms and irrigation system operations, and the red rectangle shows the selected location for the mapping between SWAT and NHD Plus v2 that's used for NEXSS simulation. (b) shows the mapping between NEXSS (black lines) and SWAT (green lines) for the rectangle area. The numbers in (b) are reach identifications.

3.3 Mass Exchange Parameters

Quantifying hyporheic exchange in streams is difficult. Exchange rate coefficients are often determined by tracer injection in the stream (e.g., Harvey et al., 2013; Gooseff et al., 2011; Laenen and Bencala, 2001). Assuming steady uniform flow, the river corridor hydrologic exchange model NEXSS in Gomez-Velez and Harvey (2014) can estimate hydrologic exchange flux rates and distribution of residence times that can be used to parameterize the exchange rate coefficients. NEXSS is a single tool that consolidates multiple previously published geomorphic and hyporheic flow models for the analysis of exchange at the basin scale (Gomez-Velez et al., 2015). The river network is discretized into individual reaches of length L , where values of channel width, bankfull width, depth, bankfull depth, discharge, average channel velocity, median grain size, channel slope, sinuosity, and regional hydraulic head gradient in the x and y direction are prescribed. The model is applied in two steps: geomorphic characterization and hyporheic exchange modelling. For each channel reach, the hyporheic exchange modelling predicts average hyporheic exchange flux per unit area of streambed and residence time distributions, as well as median residence time for vertical exchange beneath submerged bedforms (ripples, dunes and alternate bars) and lateral exchange outside the wetted channel through emergent alternate bars and meanders. To estimate the net amount of vertical exchange flux, vertical exchange is conceptualized as a three-dimensional process, assuming a homogeneous and isotropic porous medium. The boundary conditions of the system are: the top boundary at the sediment-water interface has a prescribed head distribu-

tion, lateral boundaries ($y = 0$ or w_{bf} (bankful channel width)) are impervious ($q_y(x, y = 0, z) = q_y(x, y = w_{bf}, z) = 0$), and the bottom boundary has a prescribed flux, which is defined as $q_b \approx 0.57KJ_y$ (Boano et al., 2009), where K is hydraulic conductivity, and J_y is the mean head gradient across the alluvial valley. Basal flux through the dunes and ripples induced by the regional groundwater flow is defined as $q_b = KJ_x$ (Elliott and Brooks, 1997), where J_x is the mean head gradient along the valley in the downstream direction. The lateral exchange is conceptualized as steady and two-dimensional process, and the flow is solved by the vertically integrated groundwater flow equation with the Dupuit–Forchheimer assumption. Following Gomez et al. (2012), the river is conceptualized as sinusoidal with wavelength λ [L] and amplitude α [L]. A prescribed hydraulic head $\psi_s(x) = \psi_0 + (J_x/\sigma)s(x)$ is assigned along the river stretch, where ψ_0 [L] is the elevation of the free surface elevation at the downstream end of the river above the horizontal bottom, $s(x)$ [L] is the arc length along the boundary, $\sigma = s(\lambda)/\lambda$ is sinuosity, J_x is the mean head gradient along the valley in the downstream direction. The boundary at a distance λ from the channel axis has a prescribed head $\psi(x, y = \lambda) = J_x x + J_y \lambda$, where J_y is the mean head gradient across the alluvial valley. The upgradient and downgradient boundaries of the domain along the reach are assumed periodic with a prescribed head drop $\psi(x = 0, y) = \psi(x = 2\lambda, y) - 2\lambda J_x$. A particle tracking scheme is used to estimate the flux-weighted residence time distribution and median residence time for the exchange zones. Detailed description of NEXSS and its assumptions can be found in Gomez-Velez and Harvey (2014) and its Supporting Information. Consistent with Gomez-Velez et al. (2015), we considered two storage zones corresponding to lateral and vertical exchange. NEXSS estimates these parameters for long-term average flow conditions and mean monthly flow conditions and therefore it can only capture the seasonal dynamics of flow.

Note that additional preprocessing is needed to match the scales of NEXSS and the model proposed in this study. NEXSS simulations are performed within the National Hydrography Database, which is characterized by reach lengths that range from 23 m to 43 km within the watershed of interest. Depending on the threshold of of land cover, soil, and slope in defining the hydrologic response units in SWAT, SWAT reaches may or may not overlap with NEXSS reaches. ThisIn the current configuration, NEXSS reach is different from the discretization used in the stream network delineated for the SWAT simulation (Fig. 2b). To address this issue of mapping the NEXSS exchange metrics into the SWAT stream network, we implemented a procedure that matches channels and transfers parameters over a rectangular grid that covers the entire watershed. As the reaches from the two networks do not exactly overlap (see Fig. 2b), we used a grid size of 200 m to search for matching reaches. Reaches that intersected with this grid and the length of each reach within each grid cell is calculated. For example, NEXSS reaches 386 and 380 in (Fig. 2b) contribute to SWAT reach 36. NEXSS reaches that do not overlap with those of SWAT are not considered, e.g., reach 374. To calculate the exchange flow for SWAT reach 36, exchange flux from NEXSS 386 and 380 are multiplied by the area of the channel bed and added together. The residence time for SWAT reach 36 is then calculated using residence time weighted by exchange flow of each contributing NEXSS reach. NEXSS reaches that do not overlap those of SWAT are not considered. Input file to the code includes: 1) reach identification number, vertical and lateral exchange fluxes, vertical and lateral residence times, reach width, and reach length within a grid from NEXSS; and 2) reach identification number, reach length within a grid from SWAT. Binary trees are created for both of the stream networks for NEXSS and SWAT to facilitate the search. When more than two reach segments of the two networks landed in the same grid cells, the matching reaches are found.

Mapping the NEXSS output to the simulated watershed, we found that the reaches along the Columbia River are characterized by vertical residence times ranging from 8 hours to 10 days, and the lateral residence times ranging from 17 days to 10 years (Fig. 3). The vertical and lateral residence times for the reaches highlighted in Fig. 2a are shown in Table 1 in the Supplement. Compared to other reaches in the watershed, the Columbia River is characterized by relatively larger exchange flow and shorter residence times in vertical storage zones (Fig. 3). Hydraulic conductivity, head gradient, stream geomorphology, and flow paths together determine the hyporheic residence times (Kasahara and Wondzell, 2003; Cardenas et al., 2008). The vertical exchange residence times are short, probably due to their hydraulic and geomorphic conditions that favor ripple and dune formation (Gomez-Velez et al., 2015). For example, hyporheic flow around steps and riffles with coarse-textured alluvium can result in short residence time distributions for hyporheic exchange flows (Kasahara and Wondzell, 2003). Vertical exchange flow is dominant along the Columbia River.

3.4 Parameters for Biogeochemical Reactions

Parameters for reactions in the stream water are default from SWAT. The selection of reaction parameters for HZs are informed by the denitrification experiments and modeling synthesis reported in Li et al. (2017) and Song et al. (2017), respectively. Stegen et al. (2016) showed that significant O_2 maintained in the HZ at the location shown by the red circle in Fig. 2a, which implies that aerobic respiration can take place in the HZ. Therefore, aerobic respiration and denitrification reactions are considered in this study. The parameters for biogeochemical reactions are the same as in Song et al. (2018), which were based on parameters derived from the aforementioned experiment as well as parameters for aerobic respiration assuming it is energetically more favorable than NO_3^- reduction. The uptake rates (k_i in Eq. 7) of oxygen, nitrate and nitrite are 68.94, 28.26, and 23.28 mmol mmol⁻¹ d⁻¹, respectively. Biomass degradation rate is 0.242 mmol mmol⁻¹ d⁻¹. The other parameters are not repeated here.

3.5 Case Scenarios

Starting from the base case, where mass transfer and reactions in the HZ were not simulated, we added mass transfers using two storage zones to represent vertical and lateral exchanges, and within each zone with only one exchange rate calculated from the NEXSS mean residence time was used for each zone. Then reactions in the HZs were added to isolate the impact of physical and biological processes on nitrate level in the river in order to answer the questions of the role of HZs and biogeochemical processes in HZs to nitrate concentration attenuation in the surface water. These three cases are referred to as BASE, MRMT, and MRMT+BGC, respectively. Additional cases with exchange and BGC include:

- 1) ➦ Replacing the residence time and exchange flux with those predicted by NEXSS using seasonal flow conditions. For this case, NEXSS model was run 12 times using mean monthly streamflow conditions. The exchange fluxes and residence times now change monthly instead of being constants throughout the whole simulation.

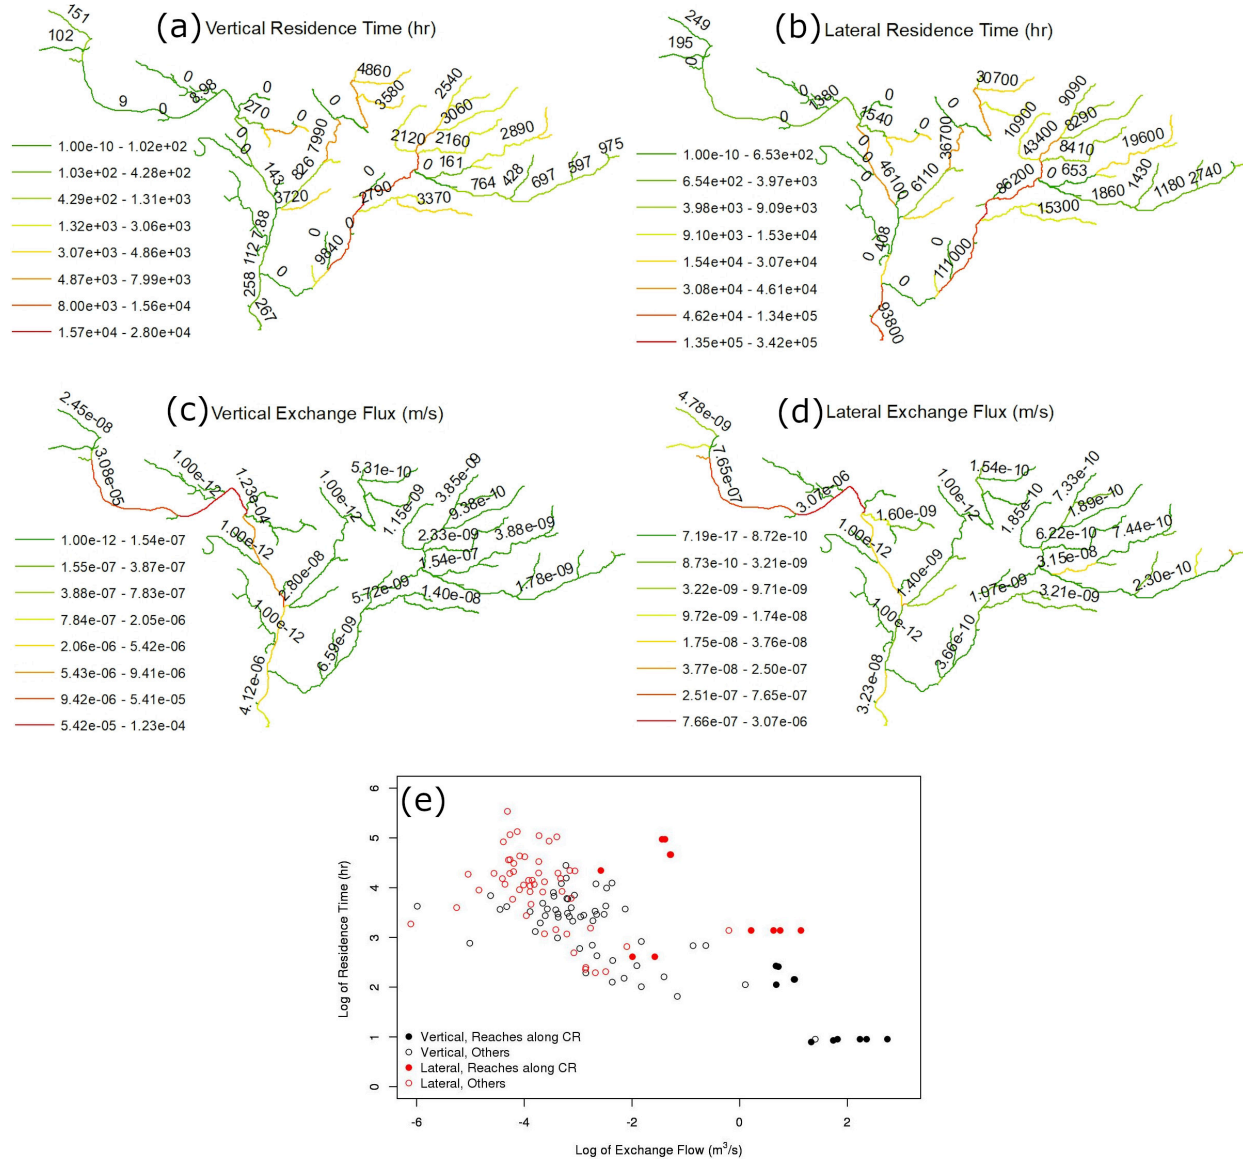


Figure 3. NEXSS simulated vertical (a,c) and lateral (b,d) residence times (h) and exchange $\text{flow rate} (m^3 s^{-1})$ flux (ms^{-1}) in the watershed, and scatter plot of exchange flow ($m^3 s^{-1}$) versus residence time (h) (e). Solid circles in (e) are for reaches along the Columbia River.

2) [2\)](#) Replacing the single storage zone in vertical and lateral with sub-storage zones within a storage zone, assuming a distribution of residence time to evaluate whether the commonly used single transient storage model is sufficient to model nitrate attenuation in the river;

285 3) [3\)](#) Pulsed increase of nitrate in the hyporheic zones to see how surface water quality will be affected when pulsed nitrate from the legacy waste intrude into the HZs that could be caused by a flow event.

4) [and 4\)](#) Adding irrigation return flows along the river as point sources to study if the river can quickly dilute the contaminant concentration from those sources because of the high discharge rate.

For case MRMT+BGC, the initial conditions for DOC, nitrate, and DO in the HZs were set to 0.0637 mmol L⁻¹, 0.079 mmol L⁻¹, and 0.287 mmol L⁻¹, respectively, the average concentrations of those observed in the field. Initial BM concentration is 0.01 mmol/L. As there is not a working model for DOC in the version of SWAT (SWAT rev664) for this study, we fitted an exponential relationship of DOC and stream discharge (shown in the supporting information Fig. S1) in the Columbia River using the limited measurement of DOC in the stream and stream discharge at the time of the measurements. This relationship is used to calculate DOC in the stream.

295 To represent multiple exchange rates according to a residence time distribution, the discrete form of the probability density function of residence time is written as

$$p(\tau_s) = \sum_j P_j \delta(\tau_s - \tau_{s,j}), \quad (10)$$

where $\tau_{s,j}$ is the residence time of the j -th sub-storage zone, P_j is the probability of occurrence of the residence time in the j -th sub-storage zone such that

$$300 \sum_j P_j = 1 \quad (11)$$

$\tau_{s,j}$ can be determined from the following equation using interpolation method:

$$f_j = \int_{\tau_s - \Delta\tau_s}^{\tau_s + \Delta\tau_s} p(\tau_s) d\tau_s, \quad (12)$$

in which f_j is defined as the fraction [or the area under the curve of the distribution function that is between \$\tau_s - \Delta\tau_s\$ and \$\tau_s + \Delta\tau_s\$](#) of the sub-storage zone within the vertical or horizontal storage zones that has an average residence time τ_s . Here
305 we assume equal fraction for each sub-storage zone, i.e., a vertical or horizontal storage is evenly divided into N_s sub-storage zones. [To extract \$N_s\$ residence times for the sub-storage zones in a given HZ with mean residence time \$\tau_m\$, we use the exponential distribution \(\$P = 1 - e^{-\tau_s/\tau_m}\$ \). We have one distribution for the vertical HZ and one for the lateral HZ, with means equal to the vertical and lateral residence time calculated from NEXSS. \$N_s\$ discrete residence time values with their](#)

corresponding probability were then extracted from this distribution for both HZs. For example, if $N_s = 10$, the fraction of each sub-storage zone is 0.1. The average residence time of each sub-storage corresponds to a value with probability less than or equal to 0.05, 0.15, 0.25, 0.35, 0.45, 0.55, 0.65, 0.75, 0.85, and 0.95, respectively. The minimum and maximum residence time are discrete values that are less than or equal to the given probability of 0.05 and 0.95, respectively. The maximum residence is interpolated from equation $1 - e^{-\tau_s/\tau_m} = 0.95$. The other discrete residence times are similarly solved.

4 Results

4.1 MRMT with single vertical and lateral storage zones

Compared to the BASE case, pure mass exchange by MRMT has little impact on the downstream nitrate level in the river due to the small exchange flow compared to the stream discharge (Fig. 4a). Vertical HZ reached dynamic steady state in the selected reach, but the concentration in the lateral HZ is still decreasing (Fig. 4b,c), indicating continuous losing of concentrations in the HZ due to slow mass transfer.

Figure 5 shows the concentration of nitrate in selected reaches (from upstream to downstream) along the Columbia River for case MRMT. The selected reach numbers are shown in Fig. 2a. In general, nitrate concentrations in the stream and HZs are nearly identical for reaches with similar residence times. Exchange with HZs of longer residence time slows the transport of nitrate in the stream (retardation) as can be inferred from the delayed peak concentration in vertical HZs of reaches RCH53 and RCH101 in Figs. 5B,D. Stream nitrate concentrations are in dynamic steady state with the vertical HZ. They are also in dynamic steady state with the lateral HZ for reaches RCH27, RCH24, RCH28, and RCH20, RCH77 and RCH88 suggesting that lateral exchange can be important too. It's not true for RCH77 and RCH88 RCH53, RCH67, RCH93, RCH100, RCH101 as their ~~exchange flows are much smaller and~~ residence times are much longer.

4.2 HZ Microbial Respiration

Including the respiration reactions in the simulation results in consumption of stream nitrate (green line in Fig. 4a) because the reaction time is faster compared to vertical HZ residence times in some reaches along the river, but on the similar order. Nitrate concentration in the vertical HZ at the selected reach (RCH93) drops due to the respiration reactions, creating a concentration difference between the channel and HZs, further decreasing the concentration in the channel compared with case MRMT. Lateral HZ is diffusion limited (slow exchange), hence not much dynamics in nitrate concentration (Fig. 4c).

4.3 Seasonal exchange flux and residence time

For this case, dynamic exchange parameters were generated using NEXSS driven by long-term averaged monthly stream discharges. During the simulation, exchange parameters were updated each month. Figure 6a,b,c shows the change of vertical exchange flux and residence time for RCH101 (outlet) as stream discharge changes: 50% change of stream discharge results in

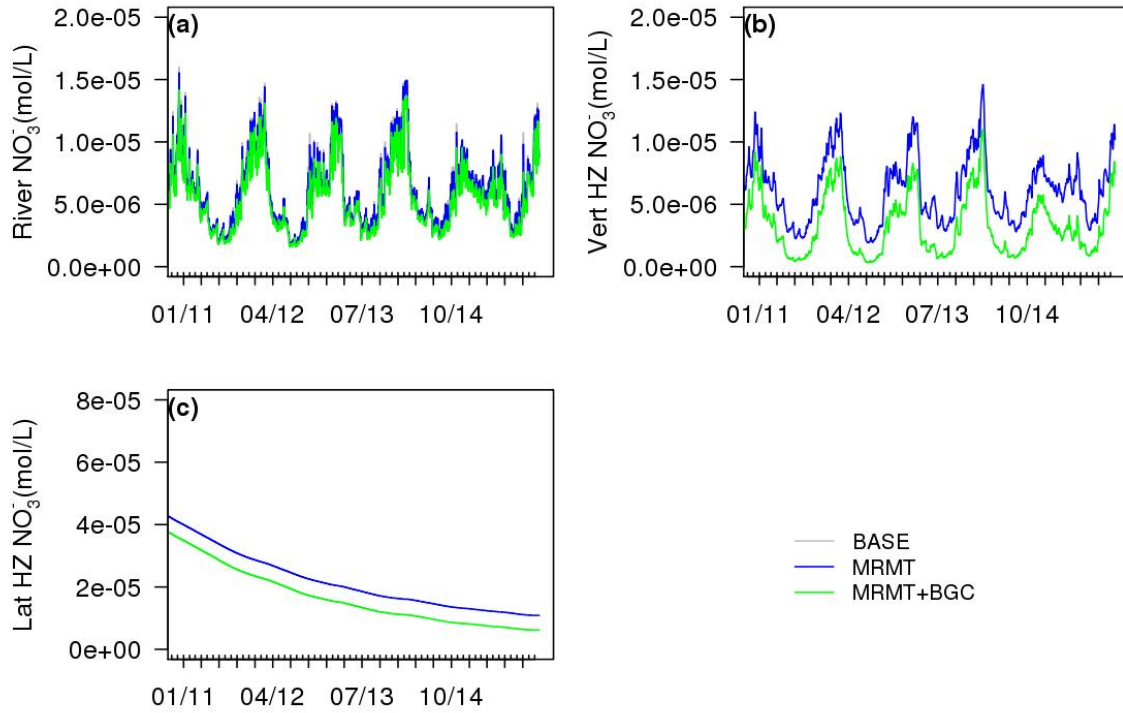


Figure 4. Comparison of nitrate in the river (a), vertical HZ (b), and lateral HZ (c) between cases BASE, MRMT, and MRMT+BGC at reach 93.

about 12% change of exchange flux and residence time. Using the seasonal exchange fluxes does not have a significant effect on the stream water nitrate concentration (Fig. 6d,e,f). ~~However, it increases the nitrate concentration in the vertical HZ in the~~
 340 ~~fall as the small exchange rates slow down the nitrate and carbon delivery to the HZ, reducing the reaction rates.~~

4.4 Multiple sub-storage zones

Zhang and Baeumer (2007) showed that the long tail behavior in stream tracer can be approximated by a small number of mass transfer coefficients. We started with 2010 mass transfer coefficients or sub-storage zones for both the lateral and vertical HZs. Using exponential residence time distribution and 2010 sub-storage zones in both the lateral and vertical HZs,
 345 we had multiple10 discrete residence times rates-based-on with the mean residence time in the lateral and vertical HZs from NEXSS following the procedure described in Section 3.5. Given the total lateral and vertical HZ volumes calculated using the

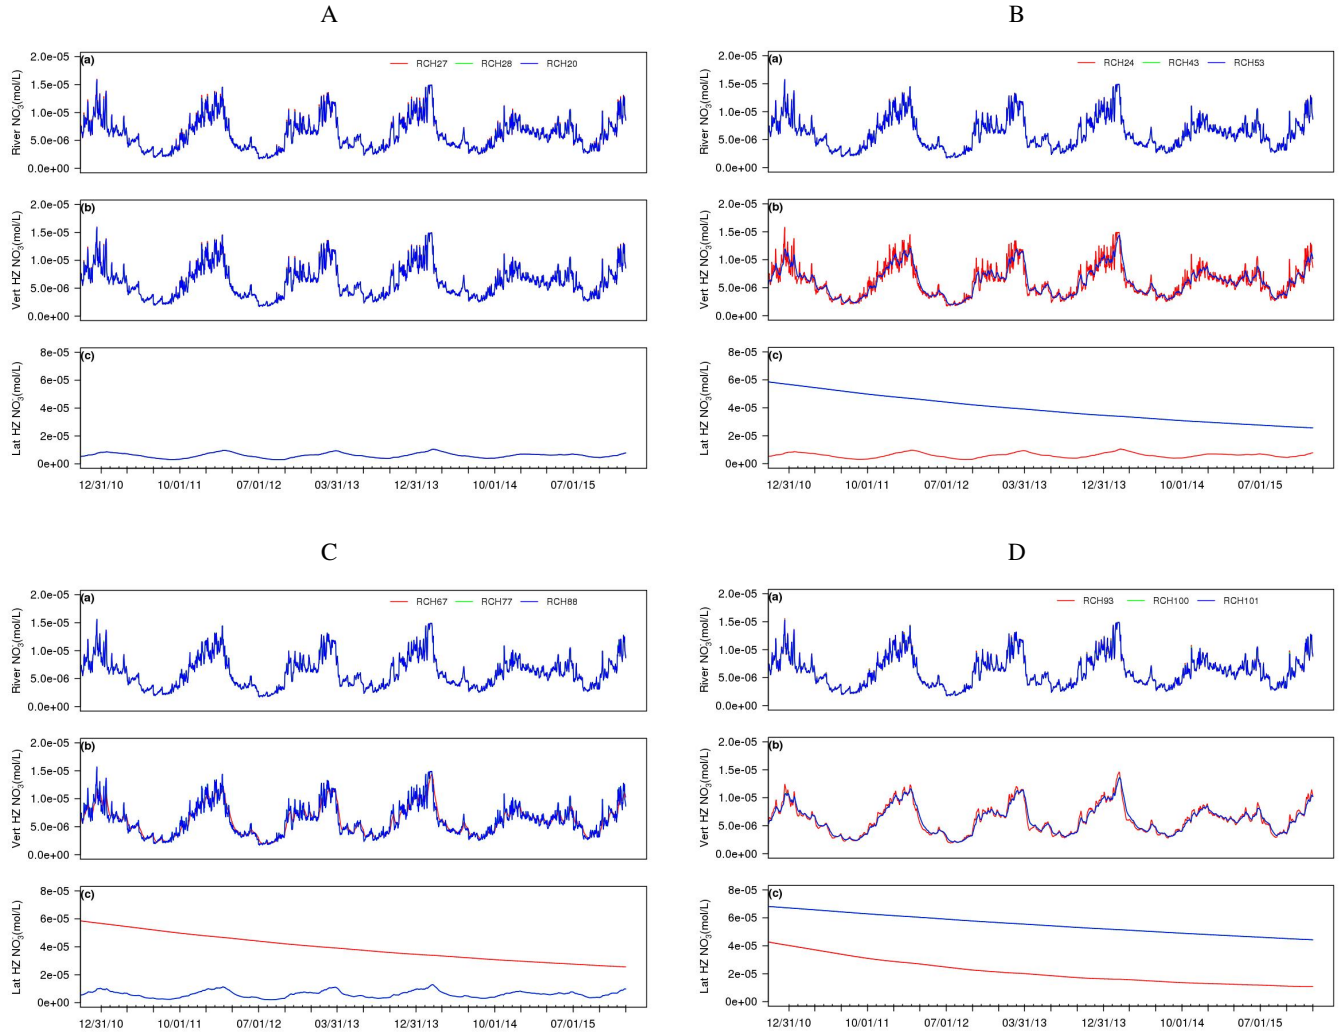


Figure 5. Nitrate concentration in the stream and HZs along the Columbia River using MRMT.

exchange flux and mean residence time from NEXSS, we assumed Assuming 1) the exchange flux from the NEXSS estimation is equally distributed in each sub-storage zone , and 2) larger fluxes are associated with longer residence times. The second assumption is based on the theory in Elliott and Brooks (1997) that exchange flowpaths with higher fluxes penetrate deeper in the streambed with homogeneous and isotropic material and are associated with longer residence times. the residence time for each sub-storage zone is calculated using Eq. 12. Compared to the single-rate simulation, Ssimulation with multiple exchange rates and uniform hyporheic exchange fluxes removes only 3% more of nitrate in the HZ of the Columbia River reaches due to denitrification (Fig. 7a), and 40% less nitrate removal in the HZs of the Columbia River reaches (Fig. 7b) when high exchange flux is associated with long residence time within each storage zone showed less removal of nitrate in the stream

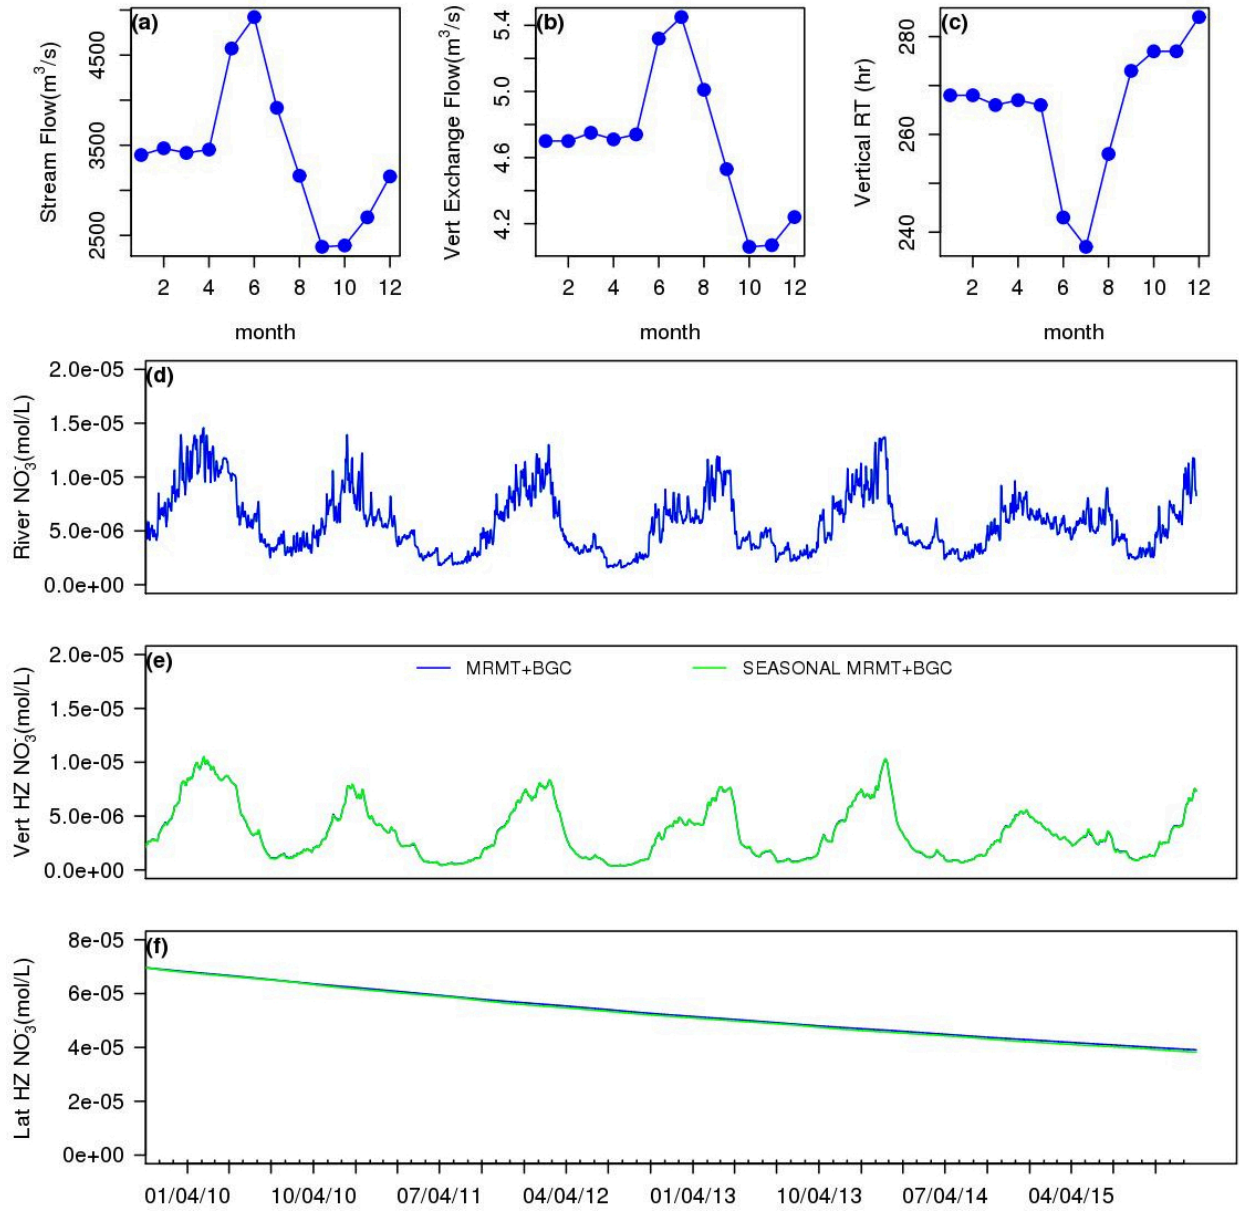


Figure 6. Effect of streamflow dynamics (a) on hyporheic exchange (b,c), and nitrate concentration in the stream (d), vertical HZ (e), and lateral HZ (f) using exchange rates derived from annual discharge (blue line) and seasonal discharge (green line) at the outlet

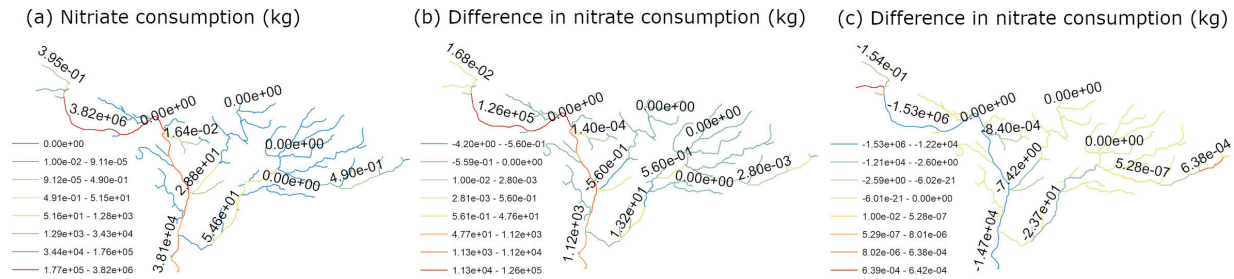


Figure 7. Total nitrate consumption through HZ denitrification at the end of simulation using a single storage zone in both vertical and lateral HZs (a), change in nitrate consumption with 10 sub-storage zones in both vertical and lateral HZs compared to the simulation with single storage zone using uniform exchange flux (b) and nonuniform exchange flux (c).

Nitrate concentration in the stream at reach 93 using single (black line) and multiple exchange rates (red line) within each HZ.

through microbial respiration in the HZs compared to the single-rate simulation (Fig. 7). Model results show no difference with 10 or 20 sub-storage zones, except for much longer simulation time for 20 sub-zones.

4.5 Pulsed nitrate increase in HZs

Contaminant can enter the stream during the upwelling of nitrate-contaminated groundwater from the legacy waste site. We changed the nitrate concentration to 0.3 mmol L^{-1} in the vertical HZ of RCH27 and RCH101 separately at the beginning of 2011. Because the residence time in HZ of RCH27 is 30 times faster than RCH101 (Table 1 in the Supplement), the stream and HZ nitrate concentration reached steady state instantaneously (Fig. 8a,b) and the high concentration pulse propagated downstream (Fig. 8c,d) because of the longer residence time downstream. Local perturbation at the outlet (RCH101) results in a small change in stream water concentration because of the longer residence time (Fig. 8c,d). At the outlet, it takes 112 days for the reach concentration to return to a pre-perturbed condition. It has been observed in the field that high stream nitrate concentration than those shown in the bBASE case can occur. The field observation may be explained by the contaminant intrusion as tested here. The non-equilibrium behavior shown in this test indicates that dynamic mass contribution from the groundwater should be considered in this model as it affects concentrations in the HZs.

4.6 Irrigation return flows

There are five major wasteways carrying return flow water into the Columbia River (Fig. 2a). Bureau of Reclamation, Pacific Northwest Region, has recorded nitrate loading from these wasteways. We generated an hourly nitrate loading (Fig. 9) as five source points and reran the MRMT+BGC case. Wasteways WB5 and PE flow into RCH77 and RCH88, respectively. These two reaches have short residence times, thus nitrate coming from these wasteways will exchange in the HZs in a short time and will not be expected to have a big impact on surface water quality, as it is shown that the increase of nitrate concentration in the main channel at RCH77 almost equals to the increase in vertical HZ (Fig. 10a,b) compared to the case without return flows.

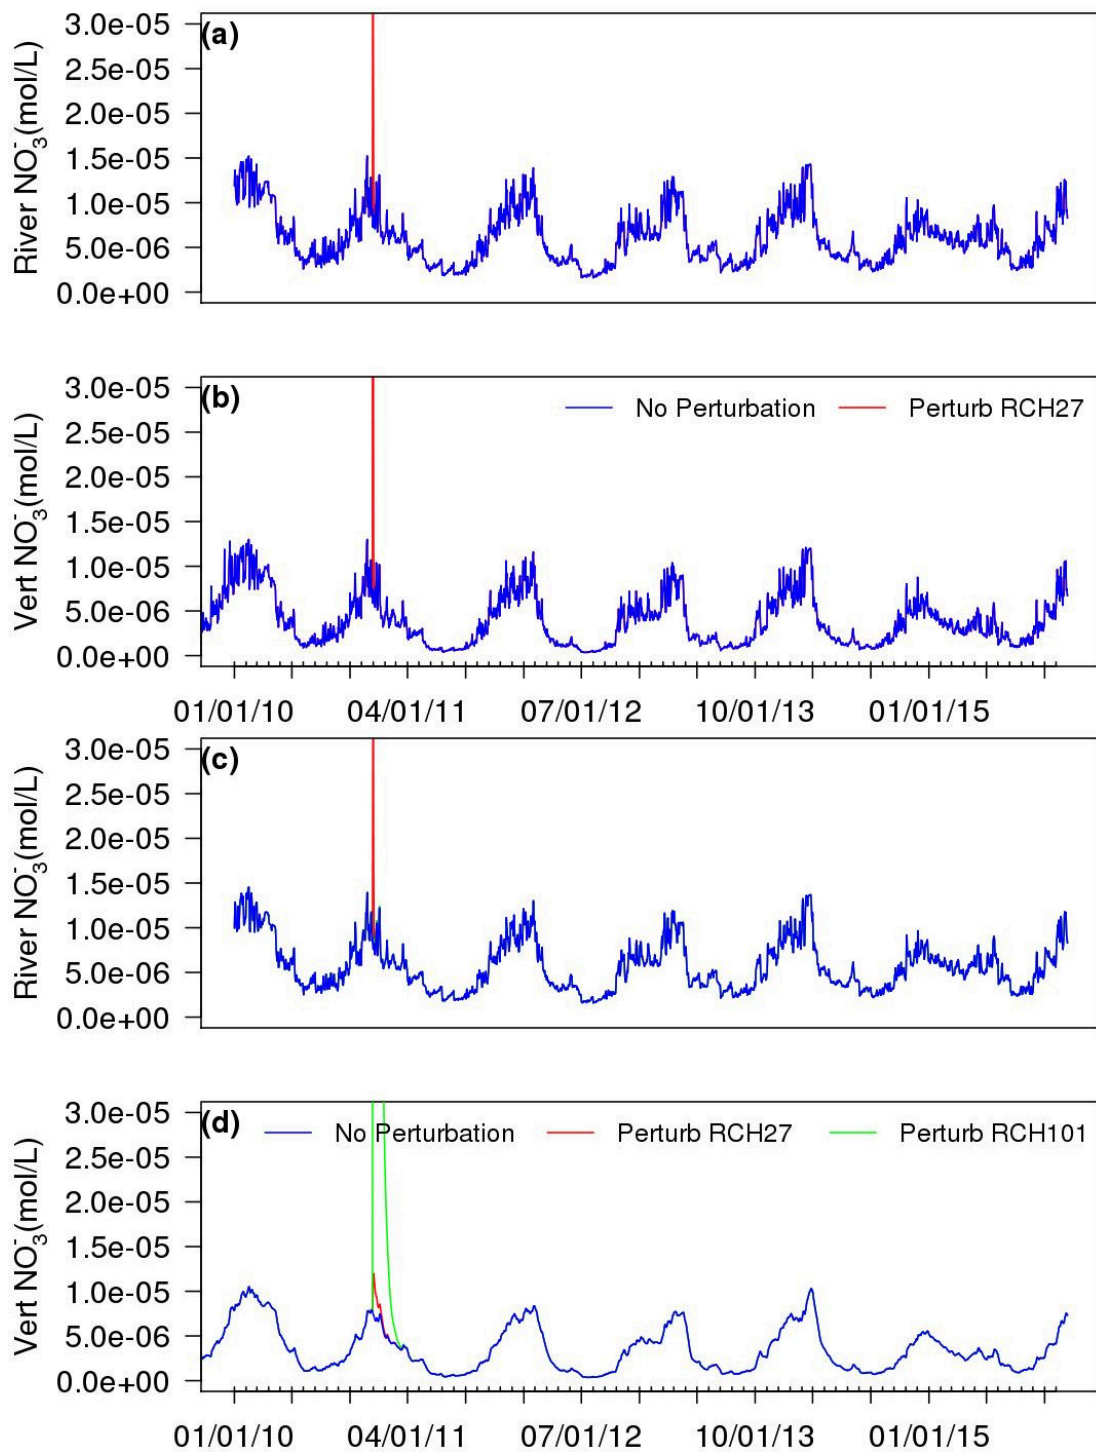


Figure 8. Nitrate concentration in the stream and vertical HZ at RCH27 (a),(b) and at the outlet (c),(d) with and without HZ perturbation using MRMT+BGC.

Wasteways WB10, Pasco, and Esquatzel Diversion flow into RCH43, RCH93, and RCH100, respectively. Because the lateral residence times of the aforementioned reaches are much longer than the vertical times, the following discussion will only focus on vertical exchanges. The residence times of RCH77, RCH88, and RCH100 are 8.49, 7.88, and 258 hr, respectively. The short residence times at RCH77 and RCH88 result in fast delivery of nutrient and carbon into the HZs and higher reaction rate for denitrification at these locations compared to RCH100. The vertical HZ volume of RCH77 and RCH88 are 14% and 13% of that of RCH100. Total upstream nitrate loading at RCH77 and RCH88 are 28% and 106% of that from Esquatzel Diversion into RCH100 alone. At the end of the simulation, the total denitrification at RCH77 and RCH88 are 7000 kg and 8400 kg due to nitrate loading from the irrigation flow only. They are 178% and 214% of that at RCH100 where total denitrification is 3920 kg (Fig 10). In other words, HZ denitrification can remove more nitrate at RCH77 and RCH88 even though the loadings and HZ volumes are smaller compared to those at RCH100. ~~These reaches have relatively longer residence times, which means nitrate coming from these wasteways will stay in the stream and deteriorate downstream water quality. Compared to RCH77 and RCH88, nitrate loadings into reaches with longer residence times, such as RCH100 and RCH101, have more negative effects on river water quality. Water treatment attention should be paid to these wasteways before they flow into the Columbia River. Compared to the case without return flows, Fig. 10c,d shows there is more increase (as high as 20%) of nitrate concentration in the main channel caused by return flow from the Esquatzel Diversion (the highest nitrate loading source) compared to that in the vertical HZ at RCH101 because of the long residence times in RCH100 and RCH101.~~

5 Discussion

Our study focuses on the effect of bedform-induced (vertical) and sinuosity-driven (lateral) hyporheic exchange derived under steady-state conditions on stream water quality in large rivers using the SWAT-MRMT-R model we developed. Our studied system is dominated by inlet conditions if there are no additional sources in the HZs.

5.1 Coupled effect of physical and biogeochemical processes

Coupling reactive transport in channel and HZs, as well as MRMT in a large river using the mean residence times and exchange fluxes calculated from NEXSS, our simulations show that HZs can attenuate the peak nitrate concentrations in the stream with mass transfer and biogeochemical reactions, with 11.6% of concentration reduction on average compared to the base case without MRMT (Fig. 4). However, for biogeochemically inactive zones, hyporheic exchange (physical process) alone is not effective in attenuating nitrate in the surface water due to the relatively small exchange flow in the vertical HZs. Depending on the channel morphologic features and the river channel aquifer's physical properties of an individual river corridor, lateral HZ can play an important role in storage and biogeochemical transformation in certain reaches as the vertical HZ (Fig. 5), which echoes the findings in Gomez-Velez et al. (2015).

5.2 Effect of dynamic hyporheic exchange

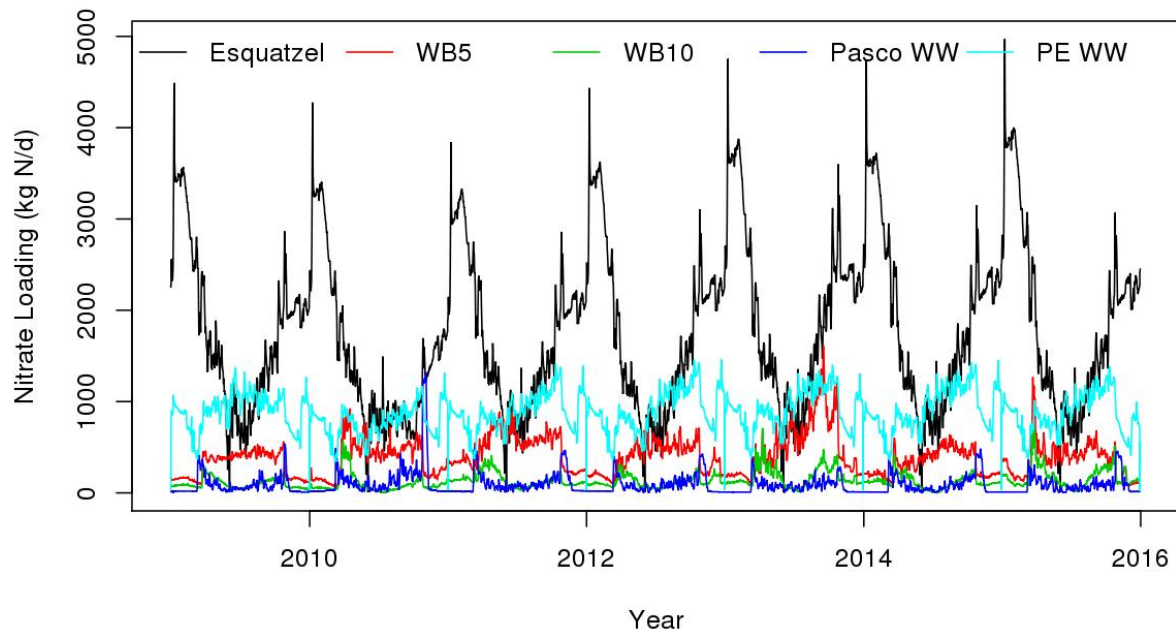


Figure 9. Nitrate loadings at five wasteways along the Columbia River.

Our simulation using seasonally dynamic hyporheic exchange shows that, although not significant, there is some decrease in nitrate removal in the channel compared to the constant exchange case (Fig. 6d) caused by the low exchange fluxes in the fall. The Hanford Reach of the gravel-bed Columbia River exhibits frequent hydrologic mixing and steep physicochemical gradients caused by the combined effects of large, long-term river stage fluctuations driven by snowmelt runoff and short-term fluctuations driven by upstream flow regulation at the Priest Rapids Dam (Graham et al., 2017; Stegen et al., 2016; Song et al., 2018). Gravel-bed river corridors, which are common worldwide (Nilsson et al., 2005; Sawyer and Cardenas, 2009; Hauer et al., 2016), exhibit coarse-textured sediments with high hydraulic conductivity. Hydrologic exchange due to dam operation and high hydraulic conductivity can drive river water into and out of the river banks, creating high frequency lateral exchanges in these type of river corridors. The study in Zhou et al. (2017) indicated the exchange fluxes in the shallow water near the river banks of the Columbia River were stronger than those in the center of the channel due to a large pressure gradient between the groundwater and river stage. This is not captured by the steady-state NEXSS model, which could result in an inaccurate estimation of the attenuation capability by the HZs and recovery time for the stream water quality.

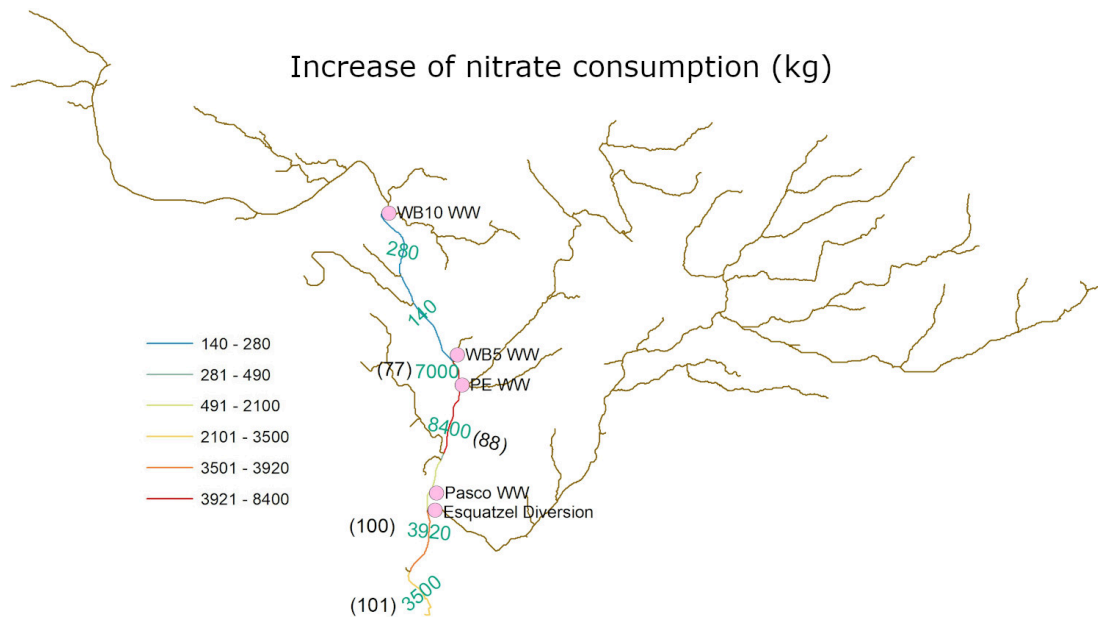


Figure 10. ~~Difference of nitrate concentration with and without irrigation return flows in the stream and vertical HZ at RCH 77 (a),(b), and at the outlet (c),(d)~~Increase of HZ nitrate consumption (kg) through denitrification due to irrigation return flow compared to case MRMT+BGC. Text in green shows the amount of nitrate consumption, pink solid circles are the locations of irrigation wasteways, and numbers in parentheses are reaches of interest.

5.3 Effect of multirate mass transfer using multiple rates

Short residence times could provide faster supply of DOC into the HZs. Including the short residence time can frequently change the chemical signature of the stream water in the HZ and could be used to explain, for example, the response of microbial community composition in Stegen et al. (2016). The importance of the biogeochemical processes in HZs on surface water quality could be affected by the fraction of this short residence time if Damköhler number for oxygen (Da_{O_2}) is greater than 1 (Zarnetske et al., 2012). Our simulation with multiple rates shows that channel hyporheic zone nitrate removal due to denitrification could increase or decrease compared to a single rate (Fig. 7) depending how exchange flux for each sub-storage zone is approximated. MRMT simulation with the uniform exchange flux approximation makes almost no difference in HZ nitrate consumption compared to the single rate simulation, while much less (40%) nitrate consumption when large fluxes are assumed to be associated with longer residence times. This conclusion is caused by the equal exchange flux assumption for each sub-storage zone that decreased the fraction of short residence time compared to the single rate case in our simulation and the steady state NEXSS assumption. It has yet to be verified by field studies.

5.4 Implications for source water quality treatment

430 Spatial perturbation in the HZs and including point sources of irrigation return flow show that high-concentration pulses of nitrate may stay in the stream before being attenuated (Figs. 8 c,d and 10c,d). This has implications for the effort to treat water quality in groundwater and irrigation return flows before entering the reaches with longer residence times, particularly for streams impacted by agricultural activities.

5.5 Limitations and future development

435 There are ~~limitations~~ limitations in the current model such as 1) the lack of nitrification processes, 2) source uncertainties, e.g., lack of groundwater contribution to the HZs in the model; 3) uncertainty in the exchange rates and residence times calculated by NEXSS; ~~and~~ 4) uncertainty in the rates for biogeochemical reactions in the HZs; and 5) lack of field observations for model comparison and application. For example, the shape of residence time distributions can be drastically changed due to heterogeneity in stream sediment hydraulic conductivity as shown in the study of Pryshlak et al. (2015). We only considered
440 denitrification processes in our study case, which is reasonable in this study as the Damköhler number for oxygen (Da_{O_2}) is > 1 based on residence times calculated from NEXSS and oxygen uptake rate assumed. If Da_{O_2} becomes less than 1, nitrification processes which dominate short residence times (Zarnetske et al., 2012) should be included in the model to better quantify the role of HZs as a net sink of nitrate. These processes can be easily implemented in PFLOTRAN. Also, we only evaluated the denitrification process using a single set of reaction rate parameters in the river corridors. However, nutrient uptake in streams
445 can be highly spatially variable (McClain et al., 2003). Our perturbation and return flow simulations show that source term can have a big impact on stream water quality. Effect of HZs on stream water quality can be compromised by upwelling of nitrate-contaminated groundwater through adding nitrate to the stream or altering features of the hyporheic zone (Azizian et al., 2017). These factors need to be evaluated and combined with field characterization and model development in future studies.

Field experiments in large rivers are challenging due to the large spatial extent, spatial heterogeneity, and high stream
450 discharge. Decision has to be made as to how and where to sample across the watershed. One of the advantages of the model developed in this study is that it can be used to cost effectively define the reaches that are biogeochemical hot spots using physically derived parameters before conducting field experiments. The model can then be combined with experiment data collected at those locations for a better mechanistic understanding of river corridor functioning, and model improvement.

As we mentioned earlier, this model is an extension of the transient storage model. The sub-storage zones are assumed to be
455 well mixed, and they only communicate with the stream water, not with each other. This assumption is unlike the integrated model such as SWAT-MODFLOW which can rigorously resolve the redox sensitivity at each location in the modeling domain. Future model development will consider approximating each storage zone as an advection-dispersion system like the model in Painter (2018) so that redox zonation in the storage zones can be represented. Models of different conceptualizations will be evaluated on the effect of watershed biogeochemical processing function and whether model complexity is warranted for reach
460 scale process understanding.

6 Conclusion

Based on widely used open-source models SWAT and PFLOTRAN, we developed an integrated model, SWAT-MRMT-R, to account for hyporheic exchange and biogeochemical processes within HZs that are often absent in reach scale modeling. In this model, the MRMT module can incorporate a spectrum of transition times to represent solute mass transfer dynamics between the channel and storage zones. The model is flexible such that different shape of residence time distributions (e.g., exponential, power-law, or lognormal distribution) and biogeochemical reactions in stream water and HZs can be easily implemented. Exchange parameters in our study were estimated from NEXSS. Although our demonstration of the model uses mass transfer parameters derived from steady state discharge conditions, it is applicable to dynamic conditions as well once the corresponding mass transfer parameters are available. An integrated model as developed in this study can serve as a base framework to answer questions related to the significance of HZs in surface water quality in higher order river networks where characterization of HZs can be challenging. Our simulation results show that ~~apart from the well known lack of long tail representation of tracer, the commonly used transient storage model may overestimate the contaminant attenuation role of HZs~~ it is critical to better approximate the hydrologic exchange flux that enters into each sub-storage zone given a residence time distribution because it can have a significant impact on how much nitrate can be removed through denitrification in HZs. Effort are needed to treat water quality in groundwater and irrigation return flows before entering the reaches with longer residence times.

Code and data availability. The model code (SWAT-MRMT-R v1.0) (Fang et al., 2019a) and the data (Fang et al., 2019b) used to produce the results in this study are available on the Zenodo repository. Zenodo DOIs for the model and data are 10.5281/zenodo.3585948 and 10.5281/zenodo.3585976, respectively.

Author contributions. YF developed SWAT-MRMT-R, which incorporates model code PFLOTRAN previously developed by GEH. JG generated output from NEXSS and ZD postprocessed the NEXSS output. XZ set up the SWAT model. YF did all model simulations, prepared the figures, and wrote the paper with support from XC. XC also helped design the simulations. AEG, VAG, and EBG provided the field data in the Supplement.

Competing interests. The authors declare that they have no conflict of interest.

Acknowledgements. This research was supported by the U.S. Department of Energy (DOE), Office of Biological and Environmental Research (BER), as part of BER's Subsurface Biogeochemistry Research (SBR) program. This contribution originates from the SBR Scientific Focus Area at Pacific Northwest National Laboratory (PNNL). This paper describes objective technical results and analysis. Any subjective views or opinions that might be expressed in the paper do not necessarily represent the views of the U.S. Department of Energy or the United

States Government. PNNL is operated for the DOE by Battelle Memorial Institute under contract DE-AC05-76RL01830. Sandia National Laboratories is a multission laboratory managed and operated by National Technology Engineering Solutions of Sandia, LLC, a wholly
490 owned subsidiary of Honeywell International Inc., for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-NA0003525. A portion of this research was performed using Institutional Computing at PNNL.

References

- Anderson, E. J. and Phanikumar, M. S.: Surface storage dynamics in large rivers: Comparing three-dimensional particle transport, one-dimensional fractional derivative, and multirate transient storage models, *Water Resources Research*, 47, <https://doi.org/10.1029/2010wr010228>, 2011.
- Azizian, M., Boano, F., Cook, P. L. M., Detwiler, R. L., Rippy, M. A., and Grant, S. B.: Ambient groundwater flow diminishes nitrate processing in the hyporheic zone of streams, *Water Resources Research*, 53, 3941–3967, <https://doi.org/10.1002/2016WR020048>, 2017.
- Bailey, R. T., Wible, T. C., Arabi, M., Records, R. M., and Ditty, J.: Assessing regional-scale spatio-temporal patterns of groundwater-surface water interactions using a coupled SWAT-MODFLOW model, *Hydrological Processes*, 30, 4420–4433, <http://doi.org/10.1002/hyp.10933>, 2016.
- Bencala, K. E. and Walters, R. A.: Simulation of Solute Transport in a Mountain Pool-and-Riffle Stream - a Transient Storage Model, *Water Resources Research*, 19, 718–724, <https://doi.org/10.1029/WR019i003p00718>, 1983.
- Boano, F., Revelli, R., and Ridolfi, L.: Quantifying the impact of groundwater discharge on the surface-subsurface exchange, *Hydrol. Process.*, <https://doi.org/10.1002/hyp.7278>, 2009.
- Boano, F., Harvey, J. W., Marion, A., Packman, A. I., Revelli, R., Ridolfi, L., and Worman, A.: Hyporheic flow and transport processes: Mechanisms, models, and biogeochemical implications, *Reviews of Geophysics*, 52, 603–679, <https://doi.org/10.1002/2012RG000417>, 2014.
- Boulton, A. J., Findlay, S., Marmonier, P., Stanley, E. H., and Valett, H. M.: The functional significance of the hyporheic zone in streams and rivers, *Annual Review of Ecology and Systematics*, 29, 59–81, <https://doi.org/10.1146/annurev.ecolsys.29.1.59>, 1998.
- Briggs, M. A., Gooseff, M. N., Arp, C. D., and Baker, M. A.: A method for estimating surface transient storage parameters for streams with concurrent hyporheic storage, *Water Resources Research*, 45, <https://doi.org/10.1029/2008wr006959>, 2009.
- Briggs, M. A., Gooseff, M. N., Peterson, B. J., Morkeski, K., Wollheim, W. M., and Hopkinson, C. S.: Surface and hyporheic transient storage dynamics throughout a coastal stream network, *Water Resources Research*, 46, <https://doi.org/10.1029/2009WR008222>, 2010.
- Briggs, M. A., Lautz, L. K., Hare, D. K., and Gonzalez-Pinzon, R.: Relating hyporheic fluxes, residence times, and redox-sensitive biogeochemical processes upstream of beaver dams, *Freshwater Science*, 32, 622–641, <https://doi.org/10.1899/12-110.1>, 2013.
- Brown, L. and Barnwell, J. T.: The enhanced water quality models QUAL2E and QUAL2E-UNCAS documentation and user manual. EPA document EPA/600/3-87/007. USEPA, Athens, GA., Tech. rep., 1987.
- Cardenas, M. B.: Hyporheic zone hydrologic science: A historical account of its emergence and a prospectus, *Water Resources Research*, 51, 3601–3616, <http://onlinelibrary.wiley.com/doi/10.1002/2015WR017028/abstract>, 2015.
- Cardenas, M. B., Wilson, J. L., and Haggerty, R.: Residence time of bedform-driven hyporheic exchange, *Advances in Water Resources*, 31, 1382–1386, <https://doi.org/10.1016/j.advwatres.2008.07.006>, 2008.
- Claret, C. and Boulton, A. J.: Integrating hydraulic conductivity with biogeochemical gradients and microbial activity along river-groundwater exchange zones in a subtropical stream, *Hydrogeology Journal*, 17, 151–160, <https://doi.org/10.1007/s10040-008-0373-3>, 2009.
- Elliott, A. H. and Brooks, N. H.: Transfer of nonsorbing solutes to a streambed with bed forms: Theory, *Water Resour. Res.*, <https://doi.org/10.1029/96WR02784>, 1997.
- Evans, R. G., Hattendorf, M. J., and Kincaid, C. T.: Evaluation of the Potential for Agricultural Development at the Hanford Site. United States: N. p., 2000. Web. doi:10.2172/965196., Tech. rep., 2000.

Fang, Y., Chen, X., Gomez-velez, J., Zhang, X., Duan, Z., Hammond, G. E., Goldman, A. E., Garayburu-caruso, V. A., and Graham, E. B.:
530 Multirate mass transfer and multicomponent reactive transport model for nutrient dynamics in river networks (SWAT-MRMT-R-v1.0),
Zenodo, <http://doi.org/10.5281/zenodo.3585948>, 2019a.

Fang, Y., Chen, X., Gomez-velez, J., Zhang, X., Duan, Z., Hammond, G. E., Goldman, A. E., Garayburu-caruso, V. A., and Graham, E. B.:
Dataset for multirate mass transfer and multicomponent reactive transport model for nutrient dynamics in river networks (SWAT-MRMT-
R-v1.0), Zenodo, <http://doi.org/10.5281/zenodo.3585976>, 2019b.

535 Fernandez-Garcia, D. and Sanchez-Vila, X.: Mathematical equivalence between time-dependent single-rate and multirate mass transfer
models, *Water Resources Research*, 51, 3166–3180, <https://doi.org/10.1002/2014WR016348>, 2015.

Gomez, J. D., Wilson, J. L., and B., C. M.: Residence time distributions in sinuosity-driven hyporheic zones and their biogeochemical effects,
Water Resources Research, <https://doi.org/10.1029/2012WR012180>, 2012.

Gomez-Velez, J. D. and Harvey, J. W.: A hydrogeomorphic river network model predicts where and why hyporheic exchange is important in
540 large basins, *Geophysical Research Letters*, 41, 6403–6412, <https://doi.org/10.1002/2014GL061099>, 2014.

Gomez-Velez, J. D., Harvey, J., Cardenas, M. B., and Kiel, B.: Denitrification in the Mississippi River network controlled by flow through
river bedforms, *Nature Geoscience*, 8, 941–U75, <https://doi.org/10.1038/NGEO2567>, 2015.

Gooseff, M. N., Benson, D. A., Briggs, M. A., Weaver, M., Wollheim, W., Peterson, B., and Hopkinson, C. S.: Residence time distributions
in surface transient storage zones in streams: Estimation via signal deconvolution, *Water Resources Research*, 47, [https://doi.org/10.1029/](https://doi.org/10.1029/2010wr009959)
545 2010wr009959, 2011.

Graham, E. B., Crump, A. R., Resch, C. T., Fansler, S., Arntzen, E., Kennedy, D. W., Fredrickson, J. K., and Stegen, J. C.: Deterministic
influences exceed dispersal effects on hydrologically-connected microbiomes, *Environmental Microbiology*, 19, 1552–1567, <https://doi.org/10.1111/1462-2920.13720>, 2017.

Haggerty, R. and Gorelick, S.: Multiple-rate mass transfer for modeling diffusion and surface reactions in media with pore-scale heterogene-
550 ity, *Water Resources Research*, 31, 2383–2400, <https://doi.org/10.1029/95WR10583>, 1995.

Harvey, J. W., Bohlke, J. K., Voytek, M. A., Scott, D., and Tobias, C. R.: Hyporheic zone denitrification: Controls on effective reaction depth
and contribution to whole-stream mass balance, *Water Resources Research*, 49, 6298–6316, <https://doi.org/10.1002/wrcr.20492>, 2013.

Hauer, F. R., Locke, H., Dreitz, V. J., Hebblewhite, M., Lowe, W. H., Muhlfeld, C. C., Nelson, C. R., Proctor, M. F., and Rood, S. B.:
Gravel-bed river floodplains are the ecological nexus of glaciated mountain landscapes, *Science Advances*, 2, [https://doi.org/10.1126/](https://doi.org/10.1126/sciadv.1600026)
555 sciadv.1600026, 2016.

Helton, A. M., Poole, G. C., Meyer, J. L., Wollheim, W. M., Peterson, B. J., Mulholland, P. J., Bernhardt, E. S., Stanford, J. A., Arango, C.,
Ashkenas, L. R., Cooper, L. W., Dodds, W. K., Gregory, S. V., Hall, R. O., Hamilton, S. K., Johnson, S. L., McDowell, W. H., Potter,
J. D., Tank, J. L., Thomas, S. M., Valett, H. M., Webster, J. R., and Zeglin, L.: Thinking outside the channel: modeling nitrogen cycling in
networked river ecosystems, *Frontiers in Ecology and the Environment*, 9, 229–238, <https://doi.org/10.1890/080211>, 2010.

560 Hoagland, B., Russo, T. A., Gu, X., Hill, L., Kaye, J., Forsythe, B., and Brantley, S. L.: Hyporheic zone influences on concentration-discharge
relationships in a headwater sandstone stream, *Water Resources Research*, 53, 4643–4667, <https://doi.org/10.1002/2016WR019717>, 2017.

Kasahara, T. and Wondzell, S. M.: Geomorphic controls on hyporheic exchange flow in mountain streams, *Water Resources Research*, 39,
<https://doi.org/10.1029/2002wr001386>, 2003.

Knapp, J. L. A. and Kelleher, C.: A perspective on the future of transient storage modeling: let’s stop chasing our tails, *Water Resources*
565 Research, <https://doi.org/10.1029/2019WR026257>, 2020.

- Laenen, A. and Bencala, K. E.: Transient storage assessments of dye-tracer injections in rivers of the Willamette Basin, Oregon, *Journal of the American Water Resources Association*, 37, 367–377, <https://doi.org/10.1111/j.1752-1688.2001.tb00975.x>, 2001.
- Li, M. J., Gao, Y. Q., Qian, W. J., Shi, L., Liu, Y. Y., Nelson, W. C., Nicora, C. D., Resch, C. T., Thompson, C., Yan, S., Fredrickson, J. K., Zachara, J. M., and Liu, C. X.: Targeted quantification of functional enzyme dynamics in environmental samples for microbially mediated biogeochemical processes, *Environmental Microbiology Reports*, 9, 512–521, <https://doi.org/10.1111/1758-2229.12558>, 2017.
- Liao, Z. J. and Cirpka, O. A.: Shape-free inference of hyporheic traveltime distributions from synthetic conservative and "smart" tracer tests in streams, 2011.
- Lichtner, P. C., Hammond, G. E., Lu, C., Karra, S., Bisht, G., Andre, B., Mills, R. T., Kumar, J., and Frederick, J. M.: PFLOTRAN User Manual, Tech. rep., <http://www.documentation.pflotran.org>, 2017.
- 575 Liu, C. X., Zachara, J. M., Qafoku, N. P., and Wang, Z. M.: Scale-dependent desorption of uranium from contaminated subsurface sediments, *Water Resources Research*, 44, <https://doi.org/10.1029/2007WR006478>, 2008.
- McClain, M. E., Boyer, E. W., Dent, C. L., Gergel, S. E., Grimm, N. B., Groffman, P. M., Hart, S. C., Harvey, J. W., Johnston, C. A., Mayorga, E., McDowell, W. H., and Pinay, G.: Biogeochemical hot spots and hot moments at the interface of terrestrial and aquatic ecosystems, *Ecosystems*, 6, 301–312, <https://doi.org/10.1007/s10021-003-0161-9>, 2003.
- 580 Mulholland, P. J., Marzolf, E. R., Webster, J. R., Hart, D. R., and Hendricks, S. P.: Evidence that hyporheic zones increase heterotrophic metabolism and phosphorus uptake in forest streams, *Limnology and Oceanography*, 42, 443–451, <https://doi.org/10.4319/lo.1997.42.3.0443>, 1997.
- Neilson, B. T., Chapra, S. C., Stevens, D. K., and Bandaragoda, C.: Two-zone transient storage modeling using temperature and solute data with multiobjective calibration: 1. Temperature, *Water Resources Research*, 46, <https://doi.org/10.1029/2009WR008756>, 2010.
- 585 Neitsch, S., Arnold, J., Kiniry, J., and Williams, J.: Soil and water assessment tool — theoretical documentation — version 2009, Technical Report 406, Texas Water Resources Institute, Tech. rep., 2011.
- Nilsson, C., Reidy, C. A., Dynesius, M., and Revenga, C.: Fragmentation and flow regulation of the world's large river systems, *Science*, 308, 405–408, <https://doi.org/10.1126/science.1107887>, 2005.
- Overton, D.: Muskingum flood routing of upland streamflow, *Journal of Hydrology*, 4, 185 – 200, [https://doi.org/10.1016/0022-1694\(66\)](https://doi.org/10.1016/0022-1694(66)90079-5)
- 590 90079-5, 1966.
- Painter, S. L.: Multiscale Framework for Modeling Multicomponent Reactive Transport in Stream Corridors, *Water Resources Research*, 54, 7216–7230, <https://doi.org/10.1029/2018WR022831>, 2018.
- Pryshlak, T. T., Sawyer, A. H., Stonedahl, S. H., and Soltanian, M. R.: Multiscale hyporheic exchange through strongly heterogeneous sediments, *Water Resources Research*, 51, 9127–9140, <https://doi.org/10.1002/2015WR017293>, 2015.
- 595 Qiu, J., Y. Q. Z. X. H. M. A. J. C. and Malek, K.: Implications of water management representations for watershed hydrologic modeling in the Yakima River basin, *Hydrol. Earth Syst. Sci.*, 23, 35–49, <https://doi.org/10.5194/hess-23-35-2019>, 2019.
- Runkel, R. L., Bencala, K. E., Broshears, R. E., and Chapra, S. C.: Reactive solute transport in streams .1. Development of an equilibrium-based model, *Water Resources Research*, 32, 409–418, <https://doi.org/10.1029/95WR03106>, 1996.
- Runkel, R. L., McKnight, D. M., and Rajaram, H.: Modeling hyporheic zone processes - Preface, *Advances in Water Resources*, 26, 901–905, [https://doi.org/10.1016/S0309-1708\(03\)00079-4](https://doi.org/10.1016/S0309-1708(03)00079-4), 2003.
- 600 Sawyer, A. H. and Cardenas, M. B.: Hyporheic flow and residence time distributions in heterogeneous cross-bedded sediment, *Water Resources Research*, 45, <https://doi.org/10.1029/2008wr007632>, 2009.

- Silva, O., Carrera, J., Dentz, M., Kumar, S., Alcolea, A., and Willmann, M.: A general real-time formulation for multi-rate mass transfer problems, *Hydrology and Earth System Sciences*, 13, 1399–1411, <https://doi.org/10.5194/hess-13-1399-2009>, 2009.
- 605 Song, H. S., Thomas, D. G., Stegen, J. C., Li, M. J., Liu, C. X., Song, X. H., Chen, X. Y., Fredrickson, J. K., Zachara, J. M., and Scheibe, T. D.: Regulation-Structured Dynamic Metabolic Model Provides a Potential Mechanism for Delayed Enzyme Response in Denitrification Process, *Frontiers in Microbiology*, 8, <https://doi.org/10.3389/Fmicb.2017.01866>, 2017.
- Song, X., Chen, X., Stegen, J., Hammond, G., Song, H. S., Dai, H., Graham, E., and Zachara, J. M.: Drought Conditions Maximize the Impact of High-Frequency Flow Variations on Thermal Regimes and Biogeochemical Function in the Hyporheic Zone, *Water Resources*
- 610 *Research*, <https://doi.org/10.1029/2018WR022586>, 2018.
- Stegen, J. C., Fredrickson, J. K., Wilkins, M. J., Konopka, A. E., Nelson, W. C., Arntzen, E. V., Chrisler, W. B., Chu, R. K., Danczak, R. E., Fansler, S. J., Kennedy, D. W., Resch, C. T., and Tfaily, M.: Groundwater-surface water mixing shifts ecological assembly processes and stimulates organic carbon turnover, *Nature Communications*, 7, <https://doi.org/10.1038/Ncomms11237>, 2016.
- Tank, J. L., Rosi-Marshall, E. J., Baker, M. A., and Hall, R. O.: Are Rivers Just Big Streams? A Pulse Method to Quantify Nitrogen Demand
- 615 in a Large River, *Ecology*, 89, 2935–2945, <https://doi.org/10.1890/07-1315.1>, 2008.
- Triska, F. J., Kennedy, V. C., Avanzino, R. J., Zellweger, G. W., and Bencala, K. E.: Retention and Transport of Nutrients in a 3rd-Order Stream in Northwestern California - Hyporheic Processes, *Ecology*, 70, 1893–1905, <https://doi.org/10.2307/1938120>, 1989.
- Valett, H. M., Morrice, J. A., Dahm, C. N., and Campana, M. E.: Parent lithology, surface-groundwater exchange, and nitrate retention in headwater streams, *Limnology and Oceanography*, 41, 333–345, <https://doi.org/10.4319/lo.1996.41.2.0333>, 1996.
- 620 Wang, P. P., Zheng, C. M., and Gorelick, S. M.: A general approach to advective-dispersive transport with multirate mass transfer, *Advances in Water Resources*, 28, 33–42, <https://doi.org/10.1016/j.advwatres.2004.10.003>, 2005.
- Ward, A. S.: The evolution and state of interdisciplinary hyporheic research, *Wiley Interdisciplinary Reviews-Water*, 3, 83–103, <https://doi.org/10.1002/wat2.1120>, 2016.
- Ward, A. S., Schmadel, N. M., Wondzell, S. M., Harman, C., Gooseff, M. N., and Singha, K.: Hydrogeomorphic controls on hyporheic
- 625 and riparian transport in two headwater mountain streams during base flow recession, *Water Resources Research*, 52, 1479–1497, <https://doi.org/10.1002/2015WR018225>, 2016.
- Wondzell, S. M.: The role of the hyporheic zone across stream networks, *Hydrological Processes*, 25, 3525–3532, <https://doi.org/10.1002/hyp.8119>, 2011.
- Ye, S., Covino, T. P., Sivapalan, M., Basu, N. B., Li, H. Y., and Wang, S. W.: Dissolved nutrient retention dynamics in river networks: A
- 630 modeling investigation of transient flows and scale effects, *Water Resources Research*, 48, <https://doi.org/10.1029/2011WR010508>, 2012.
- Ye, S., Reisinger, A. J., Tank, J. L., Baker, M. A., Hall, R. O., Rosi, E. J., and Sivapalan, M.: Scaling Dissolved Nutrient Removal in River Networks: A Comparative Modeling Investigation, *Water Resources Research*, 53, 9623–9641, <https://doi.org/10.1002/2017WR020858>, 2017.
- Young, J. D. and Ramkrishna, D.: On the matching and proportional laws of cybernetic models, *Biotechnology Progress*, 23, 83–99, <https://doi.org/10.1021/bp060176q>, 2007.
- 635 Zaramella, M., Packman, A. I., and Marion, A.: Application of the transient storage model to analyze advective hyporheic exchange with deep and shallow sediment beds, *Water Resources Research*, 39, <https://doi.org/10.1029/2002WR001344>, 2003.
- Zarnetske, J. P., Haggerty, R., Wondzell, S. M., Bokil, V. A., and Gonzalez-Pinzon, R.: Coupled transport and reaction kinetics control the nitrate source-sink function of hyporheic zones, *Water Resources Research*, 48, <https://doi.org/10.1029/2012wr013291>, 2012.
- 640 Zhang, Y., B. D. A. and Baeumer, B.: Predicting the tails of breakthrough curves in regional-scale alluvial systems, *Ground Water*, 45, 2007.

Zhou, T., Huang, M. Y., Bao, J., Hou, Z. S., Arntzen, E., Mackley, R., Crump, A., Goldman, A. E., Song, X. H., Xu, Y., and Zachara, J.: A New Approach to Quantify Shallow Water Hydrologic Exchanges in a Large Regulated River Reach, *Water*, 9, <https://doi.org/10.3390/w9090703>, 2017.