



Dynamic Anthropogenic activities impacting Heat emissions (DASH v1.0): Development and evaluation

Isabella Capel-Timms^{1,2}, Stefán Thor Smith², Ting Sun¹, Sue Grimmond¹

¹ Department of Meteorology, University of Reading, UK RG6 6BB

² School of Built Environment, University of Reading, UK RG6 6DF

Corresponding Author: c.s.grimmond@reading.ac.uk

Abstract

Thermal emissions or anthropogenic heat fluxes (Q_F) from human activities impact the local and larger scales urban climate. DASH considers both urban form and function in simulating Q_F by use of an agent-based structure that includes behavioural characteristics of city populations. This allows social practices to drive the calculation of Q_F as occupants move, varying by day type, demographic, location, activity, socio-economic factors and in response to environmental conditions. The spatial resolution depends on data availability. DASH has simple transport and building energy models to allow simulation of dynamic vehicle use, occupancy and heating/cooling demand, with subsequent release of energy to the outdoor environment through the building fabric. Building stock variations are captured using archetypes. Evaluation of DASH in Greater London for various periods in 2015 uses a top-down inventory model (GQF) and national energy consumption statistics. DASH reproduces the expected spatial and temporal patterns of Q_F but the annual average is smaller than published energy data. Overall the model generally performs well, including for domestic appliance energy use against top down model results. DASH could be coupled to an urban land surface model and/or used offline for developing coefficients for simpler/faster models.

Keywords: Anthropogenic heat emission; dynamic model; energy, urban climate, London

25

Notation (with location of 1st mention)

	Description	1 st
$\alpha, \alpha_{j,A_N}, \alpha_{j,k}, \alpha_{j,u}$	Characteristic of appliance α of type j : quantity in A_N , domestic usage factor u , market permeation k	2.4.3
$\alpha_D^N, \alpha_E^N, \alpha_H^N, \alpha_O^N, \alpha_R^N, \alpha_W^N$	Domestic, primary school, secondary school, other (e.g. leisure) shop and work subareas	2.1
$\alpha_D^{senior}, \alpha_D^{working}, \alpha_D^{young}$	Dominant age cohort characteristics of subareas (analysed): seniors, working adults and young people (infants, children or teenagers)	4
α_S^N	Subarea of A_N with specific activity s occurring	2.1
A	Building surface area (m ²)	B
AADT	Annual Average Daily Traffic	3.1
ABM	Agent-based model	2
AE_i	Absolute error ($ \Delta_i $)	3.2
A_N	Spatially discrete agent	2
AnE_i	Absolute normalised error	3.2
AO	Consumption class: active only	2.4.3
API	Application programming interface	2.4.2
AS	Consumption class: active/standby	2.4.3
β	Bowen ratio (Q_H/Q_E)	2.4.1
B	Spatial unit, may be coarser than A_N	2.2



C	Consumption class: continuous	2.4.3
CBD	Central business district	6
$C_{m,r}$	Mode-appropriate ratio for m on r ($n_{o,m,r}$ vehicle ⁻¹)	2.4.2
c, c_p	Specific heat capacity, specific heat capacity of air at constant pressure (J kg ⁻¹ K ⁻¹)	2.4.3
Δ_i	Model-observation (reference) difference for variable i	3.2
DASH	<i>Dynamic Anthropogenic activities impacting Heat emissions</i>	1
DHW	Domestic hot water	2.4.3
$d_{i,j}$	Distance between origin i and destination j (m)	2.2
ε	Emissivity	B
f	Fuel type	2.4.2
f_{x,α_j}	Fraction of households with x active occupants using α_j	2.4.3
$F_{m,f}$	Heat emission with fuel type f for m (W m ⁻¹)	2.4.2
$\Gamma_{i,j}$	Gravity weighting for all potential trips between origin i and destination j	2.2
GIS	Geographical information system	2.4.2
GL	Greater London	3.1
GQF	GQF model (Gabey et al., 2019)	3.2
h	Convection coefficient (W m ⁻² K ⁻¹)	3.1
HC	Heating and cooling usage	2.4.3
HW	Hot water usage	2.4.3
IQR	Interquartile range	3.2
κ	System efficiency	2.4.3
K_d	Downwelling shortwave radiation (W m ⁻²)	2.4.3
k_e	Effective thermal conductivity (W m ⁻¹ K ⁻¹)	3.1
l	Lighting	2.4.3
l_{base} (l_{min}/l_{max})	Base (min/max) luminous intensity	2.4.3
L	Thickness of building component (m)	B
LA	Local Authority	3.1
L_m	Length of unit vehicle for m (m)	2.4.2
LOWESS	Locally Weighted Scatterplot Smoothing	2.4.2
$L_{r,t}$	Distance travelled in t (m)	2.4.2
LSOA	Lower-level Super Output Area	3.1
m	Travel mode (e.g. car, bus, train, walk)	2.4.2
M	Metabolic rate (W)	2.4.1
MSOA	Mid-level Super Output Area	3.1
n_b ($n_{b,x}$)	Number of households (with x active occupants)	2.4.3
$n_{o,m,r}$	Number of occupants for m on r	2.4.2
nE_i	Normalised error	3.2
$nMax$	Maximum-normalised value	3.2
NS	Non-school weekday	4
OA	Output area	3.1
O_c	Occupant	2
$\pi(t)$	Stationary distribution for state at time step t	A
$\Psi_{b/g/s/i}$	View factor for buildings/ground/sky/surface i	B
P, P_{max}	Power rating, maximum power rating (W)	2.4.3
$p(t)_{m,n}$	Transition probability from state m to state n at time step t	A
q, q_H, q_C	Energy use (for heating, cooling) (W)	2.4.3
q_{cd}	Building conductive flux (W)	B



q_{cv}	Building convective flux (W)	B
Q^*	Net all-wave radiation (W m^{-2})	1
Q_E	Turbulent latent flux (W m^{-2})	1
$Q_{F(B/M/T)}$	Anthropogenic heat flux (emissions from buildings/metabolic activity/transport) (W m^{-2})	1
$Q_{F,B}^a, Q_{F,B}^{HC}, Q_{F,B}^{HW}, Q_{F,B}^g$	$Q_{F,B}$ from: appliance usage, heating and cooling, hot water demand, lighting (W m^{-2})	2.4.3
$Q_{F,B}^{elec}, Q_{F,B}^{gas}$	$Q_{F,B}$ from: electricity, gas consumption	5
Q_H	Turbulent sensible flux (W m^{-2})	1
$Q_{L*}, Q_{L\uparrow}$	Net longwave radiation. Outgoing longwave radiation (W m^{-2})	B
ΔQ_S	Net storage heat flux (W m^{-2})	1
q_{vent}	Energy loss/gain from ventilation (W)	2.4.3
ρ (ρ_a)	Density (of air) (kg m^{-3})	2.4.3
r	Route type r (e.g. minor- or major-road, over-ground- or below-ground-rail)	2.4.2
R_{lim}	Route capacity limit	2.4.2
σ	Stefan-Boltzmann constant ($\text{W m}^{-2} \text{K}^{-4}$)	B
STEBBS	Simplified Thermal Energy Balance for Building Scheme	2.4.3
SW	School/work-day	4
T	Time step (e.g. ten minutes)	2.3
τ	Effective transmissivity	B
Θ	Albedo	B
t_b	Journey specific time bin	2.4.2
$T_f/s/si/so$	Temperature or fluid f /surface s /indoor surface si /outdoor surface so (K)	B
T_i	Internal water/air temperature (K)	2.4.3
T_o	Outdoor air temperature (K)	2.4.3
ToU	Time of use	3.1
T_{set}	Setpoint temperature (K)	2.4.3
TUS	Time Use Survey	3.1
UK	United Kingdom	3.1
V_{FR}, V_R	Volumetric flow rate, ventilation rate ($\text{m}^3 \text{s}^{-1}$)	2.4.3
$V_{m,r}$	Number of unit vehicles for m on r	2.4.2
$v, v_r, v_{r,lim}$	Speed, speed of travelling vehicle on r , speed limit on r (m s^{-1})	2.4.2
V_T	Volume of water tank (m^3)	3.1
WD	Weekday	3.2
ws	Wind speed (m s^{-1})	3.1
WWR	Window-to-wall ratio	3.1
X_i ($X_{M,i}, X_{O,i}$)	Output (M: modelled, O: observed/reference) value	3.2

1 Introduction

30 The anthropogenic heat flux, Q_F , the thermal emissions arising from metabolic, chemical and electrical energy use, is an additional energy source in the urban surface energy balance. As Q_F is a function of human activity that can be associated with a range of spatial and temporal scales, it impacts the local-scale weather and climate in cities. For example, heating of buildings in cold climates can be an important influence on the urban heat island (UHI) (Hinkel et al., 2003; Bohnenstengel et al., 2014), whilst in summer the additional heat release from air conditioning (De Munck et al. 2013; Salamanca et al. 2014) can elevate air temperatures. The impacts of additional heat may exacerbate heat-related mortality rates during

35 heatwaves in urban areas (Heaviside et al., 2016) and increase electricity consumption in warmer weather (Santamouris et



al., 2001). Although there are multiple methods to estimate anthropogenic heat emissions, it has often been ignored in urban climate studies (Sailor, 2011).

The feedback of Q_F on the other surface energy balance fluxes can be important (Bueno et al., 2012; Best and Grimmond, 2016; Ward et al., 2016). The surface energy balance is a fundamental driver of the atmospheric processes within the urban boundary layer, across a range of spatial and temporal scales (Oke, 1988):

$$Q^* + Q_F = Q_H + Q_E + \Delta Q_S \quad (\text{W m}^{-2}) \quad (1)$$

where Q^* is the net all-wave radiation, Q_F the anthropogenic heat flux, ΔQ_S the net storage heat flux, Q_H the turbulent sensible and Q_E turbulent latent heat fluxes. These fluxes are partly responsible for the energy involved in the transfer of heat, mass and momentum (Oke, 198) and the stability of the urban boundary layer. The three major source terms of Q_F (Grimmond, 1992):

$$Q_F = Q_{F,B} + Q_{F,M} + Q_{F,T} \quad (\text{W m}^{-2}) \quad (2)$$

relate to buildings ($Q_{F,B}$), metabolic (people, animals) activity ($Q_{F,M}$), and transport ($Q_{F,T}$). As a result, the daily movement of people through a city will have a local, short term effect, whilst the widespread uptake of new technologies (e.g. energy efficient appliances) could have a city-wide, long term consequence.

There are multiple approaches to estimate Q_F (Sailor, 2011). Using population data, top-down methods disaggregate energy consumption and traffic data to produce diurnal profiles of Q_F (Sailor and Lu, 2004; Lee et al., 2009; Allen et al., 2011; Ferreira et al., 2011; Iamarino et al., 2012; Lindberg et al., 2013; Lu et al., 2015) Although constrained by data availability, such approaches can be updated quickly to provide representative values of past states for large areas (Gabey et al., 2019). However, there is little variation between days, as the models tend to use static diurnal profiles. For example, the flow of people between residential and work areas does not respond to potential events that cause actual changes (e.g. blocked roads from flooding) and is assumed to be homogeneous across a city (Iamarino et al. 2012). Energy is often assumed to be released directly to the outdoor environment (Sailor, 2011) rather than indoors. Whilst aggregate behaviour may be captured, the heterogeneity in processes (e.g. appliance use, technology uptake, changing work practices) are missed despite components (of eq. 2) being determined. Top-down approaches do though provide a basis to assess other approaches as their aggregate output is based on metered data.

Bottom-up models exist for the different types of heat emissions (of eq. 2) from buildings (e.g. Kikegawa et al. 2003; Bueno et al. 2012; Schoetter et al. 2017), transport (e.g. Smith et al. 2009), and metabolism (e.g. Thorsson et al. 2014). Individually, they provide some information about behavioural and system change impacts on energy use and heat emissions. For example, building heat releases to the outdoor environment can be modified by building design (e.g. material conduction) and occupancy behaviours (e.g. ventilation, heating systems); and metabolic models capture activity and metabolic types (e.g. adults, children, animals). Other methods to estimate Q_F include assuming energy balance closure (Offerle et al., 2005; Pigeon et al., 2007; Crawford et al., 2017; Chrysoulakis et al., 2018) in eq. 1 with all other terms measured or estimated, and measurements of component fluxes (e.g. Kotthaus and Grimmond 2012).

Whilst existing models of Q_F give plausible estimates, they typically do not capture changes resulting from human behaviour in small areas as city-wide assumptions are used when finer spatial resolutions are unavailable. Thus, not all techniques can identify Q_F hotspots (Gabey et al., 2019). Moreover, the processes causing change in anthropogenic energy use need to be modelled so the dynamic nature of Q_F and implications of disruption to social practices to Q_F can be investigated. Capturing the interplay between energy related behaviours and meteorological conditions should help exploration of system feedbacks and resulting effects on urban climates and city activities.



80 The terms of eq. 2 vary with land use and activity within an area creating spatial and temporal heterogeneity of Q_F . In turn,
this impacts the urban surface energy balance (eq. 1). Models that can respond to influencing factors allow changes to be
understood and potentially managed. Changes may occur at different spatial and temporal scales, for example: (i) city-wide
building stock (e.g. type, dimension, materials) changes at decadal time-scales impact heating and cooling needs (i.e.
modifying $Q_{F,B}$); (ii) individuals numerous sub-daily activity and travel decisions impact all three components at the
85 microscale; (iii) social-cultural practices play out across large spatial and temporal extents; (iv) transport dynamics can be
modified over small spatiotemporal scales (e.g. road closures) or large spatial and temporal extents through technology (e.g.
fuel, transport) and policy/planning (e.g. speed limits in neighbourhoods) changes.

Human behaviour and regional climate can impact each source term of Q_F . High- to mid-latitude cities with colder climates
90 use winter space heating, whereas in hotter climates air-conditioning in summer (Sailor and Lu, 2004) is increasingly used.
Work schedules and other culturally informed practices (e.g. social eating, religious worship) alter the time of day, day of
week, and time of year (i.e. national holidays) that energy demand occurs (Allen et al. 2011). These influences are not
addressed by many static models (Allen et al. 2011, Dong et al., 2017) and associated dynamics are neglected despite
impacting emissions spatially (e.g. Björkegren and Grimmond, 2018).

95 Here we present a new bottom-up model for Q_F (DASH, *D*ynamic *A*nthropogenic *A*ctivities *S* impacting *H*eat *E*missions) that
captures city features (i.e. place), people's activities, demographics, variations in building-type (e.g. thermal properties), and
transport energy use and heat release. The model allows impacts from activities and interactions across a wide range of
spatial and temporal scales to be explored by taking an agent-based approach. With both the heterogeneity of city energy use
and dynamics of the whole city captured by DASH, comparisons to top-down inventories or other data with coarser spatial
100 and temporal scale resolutions are possible. These patterns can be analysed to diagnose the sensitivity of the steady-state to
events that cause perturbations in agent-level behaviour. The general model structure and functionality are described (section
2). It is applied (section 3) and evaluated (section 4) in Greater London using inventory based results (Gabey et al., 2019).

2 Model development

105 As DASH takes an agent-based approach, all processes have either an interaction or reaction of agents (Macal and North,
2010). The agents represent the decisions for movement and citizens activities (e.g. cooking) that impact energy use and
therefore Q_F . The dynamics result from agent activity in multiple processes that exist in each Q_F source term (Fig. 1a) but
share outputs (Fig. 1b). For each spatially scalable agent (section 2.1) there is (Fig. 1a):

- 1) *An agent-based model (ABM) scheduler*: to capture the evolutionary dynamics (section 2.2) of the spatially-discrete
110 agents A_N .
- 2) *Three source-specific Q_F estimators*: use movement and activity from the ABM scheduler to model metabolic ($Q_{F,M}$,
section 2.4.1) and transport-related ($Q_{F,T}$, section 2.4.2) anthropogenic heat. Given the dominant role of building energy
use to urban anthropogenic heat (Sailor and Lu, 2004; Pigeon et al., 2007; Allen et al., 2011; Sailor, 2011; Nie et al.,
2014; Zheng and Weng, 2017; Gabey et al., 2019), a building energy model (section 2.4.3 and Appendix B) is
115 integrated within DASH to estimate $Q_{F,B}$ by accounting for occupant behaviour that impacts both appliance energy use
and indoor environmental conditioning.

The main DASH workflow is driven by agent-agent interactions with a three-stage process determining Q_F per time step
(Figure 1b):

120 *Stage 1*: Agent-agent interaction occurs through occupant (O_C) exchange processes (blue, Fig. 1b) that are modified by
demographics as well as type and time of day.



Stage 2: Occupancy levels associated with an agent (yellow, Fig. 1b) modify appliance energy use (P_a , Fig. 1), building heating and cooling control (via the building energy model, STEBBS), and volume of vehicles on the transport network (green, Fig. 1).

125 Stage 3: Source-specific $Q_{F,B}$, $Q_{F,T}$ and $Q_{F,M}$ terms are calculated for each agent and combined to give Q_F for each agent's geographical region.

All processes operate at the same spatial unit (rather than area) and time step. These are both defined by the data used to inform the ABM scheduler. Rules that govern the processes may be informed by data and actions at coarser scales.

130 2.1 Spatial granularity

In agent based model design there is flexibility as to what “agents” represent; for example, individuals, households, spatial areas, or businesses (Crooks and Heppenstall, 2012; O’Sullivan et al., 2012). However, the chosen units should be able to interact with each other and respond. The constraints on selecting the most suitable entity for an agent include the aim, data availability and computer resources. In DASH, agents represent spatial units that interact by exchange of occupants - the number, activity and type of which informs the calculations of Q_F (Fig. 1).

135 A spatial unit's Q_F depends on the number and composition of occupants' characteristics and their activities. For example, residential areas experience an increase in $Q_{F,B}$ as occupants wake up and start to use appliances or heating/cooling. As they leave home, $Q_{F,T}$ increases as fuel is used for transport and as the O_C are passed between agents the changing activity and occupancy numbers impact on each agent's Q_F . By using spatial units as agents (with O_C as an agent property), agents can be scaled according to behavioural data and computational constraints. The relationship of agents to occupants can be from many-to-one and many-to-many. Here a many-to-many relationship is used given the computational and data constraints.

145 The agents interact by exchanging O_C based on rules associated with the number, type, and activities of occupants. These are also used in calculation of the energy use of an agent, i.e. the agents' response. Agent representation is designed to be data-driven (analysed) and so behaviour is constrained by data availability. For individual cities, the context (social, physical) provides the agents probable ('exact') characteristics, while administrative boundaries from national census (or other large survey data) will typically constrain DASH.

150 The agent (A_N) based spatial unit (as determined by data availability) contains subareas (a_S^N) of activity (not spatial units) to which the O_C are assigned. Hence, population statistics are needed to characterise subareas. The subarea notation identifies the agent (superscript) and activity area (subscript). In this version of the model, there are six subareas: (i) domestic (a_D^N), (ii) workplace (a_W^N), (iii) primary school (a_P^N), (iv) secondary school (a_H^N), (v) shop (a_R^N), and/or (vi) other (a_O^N). There is a minimum of one subarea in each A_N , with the total number and type in each A_N to be determined according to available data and city context (e.g. a commercial district may only consist of a_W^N). Despite the A_N location being static their properties are dynamic.

160 As A_N have the decision-making capability for exchanging O_C , they interact by 'releasing' or 'accepting' occupants. Spatial variation in O_C exchange is provided by the characteristics of the a_S^N , for example a_W^N with higher workday populations being more likely to accept occupants during workday hours than other a_S^N with smaller workday populations. Temporal variability is governed by aspects of human behaviour, with granularity provided by different categories of O_C identified within the data used to inform the ABM scheduler. The model can, therefore, capture differences associated with time of day, day of week, type of day (e.g. holiday or not) and time of year within (and across) different O_C categories. Thus, this design results in the spatiotemporal dynamics of Q_F .



165

Each A_N is located within larger spatial units (B) to allow coarser resolution spatial data to inform model behaviour (e.g. traffic speed limits, school districts), as well as enabling different spatial representation of Q_F in analysis. Note that there can be multiple levels of directly nested spatial units. This permits different level of data availability and governance structure (e.g. impacting decision making/options) to be appropriately captured. Hence, impacts from changes in small areas on the surroundings can be explored.

170

2.2 Rules of A_N interaction

O_C are generated and assigned to categories used to inform energy demand behaviour and movement (e.g. age, work). To enable movement of O_C , they are each associated with subarea types a_S^N corresponding to different activities. The a_S^N may be located both within one A_N or across as many A_N as there are a_S^N . A minimum of one ‘anchor’ subarea is required per O_C to identify a place of residence, a_R^N . For other activities (e.g. work or formal education) to be captured further a_S^N are needed. Data driven assignment of occupants to subareas enables the exchange of O_C by A_N (Section 3.1). The ‘anchor’ a_S^N are relatively static (i.e. changing infrequently) as for example, workplace remains constant for long periods.

175

180

If data do not allow direct matching of multiple ‘anchor’ a_S^N for O_C , then a_S^N is assigned randomly (SciPy, 2019) but in proportion to the available choices. The choice can be informed by rules, such as imposed by local governing structures (e.g. school choice). For O_C trips to non-anchor subareas (e.g. leisure activity, shopping), assignment is stochastic. Gravity weightings (I) for all potential trips between origin i and destination j locations (B , for coarser resolution than A_N) of distance $d_{i,j}$ are pre-calculated and stored in a matrix (Casey, 1955):

$$185 \quad \Gamma_{i,j} = \frac{B_i B_j}{d_{i,j}^2} \quad (3)$$

where weights $\Gamma_{i,j}$ are derived by an attractor (e.g. total number of shops) within B and the distance (d) between locations. The destination is randomly selected using gravity weightings (eq. 3), accepting amenity attraction rules (Reilly 1931). The process is nested to allow for spatial nesting of agents and account for spatial resolution of data on amenities.

190

Within an A_N further rules, associated with movement, can be assigned to O_C to represent structural and personal factors that impact timing and ability to move between a_S^N . For example, associated dependants (e.g. children) impact on timing of movement of an O_C due to caring responsibilities.

2.3 Evolutionary dynamics

195

At each time step, the decision for an A_N to release O_C applies a Markovian approach (Appendix A). This stochastic state determination process decides the nature of an object’s (e.g. O_C) next state (e.g. a_S^N) using knowledge of its previous states (Blitzstein and Hwang, 2019). The subsequent time at which an O_C is accepted by the destination A_N is influenced by factors such as distance and time of travel. This allows random variability in human behaviour to be simulated such as presence and activities of occupants in a single building (Page et al., 2008; Richardson et al., 2008; Widén et al., 2009a) for long periods (Page et al., 2008) whilst aggregate behaviour (informed social structure) will still be apparent. This requires knowledge (data) based on movement and location associated with time and allows decision making to be identified with individual O_C as well as populations.

200

205

The movement and location data are used to create the Markov matrices’ stationary distributions (eq. A1) for the exchange of occupants at each time step (t). The Markov matrices are created prior to a model run but could be recalculated between each timestep of the model run in order to capture potential response (in movement and activity) to disruptions.



2.4 Calculation of Q_F

Heat sources (eq. 2) from people, buildings (with appliance load breakdown), and transport are determined using the O_C count and associated activity in each of the a_S^N of all A_N .

2.4.1 Metabolism $Q_{F,M}$

Metabolism ($Q_{F,M}$) of each O_C uses an individual metabolic rate (M) as:

$$Q_{F,M,i} = M \cdot O_C \quad (4)$$

with the sensible (H) and latent (E) components, using the Bowen ratio β (sensible to latent heat) as (for one O_C):

$$Q_{F,M(E),i} = \frac{Q_{F,M,i}}{1+\beta} \quad (5)$$

$$Q_{F,M(H),i} = \frac{Q_{F,M,i} \cdot \beta}{1+\beta} \quad (6)$$

Both β and M can vary with activity (e.g. office work/sitting, walking) and demographics (e.g. age, gender).

2.4.2 Transport $Q_{F,T}$

If an A_N releases an O_C , the journey time, route and mode of transport are needed to determine $Q_{F,T}$. These allow travel dynamics to influence the time and nature of energy use at the associated spatial unit through a simple traffic model. $Q_{F,T}$ is calculated at each timestep for the spatial units for each mode type m (e.g. car, truck, train, walk) and route type r (e.g. minor- or major-road, over-ground- or below-ground-rail), with speed v (m s^{-1}) and heat emission F (W m^{-1}) for all travelling O_C . The journey time is tracked to enable release of O_C at appropriate (e.g. timely, delayed) periods at their destination A_N by using a mode and journey specific time bin (t_b). The journey time t_b is updated at each time step. The notional duration is found from the mode's distance/time relation using LOWESS analysis (Cleveland, 1988) on travel data for distance travelled.

The total number of travelling O_C in each spatial unit is the sum of O_C in all t_b for all m . The number of O_C in a t_b changes at each timestep as, and when, new journeys begin. When the t_b time is zero, the held O_C are released to the next spatial unit of their journey which may be a destination or an intermediate location (e.g. mode transfer from walking to bus).

The choice of m is informed by data that associates probability of m to origin-destination pairings. If journey combinations data are unavailable, weighting by distance d_{ij} is used, informed by other sources (e.g. travel surveys). The journey route (through different spatial units that calculate local $Q_{F,T}$) is determined from geographical information system (GIS) data (e.g. OpenStreetMap contributors 2017), mapping application programming interfaces (APIs, e.g. Google (2019)) or straight line distances between centroids (in the absence of data). For the latter, spatial nesting can be used between A_N and B . Routing options between spatial units can be one (most basic) or many (data dependent).

Route (r) parameters have a capacity limit (R_{im}) assigned by r related spatial (B , A_N) capacity constraints (e.g. size and possible number of occupants of a bus or a railway carriage that operate in that area, road congestion limits). However, these may be modified if a disruption impacts part of the transport network (e.g. power failure, intense flooding). The current occupancy is constrained by a mode-appropriate ratio ($C_{m,r}$) such as number of occupants ($n_{o,m,r}$) per unit vehicle. For road related transport, unit vehicle length (L_m) is required as, for example, buses hold more people than a car but require more space on the road. These constraints are informed by local data.



A total vehicle count for each m, r (as $V_{m,r}$) is used to determine if O_C in travel can be moved between spatial units. When both

$$250 \quad V_{m,r} \leq \frac{n_{o,m,r}}{c_{m,r}} \quad \text{and} \quad \left(\left(\sum_{m=1}^{lim} V_{m,r} \cdot L_m \right) + \Delta_{V_{m,r}} \right) \leq R_{lim} \quad (7)$$

then $V_{m,r}$ is incremented by $\Delta_{V_{m,r}}$ (i.e. $V_{m,r} + \Delta_{V_{m,r}}$) where $\Delta_{V_{m,r}} = \frac{O_C}{c_{m,r}}$. If R_{lim} (e.g. total road-type length in a spatial unit) is exceeded, O_C will not be passed to the next spatial unit: time associated (t_b) in neighbouring spatial units will be lengthened.

When

$$V_{m,r} > \frac{n_{o,m,r}}{c_{m,r}} \quad (8)$$

255 then $V_{m,r}$ becomes $V_{m,r} - \Delta_{V_{m,r}}$.

Where transport is considered at the spatial resolution of B , $V_{m,r}$ are distributed to child spatial units based on the ratio of nested spatial unit capacity to the parent spatial unit's capacity (e.g. $L_{m,A_N}/L_{m,B}$ for cars).

260 The anthropogenic heat flux from transport, $Q_{F,T}$ for an A_N of area A , at time t is (Grimmond, 1992):

$$Q_{F,T} = \frac{\sum_{r=1}^{n_r} \sum_{m=1}^{n_m} V_{m,r} \cdot F_{m,f} \cdot L_{r,t}}{A} \quad (\text{W m}^{-2}) \quad (9)$$

where $L_{r,t}$ is the distance travelled in a time-step. Heat emission ($F_{m,f}$; W m^{-1}) varies with fuel type (f), m , r and vehicle speed ($v_{m,r}$; m s^{-1}). For the case of road traffic, speed can be represented as a function of permitted, or average speed limit ($v_{r,lim}$).

This is linked to traffic density (i.e. vehicles per unit length, e.g. Salter, 1989) which we relate to a ratio of total on-road vehicle length to total route length (equates to R_{lim}) as:

$$265 \quad D = \frac{\sum_{m=1}^{lim} V_{m,r} \cdot L_m}{R_{lim}} \quad (10)$$

Hence, speed-density function changes with time (e.g. Greenshields et al. 1935; Wu 2000):

$$v_r(t) = v_{r,lim} - D(t) \cdot v_{r,lim} \quad (\text{m s}^{-1}) \quad (11)$$

The relation of $v_r(t)$ to $F_{m,f}$ is dependent on local fuels types (e.g. Grimmond, 1992; Smith et al., 2009) and is part of the model parameters specification (e.g. Section 3).

2.4.3 Building energy ($Q_{F,B}$)

$Q_{F,B}$ accounts for appliance usage ($Q_{F,B}^{\alpha}$), lighting ($Q_{F,B}^l$), heating and cooling demands ($Q_{F,B}^{HC}$) and hot water demand ($Q_{F,B}^{HW}$):

$$Q_{F,B} = Q_{F,B}^{\alpha} + Q_{F,B}^l + Q_{F,B}^{HC} + Q_{F,B}^{HW} \quad (\text{W m}^{-2}) \quad (12)$$

275 These vary by A_N as O_C composition changes activities a_N^N , and the local building form, construction (materials and dimensions), and control systems (heating, cooling, lighting) change (e.g. as neighbourhood age or construction period varies). A_N release (acceptance) of O_C to (from) the movement and travel module leads to a change in occupancy levels in associated building types. Activity of O_C informs appliance (α), hot water (HW) and lighting (l) energy use as well as heating and cooling (HC) set-points for building environmental control.

280

$Q_{F,B}$ is determined through use of a simplified thermal energy balance for buildings scheme (STEBBS) that calculates heat transfer through building fabric and ventilation using an adjustable time resolution. $Q_{F,M}$, α , HW, and l provide internal gains to the building volume and fabric (Appendix B). The dynamic 1-D energy model enables both simple representation of individual buildings (Klein et al., 2017), as well as scaling to represent groups of building within an A_N . By using building archetypes, STEBBS provides a computationally efficient representation of buildings across a city (Heiple and Sailor, 2008; 285 Bueno et al., 2012; Kikegawa et al., 2014) and permit multiple types within an A_N .



For each archetype with an A_N , STEBBS requires the building dimensions (width, depth, height), window-wall ratio, and thermo-physical properties for the building components (i.e. window, wall, roof, floor, internal mass). Thermal inertia of appliances and lighting is assumed to be negligible (i.e. no regulating thermal mass) and so the heat resulting from their use (i.e. total power demand P_a) is exchanged directly with the indoor air.

Domestic hot water (DHW, following building services convention this includes both domestic and commercial buildings) heating and air heating/cooling are a response to internal conditions, controlled by a setpoint temperature (T_{set} ; K). The energy use (q) depends on the system efficiency (κ) and maximum power rating (P_{max}) for heating using an exponential control to avoid heating overshoot:

$$q_H = \kappa \left(P_{max} - \frac{P_{max}}{\exp(T_{set} - T_i)} \right) \quad (\text{W}) \quad (13)$$

and for cooling:

$$q_C = \kappa \left(P_{max} - \frac{P_{max}}{\exp(T_i - T_{set})} \right) \quad (\text{W}) \quad (14)$$

where T_i is the internal water/air temperature (K). Efficiency losses of the heating system and all cooling energy are calculated as direct heat ejection to the outdoor environment. The heating of the building fabric modifies the storage heat flux of the urban energy balance (Grimmond et al., 1991; Grimmond and Oke, 1999). Thus this term is tracked and removed from $Q_{F.B.}$.

Ventilation loss/gain (q_{vent}) is given as (Spitler, 2011):

$$q_{vent} = V_R \rho_a c_p (T_o - T_i) \quad (\text{W}) \quad (15)$$

where V_R is the ventilation rate ($\text{m}^3 \text{s}^{-1}$), ρ_a is the air density (kg m^{-3}), c_p is the specific heat capacity of air at constant pressure ($\text{J kg}^{-1} \text{K}^{-1}$), and T_o the outdoor air temperature (K). In the standalone version of this model no spatial variations of these are considered. If coupled to a meteorological model these outdoor variables can be spatially dynamic and respond to Q_F emissions locally (Sun and Grimmond, 2019).

DHW is considered as a sensible heat gain only (no latent) with hot water to drains unaccounted for in $Q_{F.B.}$. Heat exchange between DHW in storage (tank and water pipes) and building volume is accounted for. Volumetric flow rates (V_{FR} , $\text{m}^3 \text{s}^{-1}$) of DHW use and to-drain can be set to control volume of DHW in-use. The internal heat gain from this varies with O_C level and activity.

The combined internal gains based on internal building activities are passed to STEBBS. The number of active (i.e. present and awake) O_C in a building (e.g. domestic, work) influences total energy use (Druckman and Jackson, 2008; Yohanis et al., 2008) and the energy demand profiles at timescales from seconds (Richardson et al., 2010) to hours (Widén et al., 2009b). Hence, occupancy levels are essential to reproducing commercial (Kim and Srebric, 2017) and domestic load patterns (Widén and Wäckelgård, 2010).

Hence, each building archetype within an A_N is impacted by its O_C level and their activities (i.e. a_S^N). As O_C categories (e.g. age related) participate in different activities (e.g. infant differs from adult), local census (or other) data both constrain and spatially inform O_C characteristics.

Lighting and appliance gains are associated with activity, appliance type α (Firth et al., 2008) set efficiency and power usage (P_a) associated with different building types (e.g. commercial, domestic). We distinguish three energy consumption classes:

(i) *active only (AO)* - only occurs with user activity (e.g. oven, iron)



- 330 (ii) *continuous (C)* - always consuming energy (e.g. cold appliances: fridge, freezer; small appliances: telephone, clock, burglar alarm). As these may cycle power (e.g. cold appliances) the power rating accounts for the fraction of time the appliance draws power during a single complete cycle and the mean power consumed whilst operating.
- (iii) *active/standby (AS)* – two modes which depend on user activities (e.g. television, computer): (1) as *AO*, (2) less when not actively used.
- 335 Each appliance (α) type (j) is assigned to either *AO*, *C*, or *AS* with an active power rating α_p and additionally for *AS* appliances a standby rating α_s . The number of appliances of type j in A_N (α_{j,A_N}) is determined by domestic/non-domestic appliance market permeation ($\alpha_{j,k}$) as:

$$\alpha_{j,A_N} = \alpha_{j,k} \cdot n_b \quad (16)$$

- where n_b is number of households (domestic), number of work-desks (non-domestic, commercial), or floor area (non-domestic, other) in an A_N . α_{j,A_N} acts as the limit of appliance use at any time. If no distinction between j use profiles can be given (data dependent) all appliance demand is combined as one type.

For domestic use, households are categorised by total number of residents such that proportion of α_{j,A_N} (by *AO*, *C*, or *AS*) in use at a given time t is:

$$345 \quad \alpha_{j,u}(t) = \sum_{x=1}^{lim} f_{x,\alpha_j}(t) \cdot \frac{n_{b,x}(t)}{n_b} \cdot \alpha_{j,A_N} \quad (17)$$

with $f_{x,\alpha_j}(t)$ the fraction of households with x active occupants using α_j at t (based on occupant activity scheduling) and $n_{b,x}(t)$ the number of households with x active occupants at t . For non-domestic buildings, appliance use is proportional to occupancy level and lighting is considered part of this load.

- 350 The power demand P_α (W) of all appliances in use is:

$$P_\alpha = \underbrace{\sum_{j=1}^{n_{AO}} (\alpha_{j,u}(t) \cdot P_{\alpha_j})}_{P_{\alpha(Active)}} + \underbrace{\sum_{j=1}^{n_{AS(1)}} (\alpha_{j,u}(t) \cdot P_{\alpha_j})}_{P_{\alpha(standby)}} + \underbrace{\sum_{j=1}^{n_{AS(2)}} [(\alpha_{j,A_N} - \alpha_{j,u}(t)) \cdot P_{\alpha_j}]}_{P_{\alpha(continuous)}} + \sum_{j=1}^{n_C} (P_{\alpha_j} \cdot \alpha_{j,A_N}) \quad (18)$$

and is the heat gain passed to each STEBBS instance (i.e. each building archetype per A_N). Appliance characteristics are currently uniform throughout A_N but could be variable (e.g. by socio-economic structure).

- 355 Domestic lighting is considered as a separate load impacted by an outdoor downwelling shortwave radiation threshold ($K_{\downarrow lim}$), number of households with active (awake) occupants $n_{b,x}$; and a base/min/max luminous intensity, $l_{base/min/max}$, per household for scaling lighting requirement (Widén et al., 2009a):

$$K_l(t) < K_{\downarrow lim}: P_{light} = P_l \cdot n_{b,x} \cdot \left[l_{base} + \left(l_{min} \cdot \frac{K_l(t)}{K_{\downarrow lim}} + l_{max} \cdot \left(1 - \frac{K_l(t)}{K_{\downarrow lim}} \right) \right) \right] \quad (W) \quad (19)$$

- 360 Luminous intensity is converted to total power (P_{light}) using a per light power rating (P_l). This is passed to STEBBS as part of the appliance load P_α .

3 Evaluation of DASH in Greater London

3.1 DASH setup and data sources

- We evaluate DASH in Greater London (GL). In the United Kingdom (UK), the smallest spatial unit that census data are provided for is the Output Area (OA). We adopt the OA as the agent spatial units (i.e. A_N) in the model runs with A_N nested within four coarser spatial units (B): Lower-level Super Output Area (LSOA); Mid-level Super Output Area (MSOA); Local Authority (LA); and City/Region as data (from various agencies) are aligned to one or more of these spatial units. The LA have several governance roles (e.g. traffic speed, school districts, planning decisions, etc.) that will impact energy use (LGA, 2019). Similar structures are used in other countries but with varying levels creating the complete city (National Bureau of



370 Statistics of China, 2017; Statistics Bureau of Japan, 2017; Statistics Canada, 2017; US Census Bureau, 2019). In London
there are 25,053 OA (determined by residential population and social homogeneity, Office for National Statistics (2017a))
that vary in size from $1.56 \cdot 10^{-4}$ to 12.3 km^2 , 4,835 LSOA, 983 MSOA, and 33 LA within one Greater London Authority
Region (Table 1).

375 The UK Time Use Survey (TUS) 2014 – 2015 (Gershuny and Sullivan, 2017) provides a structured source of data for
simulating population movement and human activity (Iamarino et al., 2012; McKenna et al., 2015; Baetens and Saelens,
2016). Such surveys are carried out in many countries by governments or research institutes (Fisher and Gershuny, 2013),
allowing DASH to be applied elsewhere with appropriate cultural practises accounted for. In the UK TUS, residents record
their activities and location for one weekday and one weekend day, normally creating profiles of individuals with income,
380 age, sex and household type meta-data. The data samples are sufficient to allow analysis at national to regional (e.g. GL)
scale in many cases. The 10 min time-step resolution of TUS data (Gershuny and Sullivan, 2017) is the basis for the model
timestep.

The TUS data are used to construct Markov chains (Appendix A) that govern the exchange of occupants in DASH (Fig. 1a)
385 and the levels and type of activities undertaken by different groups of O_c across the day (section 2.3, Table 2). Age cohorts
(Table 2) are used as the group identifier. Appliances attributed to TUS activities (Table 2) have different power ratings and
market permeation (Table 3, C1). Non-domestic activity varies by workplace appliance types according to the land use (e.g.
industrial, office) of the A_N (BEIS 2017a; OpenStreetMap 2017).

390 The application is undertaken for 2015 to coincide with the TUS data, when GL had a population of 8.539 million (census
data updated annually, Table 2). The remaining data needed are obtained for the closest year. Throughout we endeavour to
use open-source, freely available data. A variety of data types are used, at a range of spatial resolutions (Table 1) with more
detail given subsequently (Table 2-5).

395 Movement of occupants is informed by the National Travel Survey (DfT, 2017) and census data on commute patterns (§8.10,
Table 4), to determine choice of mode by distance or type of journey providing the travel attributes (Table 4). In this
evaluation, nine modes of transport (m) exist: cars, motorcycles, vans, taxis, buses, surface rail, underground rail, cycling
and walking. Other deployments could include freight and boat related modes. Exclusion of freight vehicles does not directly
affect the travel dynamics, but will result in an underestimation of $Q_{F,T}$. Route types (r) considered, include four road types
400 (residential, minor (so called B-roads in the UK), major (UK's A-roads) and motorways (highways)); and two rail types
(underground and surface). In the model runs, journey distances for all routes that move between LAs are determined at LA
scale based on GIS shapefile LA centroids. This is the coarsest implementation of the transport component of the model.

STEBBS is used with different parameters for domestic and non-domestic buildings (Field, 2008). We simplify to the three
405 most common domestic building (houses, bungalows, and flats) archetypes in GL, varied by presence at LSOA level (Table
3, Mavrogiani et al. 2012; Valuation Office Agency 2015). Despite advances in non-domestic buildings characterisation for
GL (Evans et al., 2019), the heterogeneity in form and use limits use of a range of archetypes (Steadman et al., 2000). Again,
for simplicity in this evaluation, we use a single STEBBS characterization based on the most common domestic archetype
parameters for non-domestic (e.g. shops, hospitals, offices). Hence, a maximum of four STEBBS instances per A_N with the
410 appropriate building fabric thermo-physical properties assigned from one of two building age groups (pre- or post-1965,
Tables 3 and C2). Building dimensions are informed by total A_N building footprint and height (Table 3) for each archetype



by age category. The limited consideration of building material thermophysical properties is expected to reduce the spatial variance in heating and cooling contributions to Q_F in DASH.

415 Meteorological data to force the model are from the KSSW site in central London (Kotthaus and Grimmond, 2014, Table 5). Means (1 and 5-min) are used to obtain 10-min means (model time step). Outgoing longwave radiation observed with a Kipp and Zonen CNR4 radiometer (Table 5) is used assuming an emissivity of 0.9 (Butcher and Craig, 2016) and Stefan-Boltzmann equation (Oke, 1988) to obtain surface temperature. Soil temperature (at 5 m depth) is assigned assuming it is equivalent to the mean annual (2014-2015) air temperature (Sellers, 1972; Busby, 2015) of 11.9 °C.

420

As the model requires continuous atmospheric data, gaps are filled in consecutive order: (a) linear interpolation when less than 4 h; (b) median for same time in the surrounding ± 48 h for gaps of 4 – 24 h; and (c) similarly for gaps greater than 24 h, using the median ± 72 h. The various model runs (Table 6) have a spin-up period of 24 h (144 timesteps) for the STEBBS model to become stable.

425

3.2 Evaluation methodology

Ideally a model is evaluated with observations of the simulated variables (Table 6). However, direct observations of Q_F are extremely limited or are indirect with a series of assumptions within them. At the neighbourhood scale, combining radiation and eddy covariance observations while assuming energy balance closure has been used to assess monthly and daily values (e.g. Offerle et al., 2005; Pigeon et al., 2007). Using satellite earth observation, a much larger spatial extent (e.g. city wide) is observed but with a bias to clear sky conditions. The snapshot values at the time of the satellite overpass require a very large number of assumptions in addition to energy balance closure (e.g. Chrysoulakis et al., 2018). The closest to “direct” measurements of Q_F are micro-scale emissions from building vents (i.e. part of $Q_{F,B}$) using eddy covariance sensors (Kotthaus and Grimmond, 2012) but there are extremely limited data available. Thus, the spatial and temporal scales that DASH is capable of simulating cannot be directly compared to measured Q_F . We therefore use a series of different sources of public data and another model to evaluate various aspects of DASH.

435

The reference model used, GQF (Iamarino et al., 2012; Gabey et al., 2019), is a top-down inventory Q_F model developed for London. This is selected as it is amongst the most (spatially and temporally) detailed models for London currently available (Gabey et al., 2019). We apply it to 2014 – 2015 to align with metered data used in the evaluation. The model uses energy consumption, traffic, and workday population data to provide half-hourly estimates of Q_F at city, LA, and OA resolutions. Hence, Q_F estimates for both models are at city scale with OA resolution.

440

There are several GQF features that restrict DASH being evaluated at higher detail. These are: (i) GQF uses data from a range of scales (up to national) to determine OA results with population weighted disaggregation; (ii) diurnal patterns are prescribed based on either assumptions or coarse spatial data, with variation by day type (weekday, weekend) and season – meaning variability at smaller scales are not captured; (iii) GQF assumes the same diurnal profile for both gas and electricity usage; and (iv) effects of temperature in GQF are the net seasonal diurnal energy use profiles rather than reproducing the day-to-day conditions in London. Hence, individual DASH diurnal patterns cannot be evaluated against GQF with fine temporal or spatial resolution as differences are expected.

450

To evaluate DASH, appliance (including cooking) power demand is equated to GQF electricity demand and DASH heating and cooling demand to GQF gas demand. This will lead to discrepancies as the demand profiles used in GQF are not energy



carrier or vector specific. The calculation and evaluation of $Q_{F,T}$ is undertaken at A_N scale rather than individual routes. In
455 both models, many of the minor residential roads in A_N are unaccounted for.

DASH evaluations (Table 6) use annual (1 Oct 2014 to 30 Sept 2015) publicly available gas and electricity consumption data
(GWh) for domestic and non-domestic (commercial + industrial) use (BEIS 2017a,b) and national gas transmission
operational data for the same period (NG, 2015). DASH, run with the appropriate meteorology (Table 5), OA results are
460 aggregated for assessment to the LSOA (domestic) and MSOA (non-domestic) scales. These evaluation data have some
issues: (i) some non-domestic meter data are undisclosed at MSOA level but appear at LA level (without a MSOA) (BEIS
2018); (ii) meters with insufficient address metadata cause underreported consumption statistics for some areas; (iii) some
gas consumption statistics may be wrongly classified (domestic/non-domestic) as this is done based on annual consumption
(threshold = 73200 kW h year⁻¹) (BEIS 2018); and (iv) spatial misallocation of metered commercial gas consumption to the
465 billing address rather than actual building/location of use (BEIS 2018).

Basic metrics assessed include the median (50%), interquartile range (IQR), and standard deviation (SD). To evaluate the
modelled ($X_{M,i}$) and observed (or reference) ($X_{O,i}$) time and/or spatial data series both the difference:

$$\Delta_i = X_{M,i} - X_{O,i} \quad (20a)$$

470 and the absolute errors

$$AE_i = |\Delta_i| \quad (20b)$$

are determined, from these:

- (1) Cumulative distribution of AE_i is obtained all values (e.g. across all 25,053 OA, Fig. 9)
- (2) Normalised by maximum: $nMax = \frac{X_i}{\max(X_i)}$ (e.g. Fig. 10)
- 475 (3) Normalised errors (%): $nE_i = (\Delta_i / X_{O,i}) 100$ (e.g. Fig. 11a,b, ideal value would be 0).
- (4) Absolute normalised error: $AnE_i = \left| \frac{X_{M,i}}{\max(X_{M,i}) - \min(X_{M,i})} - \frac{X_{O,i}}{\max(X_{O,i}) - \min(X_{O,i})} \right|$ (e.g. Fig. 11c, d, ideal value would be
0).

4 Analysis of model dynamics

480 As behaviour, demographics, and travel choices influence the temporal and spatial variation in movement and activity
profiles in DASH Q_F estimates, we examine these first. A critical control on Q_F is the number of occupants within an area.
The area itself may be static (e.g. where buildings are located) or moving (e.g. transport area). The occupancy level will
change as people travel to different locations (Fig. 2).

485 In model run R1 (Table 6), the results for one B spatial unit (LA Camden, London) are used to demonstrate the O_c
movement and travel through time (six consecutive days) within each a_S^N for each age group for three day types (weekday
(school/non-school), weekend) as a result of A_N occupant exchange (Section 2.2). The occupancy levels vary by day type and
between age groups, whilst having general consistency within day-type by age cohort. Note, people travel outside (and into)
this B during the period, but no perturbation is undertaken (e.g. changing transport availability or road construction).

490 During school weekdays most children and teenagers are in school (a_E^N , a_H^N). Adults, some teenagers, and some seniors work
during all day types, and during all times of day. Adult a_W^N occupancy at work (increase at home) is slightly lower on non-
school (NS) weekdays than school/work (SW) days as a result of childcare - a small dip observed during noon on NS and
SW days that reflects lunchtime activity. a_D^N , a_R^N and a_O^N occupancy levels increase after peak school and work times, with a_D^N
495 occupancy returning to similar levels each night.



The occupancy levels of each a_D^N , a_W^N , a_E^N , a_H^N are partly informed by population data, so it is important realistic values occur from the movement processes. This is assessed by comparison of the median and IQR of the total occupancy across each a_S^N in the city to the static populations of each A_N and subarea (i.e. residential, workday, school populations) for one weekday (Fig. 3). Hence, a value of 1 indicates the total population is present. a_W^N occupancy levels have a median peak just over 0.6 of the workday population. A_N interaction in DASH allows for different types of work, such as full/part-time and shift work, as it is inherent to the movement data (in this case the TUS, Table 2). Whilst this might not reflect the accurate behaviour of a particular a_W^N (e.g. an a_W^N comprising entirely office work may in reality only be occupied 09:00-17:00), the total variability over a group of a_W^N may be more realistic, given varying work times between commercial sectors.

For R2 (Table 6) both a_E^N and a_H^N IQR occupancy levels are less than some A_N school populations (Fig. 3), but for morning to noon a_H^N the population is exceeded in some areas. Both the deficit and surplus may relate to the method of assigning school anchors to child and teenager O_C (Section 2.2). If the age group residential population is lower (higher) than the school population in a LA, there will be too few (many) students occupying this LA schools during the day. As students are assumed not to cross LA boundaries, given state school catchment area restrictions. In Greater London 89% of pupils are in state schools (DFE, 2019).

a_D^N occupancy levels are always below 1. The highest values occur overnight when most people are expected to be at home. The narrow IQR indicates there is little variation in total occupancy levels between areas. Variations are expected with active occupancy (e.g. household sizes, Section 2.3.1) and in a_D^N with large differences in resident age groups.

Total occupancy varies with behaviour of different age groups and will affect the power demand within the neighbourhood. To demonstrate the impact of demographics on daily profiles of O_C in the a_D^N , three A_N (neighbourhood, OA, scale) with similar residential populations but different dominant age-cohort are compared in Fig. 4 (R3, Table 6). The a_D^N of each of the three A_N have distinct dominant age groups as: a_D^{senior} 78% (291) residents are seniors; $a_D^{working}$ 92% (297) residents are adults; and a_D^{young} 47% (300) residents are infants, children or teenagers. In a_D^{senior} (Fig. 4a), daytime O_C remains proportionally higher (Fig. 4d) than $a_D^{working}$ (Fig. 4b) and a_D^{young} (Fig. 4c). a_D^{young} has a steeper morning decrease in O_C and earlier inflection point in the afternoon than $a_D^{working}$, likely due to formal school day lengths (Fig. 2). On the weekend day, all age groups, apart from teenagers, follow similar patterns, with about 60 – 70% remaining in the A_N (Fig. 4d).

The diurnal pattern of occupancy levels by day type is consistent between days and boroughs (R4, Table 6). The variability of borough occupancy levels for a_D^N (Fig. 5a) and a_W^N (Fig. 5b) is greater in the daytime when movement is more likely. Although, these standard deviations are quite small compared to the actual LA-level residential (8,760 - 379,691 residents) and workday (58,444 – 356,706 workers) populations (ONS, 2014a, 2015). This demonstrates that the occupancy exchange method (Section 2.2) produces variation in occupancy levels on a daily basis when the same parameters are used for each day.

In this road vehicle evaluation (R5, Table 6), routing is at LA scale with inter-LA routes determined using Google Directions (Google, 2019). The volumes of vehicles in use by mode (Figure 6) predicted by the movement component (Fig. 1, Section 2.3) peaks in the morning (07:30-09:30). Slight increases are present around noon and early evening. Low values (00:00-06:00) occur when movement is low (Fig. 2). The increase at 04:00 is due to both low sampling and the temporal



540 boundary of the TUS, which considers a day's worth of entries to occur 04:00-04:00. The volume of buses is constant over the period 08:00 – 20:00 due to an imposed condition on capacity that represents an increase in $C_{bus,r}$ (Section 2.4.2) instead of increasing $V_{bus,r}$. With only one route option given per LA origin-destination pair, road traffic is distributed between A_N in proportion to LA total road area. Routing options at A_N scale have not been implemented.

5 Evaluation of DASH with GQF

545 The DASH evaluation assumes average or typical conditions (i.e. no disruptions are imposed to modify movement and/or timing of activity). As a result the contribution of appliance use to $Q_{F,B}$ is expected to be similar for all days of each type (e.g. weekday, weekend) throughout the year for both domestic and commercial settings (seasonality in appliance-based activity is not considered). In a non-perturbed state, variation within day types across a year is expected to come from heating (space and water) and cooling use as these demands respond to immediate environmental forcing within DASH. As GQF (section 3.2) only varies electricity demand with day type and season and gas with season, we compare the DASH
550 diurnal pattern and magnitude of $Q_{F,B}$ components for two school weekdays (SW) in different seasons (summer: 18 June 2015, winter: 27 January 2015). The mean air temperature is warmer in summer (17.0°C) than winter (7.0°C) and has more total radiation (Fig. 7).

555 To evaluate heat emissions from buildings ($Q_{F,B}$) the city-wide emissions of domestic (dom) and commercial/non-domestic buildings (n-dom) are considered separately (R6, Table 6). As DASH and GQF have the same spatial resolution, comparison is made of spatial inter-quartile ranges (IQR) at the GQF 30-min temporal resolution (i.e. 30-min means (time-ending) are calculated from the DASH 10-min values). DASH appliance emissions ($Q_{F,B}^a$) are compared to GQF electricity demand ($Q_{F,B}^{elec}$) whilst combined heating (space and water) and cooling ($Q_{F,B}^{HC} + Q_{F,B}^{HW}$) in DASH are equated to GQF gas demand
560 ($Q_{F,B}^{gas}$). Discrepancies between values are expected, for example in some areas heating may be powered by electricity.

For the summer weekday, DASH domestic $Q_{F,B}$ has similar characteristics to GQF with consistent morning and evening peaks. The mean and IQR are similar from midnight to 5 am, but consistently lower (difference in medians of 2 – 2.5 W m⁻²) in DASH from the morning to end of evening peak (Fig. 8ai). Across spatial A_N more than 60% have an absolute error (AE, eq. 20b) of ≤ 2 W m⁻² for all times sampled, and for ~90% the AE ≤ 5 W m⁻² (Fig. 9a).
565

Domestic $Q_{F,B}^a$ closely follows $Q_{F,B}^{elec}$ in both pattern and magnitude on the summer day. DASH has three distinct appliance demand peaks: morning, midday, and a larger more sustained evening peak. The magnitude and timing of $Q_{F,B}^a$ and $Q_{F,B}^{elec}$ peaks are similar between DASH and GQF, although the morning peak in GQF is maintained with less variability
570 throughout the day (Fig. 8a.ii). The domestic summer day gas (GQF) and heating/cooling (DASH) $Q_{F,B}$ profile (Fig. 8a.iii) have the largest discrepancy in daily profile and magnitude. Under summer conditions, DASH heating/cooling is largely driven by hot water demand as indoor temperatures in all instances of STEBBS are passively maintained between heating and cooling setpoints.

575 DASH domestic $Q_{F,B}$ has a more distinct morning peak in winter (Fig. 8di), and from midnight to the morning peak DASH values are 1 – 4 W m⁻² greater than GQF. This is caused by greater $Q_{F,B}^{HC+HW}$, and may relate to greater sensitivity to temperature for DASH and low outdoor air temperatures. The evening peak is less pronounced and shifted to later evening, with roughly 70% of the A_N having AE ≤ 5 W m⁻² at 18:00 (Fig. 9b). All other times analysed more in agreement with GQF. $Q_{F,B}^a$ remains similar to the summer values (Fig. 8a.ii) as the only seasonal variation is due to indoor lighting. After the



580 morning peak it is slightly lower than $Q_{F,B}^{elec}$ (Fig. 8d.ii), but follows a similar pattern throughout the day. This discrepancy is likely due to electric heating use, which $Q_{F,B}^{elec}$ would include on both a small (e.g. space heaters) and large (e.g. 'district' electric heating in high-rise flats) scale.

585 Summer commercial $Q_{F,B}$ is consistently lower in DASH (median $\sim 1.5 \text{ W m}^{-2}$ less) than GQF in the middle of the day (Fig. 8b.i) with morning and evening medians more similar. The evening IQR increases for DASH and is reflected in $Q_{F,B}^g$, likely associated with energy demand from commercial properties that remain open later in the evening (e.g. leisure facilities). There is close agreement between $Q_{F,B}^g$ and $Q_{F,B}^{elec}$ medians (Fig. 8b.ii). At least 60% of A_N agree within 2 W m^{-2} for all sampled time steps (Fig. 9c).

590 The winter diurnal patterns for commercial $Q_{F,B}$ are similar for DASH and GQF (Fig. 8e.i) but DASH has a steeper morning (evening) increase (decrease) as well as consistently higher values (median $2 - 3 \text{ W m}^{-2}$ in the daytime). The evening decrease starts $\sim 2 \text{ h}$ later in DASH. These higher values are due to $Q_{F,B}^{HC+HW}$ (Fig. 8e.iii), which dominates the total pattern. The median $Q_{F,B}^g$ and $Q_{F,B}^{elec}$ profiles (Fig. 8e.ii) are in good agreement, with slightly broader IQR for DASH. More than 50% of A_N have a MAE of $\leq 2 \text{ W m}^{-2}$ for all times except 09:00, which is slightly below 50% (Fig. 9d).

595 For both domestic and commercial use, summer $Q_{F,B}^{HC+HW}$ have the largest discrepancy in profile and magnitude compared to $Q_{F,B}^{gas}$ (Figs. 8a.iii, 8b.iii). In summer for DASH, $Q_{F,B}^{HW}$ is expected to dominate as indoor temperatures in all instances of STEBBS are passively maintained between heating and cooling setpoints. City-wide domestic $Q_{F,B}$ is greater than commercial $Q_{F,B}$ in both DASH and GQF.

600 The median $Q_{F,T}$ are fairly similar between both models but GQF has less temporal variability (Figs. 8c.i, 8f) with $\text{IQR}_{\text{DASH}} \sim 4 \times \text{IQR}_{\text{GQF}}$. As DASH responds to variations in travel demand, and exchanges occupants across the city more temporal variation occur between A_N . Figs. 9e, f, show small MAEs between the two models, with more than 98.5% of A_N within 2 W m^{-2} . When considered for road area only, DASH $Q_{F,T}$ median values reach 2.9 W m^{-2} , with diurnal mean of 3.25 W m^{-2} (Fig. 605 8c.ii). Summer (Fig. 8c.i) and winter (Fig. 8f) values differ because of the behavioural change caused by daylight savings time. But no other seasonal changes are expected or occur.

Here the mean GQF values are based on key day types appropriately weighted for the year, whereas DASH is run for the year. The GL annual average $Q_{F,M}$ for DASH is 0.663 W m^{-2} , for GQF it is 0.717 W m^{-2} , whereas assuming one mean 610 metabolic flux for all that live in GL gives 0.386 W m^{-2} . The GL annual average $Q_{F,T}$ from DASH (0.24 W m^{-2}) is larger than for GQF (0.0303 W m^{-2}) as GQF uses a smaller road network (OS (2016) vs. AADT, respectively). The GL annual average $Q_{F,B}$ for DASH (5.74 W m^{-2}) is slightly smaller than the 2015 average meter data (7.22 W m^{-2} , Section 6). The GL annual total Q_F for DASH (6.0 W m^{-2}) is smaller than for GQF (7.97 W m^{-2}). The Iamarino et al. (2012) (earlier version of) GQF annual average (10.9 W m^{-2}) for 2005 to 2008 is larger which is consistent with the decrease in published values seen for 615 London (e.g. Ward et al., 2016; Ward and Grimmond, 2017).

6 Evaluation of DASH with annual gas and electricity consumption data

To assess the annual DASH city-wide hot water, heating and cooling energy demand (R7, Table 6) results are compared to normalised national gas demand. The seasonal pattern (winter peak, summer minimum) is evident in both (national, DASH) heating data, with short and long period responses to temperature also evident (Fig. 10). The DASH response to the higher 620 frequency variations is similar to the demand data but the amplitude of normalised demand differs. DASH is seemingly more



sensitive to temperature changes but as the national demand profile has net local responses to weather (*etc.*) variations across the country these may be smoother than if only London responses were observed.

625 In June to August, DASH heating/cooling demand is solely attributed to DHW demand for both domestic and commercial buildings. The consistency in DASH daily-behaviour (i.e. R7 without imposed perturbations) results in a steady-state summer load, with a baseline demand that is less dependent on environmental variability. The normalised national data have both greater magnitude and amplitude of fluctuation in summer (cf. DASH). The national data includes appliance (e.g. cooking) and industrial gas demands whereas DASH accounts for these in appliances (omitted in Fig. 10). The heating season dominates the DASH results (Fig. 10). The DASH pattern is less variable with the cooking and industrial baseline demands included (not shown).
630

Evaluation of DASH (R7, Table 6) at LSOA scale (Table 1) suggests the DASH total domestic energy consumption is less than metered values (Fig. 11a.i). The DASH IQR is 46 to 29 % lower (Fig. 11a.ii). Although the LSOA domestic consumption in the central business district (CBD – City of London) has the largest discrepancy (-81.5%), this may be due to misallocation in the published data (e.g. some dwellings classified as commercial because of a large shared meter). There is no evidence of a relation between percentage difference and population density.
635

The percentage difference between commercial DASH and non-domestic energy consumption is skewed to overestimation by DASH in most MSOAs (Fig. 11b.ii). The CBD underestimation (-52.9%, Fig. 11b.i) is likely caused by a large misallocation of commercial gas consumption in this area (section 3.2). Two spatial units (West and East London) overestimate by more than 1000% (maximum being 1150%, 25.5 GW h). Some OAs (i.e. A_N scale) with large retail buildings have potential uncertainty in both the energy consumption data (e.g. undisclosed data, section 3.2) and DASH simulations.
645

At MSOA scale, DASH simulates 38% of the areas to within $\pm 100\%$ of published values. The MSOAs that DASH most overestimates (as percentage differences) have fairly small actual magnitude differences and low workplace populations. The mean difference in magnitude across the top 5th percentile is 28.7 GW h, however 77% of these (mean difference 18.1 GW h) have workday populations of fewer than 2,000 people in the MSOA, with most businesses in these MSOA having fewer than 50 employees. Whilst the proportion of these small businesses is fairly high (89% on average) across Greater London (ONS, 2019), it is not the main cause of the uncertainty, as this arises from misclassification of small businesses as domestic within published data. Some overestimation occurs in areas with buildings that are not typically temperature controlled (e.g. warehouses, factories) as DASH assumes all commercial spaces are temperature controlled.
650

655 Although the percentage differences in commercial annual energy consumption are larger than for domestic (Fig. 11a.ii, 11b.ii), the actual commercial values (Fig. 11d) are more spatially similar across the city than domestic values (Fig. 11c). The most spatially disparate commercial area, containing Heathrow airport (west GL, Fig. 11d), likely has undisclosed data, hence the large difference (394.7%) of 726.8 GWh. Domestic values are more spatially similar in the less densely populated suburbs, whereas areas east of the CBD are more densely populated and more spatially variable.
660

The annual LA (Table 1) energy fluxes have fewer data inconsistencies when the domestic and non-domestic/commercial energy consumption are combined, allowing meter classification to be ignored. DASH Q_F estimates for Greater London



(5.74 W m⁻²) are lower than those found using the published meter data (7.22 W m⁻²), with the greatest difference in the smallest LA, City of London (DASH gives 58.02 W m⁻² and published data gives 123.48 W m⁻²). The overall spatial patterns are similar, with greater values towards the city centre and more consistent values in the surrounding suburbs.

Although address misallocation (section 3.2) is expected to cause the observed discrepancies (i.e. apparent DASH underestimation for aggregate annual values) found in the CBD, it is not possible to quantify this uncertainty. Similarly, an underestimation is expected from DASH as the meteorological input used is for one central site (Table 5) so variations (e.g. cooler temperatures or wind effects) are unaccounted for. This could be improved by coupling DASH with a meteorological model accounting for spatial heterogeneity.

7 Conclusion

DASH allows anthropogenic heat fluxes to be simulated accounting for both urban form and function, using an agent-based structure. The impact of people's behaviours at the neighbourhood scale is captured as occupants move (10 min time step), varying by day type (e.g. week day, weekend), demographics (e.g. age), location (e.g. residential, work, school), activity (e.g. cooking, recreation, travelling to school or work), socio-economic factors (e.g. appliance availability) and in response to environmental conditions (e.g. temperature related heating use). DASH includes simple transport and building energy models to allow simulation of dynamic vehicle use, occupancy, and heating/cooling demand with subsequent release of energy to the outdoor environment through the building fabric or ventilation.

Evaluation of DASH in Greater London for various periods in 2015 uses a top-down inventory model (GQF) and national energy consumption statistics (as cited in Table 6, R8). Overall the model generally performs well. Some of the spatial and temporal differences may be explained by data inconsistencies in the official data (e.g. privacy related, allocation of use to office headquarters rather than place of use). Analyses with DASH allow high spatial and temporal resolution for a wide range of time periods (demonstrated here from 10 minutes to 1 year) and large spatial extent (demonstrated from output area to mega-city). The model performance evaluation addresses a wide range of these scales (e.g. 30 min spatial patterns at OA, annual at LA scale).

The expected temporal and spatial patterns are obtained (e.g. two diurnal peaks and larger fluxes in the city centre). Given DASH's capabilities these can be explored and explained. For example, domestic building $Q_{F,B}$ is more intense towards the city centre than in outer suburbs, following residential population density. The morning and evening peaks are linked to active occupancy and appliance power demand.

As DASH is demonstrated to be able to reproduce conditions generally, future work will investigate dynamic feedbacks within a city from changes in urban form and function. DASH is designed to allow parameters to be altered spatially, thus impacts on Q_F emissions can be assessed. Changes may be both slow (i.e. over years) such as from an aging population, new technology uptake (e.g. change of vehicle fuels and efficiency), or governance (e.g. national energy or carbon goals) and short-term (i.e. hours, days to months) such as traffic restrictions (e.g. roadworks, flooding) changing flow. The model performance suggests that other capabilities (e.g. additional transport types) and feedback on other variables (e.g. CO₂) emissions are warranted in the future. With DASH coupled to an urban land surface model, the impacts can be assessed both on Q_F itself (e.g. a traffic disruption at one point in terms of the impact on $Q_{F,B}$) and its feedback on other surface energy balance terms and near-surface urban temperatures.



705 8 Acknowledgements

This work has been funded by EPSRC (doctoral training grant), NERC APEX, and Newton Fund/ Met CSSP China (SG). Dr Andy Gabey provided support in early development of DASH and adaptation Office of GQF for evaluation purposes. George Meachim carried out the gap filling for use of meteorological data.

710 9 Appendix A: Creation of Markov chains

A Markov transition matrix (Hermanns, 2003; Sericola, 2013) is built from the probabilities of transition from one state to another in the next time step, with n states forming an $n \times n$ Markov transition matrix (Table A1a). Entries are the probabilities p of transitioning from one state at time step t (row) to another at time step $t + 1$ (column) (e.g. Tables A1b,c). Stationary distribution for state 1:

$$715 \quad \pi(t) = [p(t)_{1,1}, p(t)_{1,2}, p(t)_{1,3}, p(t)_{1,4}, p(t)_{1,5}, p(t)_{1,6}] \quad (A1)$$

The transition matrices created for this model are time inhomogeneous, reflecting a realistic diurnal profile with changes in likelihood state through the day. If state transition n , n is chosen, the state does not change. Markov transition matrices may exclude entry to particular states by setting the column and row of a restricted state to zero.

720 As there is no way to determine the states prior to the start of a model run and to ensure no spin-up is required, the stationary distribution for the first-time step in the run is given by the diagonal of the matrix (e.g. based on Table A1 six states):

$$\pi(t) = [p(t)_{1,1}, p(t)_{2,2}, p(t)_{3,3}, p(t)_{4,4}, p(t)_{5,5}, p(t)_{6,6}] \quad (A2)$$

This represents the distribution across states that are not in transition during the previous or the current time step.

725 For travel (Section 2.4.2) at $t=1$, O_C are distributed using a weighted choice with the diagonal of the transition matrix (eq. A2) for that time step and age group as the weight distribution. At each subsequent time step, the origin A_N has a choice to keep each O_C or release them into another a_S^N , according to weighted choice (eq. 3) using the transition probabilities dictated by the origin a_S^N 's stationary distribution (eq. A1) at t as ω . The A_N destination depends on the destination a_S^N selected. If a_S^N for the next time step is the same as the previous time step, the A_N does not release the O_C .

730

10 Appendix B: Heat exchange within STEBBS

STEBBS employs a nodal approach (Fouquier et al., 2013) as found in commonly used simulation tools such as TrnSys (Klein et al., 2017) and EnergyPlus (Crawley et al., 2000). Each node represents a homogeneous component of the building, with heat transfer equations solved between each node (Figure B1). Each building component is modelled as 1-layer with
735 bulk or effective thermal properties that account for the external and internal surfaces (e.g. a wall cavity and insulation layers are not modelled separately). As this is computationally cheap, it allows multiple instances for each A_N at high temporal resolution. The only latent heat consideration is that of people from metabolic processes (Section 2.4.1).

The STEBBS considers heat exchanges by convection, conduction, and radiation, and heat gain from solar insolation and casual heat sources (Fig. B1). The convective flux, q_{cv} , between a fluid f and a surface s (Bergman et al., 2017) is:

$$740 \quad q_{cv} = h A (T_f - T_s) \quad (B1)$$

where T_f and T_s are the temperatures of the fluid (f) and surface (s), respectively, and A the surface area of the building.

Convective fluxes occur between indoor (outdoor) air and internal (external) wall/window/floor surface as well as the internal mass surface. For DHW, eq. B1 calculates convective flux between water and hot water tank/vessel walls. Forced
745 convection h is experienced on external walls as a function of wind speed ws ($m s^{-1}$) at roof height, so is variable whilst internal values are held constant (Cole and Sturrock, 1977):



$$h = 5.8 + 4.1ws \quad (\text{B2})$$

Conduction between internal and external surfaces of a component (i.e. wall, window, floor, hot water tank/vessel, and ground floor to ground) is:

$$q_{cd} = k_e A \frac{T_{si} - T_{so}}{L} \quad (\text{B3})$$

where k_e is the effective conductivity of a building component with 1 to n layers of thickness L_n (sum to L) and conductivity k_n :

$$k_e = \frac{L}{\frac{L_1}{k_1} + \frac{L_2}{k_2} + \dots + \frac{L_n}{k_n}} \quad (\text{B4})$$

and T_{si} , T_{so} are the component's inside and outside surface temperatures, respectively. This is calculated for inside surfaces of a wall, ceiling, window, floor, hot water tank and hot water vessel components and their respective outside surfaces, as well as the point of contact between the ground floor and the external ground.

Shortwave insolation (G_k) is considered on building walls/roof and windows, with transmitted proportion through windows added to internal heat gain and absorbed proportion contributing to wall/roof/window gains (Underwood and Yik, 2004).

Windows have an effective shortwave transmissivity (τ) and albedo (θ), whereas walls/roof depend only on their albedo.

Solar internal heat gain (q_{si}) as:

$$q_{si} = \tau \cdot G_k \quad (\text{B5})$$

and solar gain to external wall (q_{se}^a) and window (q_{se}^i) as:

$$q_{se}^a = (1 - \theta) \cdot G_k \quad \text{and} \quad q_{se}^i = (1 - \tau - \theta) \cdot G_k \quad (\text{B6})$$

The net longwave radiation (Q_{L*}) exchange between building surfaces (walls or windows) and surfaces (including sky) in their view is found using Bergman et al. (2017):

$$Q_{L*} = A \sum_{i=1}^n [\psi_i \sigma \varepsilon (T_{so}^4 - T_{s,i}^4)] \quad (\text{B7})$$

where σ is the Stefan-Boltzmann constant ($5.67 \times 10^{-8} \text{ W m}^{-2} \text{ K}^{-4}$), ε is the wall/window emissivity and surface temperature. $T_{s,i}$ is the temperature of the surface (i) in view.

The three view factors (ψ_i) for external wall/window surfaces (sky ψ_s , buildings ψ_b , and ground ψ_g) will sum to 1. Currently, for neither short nor longwave radiation are ψ accounted for (i.e. uniform temperature is assumed). This could be improved when coupled with more detailed morphology data and urban meteorology as ψ varies across a city with height (building facet) and density of buildings (Grimmond et al., 2001). Internal wall radiative exchanges are currently not considered.

11 Appendix C: Parameter values

Table C1: Appliances used in domestic and workplace subareas and their attributes. Usage categories: Active only (AO) consume energy as a results of user activities; Active with standby (AS) consume less when not in active use (standby); Continuous (C) have constant power consumption independent of human activity (cycling appliance power converted to continuous). See Table 3 for references.

Appliance	Attributed activity	Usage category	Power rating (W)	Standby power rating (W)	Proportion on standby	Market permeation
<i>Domestic appliances</i>						
Oven	Food preparation	AO	2125	-	-	0.616
TV	Watching TV	AS	124	3	1	0.977
Desktop	Computer use	AS	100	20	1	0.35
Laptop	Computer use	AS	70	10	1	0.71
Iron	Ironing	AO	1000	-	-	0.9
Washing machine	Laundry	AS	792	1	0.5	0.93



Chest fridge	-	C	38	-	-	1
Small appliance (generic)	-	C	2	-	-	
Lighting (single bulb)	Active	AO	43	-	-	-
<i>Workplace appliances</i>						
Office “desk”	At work	AS	250	25	0.5	per worker
Office background (e.g. IT equipment)	-	C	230	-	-	per worker
Lighting	At work	AS	120	120	0.5	per worker

Table C2: Applied building component properties to all instances of STEBBS model (Pre-1965 [House & Bungalow/Flat], Post-1965), regardless of use type and building size. L thickness, ε emissivity, τ effective transmissivity, Θ surface albedo, k_e effective thermal conductivity, ρ density, c_p specific heat capacity of air at constant pressure, h convection coefficient, V_{FR} volumetric flow rate of DHW for single use domestic/commercial, V_R ventilation rate, V_T DHW tank volume, WWR window-to-wall ratio. Tank n = number of people per household. Vessels all other storage of DHW. For data sources refer to Table 3. * variable by wind speed, **per water user (domestic/non-domestic)

		L (m)	$\varepsilon, \tau, \Theta$	k_e (W m ⁻¹ K ⁻¹)	ρ (kg m ⁻³)	c_p (J kg ⁻¹ K ⁻¹)	h (W m ⁻² K ⁻¹)		V_{FR}, V_R^{**} (10 ⁻³ m ³ s ⁻¹)	V_T (m ³)	WWR	
							Int.	Ext.				
Building Fabric	External Wall/Roof	0.241/0.327, 0.373	0.9, 0, 0.6	0.837/0.835, 0.104	1692/1690, 1076	803.1/804.1, 865.9	3	var*	600	-	0.4	
	Window	0.005, 0.02	0.88, 0.9, 0.05	1.05, 0.041	2500, 1000.7	840, 902.4	3	var*		-		
	Ground Floor	0.5	-	0.752, 0.690	1540, 1470	1012.8, 1016	2.8	-		-		-
	Internal Mass	-	0.91, 0, 0	0.121	873.7	967.9	3	-		-		-
DHW	Tank n = 1	0.055	0.9, -, -	0.0275	745.55	1380	243	3	0.183 / 0.15	0.115	-	
	Tank n = 2									0.115		
	Tank n = 3									0.125		
	Tank n = 4									0.148		
	Tank n = 5									0.170		
	Tank n = 6									0.180		
Vessels	0.0047	0.91, -, -	0.16	1380	1380	243	3	0.1372 / 0.1125	-	-		
External Ground	2	-	1.28	-	-	-	-	-	-	-		
Internal Air	-	-	-	-	1005	-	-	-	-	-		

790 **12 Appendix D: Code availability/Data availability**

All code and data are deposited at 10.5281/zenodo.3745524. The archive will be made available once the paper is accepted.



795 **Table D1:** Data examples. More details (example structure, units, raw data source, location in repository and location of use in code) can be found at: <https://github.com/Urban-Meteorology-Reading/DASH-X/wiki/All-data>

Filename	File type	Definition	
i) Population			
a	age_groups	csv	Population of each age group in each A_N
b	allworkers	csv	Residential and workplace spatial unit relation
c	area_hierarchy	csv	List of A_N in the larger, containing, spatial unit (B)
d	daytype	csv	Dates used by run and corresponding day of year and day type
e	SchoolWorkShopcap	csv	School and workplace populations and shops and 'other' subarea capacities for each A_N
ii) Transport			
a	SpatialUnitRoadLengths	csv	L_r in each B
b	average_passengers	csv	Average number of people in a single m vehicle
c	distance_freqs	csv	Journey distance categories and their respective mode weightings
d	fuel_consumption	csv	Average urban fuel consumption for urban roads for vehicle stock ($g\ km^{-1}$)
e	fuel_ratio	csv	Proportions of each m using each f
f	IntraBorDist/matrix	csv	Distance matrix for distance between A_N centroids in B
g	IndivBor/xh_wsorted	csv	Proportions of people using each mode to travel from home to work
h	IndivBor/xw_hsorted	csv	Proportions of people using each mode to travel from work to home
i	MeanSpeedLimits	csv	Mean $v_{r,lim}$ for each r in each B
j	RoadAADTMeansLengthWeighted	csv	AADT means of each r , mode for each B
k	routes_distances	csv	List of route segment distances for each spatial unit traversed for each route
l	routes_int	csv	List of routes between each start-destination pair, including the spatial units traversed for each route
m	route_reference_matrix	csv	Reference matrix for route numbers
n	ShopsGravity	csv	Gravity weightings (Eq. 3) for travel to shops and other subareas
o	speed_fuel_ratio_func	pickle	Functions of normalised speed - fuel consumption relation for each m
p	travelttime_functions	pickle	Functions relating distance to time travelled for each mode
q	vehicle_length (in settings.nml)	-	Length of representative vehicle
iii) Area			
a	env_vars	csv	Environmental variables used for each time step
b	IndustrialOAs	csv	Location of industrial land use around the study area
c	OA_area_details	csv	Population, road length, building stock and dimensions, floor plan area data for each A_N
iv) Buildings			
a	CommBuildingArchetype	nml	Multiple <i>.nml</i> lists for each commercial building archetype and their STEBBS parameters
b	CommTypes	nml	Multiple <i>.nml</i> lists for each school/shops/other land use type and their parameters
c	DomApplianceList	nml	Multiple <i>.nml</i> lists for appliances used by occupants in domestic buildings, and their parameters
d	DomBuildingArchetype	nml	Multiple <i>.nml</i> lists for each commercial building archetype and their STEBBS parameters
e	domlighting	nml	Parameters for domestic lighting
f	WorkApplianceList	nml	Multiple <i>.nml</i> lists for appliances used by occupants in commercial buildings, and their parameters
g	xpersonactiveweekend/day	csv	Proportions of people active (awake and present) in households with x people present at each time step
h	xpersonweekend/day	csv	Proportions of people who belong to household of size x present in household at each time step, given that someone is present



Table D.2 Archive of model runs (Table 6) inputs and results

<i>R</i>	<i>Zenodo reference</i>	<i>Extent</i>	<i>Area</i>	<i>Spatial Scale</i>	<i>Temporal Scale</i>
1	10.5281/zenodo.3745524	GL	Camden	a_N^x	10 min
2	10.5281/zenodo.3745524	GL	GL	A_N	10 min
3	10.5281/zenodo.3745524	GL	E00023911, E00015661, E00008490	A_N	10 min
4	10.5281/zenodo.3745524	GL	GL	LA	10 min
5	10.5281/zenodo.3745524	GL	GL	GL, LA	10 min
6	10.5281/zenodo.3745524	GL	GL	OA (A_N)	As Run 5
7	10.5281/zenodo.3745524	GL	GL	GL	Annual
8	10.5281/zenodo.3745524	GL	GL	LSOA - dom, MSOA - n-dom	Annual

800

References

- Allen, L., Lindberg, F. and Grimmond, C. S. B.: Global to city scale urban anthropogenic heat flux: model and variability, *Int. J. Climatol.*, 31, 1990–2005, 2011.
- Baetens, R. and Saelens, D.: Modelling uncertainty in district energy simulations by stochastic residential occupant behaviour, *J. Build. Perform. Simul.*, 9(4), 431–447, doi:10.1080/19401493.2015.1070203, 2016.
- BCO: Guide to Specification 2009, British Council for Offices., 2009.
- BEIS: Department for Business, Energy & Industrial Strategy: Sub-national electricity consumption data, [online] Available from: <https://www.gov.uk/government/collections/sub-national-electricity-consumption-data#lsoa/msoa-data> (Accessed 14 July 2017a), 2017.
- BEIS: Department for Business, Energy & Industrial Strategy: Sub-national gas consumption data, [online] Available from: <https://www.gov.uk/government/collections/sub-national-gas-consumption-data> (Accessed 14 July 2017b), 2017.
- BEIS: Department for Business, Energy & Industrial Strategy: Sub-national total final energy consumption data, [online] Available from: <https://www.gov.uk/government/collections/total-final-energy-consumption-at-sub-national-level> (Accessed 14 July 2017c), 2017.
- BEIS: Department for Business, Energy & Industrial Strategy: Sub-National Consumption Statistics: Methodology and guidance booklet., 2018.
- Bergman, T. L., Lavine, A. S., Incropera, F. P. and DeWitt, D. P.: *Fundamentals of Heat and Mass Transfer*, 8th ed., Wiley Global Education., 2017.
- Best, M. J. and Grimmond, C. S. B.: Investigation of the impact of anthropogenic heat flux within an urban land surface model and PILPS-urban, *Theor. Appl. Climatol.*, 126(1–2), 51–60, doi:10.1007/s00704-015-1554-3, 2016.
- Björkegren, A. and Grimmond, C. S. B.: Net carbon dioxide emissions from central London, *Urban Clim.*, 23, 131–158, doi:10.1016/j.uclim.2016.10.002, 2018.
- Blitzstein, J. K. and Hwang, J.: *Introduction to Probability*, 2nd ed., Chapman and Hall, CRC Press., 2019.
- Bohnenstengel, S. I., Hamilton, I., Davies, M. and Belcher, S. E.: Impact of anthropogenic heat emissions on London’s temperatures, *Q. J. R. Meteorol. Soc.*, 140(679), 687–698, doi:10.1002/qj.2144, 2014.
- BSI: BS 6700: Specification for Design, installation, testing and maintenance of services supplying water for domestic use within buildings and their curtilages, British Standards Institution., 1997.
- Bueno, B., Pigeon, G., Norford, L. K., Zibouche, K. and Marchadier, C.: Development and evaluation of a building energy model integrated in the TEB scheme, *Geosci. Model Dev.*, 5(2), 433–448, doi:10.5194/gmd-5-433-2012, 2012.
- Busby, J.: UK shallow ground temperatures for ground coupled heat exchangers, *Q. J. Eng. Geol. Hydrogeol.*, 2015–077, doi:10.1144/qjgeh2015-077, 2015.
- Butcher, K., Ed.: *CIBSE Guide K: Electricity in buildings*, Chartered Institution of Building Services Engineers., 2004.
- Butcher, K., Ed.: *CIBSE Guide F: Energy Efficiency in Buildings*, Chartered Institution of Building Services Engineers., 2012.
- Butcher, K., Ed.: *CIBSE Guide G: Public health and plumbing engineering*, Chartered Institute of Building Service Engineers., 2014.
- Butcher, K. and Craig, B., Eds.: *CIBSE Guide A: Environmental design*, Chartered Institute of Building Service Engineers, London., 2016.
- Casey, H. J.: The law of retail gravitation applied to traffic engineering, *Traffic Q.*, 9(3), 313–321, 1955.
- Chrysoulakis, N., Grimmond, S., Feigenwinter, C., Lindberg, F., Gastellu-Etchegorry, J. P., Marconcini, M., Mitraka, Z., Stagakis, S., Crawford, B., Olofson, F., Landier, L., Morrison, W. and Parlow, E.: Urban energy exchanges monitoring from space, *Sci. Rep.*, 8(1), 1–8, doi:10.1038/s41598-018-29873-x, 2018.
- Cleveland, W. S.: LOWESS: A Program for Smoothing Scatterplots by Robust Locally Weighted Regression, *Am. Stat.*, 35(1), 54, 1988.
- Cole, R. J. and Sturrock, N. S.: The convective heat exchange at the external surface of buildings, *Build. Environ.*, 12(4), 207–214, doi:10.1016/0360-1323(77)90021-X, 1977.
- Crawford, B., Grimmond, C. S. B., Ward, H. C., Morrison, W. and Kotthaus, S.: Spatial and temporal patterns of surface–



- atmosphere energy exchange in a dense urban environment using scintillometry, Q. J. R. Meteorol. Soc., 143(703), 817–833, doi:10.1002/qj.2967, 2017.
- 850 Crawley, D. B., Lawrie, L. K., Pedersen, C. O. and Winkelmann, F. C.: EnergyPlus: Energy Simulation Program, ASHRAE J., 42, 49–56, 2000.
- Crooks, A. T. and Heppenstall, A. J.: Introduction to Agent-Based Modelling, in Agent-Based Models of Geographical Systems, pp. 85–105., 2012.
- 855 DECC: Non-Domestic National Energy Efficiency Data-Framework: Energy Statistics 2006-12, Department of Energy and Climate Change. [online] Available from: <https://www.gov.uk/government/statistics/non-domestic-national-energy-efficiency-data-framework-energy-statistics-2006-12> (Accessed 11 February 2020), 2015.
- DECC and BRE: Energy Follow Up Survey (EFUS) 2011, Department of Energy and Climate Change and Building Research Establishment. [online] Available from: <https://www.gov.uk/government/statistics/energy-follow-up-survey-efus-2011> (Accessed 11 February 2020), 2016.
- 860 DfE: Schools, Pupils and their Characteristics, January 2019 - Accompanying Table, Department for Education. [online] Available from: <https://www.gov.uk/government/statistics/schools-pupils-and-their-characteristics-january-2019> (Accessed 11 February 2020), 2019.
- DfT: Department for Transport. TRA0203 - Motor vehicle traffic (vehicle kilometres) by road class and region and country in Great Britain, annual 2014, [online] Available from: <https://www.gov.uk/government/statistical-data-sets/road-traffic-statistics-tra> (Accessed 10 February 2016a), 2014.
- 865 DfT: Department for Transport. TRA0204 - Road traffic (vehicle kilometres) by vehicle type and road class in Great Britain, annual 2014, [online] Available from: <https://www.gov.uk/government/statistical-data-sets/road-traffic-statistics-tra> (Accessed 10 February 2016b), 2014.
- DfT: Department for Transport. National Travel Survey, 2002-2016. [data collection]. 12th Edition. UK Data Service. SN: 5340, [online] Available from: <http://doi.org/10.5255/UKDA-SN-5340-8> (Accessed 11 February 2020), 2017.
- 870 DfT and DVLA: Department for Transport (DfT) and Driver and Vehicle Licensing Agency (DVLA). Data on all licensed and registered vehicles (VEH01), [online] Available from: <https://www.gov.uk/government/statistical-data-sets/all-vehicles-veh01> (Accessed 10 February 2020), 2019.
- Dong, Y., Varquez, A. C. G. and Kanda, M.: Global anthropogenic heat flux database with high spatial resolution, Atmos. Environ., 150, 276–294, doi:10.1016/j.atmosenv.2016.11.040, 2017.
- 875 Druckman, A. and Jackson, T.: Household energy consumption in the UK: A highly geographically and socio-economically disaggregated model, Energy Policy, 36(8), 3167–3182, doi:10.1016/j.enpol.2008.03.021, 2008.
- Evans, S., Liddiard, R. and Steadman, P.: Modelling a whole building stock: domestic, non-domestic and mixed use, Build. Res. Inf., 47(2), 156–172, doi:10.1080/09613218.2017.1410424, 2019.
- 880 Ferreira, M. J., de Oliveira, A. P. and Soares, J.: Anthropogenic heat in the city of São Paulo, Brazil, Theor. Appl. Climatol., 104(1–2), 43–56, doi:10.1007/s00704-010-0322-7, 2011.
- Field, J.: TM46: Energy Benchmarks, Chartered Institute of Building Service Engineers., 2008.
- Firth, S., Lomas, K., Wright, A. and Wall, R.: Identifying trends in the use of domestic appliances from household electricity consumption measurements, Energy Build., 40(5), 926–936, doi:10.1016/j.enbuild.2007.07.005, 2008.
- 885 Fisher, K. and Gershuny, J.: Coming full circle - introducing the multinational Time Use Study Simple File, Electron. Int. J. Time Use Res., 10(1), 91–96, doi:10.1016/j.physbeh.2017.03.040, 2013.
- Flamco: Indirect Water Heaters (mains water systems), [online] Available from: https://flamcogroup.com/media/files/documentation/EXP17_PSTEST_LR_v09022017_Chapter_6.pdf (Accessed 7 March 2019), 2017.
- 890 Fouquier, A., Robert, S., Suard, F., Stéphan, L. and Jay, A.: State of the art in building modelling and energy performances prediction: A review, Renew. Sustain. Energy Rev., 23, 272–288, doi:10.1016/j.rser.2013.03.004, 2013.
- Gabey, A. M., Grimmond, C. S. B. and Capel-Timms, I.: Anthropogenic heat flux: advisable spatial resolutions when input data are scarce, Theor. Appl. Climatol., 135(1–2), 791–807, doi:10.1007/s00704-018-2367-y, 2019.
- 895 Gershuny, J. and Sullivan, O.: United Kingdom Time Use Survey, 2014-2015. [data collection]. UK Data Service. SN: 8128, [online] Available from: <http://doi.org/10.5255/UKDA-SN-8128-1>, 2017.
- GLA: Greater London Authority, Statistical GIS Boundary Files for London, [online] Available from: <https://data.london.gov.uk/dataset/statistical-gis-boundary-files-london> (Accessed 11 February 2020), 2011.
- GLA: Greater London Authority, London Schools Atlas, [online] Available from: <https://data.london.gov.uk/dataset/london-schools-atlas>, 2014.
- 900 Google: Google Directions API, [online] Available from: <https://developers.google.com/maps/documentation/directions/start> (Accessed 31 January 2020), 2019.
- Greenshields, B. D., Bibbins, J. R., Channing, W. S. and Miller, H. H.: A Study of Traffic Capacity, in Proceedings of the highway research board (Highway Research Board, Washington, D. C.), pp. 14: 448–477., 1935.
- 905 Grimmond, C. S. B.: The Suburban Energy Balance : Methodological Considerations and Results for a Mid-Latitude West, Int. J., 12, 481–497, doi:10.1002/joc.3370120506, 1992.
- Grimmond, C. S. B. and Oke, T. R.: Aerodynamic properties of urban areas derived from analysis of surface form, J. Appl. Meteorol., 1999.
- Grimmond, C. S. B., Cleugh, H. A. and Oke, T. R.: An objective urban heat storage model and its comparison with other schemes, Atmos. Environ. Part B. Urban Atmos., 25(3), 311–326, doi:10.1016/0957-1272(91)90003-W, 1991.
- 910 Grimmond, C. S. B., Potter, S. K., Zutter, H. N. and Souch, C.: Rapid methods to estimate sky view factors applied to urban areas, Int. J. Clim., 21, 903–913, doi:10.1002/joc.659, 2001.



- Hawkins, G.: Rules of Thumb, Guidelines for Building Services, 5th ed., BSRIA (Building Services Research and Information Association), 2011.
- 915 HCA: Employment Densities Guide: 2nd Edition, Homes and Communities Agency. [online] Available from: <https://www.gov.uk/government/publications/employment-densities-guide>, 2010.
- Heaviside, C., Vardoulakis, S. and Cai, X.-M.: Attribution of mortality to the urban heat island during heatwaves in the West Midlands, UK., *Environ. Health*, 15 Suppl 1(Suppl 1), 50–59, doi:10.1186/s12940-016-0100-9, 2016.
- Heiple, S. and Sailor, D. J.: Using building energy simulation and geospatial modeling techniques to determine high resolution building sector energy consumption profiles, *Energy Build.*, 40(8), 1426–1436, doi:10.1016/j.enbuild.2008.01.005, 2008.
- 920 Hermans, H.: *Interactive Markov Chains: The Quest for Quantified Quality*, Springer., 2003.
- Highways Agency: Traffic Capacity of Urban Roads. Design Manual for Roads and Bridges: TA 79/99, Highways Agency. [online] Available from: <http://www.standardsforhighways.co.uk/ha/standards/dmrb/vol5/section1/ta7999.pdf> (Accessed 10 February 2020), 2017.
- 925 Hinkel, K. M., Nelson, F. E., Klene, A. E. and Bell, J. H.: The urban heat island in winter at Barrow, Alaska, *Int. J. Climatol.*, 23(15), 1889–1905, doi:10.1002/joc.971, 2003.
- Iamarino, M., Beever, S. and Grimmond, C. S. B.: High-resolution (space, time) anthropogenic heat emissions: London 1970–2025, *Int. J. Climatol.*, 32(11), 1754–1767, doi:10.1002/joc.2390, 2012.
- IOP: Institute of Plumbing. Plumbing Services Engineering Design Guide ISBN 9781871956405, 2002.
- 930 Kikegawa, Y., Genchi, Y., Yoshikado, H. and Kondo, H.: Development of a numerical simulation system toward comprehensive assessments of urban warming countermeasures including their impacts upon the urban buildings' energy-demands, *Appl. Energy*, 76(4), 449–466, doi:10.1016/S0306-2619(03)00009-6, 2003.
- Kikegawa, Y., Tanaka, A., Ohashi, Y., Ihara, T. and Shigeta, Y.: Observed and simulated sensitivities of summertime urban surface air temperatures to anthropogenic heat in downtown areas of two Japanese Major Cities, Tokyo and Osaka, *Theor. Appl. Climatol.*, 117(1), 175–193, doi:10.1007/s00704-013-0996-8, 2014.
- 935 Kim, Y. S. and Srebric, J.: Impact of occupancy rates on the building electricity consumption in commercial buildings, *Energy Build.*, 138, 591–600, doi:10.1016/j.enbuild.2016.12.056, 2017.
- Klein, S. A., Duffie, J. A. and Mitchell, J. C.: TRNSYS 18: A Transient System Simulation Program, Solar Energy Laboratory, University of Wisconsin, [online] Available from: <https://sel.me.wisc.edu/trnsys/> (Accessed 31 January 2020), 2017.
- 940 Knudsen, S.: Heat transfer in a “tank in tank” combi store. BYG_DTU R-025., 2002.
- Kotthaus, S. and Grimmond, C. S. B.: Identification of Micro-scale Anthropogenic CO₂, heat and moisture sources - Processing eddy covariance fluxes for a dense urban environment, *Atmos. Environ.*, 57, 301–316, doi:10.1016/j.atmosenv.2012.04.024, 2012.
- 945 Kotthaus, S. and Grimmond, C. S. B.: Energy exchange in a dense urban environment - Part I: Temporal variability of long-term observations in central London, *Urban Clim.*, 10(P2), 261–280, doi:10.1016/j.uclim.2013.10.002, 2014.
- Lee, S. H., Song, C. K., Baik, J. J. and Park, S. U.: Estimation of anthropogenic heat emission in the Gyeong-In region of Korea, *Theor. Appl. Climatol.*, 96(3–4), 291–303, doi:10.1007/s00704-008-0040-6, 2009.
- LGA: Local Government Association website, [online] Available from: <https://www.local.gov.uk/about/what-local-government> (Accessed 26 November 2019), 2019.
- 950 Lindberg, F., Grimmond, C. S. B., Yogeswaran, N., Kotthaus, S. and Allen, L.: Impact of city changes and weather on anthropogenic heat flux in Europe 1995–2015, *Urban Clim.*, 4(2013), 1–15, doi:10.1016/j.uclim.2013.03.002, 2013.
- London Datastore: London Atmospheric Emissions Inventory (LAEI) 2013 - Supporting information: key GIS geographies and road traffic flows and vehicle-kilometres, [online] Available from: <https://data.london.gov.uk/dataset/london-atmospheric-emissions-inventory-2013> (Accessed 11 February 2020), 2014.
- 955 Lu, Y., Wang, Q., Zhang, Y., Sun, P. and Qian, Y.: An estimate of anthropogenic heat emissions in China, *Int. J. Climatol.*, 36(3), 1134–1142, doi:10.1002/joc.4407, 2016.
- Macal, C. and North, M.: Tutorial on agent-based modelling and simulation, *J Simul*, 4(3), 151–162, doi:10.1057/jos.2010.3, 2010.
- 960 Mavrogiani, A., Wilkinson, P., Davies, M., Biddulph, P. and Oikonomou, E.: Building characteristics as determinants of propensity to high indoor summer temperatures in London dwellings, *Build. Environ.*, 55, 117–130, doi:10.1016/j.buildenv.2011.12.003, 2012.
- McKenna, E., Krawczynski, M. and Thomson, M.: Four-state domestic building occupancy model for energy demand simulations, *Energy Build.*, 96, 30–39, doi:10.1016/j.enbuild.2015.03.013, 2015.
- 965 MWS: McDonald Water Storage Ltd: Hot Water Tanks Specifications and Sizing, [online] Available from: <https://www.mcdonaldwaterstorage.com/rectangular-tank-sizing-specifications> (Accessed 7 March 2019), 2019.
- National Bureau of Statistics of China: China Statistical Information Network, [online] Available from: <http://www.stats.gov.cn/english/statisticaldata/censusdata/> (Accessed 11 February 2020), 2017.
- 970 NG: National Grid: Transmission operational data, [online] Available from: <https://www.nationalgridgas.com/data-and-operations/transmission-operational-data> (Accessed 28 November 2015), 2015.
- Nie, W. S., Sun, T. and Ni, G. H.: Spatiotemporal characteristics of anthropogenic heat in an urban environment: A case study of Tsinghua Campus, *Build. Environ.*, 82, 675–686, doi:10.1016/j.buildenv.2014.10.011, 2014.
- O’Sullivan, D., Millington, J., Perry, G. and Wainwright, J.: Agent-Based Models - Because They’re Worth It?, in *Agent-Based Models of Geographical Systems*, pp. 109–123., 2012.
- 975 Offerle, B., Grimmond, C. S. B. and Fortuniak, K.: Heat storage and anthropogenic heat flux in relation to the energy



- balance of a central European city centre, *Int. J. Climatol.*, 25(10), 1405–1419, doi:10.1002/joc.1198, 2005.
- Oke, T. R.: The urban energy balance, *Prog. Phys. Geogr.*, 12(4), 471–508, doi:10.1177/030913338801200401, 1988.
- ONS: Office for National Statistics, QS406EW - Household size, [online] Available from:
https://www.nomisweb.co.uk/census/2011/qs406ew (Accessed 10 February 2020), 2011.
- 980 ONS: Office for National Statistics, WP101EW Population (Workplace population), [online] Available from:
https://www.nomisweb.co.uk/query/construct/summary.asp?reset=yes&mode=construct&dataset=1300&version=0&anal=1&initset=%0D (Accessed 31 January 2020a), 2014.
- ONS: Office for National Statistics, WU03UK Location of usual residence and place of work by method of travel to work,
[online] Available from:
985 https://www.nomisweb.co.uk/query/construct/summary.asp?reset=yes&mode=construct&dataset=1207&version=0&anal=1&initset= (Accessed 31 January 2020b), 2014.
- ONS: Office for National Statistics, Mid-2015 Population Estimates for Census Output Areas in London by Single Year of
Age and Sex, [online] Available from:
https://www.ons.gov.uk/peoplepopulationandcommunity/populationandmigration/populationestimates/datasets/censu
990 utputareaestimatesinthelondonregionofengland (Accessed 25 May 2015), 2015.
- ONS: Office for National Statistics, Census Geography, [online] Available from:
https://www.ons.gov.uk/methodology/geography/ukgeographies/censusgeography (Accessed 11 February 2017a),
2017.
- ONS: Office for National Statistics, Labour force survey - Families and Households, [online] Available from:
995 https://www.ons.gov.uk/peoplepopulationandcommunity/birthsdeathsandmarriages/families/datasets/familiesandhouse
holdsandhouseholds (Accessed 30 October 2017b), 2017.
- ONS: Estimated average calorific values of fuels 2017 - Digest of UK Energy Statistics (DUKES): calorific values, [online]
Available from: https://www.gov.uk/government/statistics/dukes-calorific-values (Accessed 31 January 2020), 2018.
- ONS: Office for National Statistics, UK Business Counts - local units by industry and employment size band, [online]
1000 Available from: https://www.nomisweb.co.uk/datasets/idbrlu (Accessed 17 January 2020), 2019.
- OpenStreetMap: OpenStreetMap data of Greater London, [online] Available from: https://www.openstreetmap.org
(Accessed 31 January 2017), 2017.
- OS: OS MasterMap®, [online] Available from: http://digimap.edina.ac.uk (Accessed 11 October 2015), 2014.
- OS: London digital speed limit map and private communication, Ordnance Survey., 2015.
- 1005 OS: OS Open Roads, [online] Available from: https://www.ordnancesurvey.co.uk/opendatadownload/products.html
(Accessed 30 August 2016), 2016.
- Page, J., Robinson, D., Morel, N. and Scartezzini, J. L.: A generalised stochastic model for the simulation of occupant
presence, *Energy Build.*, 40(2), 83–98, doi:10.1016/j.enbuild.2007.01.018, 2008.
- Palmer, E., Ed.: CIBSE Guide B1: Heating, Chartered Institution of Building Services Engineers., 2016.
- 1010 Pigeon, G., Legain, D., Durand, P. and Masson, V.: Anthropogenic heat release in an old European agglomeration
(Toulouse, France), *Int. J. Climatol.*, 27, 1969–1981, 2007.
- Reilly, W. J.: *The Law of Retail Gravitation* (1931), 2nd ed., Pilsbury Publishers, New York., 1953.
- Richardson, I., Thomson, M. and Infield, D.: A high-resolution domestic building occupancy model for energy demand
simulations, *Energy Build.*, 40(8), 1560–1566, doi:10.1016/j.enbuild.2008.02.006, 2008.
- 1015 Richardson, I., Thomson, M., Infield, D. and Clifford, C.: Domestic electricity use: A high-resolution energy demand model,
Energy Build., 42(10), 1878–1887, doi:10.1016/j.enbuild.2010.05.023, 2010.
- Sailor, D. J.: A review of methods for estimating anthropogenic heat and moisture emissions in the urban environment, *Int. J.*
Climatol., 31, 189–199, doi:10.1002/joc.2106, 2011.
- 1020 Sailor, D. J. and Lu, L.: A top-down methodology for developing diurnal and seasonal anthropogenic heating profiles for
urban areas, *Atmos. Environ.*, 38(17), 2737–2748, doi:10.1016/j.atmosenv.2004.01.034, 2004.
- Salter, R. J.: The relationship between space, flow and density of a highway traffic stream, in *Highway Traffic Analysis and
Design*, pp. 119–120, Palgrave Macmillan., 1989.
- Santamouris, M., Papanikolaou, N., Livada, I., Koronakis, I., Georgakis, C., Argiriou, A. and Assimakopoulos, D. N.: On the
1025 impact of urban climate on the energy consumption of buildings, *Sol. Energy*, 70(3), 201–216, doi:10.1016/S0038-
092X(00)00095-5, 2001.
- Schoetter, R., Masson, V., Bourgeois, A., Pellegrino, M. and Lévy, J. P.: Parametrisation of the variety of human behaviour
related to building energy consumption in the Town Energy Balance (SURFEX-TEB v. 8.2), *Geosci. Model Dev.*,
10(7), 2801–2831, doi:10.5194/gmd-10-2801-2017, 2017.
- SciPy: Numpy random sampling, [online] Available from: https://docs.scipy.org/doc/numpy/reference/random/index.html
1030 (Accessed 30 November 2019), 2019.
- Sellers, W. D.: *Physical Climatology*, 4th ed., Univeristy of Chicago Press, Ltd., 1972.
- Sericola, B.: *Markov chains: theory, algorithms and applications*, John Wiley & Sons, Inc., 2013.
- Smith, C., Lindley, S. and Levermore, G.: Estimating spatial and temporal patterns of urban anthropogenic heat fluxes for
UK cities: The case of Manchester, *Theor. Appl. Climatol.*, 98(1–2), 19–35, doi:10.1007/s00704-008-0086-5, 2009.
- 1035 Spitler, J. D.: Thermal Load and Energy performance prediction, in *Building performance simulation for design and
operation*, edited by J. L. Hensen and R. Lamberts, Spon Press., 2011.
- Statistics Bureau of Japan: Japanese census data resolution, [online] Available from:
https://www.stat.go.jp/english/data/index.html, 2017.
- Statistics Canada: Statistical Area Classification (SAC), [online] Available from: https://www150.statcan.gc.ca/n1/pub/92-



- 1040 195-x/2016001/other-autre/sac-css/sac-css-eng.htm (Accessed 11 February 2020), 2017.
- Steadman, P., Bruhns, H. R. and Rickaby, P. A.: An introduction to the national Non-Domestic Building Stock database, *Environ. Plan. B Plan. Des.*, 27, 3–10, doi:10.1068/bst2, 2000.
- Stewart, I. D., Oke, T. R. and Krayenhoff, E. S.: Evaluation of the “local climate zone” scheme using temperature observations and model simulations, *Int. J. Climatol.*, 34(4), 1062–1080, doi:10.1002/joc.3746, 2014.
- 1045 Sun, T. and Grimmond, S.: A Python-enhanced urban land surface model SuPy (SUEWS in Python, v2019.2): Development, deployment and demonstration, *Geosci. Model Dev.*, 12(7), 2781–2795, doi:10.5194/gmd-12-2781-2019, 2019.
- TfL: Transport for London. Bus service usage, passengers and kilometres operated by route (2014 - 2015), [online] Available from: <https://tfl.gov.uk/corporate/publications-and-reports/buses#on-this-page-1> (Accessed 12 February 2020), 2018.
- 1050 TfL: Transport for London. Number of Buses by Type of Bus in London, [online] Available from: <https://data.london.gov.uk/dataset/number-buses-type-bus-london> (Accessed 11 February 2020), 2019.
- Thorsson, S., Rocklöv, J., Konarska, J., Lindberg, F., Holmer, B., Dousset, B. and Rayner, D.: Mean radiant temperature - A predictor of heat related mortality, *Urban Clim.*, 10(P2), 332–345, doi:10.1016/j.uclim.2014.01.004, 2014.
- Underwood, C. P. and Yik, F.: Modelling methods for energy in buildings, Blackwell Publishing, Malden., 2004.
- 1055 US Census Bureau: US Census Geography, [online] Available from: <https://www.census.gov/data.html> (Accessed 11 February 2020), 2019.
- VOA: Dwellings by Property Build Period and Type, [online] Available from: <https://data.london.gov.uk/dataset/property-build-period-isoa> (Accessed 31 January 2020), 2015.
- Ward, H. C. and Grimmond, C. S. B.: Assessing the impact of changes in surface cover, human behaviour and climate on energy partitioning across Greater London, *Landsc. Urban Plan.*, 165, 142–161, 2017.
- 1060 Ward, H. C., Kotthaus, S., Järvi, L. and Grimmond, C. S. B.: Surface Urban Energy and Water Balance Scheme (SUEWS): Development, Evaluation and Application, *Urban Clim.*, 18, 1–32, doi:10.1016/j.uclim.2016.05.001, 2016.
- Widén, J. and Wäckelgård, E.: A high-resolution stochastic model of domestic activity patterns and electricity demand, *Appl. Energy*, 87(6), 1880–1892, doi:10.1016/j.apenergy.2009.11.006, 2010.
- 1065 Widén, J., Nilsson, A. M. and Wäckelgård, E.: A combined Markov-chain and bottom-up approach to modelling of domestic lighting demand, *Energy Build.*, 41(10), 1001–1012, doi:10.1016/j.enbuild.2009.05.002, 2009a.
- Widén, J., Lundh, M., Vassileva, I., Dahlquist, E., Ellegård, K. and Wäckelgård, E.: Constructing load profiles for household electricity and hot water from time-use data-Modelling approach and validation, *Energy Build.*, 41(7), 753–768, doi:10.1016/j.enbuild.2009.02.013, 2009b.
- 1070 Wu, N.: A new Approach for Modeling of Fundamental Diagrams and its Applications, *Transp. Res. B*, 36, 867–884, 2000.
- Yohanis, Y. G., Mondol, J. D., Wright, A. and Norton, B.: Real-life energy use in the UK: How occupancy and dwelling characteristics affect domestic electricity use, *Energy Build.*, 40(6), 1053–1059, doi:10.1016/j.enbuild.2007.09.001, 2008.
- 1075 Zheng, Y. and Weng, Q.: High spatial- and temporal-resolution anthropogenic heat discharge estimation in Los Angeles County, California, *J. Environ. Manage.*, 1–13, doi:10.1016/j.jenvman.2017.07.047, 2017.


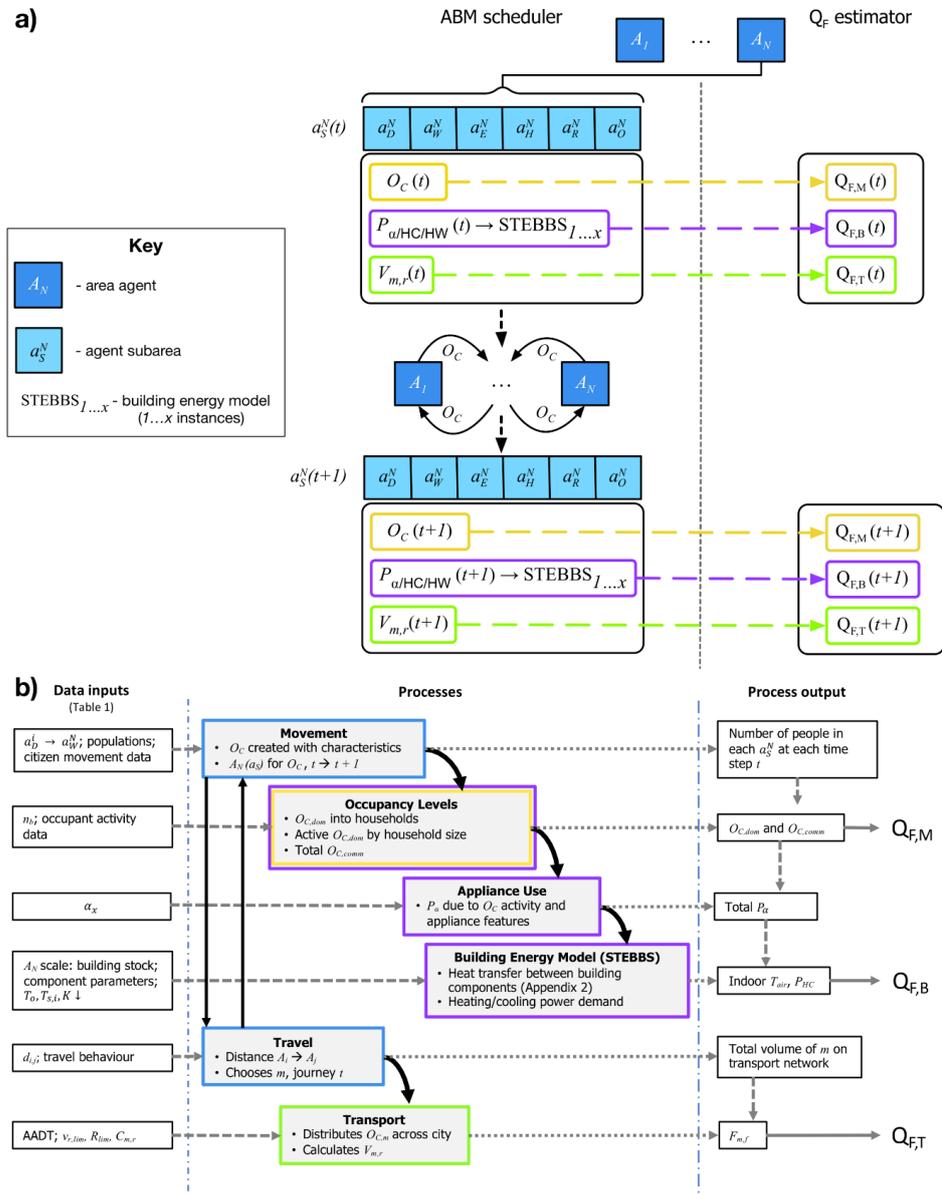


Figure 1: Overview of DASH (a) Agent-agent interaction and estimation of Q_F with the A_N (mid blue) to a_S^N (light blue) relations, changes in process outputs (yellow, purple, green) between time steps and the reaction (arrows) to give Q_F . (b) Processes include agent-agent interactions (blue boxes), agent reaction and interaction with environment ($Q_{F,B}$: purple, $Q_{F,M}$: yellow, $Q_{F,T}$: green boxes), inputs (dashed lines), process outputs (dotted lines) and their interactions (thick lines), and Q_F outputs (solid grey lines). Notation list gives definitions.

1080

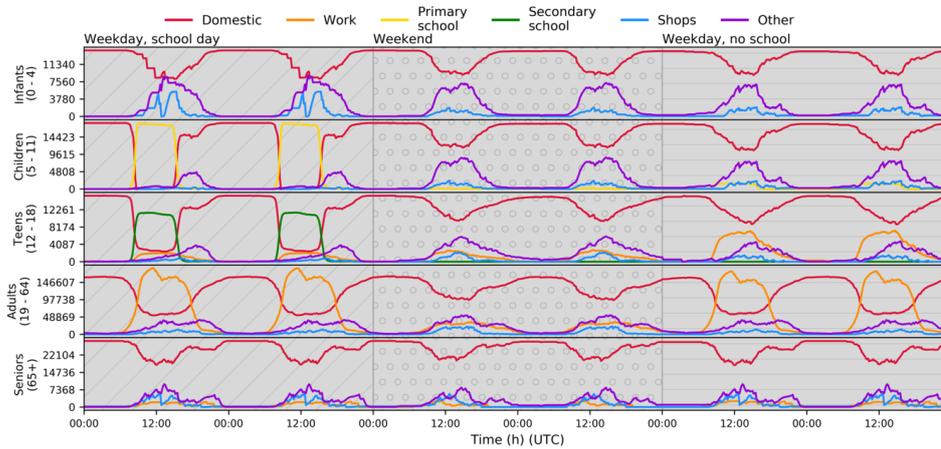

1085 **Figure 2:** Total occupancy of each a_s^N in one LA for five age groups across six consecutive days of three types (textured background): SW (diagonal lines); WE (dotted); NS (horizontal lines) Run 1 (Table 6).


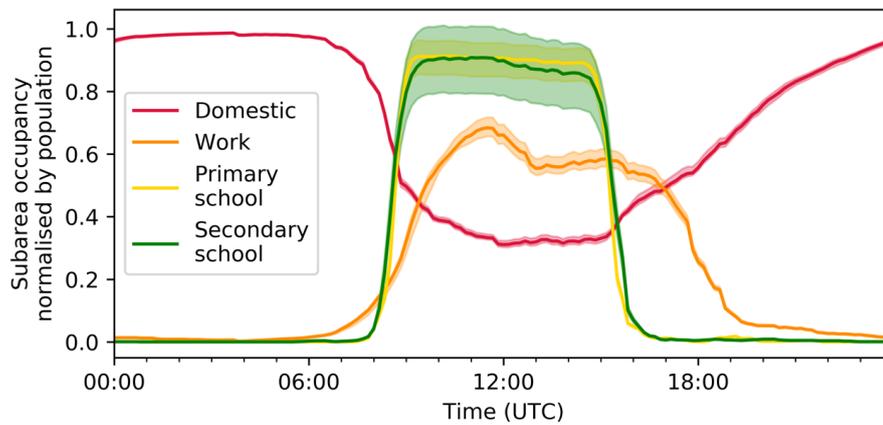


Figure 3: Median (line) and IQR (shading) of total occupancy of each a_s^N in Greater London for one weekday (R2, Table 6), normalised by actual static population (Table 2).

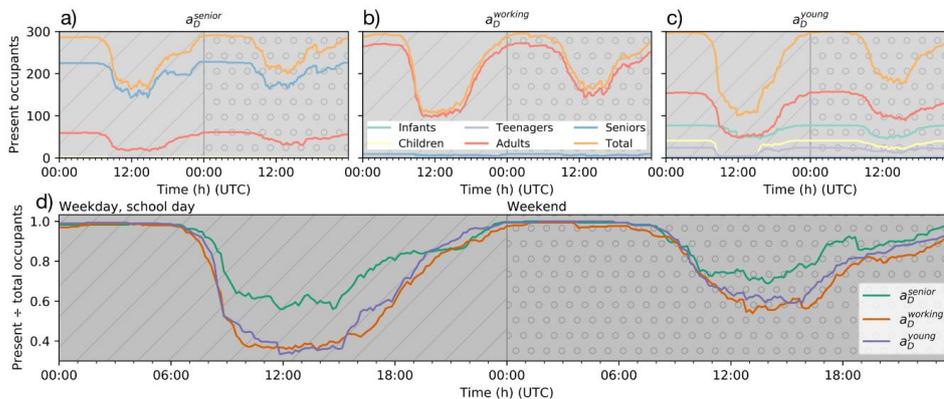

1090 **Figure 4:** Present occupancy levels (R3, Table 6) in three a_D^N by day type (textured background) **a)** a_D^{senior} (number of people per age group living in the area: 0 infants, 2 children, 0 teenagers, 61 adults, 228 seniors); **b)** $a_D^{working}$ (5 infants, 6 children, 3 teenagers, 274 adults, 9 seniors); **c)** a_D^{young} (77 infants, 41 children, 24 teenagers, 157 adults, 1 senior). **d)** Normalised total occupancy levels for the three a_D^N .

1095



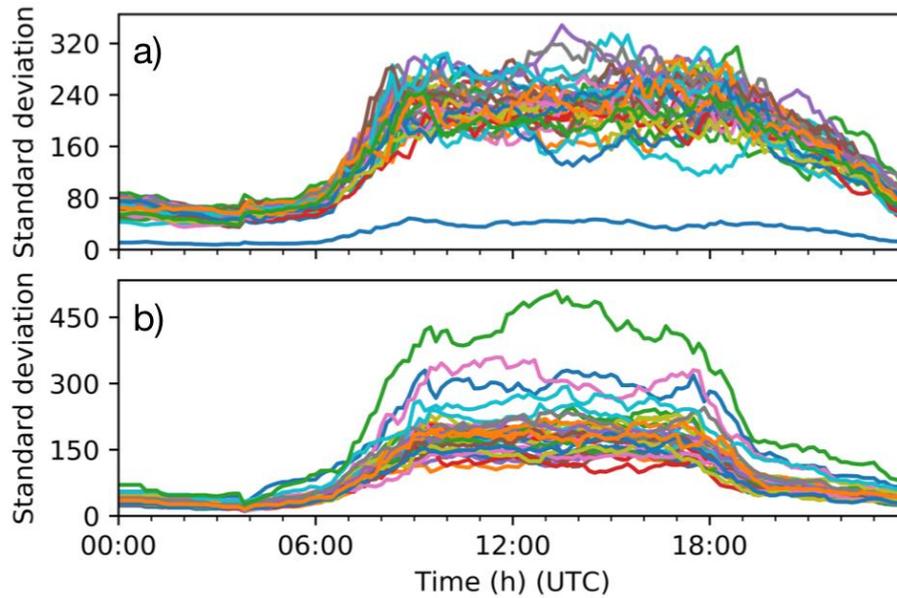


Figure 5: Standard deviation of LA (all boroughs of London, colour, for 44 weekdays (preceded by weekdays)) occupancy levels (R4, Table 6) for: (a) a_D^N and (b) a_W^N .

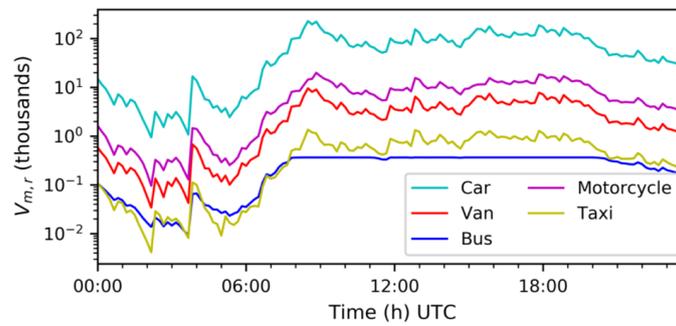


1100


Figure 6: Simulated volume of vehicles across Greater London for 19 June 2015 (R5, Table 6).

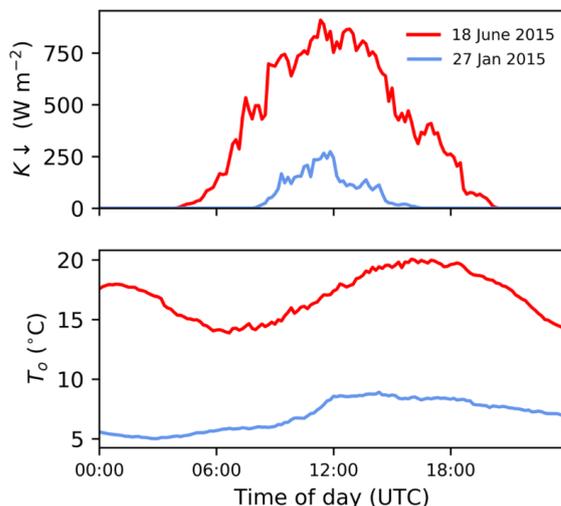

1105 **Figure 7:** Incoming shortwave radiation (K_{\downarrow} , W m^{-2}) and outdoor air temperature (T_o , $^{\circ}\text{C}$) for two SW days. Observations (Table 5) are assumed to be constant across the domain in all runs (Table 6).

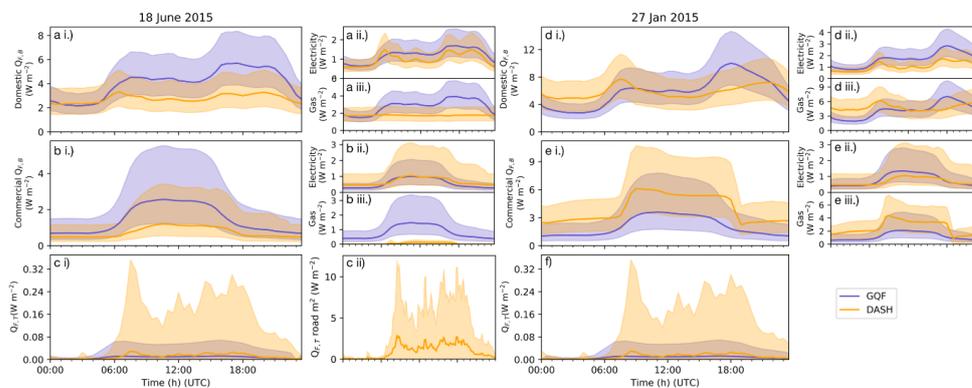

1110 **Figure 8:** Analysis of Q_F (R6, Table 6) median (line) and IQR (shading) for two days in 2015: (a, b, c) 18 June and (d, e, f) 27 January; showing total $Q_{F,B}$ for (a.i, d.i) domestic, (b.i, e.i) commercial; with (a.ii, d.ii) domestic electricity (GQF) or appliance power demand (DASH); (a.iii, d.iii) domestic gas (GQF) or heating + cooling + hot water demand (DASH); (b.ii, e.ii) commercial electricity (GQF) or appliance power demand (DASH); (b.iii, e.iii) commercial gas (GQF) or heating + cooling + hot water demand (DASH); and (c, f) $Q_{F,T}$ at A_N scale; and (c.ii) $Q_{F,T}$ for road area only. Fig. 7 shows weather conditions. Fig. 9 shows absolute errors between the two models.

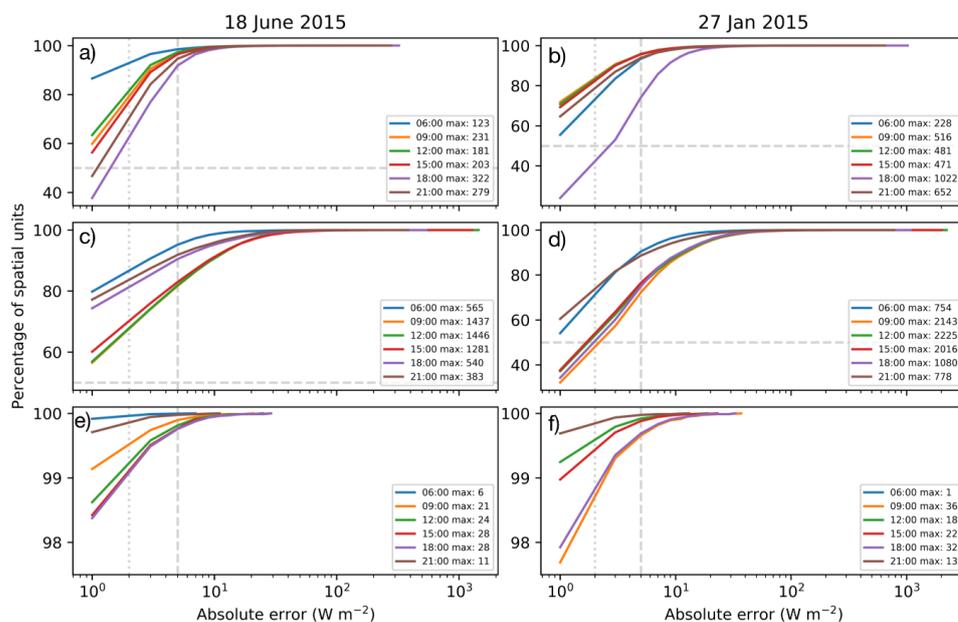

1115

Figure 9: Ranked cumulative frequency of spatial AE_i (eq. 20b) with 2, 5 $W m^{-2}$ (vertical lines) and maximum (key, $W m^{-2}$) indicated at six times (colour) for R6 (Table 6, Fig. 8) on two days in 2015: (a, c, e) 18 June 2015, (b, d, f) 27 January 2015, for (a, b) total domestic $Q_{F,B}$, (c, d) total commercial $Q_{F,B}$, and (e, f) total transport $Q_{F,T}$. Note y-axes are different between rows (50 % of spatial units shown by horizontal dashed line if applicable) and x-axes are \log_{10} .

1120

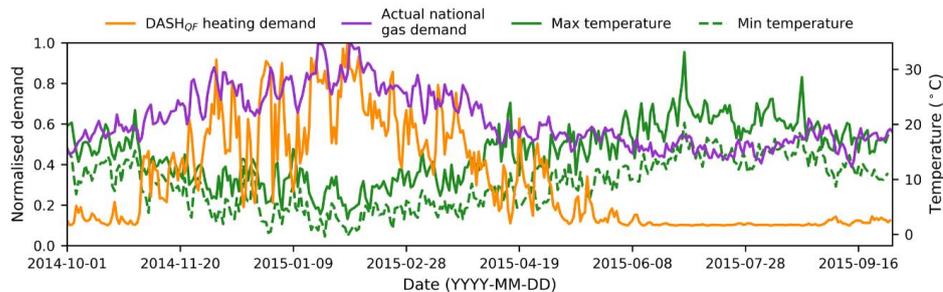


Figure 10: Daily (1 October 2014 - 30 September 2015) DASH normalised total heating/cooling and domestic hot water (DHW) energy demand (R7, Table 6) for Greater London, minimum and maximum London outdoor air temperature ($^{\circ}C$) (Table 5) and normalised national gas demand (NG, 2015). See section 3.2 for normalisation.

1125

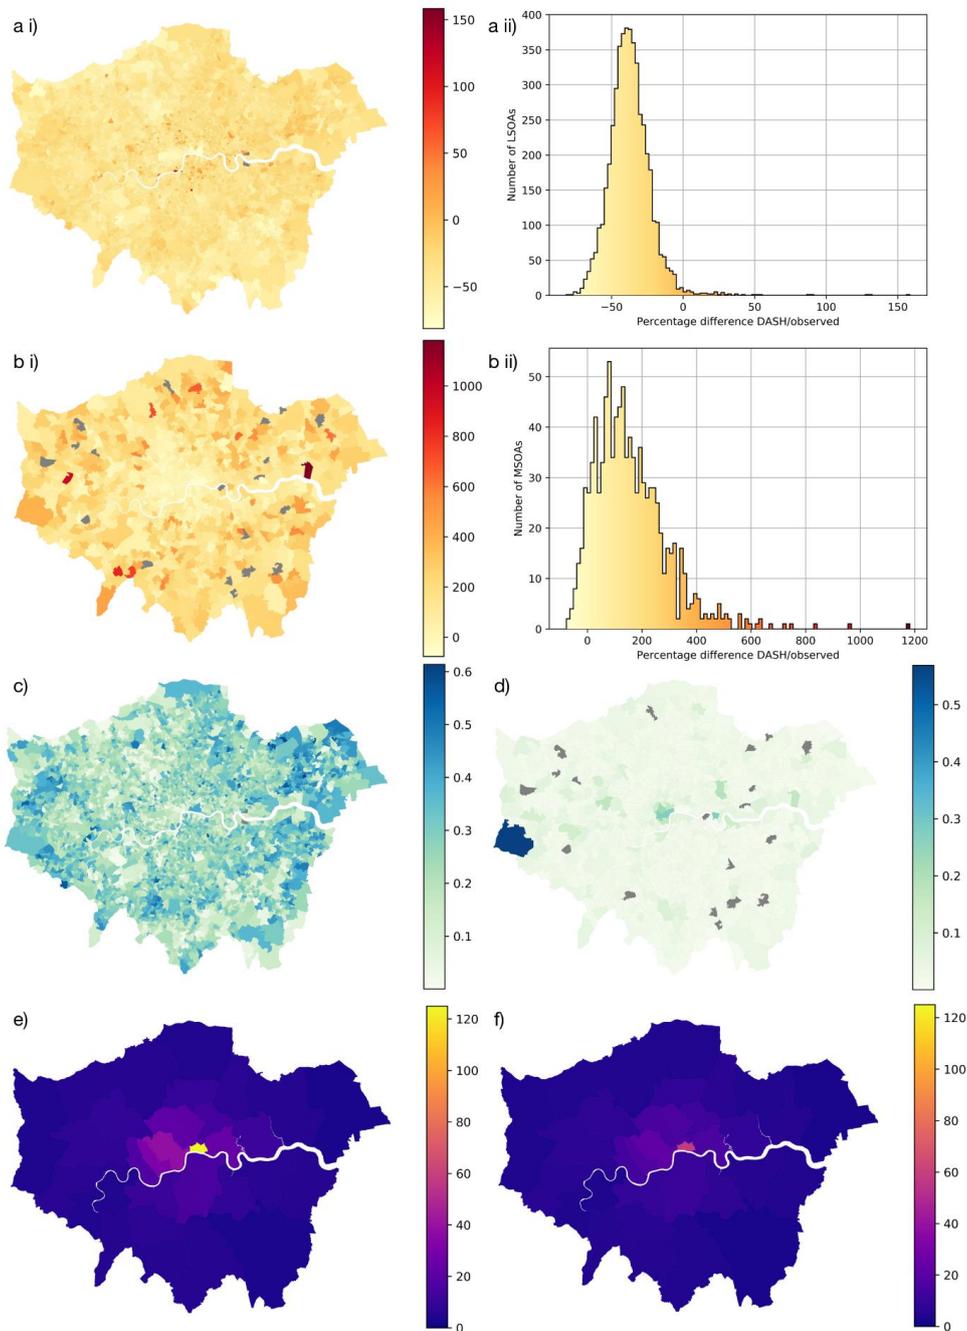


Figure 11: DASH (R8, Table 6) nE_i of total energy consumption represented by (i) choropleth and (ii) histogram for (a) LSOA scale domestic use and (b) MSOA scale commercial use. nE_i of total energy consumption for (c) LSOA scale domestic and (d) MSOA scale commercial. Annual average energy consumption at LA scale for (e) reference data and (f) DASH.

1130

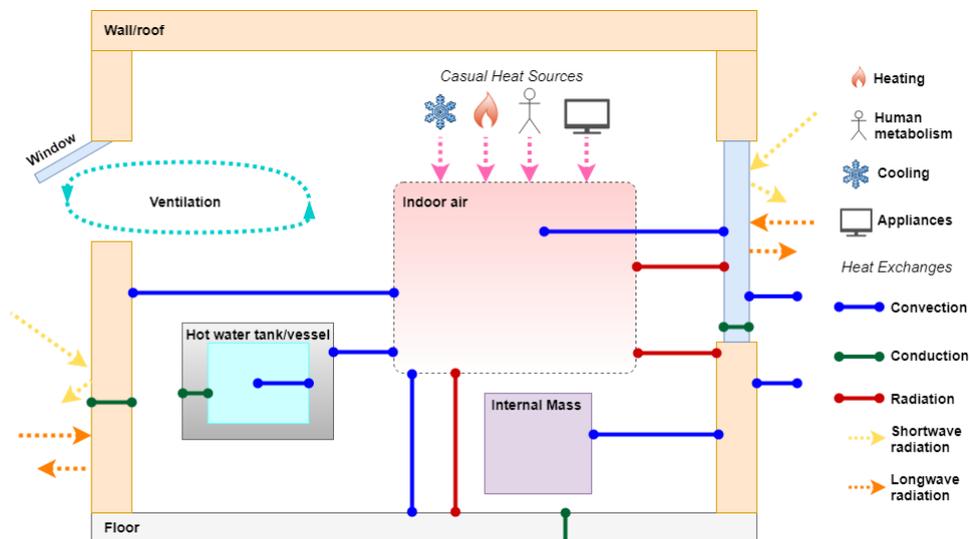


Figure B1: STEBBS 1-D model simulates building facets/nodes (dots), casual heat sources and heat exchanges. Longwave radiation is absorbed by building facets from the outdoor environment, and shortwave radiation from direct, diffuse and reflected sources.

1135

Table 1: Sources of data used by DASH and the highest spatial resolution (columns) used in Greater London. Details are given in the other Tables (Tab) and Appendices (App) indicated. Notation defined in text.

Data Category	Spatial Scale	A _N					B	
		OA	LSOA	MSOA	LA	City	London/National	
Population		Tab 2						
Activities						App. A		
Appliance						Tab C1		
Building	Size	Tab 4						
	Types					Tab 4		
	Properties					Tab 4	Tab C2	
Transport	Mode Attributes						Tab 3	
	Route speed limits					Tab 3		
	Mode & route capacity	Tab 3						
Environmental conditions					Tab 5			

1140



Table 2: Spatial, temporal, and demographic data used to inform activity in Greater London. *Data sources:* Greater London Authority (GLA), Office for National Statistics (ONS), Chartered Institution of Building Services Engineers (CIBSE), Ordnance Survey (OS), Valuation Office Agency (VOA). See also Table D1.

Data Category	Model Application	Data Source
Area Codes	all B – LSOA, MSOA, LA all A_N – OA	GLA (2011)
Centroid	all B, A_N	GLA (2011) - GIS
Area	A_N - OA	shapefiles
Population	Domestic (a_D^N) - # by age cohort [all]	ONS (2015)
	Workplace (a_W^N) - # by age cohort [Teen/Adult/Senior]	ONS (2014a)
	Primary school (a_P^N) - # registered [Child]	GLA (2014)
	Secondary School (a_H^N) - # registered [Teen]	
	Shops (a_R^N) - # of shops Other (a_O^N) - # of businesses	OpenStreetMap (2017)
Household	Domestic (a_D^N) – distribution by # of O_C per house	ONS (2011)
Age cohort	Infant [0-4 years] - # in a_D^N	ONS (2015)
	Child [5-11 years] - # in a_D^N, a_P^N	
	Teen [12-18 years] - # in a_D^N, a_H^N, a_W^N	
	Adult [19-64 years] - # in a_D^N, a_W^N	
	Seniors [65+ years] - # in a_D^N, a_W^N	
Anchor locations	A_N - # of residence/workers/students as function of age	-
Day Types (to inform activity profiling)	School weekday [by age cohorts: Child/Teen/Adult]	Gershuny and Sullivan (2017)
	Weekend [by all age cohorts]	
	Public holiday [by all age cohorts – as weekend]	
	Non-school weekday [by age cohorts: Child/Teen/Adult and # of dependent children in different households]	
Initiation of travel	Clock time of start of journeys within city and subareas	Gershuny and Sullivan (2017)
Building Archetypes assigned Areas	Typical height (m), depth (m) and total floor area (m) of identified types. Height: depth ratios: House 9:12.5, Bungalow 5.5:12.5, Low-rise flats: 6.1:20. Width calculated to maintain ratio and total building volume.	VOA (2015), Butcher and Craig (2016), Mavrogianni et al. (2012)
	Floor Plan Area (m ²) and average height (m) to give volume.	OS (2014)

1145

Table 3: Data sources for physical building characteristics applied to building archetypes. Symbols notation table. Symbols used are: L wall thickness (m), ρ building material density (kg m⁻³), k_e wall effective thermal conductivity (W m⁻¹ K⁻¹), ϵ emissivity, h convection coefficient (W m⁻² K⁻¹), V_T (m³) volume of tank (dependent on number of persons per household), **ToU** time of use. **Data Sources:** \S_1 – British Council for Offices (BCO (2009)), \S_2 - Richardson et al. (2010), \S_3 - DECC and BRE (2016), \S_4 - Hawkins (2011), \S_5 - DECC (2015), \S_6 - HCA (2010), \S_7 - Butcher (2004). \S_2 used for cycling patterns of continuously on appliances (i.e. fridge/freezer). See also Table D1.

1150

Characteristic		Domestic	Non-Domestic	
Building dimension	Height / Floor Plan	Mavrogianni et al. (2012), OS (2014)		
	WWR	Butcher (2012)		
Thermophysical properties (Table C2)	Building	L, ρ, k_e	Butcher and Craig (2016)	
		ϵ, c_p	Stewart et al. (2014), Butcher and Craig (2016)	
		V_R	Butcher (2014)	
	External	Internal h	Butcher and Craig (2016)	
		External h	Cole and Sturrock (1977)	
		k_{ground}	Butcher and Craig (2016)	
DHW Services (Tank/Pipes)	L	Flamco (2017)		
	ϵ, c_p, k_e	Butcher and Craig (2016), Flamco (2017)		
	ρ	Butcher and Craig (2016), Flamco (2017)		
	h	Butcher and Craig (2016), Knudsen (2002)		
	V_T	MWS (2019)	IOP (2002)	
Power Ratings (W) (*Table C1)	Heating/ Cooling	Butcher and Craig (2016)		
	DHW	Flamco (2017), Palmer (2016)		
	Appliance*	$\S_1 \ \S_2 \ \S_3 \ \S_7$	$\S_4 \ \S_5 \ \S_6$	
Activity	Appliance $\alpha_{j,k}$	\S_7 , BCO (2009), DECC and BRE (2016)		
	DHW V_{FR}	BSI (1997), Butcher (2014)		
	ToU	Gershuny and Sullivan (2017)		



1155

Table 4: Transport mode and route attributes used in model. Fixed, homogeneous, values given explicitly. Note that buses assumed all diesel (85% of fleet in 2015, rest mostly ‘Hybrid’) and other electric and low emission vehicles are excluded (plugin cars reported as 0.2% of registered vehicles in GL in 2015 from DfT and DVLA (2019)). **Data sources:** §8 ONS (2014b), §9 ONS (2018), §10 DfT (2017), §11 DfT (2014a, 2014b), §12 London Datastore (2014), §13 OS (2016), §14 Smith et al. (2009), §15 Highways Agency (2017), §16 TfL (2018), §17 TfL (2019), §18 OS (2015), §19 TfL Train and Underground Rolling Stock Information Sheets from §10, §20 TfL working timetables from §10, §21 Iamarino et al. (2012). Annual Average Daily Traffic AADT.

Mode (m)	People per vehicle (§ 10, § 15)	Fuel Use Ratio (petrol: diesel: electric) § 10, § 17	$Q_{F,M}$ per passenger (W m ⁻²) § 21 ^Δ Not applied in evaluation	Heat emission of [^] combustion and by * speed & fuel (electric not considered)	Commute mode Choice ($a_b^j \rightarrow a_W^j$)	Journey Time	Constraints/Limits		
							Proportion of mode by route	(Mode, Route) capacity ($C_{m,r}$, R_{lim}) and [speed] [V_r, lim] limit	Route (r) Dimensions (e.g. length, # of lanes, # of tracks) ^Δ Not applied in evaluation
Car	1.4	0.84:0.16:0	70	[^] §9 * §14	§8	§10	§11	AADT – §12 Speed – §18	§12, §13, §16
Van	1.4	0.1:0.9:0	70						
Taxi	2.5	0:1:0	70						
Motorcycle	1	1:0:0	70						
Bus/coach	17.3	0:1:0	55						
Metro	--	--	62 ^Δ	--	--	--	--	§19, §20 ^Δ	§19 ^Δ
Surface rail	--	--	55 ^Δ	--	--	--	--	--	--
Bicycle	1	--	230	--	--	--	--	--	--
Walking	1	--	140	--	--	--	--	--	--

1160

Table 5: Observed meteorological variables at 60.9 m above ground level King’s College London KSSW site (Kotthaus and Grimmond 2014, Ward et al. 2016). See Figure 1a in Kotthaus and Grimmond (2014) for site location. From these other variables are derived.

Meteorological Variable		Sensor
T_o	Outdoor air temperature (°C)	Vaisala WXT 520
w_s	Wind speed (m s ⁻¹)	
K_d	Incoming shortwave radiation (W m ⁻²)	
Q_{L1}	Outgoing longwave radiation (W m ⁻²)	Kipp & Zonen CNR4 Net Radiometer

1165

Table 6: DASH model runs (R) setup. Runs are characterised by period (dates, and day types: WD weekdays), areal extent (Table 1, dom: domestic, n-dom: non-domestic). Data sources: §22 GLA (2014), §23 ONS (2015), §24 ONS (2014a), §25 National Grid (NG, 2015), §26 BEIS (2017c), §26 BEIS (2017c). Other details are given in Table D.2 and Section 2.

R	Period	Extent run	Area Analysed	Spatial Scale	Spin-up (days)	Evaluation Data	Temporal Scale	Fig.
1	12 – 17 Feb 2015	GL	Camden	a_N^x	-	-	10 min	2
2	12 Feb 2015	GL	GL	A_N	-	§22, §23, §24	10 min	3
3	13 – 14 Feb 2015	GL	E00023911, E00015661, E00008490	A_N	-	-	10 min	4
4	First 44 WD of 2015 preceded by WD 6-9, 13-16, 20-23, 27-30 Jan, 3-6, 10-13, 24-27 Feb, 3-6, 10-13, 17-20, 24-27 Mar 2015	GL	GL	LA	-	-	10 min	5
5	19 June 2015	GL	GL	GL, LA	1	-	10 min	6
6	19 June 2015, 27 Jan 2015	GL	GL	OA (A_N)	1	GQF	30 min	8, 9
7	1 Oct 2014 – 30 Sept 2015	GL	GL	GL	1	§25	Annual	10
8	1 Oct 2014 – 30 Sept 2015	GL	GL	LSOA - dom, MSOA - n-dom	1	§26	Annual	11



1170 **Table A1:** Markov transition matrix (a) general for six states (rows and columns) (b) data for a single time step and (c) transition probabilities for the data in (b) (Gershuny and Sullivan, 2017)

a)	1	2	3	4	5	6
1	$p(t)_{1,1}$	$p(t)_{1,2}$	$p(t)_{1,3}$	$p(t)_{1,4}$	$p(t)_{1,5}$	$p(t)_{1,6}$
2	$p(t)_{2,1}$	$p(t)_{2,2}$	$p(t)_{2,3}$	$p(t)_{2,4}$	$p(t)_{2,5}$	$p(t)_{2,6}$
3	$p(t)_{3,1}$	$p(t)_{3,2}$	$p(t)_{3,3}$	$p(t)_{3,4}$	$p(t)_{3,5}$	$p(t)_{3,6}$
4	$p(t)_{4,1}$	$p(t)_{4,2}$	$p(t)_{4,3}$	$p(t)_{4,4}$	$p(t)_{4,5}$	$p(t)_{4,6}$
5	$p(t)_{5,1}$	$p(t)_{5,2}$	$p(t)_{5,3}$	$p(t)_{5,4}$	$p(t)_{5,5}$	$p(t)_{5,6}$
6	$p(t)_{6,1}$	$p(t)_{6,2}$	$p(t)_{6,3}$	$p(t)_{6,4}$	$p(t)_{6,5}$	$p(t)_{6,6}$

b)	Domestic	Workplace	Shops	Other	c)	Domestic	Workplace	Shops	Other
Domestic	270	46	2	4	Domestic	270/320	46/320	2/320	4/320
Workplace	1	170	0	1	Workplace	1/172	170/172	0	1/172
Shops	0	0	5	0	Shops	0	0	1	0
Other	0	1	1	18	Other	0	1/20	1/20	18/20