



CSDMS Data Components: data-model integration tools for Earth surface processes modeling

Tian Gan¹, Gregory E. Tucker^{2,3}, Eric W. H. Hutton¹, Mark D. Piper¹, Irina Overeem^{1,2}, Albert J. Kettner¹, Benjamin Campforts¹, Julia M. Moriarty^{1,4}, Brianna Undzis^{1,4}, Ethan Pierce², and Lynn
5 McCready¹

¹ Institute for Arctic and Alpine Research (INSTAAR), University of Colorado Boulder, Boulder, 80309, USA

² Department of Geological Sciences, University of Colorado Boulder, Boulder, 80309, USA

³ Cooperative Institute for Research in Environmental Sciences (CIRES), University of Colorado Boulder, Boulder, 80309, USA

10 ⁴ Department of Atmospheric and Oceanic Sciences, University of Colorado Boulder, Boulder, 80309, USA

Correspondence to: Tian Gan (gantian127@gmail.com)

Abstract. Progress in better understanding and modeling Earth surface systems requires an ongoing integration of data and numerical models. Advances are currently hampered by technical barriers that inhibit finding, accessing, and executing modeling software with related datasets. We propose a design framework for ‘Data Components’: software
15 packages that provide access to particular research datasets or types of data. Because they use a standard interface based on the Basic Model Interface (BMI), Data Components can function as plug-and-play components within modeling frameworks to facilitate seamless data-model integration. To illustrate the design and potential applications of Data Components and their advantages, we present several case studies in Earth surface processes analysis and modeling. The results demonstrate that the Data Component design provides a consistent and efficient way to access
20 heterogeneous datasets from multiple sources, and to seamlessly integrate them with various models. This design supports the creation of open data-model integration workflows that can be discovered, accessed, and reproduced through online data sharing platforms, which promotes data reuse and improves research transparency and reproducibility.

1 Introduction

25 As the global population increases and infrastructure expands, the need to understand and predict processes at and near the Earth’s surface, such as water cycling, landsliding, flooding, permafrost thaw, and coastal change becomes increasingly acute. Progress in understanding and predicting these systems requires an ongoing integration of data and numerical models. Also, given the growing importance of open computational science (Barton et al., 2022; Hall et al., 2022; Lamprecht et al., 2019; Wilkinson et al., 2016), there is a need to overcome technical barriers that inhibit finding,
30 accessing, and operating modeling software tools and related datasets.



To address these challenges, one research focus is the development of modeling frameworks and standards to support model coupling (Hoch et al., 2019; Hutton et al., 2020; Kralisch et al., 2005; Moore & Tindall, 2005; Peckham et al., 2013). These modeling technologies make it easier to integrate diverse models that represent interrelated physical processes to simulate the complex Earth system that drives the movement of water and shapes the planet's surface.

35 For instance, the Earth System Modeling Framework (ESMF) is a flexible open-source software infrastructure for building and coupling Earth science applications (Hill et al., 2004). The ESMF defines an architecture for composing coupled modeling systems and includes data structures and utilities for developing individual models. Another example is the open World–Earth modeling framework copan:CORE, which is focused on Earth system models with endogenous human societies (Donges et al., 2020) to support the analysis of Earth system dynamics in the

40 Anthropocene (Verburg et al., 2016).

In the past decade, efforts were also made to design modeling frameworks that improve the reproducibility of data-model integration workflows (Gan et al., 2020b; Hut et al., 2022). For example, the Community Surface Dynamic Modeling System (CSDMS) is an NSF supported facility that supports and promotes a community of computational modelers of the Earth's surface - the dynamic interface between lithosphere, hydrosphere, cryosphere, and atmosphere.

45 CSDMS Workbench is developed as a suite of free and open-source software tools and standards that provide a nimble, plug-and-play environment for model building, coupling, and exploration for Earth surface processes modeling (Tucker et al., 2022). These modeling technologies enable users to write code to create reproducible workflows for coupled model simulations and improve efficiency by reducing the time researchers spend wrestling with idiosyncratic programs and their interfaces. Another example is CyberWater (Chen et al., 2022), a modeling framework designed

50 to support open data and open model integration for solving environmental and water problems. CyberWater supports direct access to online datasets without tedious work for data preparation, and it includes a generic model agent toolkit to help easily integrate models. This system enables users to create graphical workflows to support data provenance and reproducible computing. With the development of web technologies and cloud computing, sharing and integrating models across an open web environment also becomes possible. Chen et al. (2020) proposed a conceptual framework

55 for open web-distributed integrated modeling and simulation, which is intended to enhance the use of existing resources and help people in different locations and from various research fields to perform comprehensive modeling tasks collaboratively.

In addition, there are several organizations that provide the scientific community with online platforms for sharing research datasets, models, and tools to improve the findability, accessibility, interoperability, and reusability (the FAIR principles) of digital research objects (Lamprecht et al., 2019; Wilkinson et al., 2016; Chue Hong et al., 2021). For

60 for instance, CSDMS maintains an online Model Repository (Tucker et al., 2022) that catalogs over 400 open-source models and tools, ranging from individual subroutines to large and sophisticated integrated models. The Model Repository now includes about 20,000 references to literature describing these models and their applications, giving prospective model users efficient access to information about how various codes have evolved and are being used.

65 Similarly, the Network for Computational Modeling in Social and Ecological Sciences (CoMSES Net) provides an extensive Model Library of codes used in social and ecological sciences, and together with a curated database of over 7,500 publications (Janssen et al., 2008). For water-related sciences, HydroShare (Gan et al., 2020a; Horsburgh et al.,



2015) provides a web-based hydrologic information system to share and publish data and models in various formats that are created by individual researchers and research groups. This platform enables researchers to collaborate and work in an online environment to enhance research and education and improve the reproducibility of the research results. Geoscience Cyberinfrastructure for Open Discovery in the Earth Sciences (GeoCODES <https://www.earthcube.org/geocodes>) is another effort aiming to improve the discovery and access of research datasets and tools. GeoCODES provides a data standard and a set of tools to expose, index and query datasets across repositories.

75 Although many modeling technologies and cyberinfrastructures are available to support open data and model integration, challenges still exist. For example, rapid advances in observational data using remote sensing and other technologies have brought about a data revolution, and with it the potential for substantial improvement in our ability to understand and predict a diverse array of Earth systems. However, the majority of model frameworks and systems lack an effective mechanism to easily access datasets from a variety of sources and couple them with the models.

80 Although some model frameworks and systems can use web services to access various datasets and provide them as model inputs, the problem remains that the data access and preparation methods tend to be developed around specific models or model frameworks, and the corresponding details are either hidden behind a graphical user interface (GUI) or provided with scripts that offer only limited options for the users. It is challenging for researchers to understand or modify the data access or preparation methods for their research needs, which inhibits the research transparency and impedes flexibility. Moreover, it is often difficult to reuse data access methods for different modeling frameworks, which leads to redundant programming efforts.

To address these challenges, we present the design and development of the CSDMS Data Components. This design is built on the model coupling technologies from the CSDMS Workbench to enable data access through plug-and-play components, and thereby integrate datasets with models. This design aims to provide a consistent way of using datasets across multiple sources to better facilitate the integration of heterogeneous datasets with models for Earth surface processes. This design also supports creating data-model integration workflows that can include detailed data access and preparation steps, and can be shared and executed on cloud platforms to enable the geoscience community to discover, access, and reproduce computational modeling research. In addition, the proposed design provides the flexibility to couple Data Components under different modeling frameworks with minimal coding effort.

95 In this paper, Section 2 presents the background for the CSDMS model coupling technologies and the Data Component design. Section 3 presents case studies for Data Component implementation and their use cases for Earth surface processes modeling. Section 4 provides the summary and conclusions.



2 Methods

100 2.1 CSDMS Workbench

Since the Data Component design is based on the CSDMS Workbench, we will first introduce its underpinning modeling technologies, including the Basic Model Interface (BMI), Babelizer, Python Modeling Toolkit (pymt), and Landlab.

105 **BMI** is an interface specification that identifies a minimal set of functions necessary for dynamic coupling of data to models or models to other models. The BMI concept was first introduced as a foundational technology for the CSDMS model coupling framework (Peckham et al., 2013). The current version of BMI updated the original design with new functions for describing variables and for working with structured and unstructured grids (Hutton et al., 2020; Tucker et al., 2022). BMI is a language-neutral standard that is defined using the Scientific Interface Definition Language (SIDL) (Epperly et al., 2011). CSDMS has defined language-specific BMI specifications for Python, C, C++, Java, 110 and Fortran, which are the most commonly used languages for Earth system models. BMI is designed to be framework agnostic, and to be as easy as possible for a developer to implement. This means that a component that exposes a BMI can be incorporated into any framework and does not need to be modified to add any BMI-specific dependencies into the component. Several modeling frameworks that support model coupling (Hoch et al., 2019; Hut et al., 2022) have been built upon the BMI. Two such BMI-capable frameworks, the pymt and Landlab, are described below.

115 **Babelizer** is a command-line utility that creates a Python-importable package to present the BMI component as a Python class (Hutton et al., 2022). Language interoperability is critical to a model coupling framework that brings together models written in a range of programming languages. One of the approaches to tackle this challenge is to use a hub language, through which other languages will communicate, and to build bridges from each supported language to the hub language. CSDMS adopted this approach for the Babelizer and chose Python as the hub language. The 120 Babelizer helps streamline the process of bringing a BMI component written in C, C++, and Fortran into Python and is easily extensible to support other languages.

pymt is a Python-based model coupling framework that provides a set of utilities for running and coupling BMI components (for model and data) (Tucker et al., 2022). This model coupling framework consists of three major pieces. The first is a collection of legacy models that represent a diverse set of environmental systems. Models in the pymt 125 collection are written in a variety of languages (e.g., C, C++, and Fortran), but are wrapped with a Python BMI as a common interface. The second piece is a wrapper for BMI components that augments them with additional capabilities, such as memory management, unit conversion utilities, and grid mappers. The third piece is a set of utilities for performing common model-coupling tasks, which includes the grid interpolation via the ESMF grid mapping engine (used when models or data operate on different grids) (ESMF Reference Manual for Fortran, 2023), 130 time interpolation (used when models or data operate on different temporal time steps), unit conversion through the UDUNITS package (<https://www.unidata.ucar.edu/software/udunits/>), and a coupling orchestrator that organizes the time stepping of a set of components.

Landlab is a toolbox for building new components within a Python-based (BMI compatible) modeling framework (Hobley et al., 2017; Barnhart et al., 2020). Landlab includes three major elements that speed up model development



135 and analysis. The first is a gridding engine that allows model developers to create a grid in as little as a single line of
code, and that provides users a choice of grid type (e.g., a structured rectilinear grid versus an unstructured mesh).
The second piece is a growing collection of modularized components that model single physical processes (e.g.,
overland flow or hillslope process). The third element is a library of utilities for common operations such as file input
and output that includes standard formats such as NetCDF and Esri ASCII. The Landlab library provides components
140 that can be brought into other frameworks and, additionally, be automatically wrapped with BMI, allowing them to
operate within BMI-friendly systems such as pygmt.

2.2 Data Component Design

A Data Component is a dataset that is wrapped with a BMI. When a model is equipped with a BMI, we refer to it as
145 'Model Component'. Model Components make models easier to learn and to couple with other models because of the
similarity in control and query functions among different models. Similarly, by wrapping datasets with BMI functions,
we provide a consistent way to access various types of datasets without considering their specific file formats and
making them easier to integrate with Model Components. Thus, the Data Component extends the application of BMI
from models to datasets. With BMI, Model and Data Components use the same functions to initialize the component,
150 control its execution (e.g., advance a model or dataset in time), and access variables, grid, and/or time information.
Both applications use configuration files to specify the detailed information needed to initialize component instances.
Table 1 lists the example BMI functions for each category. (Note that not all BMI functions are necessarily relevant
for every Data Component. For example, for a dataset that lacks time-stamped data, the time-related functions would
not be needed, and would simply return null values.)

155 The specifications for the Data Components are designed to meet the following requirements:

- Access datasets from either a remote server or a local file system. Remote servers provide web services and/or
a corresponding application programming interface (API) to support programmatic data access.
- Use the same data structure to manage datasets stored in different file formats (e.g., CSV, GeoTIFF, or
NetCDF) and grid types (e.g., 1D, 2D or 3D array) for time series, raster, or multidimensional space-time
160 data.
- Use open-source tools and standards for Data Component implementation and avoid dependencies on
proprietary software.
- Expose a BMI so that Data Components can be used within different modeling frameworks without the need
to modify their implementation.

165 The Data Component design is based on the CSDMS Workbench and includes two major elements (Fig. 1). The first
element is the BMI component which can be implemented as a Python package to download the datasets and wrap
them with BMI functions (Table 1). This package includes an API, which can be implemented as a Python class to
access and retrieve the datasets from a remote server. The corresponding command line interface (CLI) can also be
included, which allows users to download datasets through shell commands. The datasets can be cached locally and
170 loaded as an xarray object (Hoyer and Hamman, 2017) to satisfy the need for using the same data structure to manage




175 datasets in various formats and grid types. The second element is a Babelized component, which is a Python package created by the Babelizer. This Babelized component converts the BMI component into a plug-and-play component for the modeling frameworks (e.g., pymt). It can also help import the BMI components that are implemented in other languages as a Python class, so that they can communicate with each other using the hub language (Python). For the second element, the developer only needs to provide metadata describing the BMI component through a toml-format file. And the Babelizer will use the metadata to construct a Python package, which is almost completely autogenerated (Hutton et al., 2022). This design minimizes the effort of using the Data Component within different modeling frameworks, because there is no need to change the BMI implementation and one only needs the Babelizer and the required metadata to create a component for any relevant modeling framework.

180

Table 1 List of BMI functions shared by Model and Data Components.

Function Category	Function Name	Description
component control	initialize	Perform startup tasks for the component.
	update	Advance component state by one time step.
	finalize	Perform post execution tasks for the component.
component information	get_component_name	Name of the component.
	get_output_names	List of a component's output variables.
	get_output_item_count	Number of a component's output variables.
variable information	get_var_grid	Get the grid identifier for a variable.
	get_var_units	Get the units of a variable.
	get_var_type	Get the data type of a variable.
	get_var_location	Get the grid element type of a variable.
time information	get_current_time	Current time of the component.
	get_time_units	Time units used in the component.
	get_time_step	Time step used in the component.
grid information	get_grid_type	Get the grid type as a string.
	get_grid_shape	Get the dimensions of a computational grid
	get_grid_spacing	Get the spacing between grid nodes.
variable getter and setter	get_value	Get current values for a variable.
	set_value	Set current values for a variable.

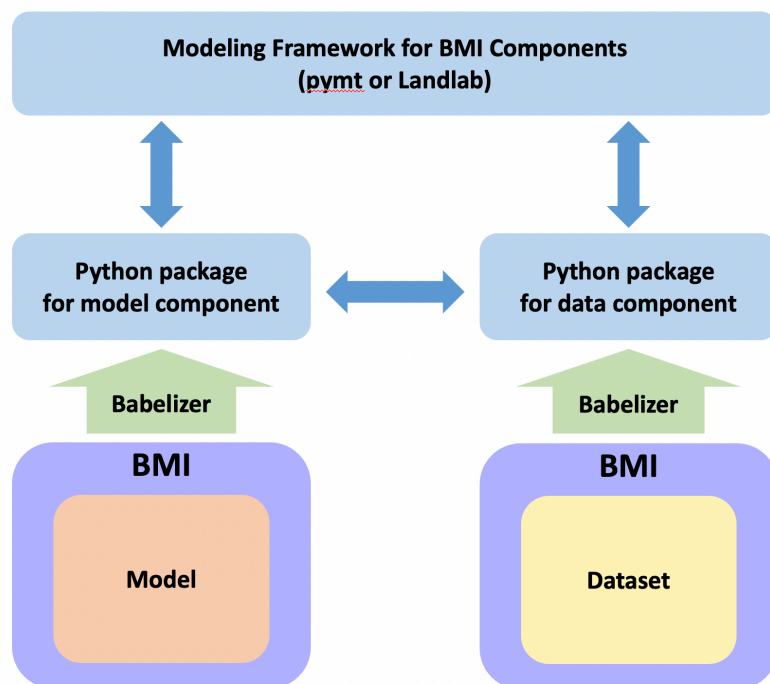

185 **Figure 1: Relationship between datasets, models, and the CSDMS Workbench tools.**

To test the Data Component design, we conducted case studies by implementing several Data Components and creating use cases for Earth surface processes modeling and analysis. These datasets are from multiple data providers and in various file formats and grid types. The use cases are data-model integration workflows created as Jupyter
190 Notebooks and shared in HydroShare. We also installed the CSDMS Workbench tools on the CUAHSI JupyterHub (<https://help.hydroshare.org/apps/CUAHSI-JupyterHub/>) and the CSDMS JupyterHub (<https://csdms.colorado.edu/wiki/JupyterHub>). This enables users to discover and access these use cases from HydroShare and use the CUAHSI or CSDMS JupyterHub to reproduce the modeling workflows without the need of software installation and data download on the local computers. Moreover, users can also use the environment files
195 which are prepared for these use case Jupyter Notebooks to build local virtual environments and run them. Detailed results and discussion are presented in the next section.



3 Case Studies

3.1 Data Components

200 We implemented multiple Data Components to demonstrate the access to widely used datasets for Earth surface processes modeling. To illustrate the broad applicability of Data Components, these examples cover several disciplinary domains: hydrology, topography, soil, meteorology, and oceanography. The data types span the categories of time series, geographic raster, and multidimensional space-time data. Here we provide an overview of each Data Component; the code implementation details are available in GitHub (See Code Availability Section).

205 **The NWIS Data Component** is implemented to access time series of hydrological data from the US Geological Survey's National Water Information System (NWIS <https://waterdata.usgs.gov/nwis>). NWIS provides RESTful (Representational State Transfer) web service to access current and historical water-resources datasets across the US, such as discharge, gage height, and water temperature. REST web services allow users to access data using Uniform Resource Identifier (URI), which distinguishes one resource from another (e.g., links on the web). Our NWIS Data
210 Component can download the time series for instantaneous and daily values from NWIS using the 'dataretrieval' Python package (Hodson et al., 2023), which is a Python client for the REST web services of NWIS. This Data Component needs a configuration file that specifies USGS site number, start and end time, USGS variable code, and output file name. Each Data Component supports storage of the dataset in a NetCDF file which can include time series for multiple variables at multiple USGS sites. The time values are stored in a format by following the Climate and
215 Forecast (CF) metadata conventions (<http://cfconventions.org/>).

The Topography Data Component fetches global terrain elevation raster data from OpenTopography (<https://opentopography.org/>), an NSF-supported facility that provides access to many different types of topography data, alongside related tools and resources. OpenTopography provides REST web services to retrieve raster datasets such as NASA Shuttle Radar Topography Mission (SRTM) and JAXA Advanced Land Observing Satellite (ALOS) global data (Tadono et al., 2014; Farr et al., 2007). These REST web services were used to implement an API and a
220 CLI in the Topography Data Component for downloading these datasets. Dataset type, latitude-longitude bounding box, and the desired output file format can be specified with arguments to this Data Component or through a configuration file. As of this writing, users are required to apply for an API key from OpenTopography to be authorized for data access, which helps OpenTopography monitor and understand the usage of the REST web services and to
225 provide a more stable and secure user experience. For this data component, we implemented a utility function to help access the API key on local computers to simplify the process for data access authorization.

The SoilGrids Data Component provides access to the global gridded soil data from SoilGrids (<https://www.isric.org/explore/soilgrids>), a system for global digital soil mapping that uses machine learning methods to map the spatial distribution of soil properties (Poggio et al., 2021; Hengl et al., 2017). The SoilGrids system provides
230 web coverage services (WCS) to help users obtain a subset of the soil maps as raster datasets for soil properties such as bulk density, clay content, and soil organic carbon content. The WCS were used to implement the API and CLI in the SoilGrids Data Component to download the desired soil datasets and store them in a local GeoTIFF file. This Data Component requires a configuration file that includes the information for the map service name, bounding box,



coordinate system, grid resolution, and other parameters. Fig. 2 shows the example scripts that use the API and the
235 Babelized component (e.g., pymt component) to access and visualize the same soil property dataset from SoilGrids
system.

The ERA5 Data Component accesses the ERA5 climate dataset, which is available in the Copernicus Climate Data
Store (CDS <https://cds.climate.copernicus.eu/>). ERA5 refers to European Centre for Medium-Range Weather
Forecasts (ECMWF) reanalysis 5, which includes multidimensional space-time datasets produced using data
240 assimilation and model forecasts for the global climate and weather for the period from the 1950s to near real time.
The ERA5 Data Component downloads data using ‘cadsapi’ Python package, which is the API for retrieving datasets
from the CDS platform. This Data Component requires a configuration file that includes information for data variables,
time period, latitude-longitude bounding box, grid resolution, and other parameters. Each ERA5 Data Component
supports storing the datasets in a NetCDF file, which can contain multiple variables for a given bounding box area.
245 Similar to the Topography Data Component, users are required to apply for API keys from the CDS platform to be
authorized for data access. We implemented a utility function to help generate the API key files on the local computers
for data access authorization.

The WAVEWATCH III Data Component retrieves data from the global wave datasets
(https://polar.ncep.noaa.gov/waves/product_table.shtml?) that are generated with the WAVEWATCH III model
250 (Booij et al., 1999). These model outputs are multidimensional space-time datasets for wave height, period, direction,
and other attributes. The WAVEWATCH III Data Component includes an API and a CLI, which use web services to
download the 30-year wave hindcast (Phase 1 and 2) and the production hindcast (single grid and multigrid) datasets
and store them as GRIB-formatted files. This Data Component requires a configuration file that includes the
information for time, grid type, and data source.

255 Aside from the Data Components presented here, we also implemented other Data Components. For example, the
GeoTIFF Data Component can access any raster data in a GeoTIFF file through either a local file path or a remote
URL. The GridMET Data Component can fetch the daily meteorological datasets from gridMET (Abatzoglou, 2013).
A full list of the CSDMS Data Components can be found at <https://csdms.colorado.edu/wiki/DataComponents>.



```
import matplotlib.pyplot as plt
from soilgrids import SoilGrids

# get data from SoilGrids
soil_grids = SoilGrids()
data = soil_grids.get_coverage_data(service_id='clay',
                                   coverage_id='clay_0-5cm_mean',
                                   west=-1784000, south=1356000,
                                   east=-1140000, north=1863000,
                                   crs='urn:ogc:def:crs:EPSG::152160',
                                   output='demo.tif')

# plot data
data.plot(figsize=(10,6))
plt.ylabel('Y (m)', fontsize=12)
plt.xlabel('X (m)', fontsize=12)
plt.title('Mean clay content (g/kg) at 0-5cm soil depth in Senegal')
```

260

(a)

```
import matplotlib.pyplot as plt
from pygmt.models import SoilData

# initiate a data component
data_comp = SoilData()
data_comp.initialize('config.yaml')


# get variable and grid metadata
var_name = data_comp.output_var_names[0]
var_grid = data_comp.var_grid(var_name)
grid_shape = data_comp.grid_shape(var_grid)
grid_spacing = data_comp.grid_spacing(var_grid)
grid_origin = data_comp.grid_origin(var_grid)

# get variable data
data = data_comp.get_value(var_name)
data_2D = data.reshape(grid_shape)

# get X, Y extent for plot
min_y, min_x = grid_origin
max_y = min_y + grid_spacing[0]*(grid_shape[0]-1)
max_x = min_x + grid_spacing[1]*(grid_shape[1]-1)
dy = grid_spacing[0]/2
dx = grid_spacing[1]/2
extent = [min_x - dx, max_x + dx, min_y - dy, max_y + dy]

# plot data
fig, ax = plt.subplots(figsize=(10,6))
im = ax.imshow(data_2D, extent=extent)
fig.colorbar(im)
plt.ylabel('Y (m)', fontsize=12)
plt.xlabel('X (m)', fontsize=12)
plt.title('Mean clay content (g/kg) at 0-5cm soil depth in Senegal')
```

(b)

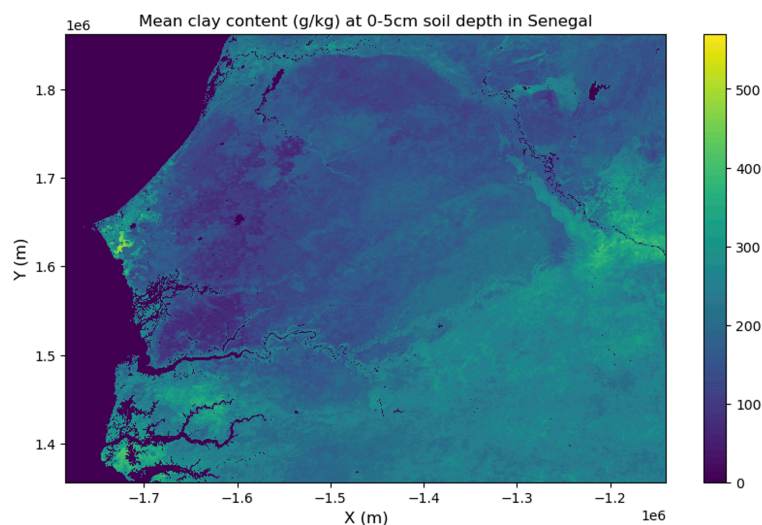

(c)

Figure 2: Example scripts that use the API (a) and the pymt component (b) of the SoilGrids Data Component to access and visualize the soil property dataset (c).

265

3.2 Use Cases

We here present several use cases that cover a variety of topics, including landslide susceptibility mapping, modeling of overland flow in a wildfire-impacted catchment, permafrost landscape processes, and wave power. Each use case is designed to demonstrate the application and the capabilities of Data Components rather than new findings for these research topics, so we will not focus on the analysis details. The data-model integration workflows for these use cases can be discovered, accessed, and reproduced on the HydroShare platform or the CSDMS web portal (See Code Availability Section).

270

3.2.1 Landsliding

Landslides are a dominant source of sediments in mountain regions (Broeckx et al., 2020). Landslides cause thousands of casualties annually, together with expensive damage to infrastructure (Haque et al., 2016; Petley, 2012). Landslides are also point sources of sediment in riverine systems, altering stream geomorphology (Benda and Dunne, 1997), potentially creating landslide dams and subsequent failures (Costa and Schuster, 1988), altering ecosystem functioning (May et al., 2009), and increasing downstream flood risk (Fan et al., 2019). Our example use case focuses on Puerto Rico, where a combination of steep terrain and heavy rainfall from hurricanes makes landslides a common occurrence. For example, Hurricane Maria made its landfall on September 20th, 2017 and triggered more than 40,000 landslides (Bessette-Kirton et al., 2019). In this use case, we chose a study area that had high concentration of landslides during Hurricane Maria. We used several Data Components to generate landslide susceptibility maps in this region.

280



We adopted the method of Strauch et al. (2018) to calculate landslide susceptibility using a factor-of-safety approach. This method requires data for soil depth, terrain slope, and subsurface flow depth. To prepare those inputs, we used
285 the Topography and ERA5 Data Components to access terrain elevation, soil moisture content, and precipitation datasets. We also retrieved the soil depth-to-bedrock dataset from the SoilGrids system. Terrain slope was derived by coupling the Topography Data Component with the Landlab RasterModelGrid component to calculate the slope angle. Subsurface flow depth was calculated by using the soil depth and soil moisture content datasets. The precipitation data is not used for input preparation but rather for visualization purposes to show the water input conditions in the study
290 area. Since these datasets are in different grid resolutions, we performed data regridding to interpolate the soils and precipitation data to the same resolution as the SRTM terrain elevation data (~90 by 90 m per grid cell). Using these inputs, we looped through 48 one-hour time steps (for Sept 20-21, 2017, the time period over which Hurricane Maria made landfall) to generate hourly results. The hourly maps were used to create an animation that shows the changes in landslide susceptibility and subsurface flow depth over the two-day period. The time series of mean total
295 precipitation and soil moisture content at four soil layers (layer 1: 0 - 7cm, layer 2: 7 - 28cm, layer 3: 28 - 100cm, layer 4: 100 - 289cm) for the study area are also shown in the results. Fig. 3 shows the input terrain elevation and slope maps, and Fig. 4 shows an example output. When the precipitation reached its peak, soil layer 1 and 2 responded quickly and reached high soil moisture content, while layer 3 responded with a time lag and layer 4 kept with a low value. The areas where the landslide susceptibility increased most correspond to the areas that have high slope angle and more increase of subsurface flow depth. Landslide susceptibility mapping is an important approach for evaluating
300 the likelihood of a landslide occurring in an area, which provides critical support to reduce disaster loss. This use case highlights the value of Data Components for recreating near-real time landslide susceptibility maps in regions prone to the landslide hazards, or to do first-order exploratory simulations in response to a large landsliding event anywhere in the world.

305

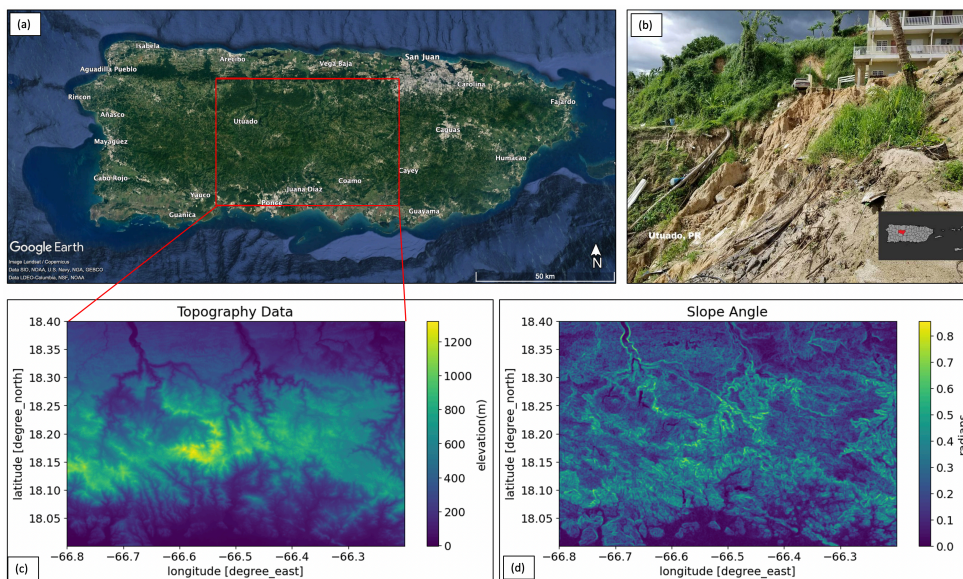


Figure 3: The study area in Puerto Rico. Panel (a) shows the bounding box of the study area; (b) shows a field photo of a landslide in the study area after Hurricane Maria (source from NOAA weather service <https://www.weather.gov/sju/maria2017>); (c) shows the terrain elevation data; (d) shows the calculated slope angle using the Landlab RasterModelGrid component.

310

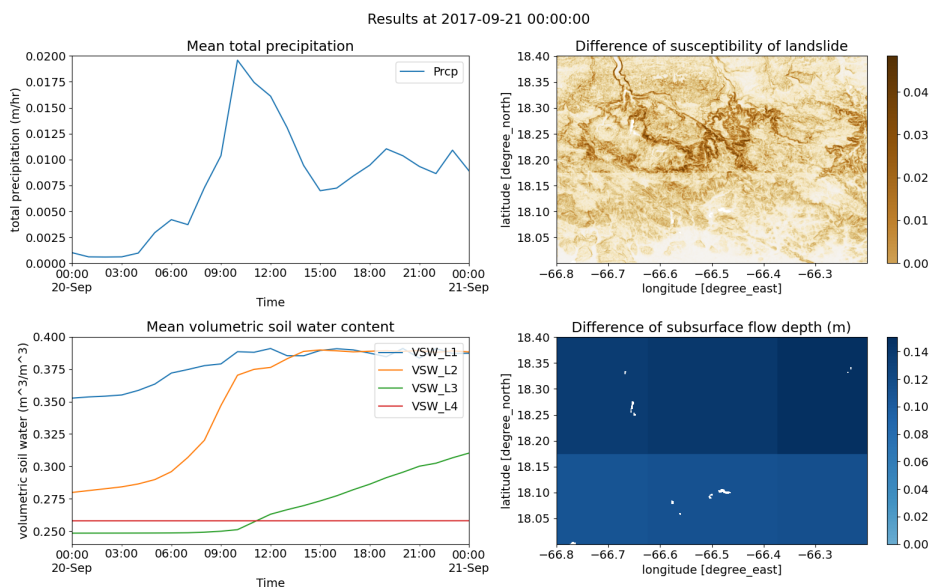


Figure 4: Example result for the study area in Puerto Rico. The left panel shows the mean total precipitation and the mean volumetric soil water content at four soil layers; the right panel shows the difference of landslide



315 **susceptibility and the subsurface flow depth between the first (2017-09-20 00:00) and the current (2017-09-21**
00:00) time step.

3.2.2 Rainfall-runoff modeling in wildfire-affected watersheds

Storm runoff occurs when saturated soil cannot absorb additional water (saturation-excess mechanism) or when the rate of water input on the land surface is higher than the infiltration rate (infiltration-excess mechanism). The generation of runoff is mainly impacted by the intensity of rainfall and the landscape surface characteristics such as vegetation density (surface roughness), antecedent moisture condition, and slope. In particular, after a destructive wildfire burns away plants and trees and affects the soil to alter the site characteristics (Shakesby and Doerr, 2006), heavy rain can cause substantial overland flow and potentially trigger debris flows (Malvar et al., 2011; Cannon et al., 1998). In the western US, wildfires are already increasing in size and frequency, and the frequency and intensity of post-fire overland flow are likely to increase even further in the future (Beeson et al., 2001; Halofsky et al., 2020; Abatzoglou et al., 2021). Thus, it is important to simulate overland flow processes to study the hydrologic responses of burned watersheds. In this use case, we performed a rainfall-runoff simulation for the watershed of Geer Canyon in the Colorado Front Range (USA), northwest of the city of Boulder (Fig. 5a, 5b). This watershed was impacted by the CalWood Fire, which occurred in 2020 and burned more than 4,000 hectares.


320

325

330 In this use case, we used the Topography Data Component to retrieve terrain elevation data for the study area (Fig. 5c). We performed a watershed delineation (Fig. 5d) by coupling this Data Component with Landlab components, specifically FlowAccumulator and ChannelProfiler (Barnhart et al., 2020). Then we used the watershed terrain elevation as input for a model of rainfall and runoff using Landlab's OverlandFlow component (Adams et al., 2017). The model run time is set as 200 minutes with the first 10 minutes assigned a constant rainfall intensity (59.2 mm/hr)

335 based on the meteorological observations on June 25, 2021, the summer after the CalWood fire occurred. This simulation created a discharge time series plot at the watershed outlet and a map of the surface water depth over the watershed at each 30-second time step (Fig. 6). Finally, an animation was made to show the overland flow process during the simulation time. This use case demonstrates the ability to couple a Data Component with Landlab components for post-fire overland flow simulation and for exploring a watershed storm response after fire events. This modeling workflow can be applied to perform experiments by adjusting the model parameters and inputs (e.g., surface roughness, infiltration rate, rain intensity) to evaluate the impact of wildfire on hydrologic responses for watersheds more generally.

340

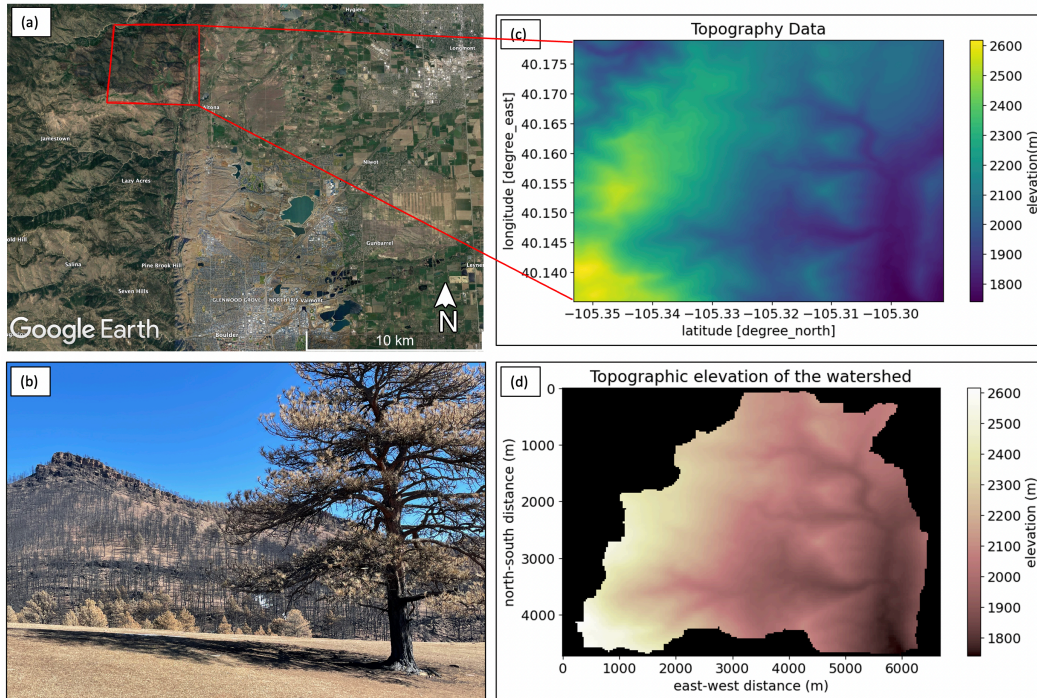

345 **Figure 5: The watershed of Geer Canyon. Panel (a) shows the bounding box of the study area; (b) shows field photo of the burned study area in March 2021; (c) shows the terrain elevation data; (d) shows the watershed delineation result using the Landlab FlowAccumulator and ChannelProfiler components.**

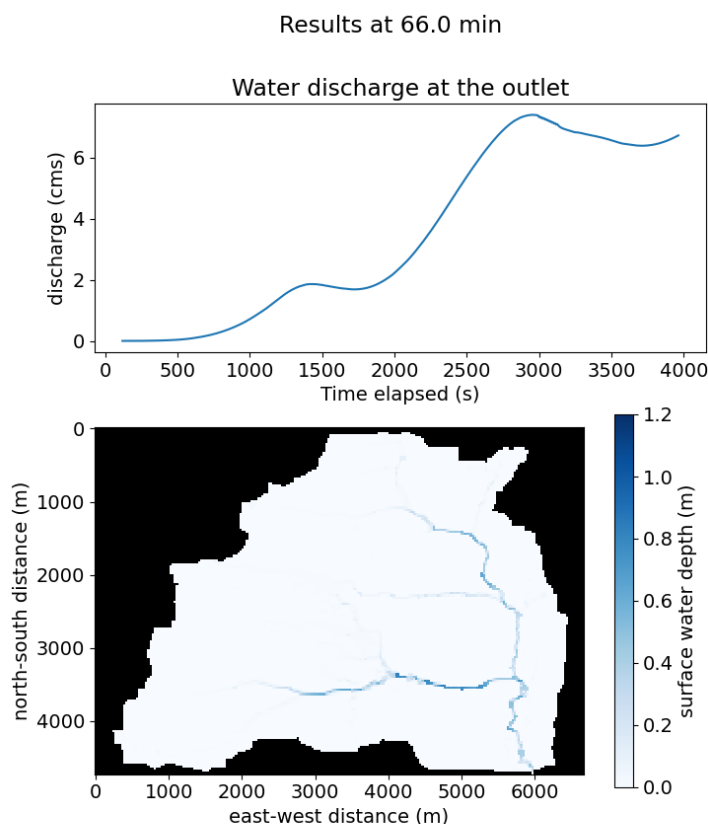


Figure 6: Example result of discharge and surface water depth from the Landlab OverlandFlow component for the watershed of Geer Canyon. This watershed is not gauged at its outlet but flows overbanked Geer Creek and spilled over the adjacent road in the June 25th rain event (personal comment Boulder Open Space).

350

3.2.3 Permafrost thaw and hillslope diffusion

Permafrost is defined as rock or soil that remains below 0°C for two or more consecutive years. Nearly a quarter of soils in the Northern Hemisphere are permafrost-affected (Zhang et al., 2008). With the trend of global warming, an increasing amount of permafrost thaws due to above freezing temperatures and causes geologic hazards such as landslides, ground subsidence, erosion, and other severe surface distortions (Lawrence and Slater, 2005; Nelson et al., 2001; Patton et al., 2019). Research for the future transformation of the permafrost in a changing climate becomes vital to reduce the negative impact of thawing permafrost on, for example, coastal erosion and infrastructure (e.g., roads and houses), and to assess the potential for the release of soil carbon to the atmosphere. In this use case, we applied the Kudryavtsev model (Anisimov et al., 1997; Kudryavtsev et al., 1977) for a study area in Alaska to evaluate

355


360




the impact of the warming climate on the thickness of the active layer of permafrost. Additionally, we applied the Kudryavtsev model output, the active layer thickness, as the input for a hillslope soil transport model to predict hillslope evolution in the Eight Mile Lake area, just south of Denali National Park.

The Kudryavtsev model includes thermodynamic processes that provide a steady-state solution under the assumption of a sinusoidal air temperature forcing to predict the annual active layer thickness and snow surface temperature. This model has been implemented as a pymt Model Component, for which the major inputs include annual mean temperature, amplitude of annual temperature variation, and snow cover depth. We obtained monthly mean air temperature, snow density, and snow water equivalent data using the ERA5 Data Component, and further processed these quantities to provide model inputs. To evaluate the impact of a warming climate, we prepared two sets of inputs—for 1980-1989 and 2010-2019, respectively—to compare their corresponding model outputs. Fig. 7 shows the model input time series and Fig. 8 shows the model output of the annual active layer thickness. These plots show that the annual mean temperature tends to increase while the temperature amplitude and snow cover depth became lower in 2010-2019 than in 1980-1989. However, the warming and drying climate didn't lead to a significant change in the active layer thickness. We conducted model experiments to find out the reason. We first calculated the 10-year average of annual mean temperature, amplitude of annual temperature variation, and snow cover depth for 1980-1989 and 2010-2019. Then we used these inputs to conduct two model runs for those periods. The model result for 1980-1989 will be taken as the "base" experiment for comparison. We then conducted 3 model runs of which each experiment used two inputs from the 10-year average for 1980-1989 and one for 2010-2019. The results showed that it can lead to an increase of the active layer thickness by only increasing the annual temperature. But especially if the snow thickness decreases, its insulating capacity in mid and late winter will decrease, and as such the active layer thickness will also decrease. Therefore, the respective change of warming temperature versus a decreasing snow thickness can act in opposing directions and thereby minimize changes for the active layer thickness. This phenomenon was also observed with field datasets and studied by several researchers at other study sites (Garnello et al., 2021; Zhang, 2005).


To examine the potential impact of active layer thickening on soil transport, we implemented a simple model of hillslope evolution using the Landlab DepthDependentDiffuser component to simulate the modification of topography by thaw-enhanced soil creep. The Topography Data Component was used to prepare the terrain elevation input (Fig. 9), and the active layer thickness for 2010-2019 was used as the soil depth input to the hillslope evolution model. We performed a model simulation representing 1,000 years of geomorphic evolution and made an animation to show the changes in terrain elevation. This use case provides an example of coupling Data Components with both pymt and Landlab Model Components, which shows the flexibility of integrating Data Components with multiple modeling frameworks to simulate interrelated landscape surface processes.

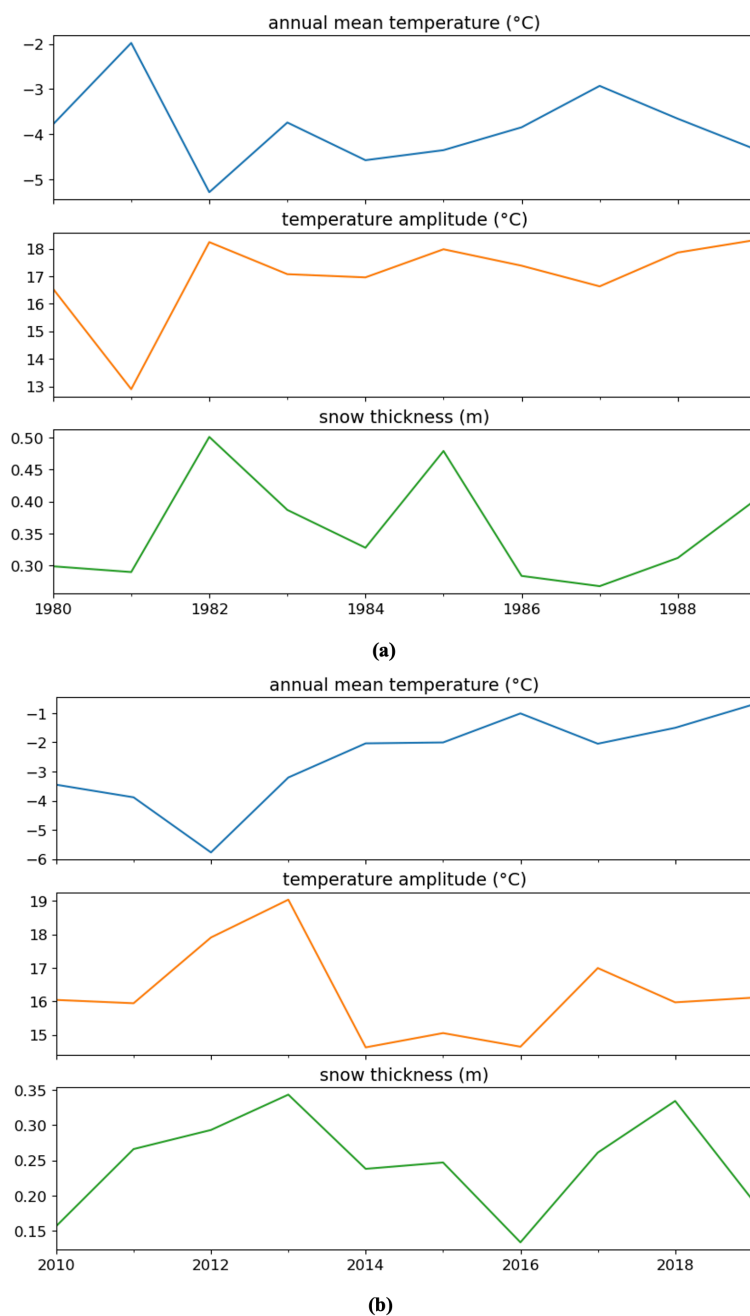

395 **Figure 7: Temperature and snow inputs of the Kudryavtsev model for the Eight Mile Lake area. Panel (a) for 1980-1989 and (b) for 2010-2019.**

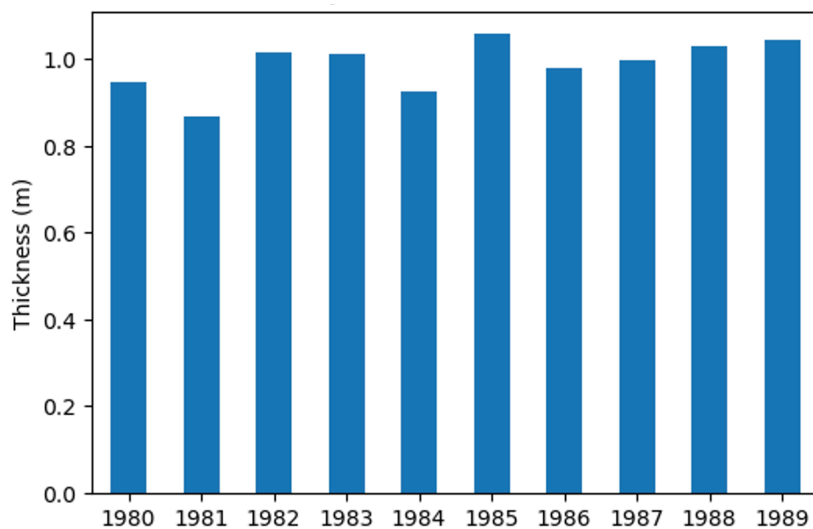


(a)

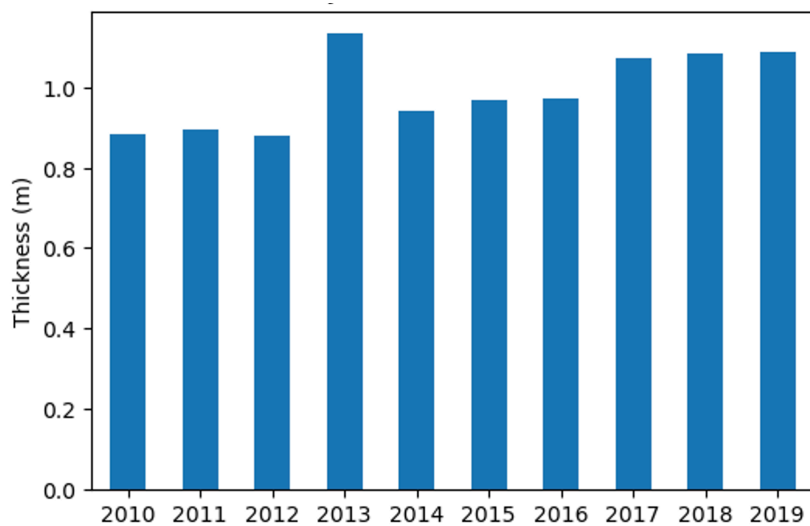

(b)

400 **Figure 8: Active layer thickness results of the Kudryavtsev model for the Eight Mile Lake area. Panel (a) for 1980-1989 and (b) for 2010-2019.**

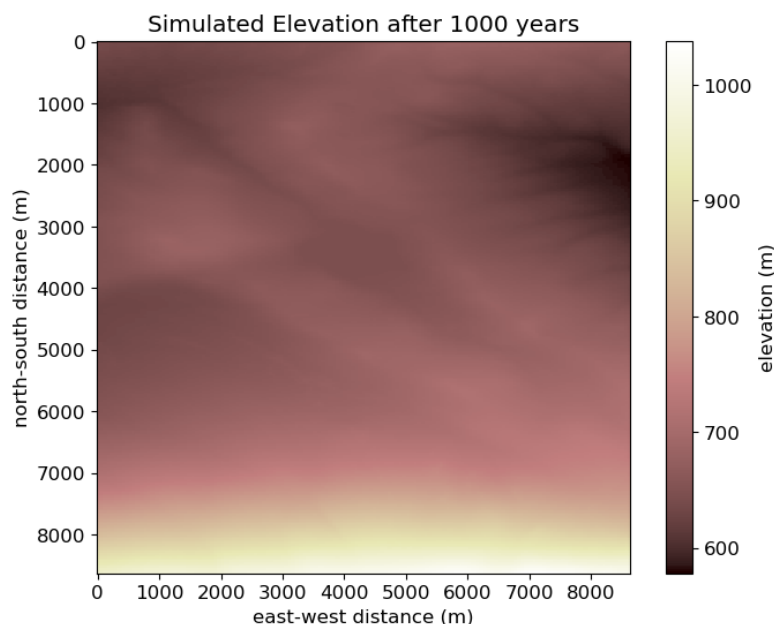

405 **Figure 9: Hillslope evolution result of the Landlab DepthDependentDiffuser component for the Eight Mile Lake area.**


3.2.4 Wave Power

Energetic waves cause shoreline erosion, change geomorphology, and generate renewable energy (Hansen and
410 Barnard, 2010; Mwasilu and Jung, 2019; Vousdoukas et al., 2020). Globally, around 28,000 km² of permanent coastal
land was lost from 1984 to 2015, which is double the amount of land gained over this same period (Mentaschi et al.,
2018). Wave power can be a useful predictor of shoreline change (e.g., beaches: Davidson et al., 2013; marshes:
Leonardi et al., 2016), with higher wave heights and longer wave periods leading to larger wave power. Wave power
is also used to assess feasibility of renewable energy generation (Ozkan and Mayo, 2019; Thorpe, 1999). This use
415 case therefore focuses on extracting and analyzing wave characteristics and calculating wave power for the Louisiana
Shelf in the Northern Gulf of Mexico.

The National Oceanic and Atmospheric Administration (NOAA) runs the WAVEWATCH III model (Booij et al.,
1999) on several different grids (EMC Operational Wave Product Table, 2023). The WAVEWATCH III Data
Component increases the accessibility and useability of model estimates and is used here to facilitate wave power
420 calculations. WAVEWATCH III variables, including significant wave height, peak wave period, peak wave direction,
and east-west and north-south wind speeds were downloaded using this Data Component. For the analysis, data from
the Gulf of Mexico and Northwest Atlantic grid were used because of the relatively high resolution of 4 arcminutes
(~110 m at the study site). Data for the summer of 2005 was interpolated to a specific location (28.8°N, 276.4°E) on
the Louisiana Shelf and shown in Fig. 10. For this figure, wave direction is given in meteorological convention, with



425 0 degrees meaning that waves are coming from the north and 90 degrees meaning waves are coming from the east.
Winds are also given in meteorological convention, meaning positive v values are coming from the north and positive
u values are coming from the east. Wave power was then calculated using the WAVEWATCH III estimates of
significant wave height and peak wave period for this location. The result was visualized using a time series and a
430 in mid-March through mid-April, compared to later portions of Spring 2005. Waves were primarily traveling
northwestward, including during the time periods with larger wave power. This use case demonstrates how the
WAVEWATCH III Data Component can be used to analyze wave conditions that are important for coastal shoreline
change and renewable energy generation. It also demonstrates how to use the API of the Data Component instead of
the Babelized component for data access, when there is no need to couple Data and Model Components for analysis.

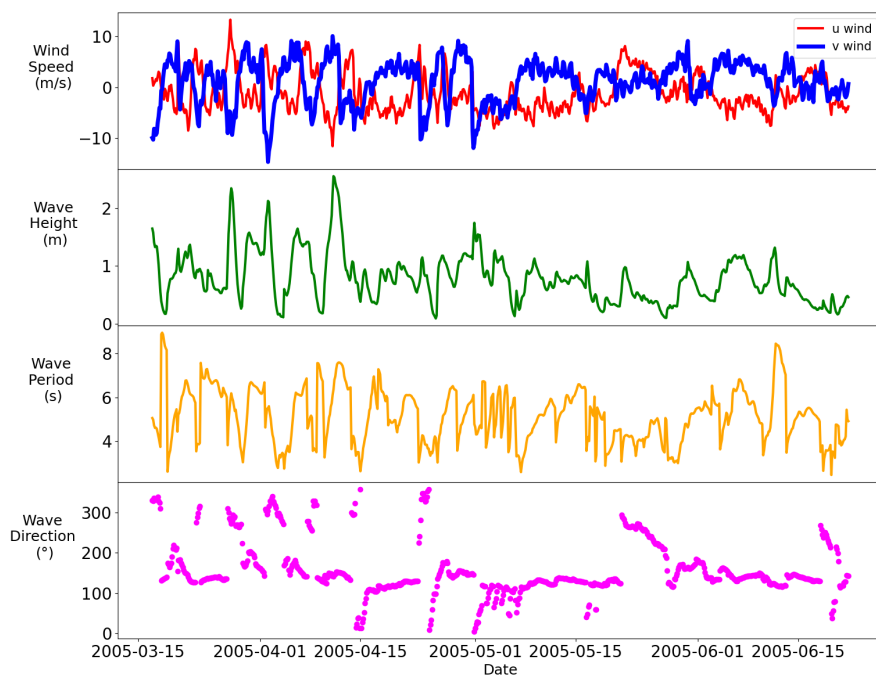

435

Figure 10: Time series of the wave characteristics from WAVEWATCH III interpolated to 28.8°N, 276.4°E in the Gulf of Mexico.

440


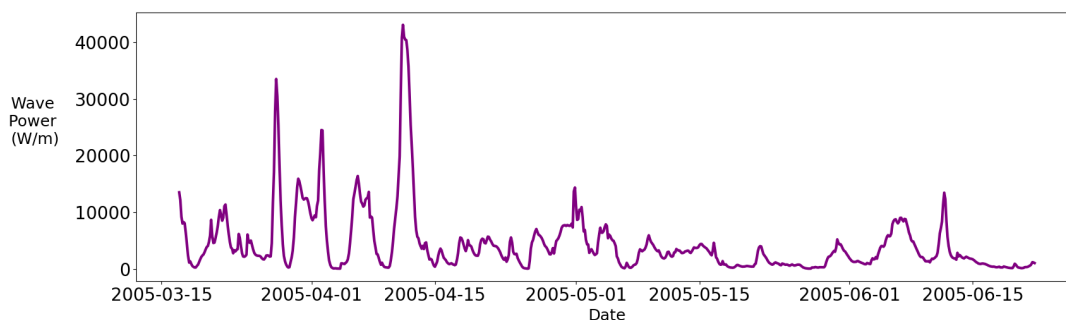


Figure 11: Time series of wave power at 28.8°N, 276.4°E in the Gulf of Mexico.



445 Figure 12: Rose diagram of wave power at 28.8°N, 276.4°E in the Gulf of Mexico. The length of each bar and the concentric circles indicate the percentage of datapoints with waves coming from that direction (meteorological convention). The color indicates the wave power.

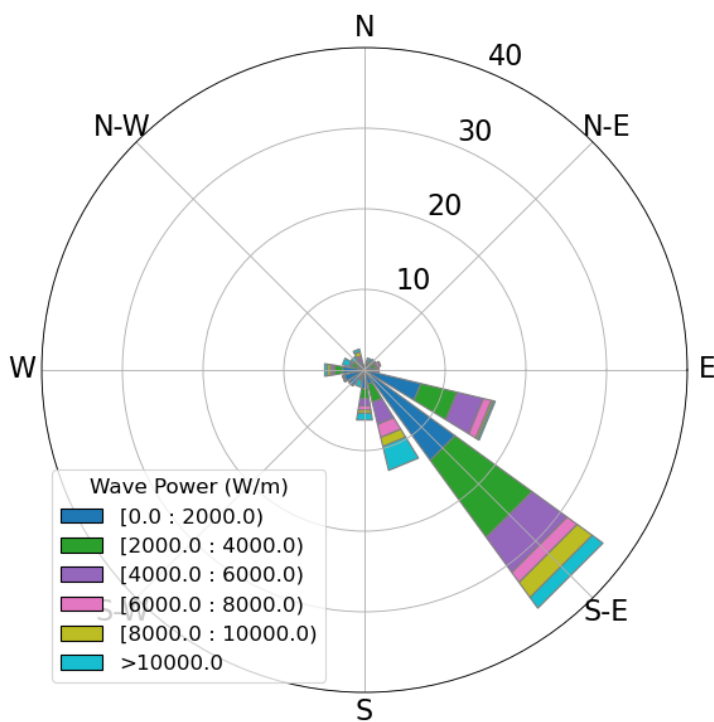

3.3 Discussion

450 The case studies demonstrated that the Data Component design can be applied to a variety of datasets to support data-
model integration for Earth surface processes research. From the implementation and use cases of the Data
Components, we found that our design provides benefits in the following aspects. 1) Usability: since the datasets are
wrapped with BMI, the methods to get metadata and data values are the same regardless of their file formats and the
grid types. This feature can be found from the four use cases where the code for retrieving the variable and grid
455 information is the same for various Data Components. This simplifies the way to learn about new Data Components
if the users are already familiar with other Data Components. Additionally, because the Model Components also adopt
the BMI methods, it becomes intuitive for users to know how to couple the data and model components together. 2)
Reproducibility: Data Components are implemented as open-source Python packages, which enables users to
document the data-model integration workflows in the Jupyter Notebooks for tracking and sharing computational
460 analysis. Compared with the modeling frameworks that allow users to create modeling workflows via GUI, the Data
Component design helps to provide detailed information for data access and preparation behind the scenes. 3)
Flexibility: the design provides a flexible way of using Data Components. Users can either use the API directly for
data analysis when there is no need to couple data with models (e.g., Coastal erosion use case) or use the Babelized
component under the modeling framework (e.g., Overland flow use case), which can help write efficient code for
465 different situations. In addition, this design provides the flexibility to make the Data Components work within
modeling frameworks or tools that support, or are compatible with, the BMI standard (e.g., Landlab) without making
additional changes to the Data Components.

While developing the use cases, we also identified the limitations of the existing BMI methods to represent the features
of datasets. It will improve the usability of Data Components by extending the BMI standard with new methods
470 designed for Data Components. For instance, adding methods to access the spatial reference information of the datasets
can facilitate data reprojection and regridding to convert heterogeneous datasets to the same grid resolution and
coordinate system. Moreover, the existing BMI methods mainly support wrapping datasets with spatial and time
dimensions, and it becomes challenging to deal with datasets that include dimensions representing other variables.
Take the ERA5 datasets as an example: there are ensemble model simulation results that include dimensions
475 representing the ensemble number and/or the pressure levels. The existing BMI methods don't support accessing the
information for those types of dimensions, so the current implementation of ERA5 Data Component mainly supports
datasets that only include spatial and time dimensions.

Currently, new Data Component and use cases are also under development. One example is the ROMS Data
Component designed to access the model outputs of the Regional Ocean Modeling System (ROMS) (Haidvogel et al.,
480 2008). The ROMS Data Component will be coupled with the Landlab and pymt Model Components to help explore
the fate of particulate organic carbon in the Arctic, including its release via permafrost thaw, transport and oxidation
in the fluvial and coastal systems, and its burial in offshore sediments.



4 Conclusions

485 The integration of data and numerical models plays a vital role in advancing the understanding of the complex processes of Earth systems. However, with the increasing number of datasets available on the internet and the growing trend of reproducible computational research, there is a need to provide a convenient and standardized way to access a variety of datasets and easily couple them with diverse models to improve the efficiency and reproducibility of the data-model integration workflows.

490 This paper presents an approach that uses open-source software and standards from the CSDMS Workbench to create ‘Data Components’ that support open data-model integration for Earth surface processes modeling. A Data Component is a dataset wrapped with BMI functions. To test and evaluate our approach, we implemented several Data Components for datasets in various file formats and grid types, and then applied them in research demonstrations related to landsliding, overland flow, permafrost, and ocean waves. The results demonstrated that the Data Component
495 design provides a consistent way to access and use online datasets from multiple sources and to easily couple data with models, which increases the accessibility and reusability of research datasets.

Another advantage of the Data Component design is that it enables researchers to document the data-model integration workflow in a Jupyter Notebook, which helps other researchers to discover, access, operate, and reuse modeling work through online platforms. This approach can help improve research transparency and workflow reproducibility to
500 encourage collaboration. Moreover, our use cases can be adapted and applied to other study sites so that researchers can rapidly set up modeling studies after or during an event to have a quick exploration or initial assessment of the natural hazards. Although our case studies are centered on Earth surface processes and natural hazard impacts, the core concepts of the Data Component design are extensible to datasets in other scientific domains.

In the future, we will focus on developing new Data Components and extending BMI to support wider range of
505 datasets. We will also provide educational materials to encourage the geoscience community to apply existing, or implement new, Data Components to create reproducible data-model integration workflows.

Code Availability

NWIS Data Component:

510 For BMI: https://github.com/gantian127/bmi_nwis For pymt: https://github.com/gantian127/pymt_nwis

Topography Data Component:

For BMI: <https://github.com/csdms/bmi-topography> For pymt https://github.com/pymt-lab/pymt_topography

SoilGrids Data Component:

For BMI: <https://github.com/gantian127/soilgrids> For pymt: https://github.com/gantian127/pymt_soilgrids

515 **ERA5 Data Component:**

For BMI: https://github.com/gantian127/bmi_era5 For pymt https://github.com/gantian127/pymt_era5

WAVEWATCH III Data Component:

For BMI <https://github.com/csdms/bmi-wavewatch3> For pymt https://github.com/pymt-lab/pymt_wavewatch3



Use Case Jupyter Notebooks:

520 <https://www.hydroshare.org/resource/28af99c09ee4423dbffef28bf32837e0/>

Author's Contribution

Mark Piper, Eric Hutton, and Tian Gan developed the Data Components. Tian Gan, Benjamin Campforts, Brianna Undzis, Ethan Pierce, Greg Tucker, Irina Overeem, and Julia Moriarty created the use case Jupyter Notebooks. Tian Gan prepared the manuscript draft and all co-authors reviewed and edited the manuscript.

525 Competing interests

The authors declare that they have no conflict of interest.

Acknowledgements

This work was supported by the National Science Foundation under collaborative grants 1831623, 2026951, 2104102, and 2148762. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the authors and do not necessarily reflect the views of the National Science Foundation. We also thank our collaborator
530 Dr. Anthony Castronova for his technical support of the CUAHSI JupyterHub.

References

- Abatzoglou, J. T.: Development of gridded surface meteorological data for ecological applications and modelling, *International Journal of Climatology*, 33, 121–131, <https://doi.org/https://doi.org/10.1002/joc.3413>, 2013.
- 535 Abatzoglou, J. T., Battisti, D. S., Williams, A. P., Hansen, W. D., Harvey, B. J., and Kolden, C. A.: Projected increases in western US forest fire despite growing fuel constraints, *Commun Earth Environ*, 2, 227, <https://doi.org/10.1038/s43247-021-00299-0>, 2021.
- Adams, J. M., Gasparini, N. M., Hobbey, D. E. J., Tucker, G. E., Hutton, E. W. H., Nudurupati, S. S., and Istanbuluoglu, E.: The Landlab v1.0 OverlandFlow component: a Python tool for computing shallow-water flow across watersheds, *Geosci Model Dev*, 10, 1645–1663, <https://doi.org/10.5194/gmd-10-1645-2017>, 2017.
- 540 Anisimov, O. A., Shiklomanov, N. I., and Nelson, F. E.: Global warming and active-layer thickness: results from transient general circulation models, *Glob Planet Change*, 15, 61–77, [https://doi.org/https://doi.org/10.1016/S0921-8181\(97\)00009-X](https://doi.org/https://doi.org/10.1016/S0921-8181(97)00009-X), 1997.
- Barnhart, K. R., Hutton, E. W. H., Tucker, G. E., M. Gasparini, N., Istanbuluoglu, E., E. J. Hobbey, D., J. Lyons, N.,
545 Mouchene, M., Siddhartha Nudurupati, S., M. Adams, J., and Bandaragoda, C.: Short communication: Landlab v2.0: A software package for Earth surface dynamics, *Earth Surface Dynamics*, 8, 379–397, <https://doi.org/10.5194/esurf-8-379-2020>, 2020.



- Barton, C. M., Lee, A., Janssen, M. A., van der Leeuw, S., Tucker, G. E., Porter, C., Greenberg, J., Swantek, L., Frank, K., Chen, M., and Jagers, H. R. A.: How to make models more useful, *Proceedings of the National Academy of Sciences*, 119, e2202112119, <https://doi.org/10.1073/pnas.2202112119>, 2022.
- 550 Beeson, P. C., Martens, S. N., and Breshears, D. D.: Simulating overland flow following wildfire: mapping vulnerability to landscape disturbance, *Hydrol Process*, 15, 2917–2930, <https://doi.org/https://doi.org/10.1002/hyp.382>, 2001.
- Benda, L. and Dunne, T.: Stochastic forcing of sediment supply to channel networks from landsliding and debris flow, *Water Resour Res*, 33, 2849–2863, <https://doi.org/https://doi.org/10.1029/97WR02388>, 1997.
- 555 Bessette-Kirton, E. K., Cerovski-Darriau, C., Schulz, W. H., Coe, J. A., Kean, J. W., Godt, J. W., Thomas, M. A., and Stephen Hughes, K.: Landslides triggered by Hurricane Maria: Assessment of an extreme event in Puerto Rico, *GSA Today*, 29, 4–10, <https://doi.org/10.1130/GSATG383A.1>, 2019.
- Booij, N., Ris, R. C., and Holthuijsen, L. H.: A third-generation wave model for coastal regions: 1. Model description and validation, *J Geophys Res Oceans*, 104, 7649–7666, <https://doi.org/https://doi.org/10.1029/98JC02622>, 1999.
- 560 Broeckx, J., Rossi, M., Lijnen, K., Campforts, B., Poesen, J., and Vanmaercke, M.: Landslide mobilization rates: A global analysis and model, <https://doi.org/10.1016/j.earscirev.2019.102972>, 1 February 2020.
- Cannon, S. H., Powers, P. S., and Savage, W. Z.: Fire-related hyperconcentrated and debris flows on Storm King Mountain, Glenwood Springs, Colorado, USA, *Environmental Geology*, 35, 210–218, <https://doi.org/10.1007/s002540050307>, 1998.
- 565 Chen, M., Voinov, A., Ames, D. P., Kettner, A. J., Goodall, J. L., Jakeman, A. J., Barton, M. C., Harpham, Q., Cuddy, S. M., DeLuca, C., Yue, S., Wang, J., Zhang, F., Wen, Y., and Lü, G.: Position paper: Open web-distributed integrated geographic modelling and simulation to enable broader participation and applications, <https://doi.org/10.1016/j.earscirev.2020.103223>, 1 August 2020.
- 570 Chen, R., Luna, D., Cao, Y., Liang, Y., and Liang, X.: Open data and model integration through generic model agent toolkit in CyberWater framework, *Environmental Modelling & Software*, 152, 105384, <https://doi.org/https://doi.org/10.1016/j.envsoft.2022.105384>, 2022.
- Chue Hong, N. P., Katz, D. S., Barker, M., Lamprecht, A.-L., Martinez, C., Psomopoulos, F. E., Harrow, J., Jael Castro, L., Gruenpeter, M., Andrea Martinez, P., Honeyman, T., Struck, A., Lee, A., Loewe, A., van Werkhoven, B., 575 Jones, C., Garijo, D., Plomp, E., Genova, F., Shanahan, H., Leng, J., Hellström, M., Sandström, M., Sinha, M., Kuzak, M., Herterich, P., Zhang, Q., Islam, S., Sansone, S.-A., Pollard, T., Dwi Atmojo, U., Williams, A., Czerniak, A., Niehues, A., Claire Fouilloux, A., Desinghu, B., Goble, C., Richard, C., Gray, C., Erdmann, C., Nüst, D., Tartarini, D., Rangelova, E., Anzt, H., Todorov, I., McNally, J., Moldon, J., Burnett, J., Garrido-Sánchez, J., Belhajjame, K., Sesink, L., Hwang, L., Roberto Tovani-Palome, M., Wilkinson, M. D., Servillat, M., Liffers, M., Fox, M., Miljković, 580 N., Lynch, N., Martinez Lavanchy, P., Gesing, S., Stevens, S., Martinez Cuesta, S., Peroni, S., Soiland-Reyes, S., Bakker, T., Rabemanantsoa, T., Sochat, V., and Yehudi, Y.: FAIR Principles for Research Software (FAIR4RS Principles), Research Data Alliance, <https://doi.org/https://doi.org/10.15497/RDA00065>, 2021.
- Costa, J. E. and Schuster, R. L.: The formation and failure of natural dams, *GSA Bulletin*, 100, 1054–1068, [https://doi.org/10.1130/0016-7606\(1988\)100<1054:TFAFON>2.3.CO;2](https://doi.org/10.1130/0016-7606(1988)100<1054:TFAFON>2.3.CO;2), 1988.



- 585 Davidson, M. A., Splinter, K. D., and Turner, I. L.: A simple equilibrium model for predicting shoreline change, *Coastal Engineering*, 73, 191–202, <https://doi.org/https://doi.org/10.1016/j.coastaleng.2012.11.002>, 2013.
- Donges, J. F., Heitzig, J., Barfuss, W., Wiedermann, M., Kassel, J. A., Kittel, T., Kolb, J. J., Kolster, T., Müller-Hansen, F., Otto, I. M., Zimmerer, K. B., and Lucht, W.: Earth system modeling with endogenous and dynamic human societies: the copan:CORE open World–Earth modeling framework, *Earth System Dynamics*, 11, 395–413, <https://doi.org/10.5194/esd-11-395-2020>, 2020.
- 590 Epperly, T. G. W., Kumfert, G., Dahlgren, T., Ebner, D., Leek, J., Prantl, A., and Kohn, S.: High-performance language interoperability for scientific computing through Babel, *Int J High Perform Comput Appl*, 26, 260–274, <https://doi.org/10.1177/1094342011414036>, 2011.
- ESMF Reference Manual for Fortran: https://earthsystemmodeling.org/docs/release/latest/ESMF_refdoc/, last access: 20 February 2023.
- 595 Fan, X., Scaringi, G., Korup, O., West, A. J., van Westen, C. J., Tanyas, H., Hovius, N., Hales, T. C., Jibson, R. W., Allstadt, K. E., Zhang, L., Evans, S. G., Xu, C., Li, G., Pei, X., Xu, Q., and Huang, R.: Earthquake-Induced Chains of Geologic Hazards: Patterns, Mechanisms, and Impacts, *Reviews of Geophysics*, 57, 421–503, <https://doi.org/https://doi.org/10.1029/2018RG000626>, 2019.
- 600 Farr, T. G., Rosen, P. A., Caro, E., Crippen, R., Duren, R., Hensley, S., Kobrick, M., Paller, M., Rodriguez, E., Roth, L., Seal, D., Shaffer, S., Shimada, J., Umland, J., Werner, M., Oskin, M., Burbank, D., and Alsdorf, D.: The Shuttle Radar Topography Mission, *Reviews of Geophysics*, 45, <https://doi.org/https://doi.org/10.1029/2005RG000183>, 2007.
- Gan, T., Tarboton, D. G., Horsburgh, J. S., Dash, P., Idaszak, R., and Yi, H.: Collaborative sharing of multidimensional space-time data in a next generation hydrologic information system, *Environmental Modelling & Software*, 129, 104706, <https://doi.org/https://doi.org/10.1016/j.envsoft.2020.104706>, 2020a.
- Gan, T., Tarboton, D. G., Dash, P., Gichamo, T. Z., and Horsburgh, J. S.: Integrating hydrologic modeling web services with online data sharing to prepare, store, and execute hydrologic models, *Environmental Modelling and Software*, 130, <https://doi.org/10.1016/j.envsoft.2020.104731>, 2020b.
- 610 Garnello, A., Marchenko, S., Nicolsky, D., Romanovsky, V., Ledman, J., Celis, G., Schädel, C., Luo, Y., and Schuur, E. A. G.: Projecting Permafrost Thaw of Sub-Arctic Tundra With a Thermodynamic Model Calibrated to Site Measurements, *J Geophys Res Biogeosci*, 126, e2020JG006218, <https://doi.org/https://doi.org/10.1029/2020JG006218>, 2021.
- Haidvogel, D. B., Arango, H., Budgell, W. P., Cornuelle, B. D., Curchitser, E., Di Lorenzo, E., Fennel, K., Geyer, W. R., Hermann, A. J., Lanerolle, L., Levin, J., McWilliams, J. C., Miller, A. J., Moore, A. M., Powell, T. M., Shchepetkin, A. F., Sherwood, C. R., Signell, R. P., Warner, J. C., and Wilkin, J.: Ocean forecasting in terrain-following coordinates: Formulation and skill assessment of the Regional Ocean Modeling System, *J Comput Phys*, 227, 3595–3624, <https://doi.org/https://doi.org/10.1016/j.jcp.2007.06.016>, 2008.
- Hall, C. A., Saia, S. M., Popp, A. L., Dogulu, N., Schymanski, S. J., Drost, N., van Emmerik, T., and Hut, R.: A hydrologist’s guide to open science, *Hydrol Earth Syst Sci*, 26, 647–664, <https://doi.org/10.5194/hess-26-647-2022>, 2022.
- 620



- Halofsky, J. E., Peterson, D. L., and Harvey, B. J.: Changing wildfire, changing forests: the effects of climate change on fire regimes and vegetation in the Pacific Northwest, USA, *Fire Ecology*, 16, 4, <https://doi.org/10.1186/s42408-019-0062-8>, 2020.
- 625 Hansen, J. E. and Barnard, P. L.: Sub-weekly to interannual variability of a high-energy shoreline, *Coastal Engineering*, 57, 959–972, <https://doi.org/10.1016/j.coastaleng.2010.05.011>, 2010.
- Haque, U., Blum, P., da Silva, P. F., Andersen, P., Pilz, J., Chalov, S. R., Malet, J.-P., Auflič, M. J., Andres, N., Poyiadji, E., Lamas, P. C., Zhang, W., Peshevski, I., Pétursson, H. G., Kurt, T., Dobrev, N., García-Davalillo, J. C., Halkia, M., Ferri, S., Gaprindashvili, G., Engström, J., and Keellings, D.: Fatal landslides in Europe, *Landslides*, 13, 1545–1554, <https://doi.org/10.1007/s10346-016-0689-3>, 2016.
- 630 Hengl, T., Mendes de Jesus, J., Heuvelink, G. B. M., Ruiperez Gonzalez, M., Kilibarda, M., Blagotić, A., Shangquan, W., Wright, M. N., Geng, X., Bauer-Marschallinger, B., Guevara, M. A., Vargas, R., MacMillan, R. A., Batjes, N. H., Leenaars, J. G. B., Ribeiro, E., Wheeler, I., Mantel, S., and Kempen, B.: SoilGrids250m: Global gridded soil information based on machine learning, *PLoS One*, 12, e0169748-, 2017.
- 635 Hill, C., DeLuca, C., Balaji, Suarez, M., and da Silva, A.: The architecture of the Earth system modeling framework, *Comput Sci Eng*, 6, 18–28, <https://doi.org/10.1109/MCISE.2004.1255817>, 2004.
- Hobley, D. E. J., Adams, J. M., Siddhartha Nudurupati, S., Hutton, E. W. H., Gasparini, N. M., Istanbuloglu, E., and Tucker, G. E.: Creative computing with Landlab: An open-source toolkit for building, coupling, and exploring two-dimensional numerical models of Earth-surface dynamics, *Earth Surface Dynamics*, 5, 21–46, <https://doi.org/10.5194/esurf-5-21-2017>, 2017.
- 640 Hoch, J. M., Eilander, D., Ikeuchi, H., Baart, F., and Winsemius, H. C.: Evaluating the impact of model complexity on flood wave propagation and inundation extent with a hydrologic-hydrodynamic model coupling framework, *Natural Hazards and Earth System Sciences*, 19, 1723–1735, <https://doi.org/10.5194/nhess-19-1723-2019>, 2019.
- Hodson, T. O., Hariharan, J. A., Black, S., and Horsburgh, J. S.: dataretrieval (Python): a Python package for discovering and retrieving water data available from U.S. federal hydrologic web services, <https://pypi.org/project/dataretrieval/>, 2023.
- 645 Horsburgh, J. S., Morsy, M. M., Castronova, A. M., Goodall, J. L., Gan, T., Yi, H., Stealey, M. J., and Tarboton, D. G.: HydroShare: Sharing diverse hydrologic data types and models as social objects within a Hydrologic Information System, *J Am Water Resour Assoc*, 27517, <https://doi.org/10.1111/1752-1688.12363>, 2015.
- 650 Hoyer, S. and Hamman, J.: xarray: N-D labeled Arrays and Datasets in Python, *J Open Res Softw*, 5, 10, <https://doi.org/10.5334/jors.148>, 2017.
- Hut, R., Drost, N., van de Giesen, N., van Werkhoven, B., Abdollahi, B., Aerts, J., Albers, T., Alidoost, F., Andela, B., Camphuijsen, J., Dzigan, Y., van Haren, R., Hutton, E., Kalverla, P., van Meersbergen, M., van den Oord, G., Pelupessy, I., Smeets, S., Verhoeven, S., de Vos, M., and Weel, B.: The eWaterCycle platform for open and FAIR hydrological collaboration, *Geosci Model Dev*, 15, 5371–5390, <https://doi.org/10.5194/gmd-15-5371-2022>, 2022.
- 655 Hutton, E., Piper, M., and Tucker, G.: The Basic Model Interface 2.0: A standard interface for coupling numerical models in the geosciences, *J Open Source Softw*, 5, 2317, <https://doi.org/10.21105/joss.02317>, 2020.



- Hutton, E. W. H., Piper, M. D., and Tucker, G. E.: The Babelizer: language interoperability for model coupling in the geosciences, *J Open Source Softw*, 7, 3344, <https://doi.org/10.21105/joss.03344>, 2022.
- 660 Janssen, M. A., Na'ia Alessa, L., Barton, M., Bergin, S., and Lee, A.: Towards a Community Framework for Agent-Based Modelling, *Journal of Artificial Societies and Social Simulation*, 11, 2008.
- Kralisch, S., Krause, P., and David, O.: Using the object modeling system for hydrological model development and application, *Advances in Geosciences*, 75–81 pp., 2005.
- Kudryavtsev, V., Garagulya, L., Kondrat Yeva, V., and Melamed, K. A. nad: Fundamentals of frost forecasting in geological engineering investigations, 1977.
- 665 Lamprecht, A.-L., Garcia, L., Kuzak, M., Martinez, C., Arcila, R., Martin Del Pico, E., Dominguez Del Angel, V., van de Sandt, S., Ison, J., Martinez, P. A., McQuilton, P., Valencia, A., Harrow, J., Psomopoulos, F., Gelpi, J. LL., Chue Hong, N., Goble, C., and Capella-Gutierrez, S.: Towards FAIR principles for research software, *Data Science*, 3, 37–59, <https://doi.org/10.3233/ds-190026>, 2019.
- 670 Lawrence, D. M. and Slater, A. G.: A projection of severe near-surface permafrost degradation during the 21st century, *Geophys Res Lett*, 32, <https://doi.org/https://doi.org/10.1029/2005GL025080>, 2005.
- Leonardi, N., Ganju, N. K., and Fagherazzi, S.: A linear relationship between wave power and erosion determines salt-marsh resilience to violent storms and hurricanes, *Proceedings of the National Academy of Sciences*, 113, 64–68, <https://doi.org/10.1073/pnas.1510095112>, 2016.
- 675 Malvar, M. C., Prats, S. A., Nunes, J. P., and Keizer, J. J.: Post-fire overland flow generation and inter-rill erosion under simulated rainfall in two eucalypt stands in north-central Portugal, *Environ Res*, 111, 222–236, <https://doi.org/https://doi.org/10.1016/j.envres.2010.09.003>, 2011.
- May, C. L., Pryor, B., Lisle, T. E., and Lang, M.: Coupling hydrodynamic modeling and empirical measures of bed mobility to predict the risk of scour and fill of salmon redds in a large regulated river, *Water Resour Res*, 45, <https://doi.org/https://doi.org/10.1029/2007WR006498>, 2009.
- 680 Mentaschi, L., Vousdoukas, M. I., Pekel, J.-F., Voukouvalas, E., and Feyen, L.: Global long-term observations of coastal erosion and accretion, *Sci Rep*, 8, 12876, <https://doi.org/10.1038/s41598-018-30904-w>, 2018.
- Moore, R. v. and Tindall, C. I.: An overview of the open modelling interface and environment (the OpenMI), *Environ Sci Policy*, 8, 279–286, <https://doi.org/10.1016/j.envsci.2005.03.009>, 2005.
- 685 Mwasilu, F. and Jung, J.-W.: Potential for power generation from ocean wave renewable energy source: a comprehensive review on state-of-the-art technology and future prospects, *IET Renewable Power Generation*, 13, 363–375, <https://doi.org/https://doi.org/10.1049/iet-rpg.2018.5456>, 2019.
- Nelson, F. E., Anisimov, O. A., and Shiklomanov, N. I.: Subsidence risk from thawing permafrost, *Nature*, 410, 889–890, <https://doi.org/10.1038/35073746>, 2001.
- 690 EMC Operational Wave Product Table: [https://polar.ncep.noaa.gov/waves/product_table.shtml?-\(none\)-](https://polar.ncep.noaa.gov/waves/product_table.shtml?-(none)-), last access: 29 January 2023.
- Ozkan, C. and Mayo, T.: The renewable wave energy resource in coastal regions of the Florida peninsula, *Renew Energy*, 139, 530–537, <https://doi.org/https://doi.org/10.1016/j.renene.2019.02.090>, 2019.



- 695 Patton, A. I., Rathburn, S. L., and Capps, D. M.: Landslide response to climate change in permafrost regions, *Geomorphology*, 340, 116–128, <https://doi.org/10.1016/j.geomorph.2019.04.029>, 2019.
- Peckham, S. D., Hutton, E. W. H., and Norris, B.: A component-based approach to integrated modeling in the geosciences: The design of CSDMS, *Comput Geosci*, 53, 3–12, <https://doi.org/10.1016/j.cageo.2012.04.002>, 2013.
- Petley, D.: Global patterns of loss of life from landslides, *Geology*, 40, 927–930, <https://doi.org/10.1130/G33217.1>, 2012.
- 700 Poggio, L., de Sousa, L. M., Batjes, N. H., Heuvelink, G. B. M., Kempen, B., Ribeiro, E., and Rossiter, D.: SoilGrids 2.0: producing soil information for the globe with quantified spatial uncertainty, *SOIL*, 7, 217–240, <https://doi.org/10.5194/soil-7-217-2021>, 2021.
- Shakesby, R. A. and Doerr, S. H.: Wildfire as a hydrological and geomorphological agent, *Earth Sci Rev*, 74, 269–307, <https://doi.org/10.1016/j.earscirev.2005.10.006>, 2006.
- 705 Strauch, R., Istanbuluoglu, E., Nudurupati, S. S., Bandaragoda, C., Gasparini, N. M., and Tucker, G. E.: A hydroclimatological approach to predicting regional landslide probability using Landlab, *Earth Surface Dynamics*, 6, 49–75, <https://doi.org/10.5194/esurf-6-49-2018>, 2018.
- Tadono, T., Ishida, H., Oda, F., Naito, S., Minakawa, K., and Iwamoto, H.: Precise Global DEM Generation by ALOS PRISM, *ISPRS Annals of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, II–4, 71–76, <https://doi.org/10.5194/isprsannals-ii-4-71-2014>, 2014.
- 710 Thorpe, T. W.: A Brief Review of Wave Energy A report produced for The UK Department of Trade and Industry, 1999.
- Tucker, G. E., Hutton, E. W. H., Piper, M. D., Campforts, B., Gan, T., Barnhart, K. R., Kettner, A. J., Overeem, I., Peckham, S. D., McCreedy, L., and Syvitski, J.: CSDMS: A community platform for numerical modeling of Earth surface processes, *Geosci Model Dev*, 15, 1413–1439, <https://doi.org/10.5194/gmd-15-1413-2022>, 2022.
- 715 Verburg, P. H., Dearing, J. A., Dyke, J. G., Leeuw, S. van der, Seitzinger, S., Steffen, W., and Syvitski, J.: Methods and approaches to modelling the Anthropocene, *Global Environmental Change*, 39, 328–340, <https://doi.org/10.1016/j.gloenvcha.2015.08.007>, 2016.
- Vousdoukas, M. I., Ranasinghe, R., Mentaschi, L., Plomaritis, T. A., Athanasiou, P., Luijendijk, A., and Feyen, L.: Sandy coastlines under threat of erosion, *Nat Clim Chang*, 10, 260–263, <https://doi.org/10.1038/s41558-020-0697-0>, 2020.
- 720 Wilkinson, M. D., Dumontier, M., Aalbersberg, I. J., Appleton, G., Axton, M., Baak, A., Blomberg, N., Boiten, J. W., da Silva Santos, L. B., Bourne, P. E., Bouwman, J., Brookes, A. J., Clark, T., Crosas, M., Dillo, I., Dumon, O., Edmunds, S., Evelo, C. T., Finkers, R., Gonzalez-Beltran, A., Gray, A. J. G., Groth, P., Goble, C., Grethe, J. S., Heringa, J., t Hoen, P. A. C., Hoof, R., Kuhn, T., Kok, R., Kok, J., Lusher, S. J., Martone, M. E., Mons, A., Packer, A. L., Persson, B., Rocca-Serra, P., Roos, M., van Schaik, R., Sansone, S. A., Schultes, E., Sengstag, T., Slater, T., Strawn, G., Swertz, M. A., Thompson, M., van der Lei, J., van Mulligen, E., Velterop, J., Waagmeester, A., Wittenburg, P., Wolstencroft, K., Zhao, J., and Mons, B.: Comment: The FAIR Guiding Principles for scientific data management and stewardship, *Sci Data*, 3, <https://doi.org/10.1038/sdata.2016.18>, 2016.



730 Zhang, T.: Influence of the seasonal snow cover on the ground thermal regime: An overview, *Reviews of Geophysics*, 43, <https://doi.org/https://doi.org/10.1029/2004RG000157>, 2005.

Zhang, T., Barry, R. G., Knowles, K., Heginbottom, J. A., and Brown, J.: Statistics and characteristics of permafrost and ground-ice distribution in the Northern Hemisphere, *Polar Geography*, 31, 47–68, <https://doi.org/10.1080/10889370802175895>, 2008.

735