

Calibration of Absorbing Boundary Layers for Geoacoustic Wave Modeling in Pseudo-Spectral Time-Domain Methods

Carlos Spa¹, Otilio Rojas^{1,2}, and Josep de la Puente¹

¹Barcelona Supercomputing Center. Barcelona, Spain.

²Department of Computer Science of Universidad Central de Venezuela, Caracas, Venezuela.

Correspondence: Carlos Spa (cspacarv@bsc.es)

Abstract. This paper develops a calibration methodology of the artificial absorbing techniques typically used by Fourier pseudo-spectral time-domain (PSTD) methods for geoacoustic wave simulations. Specifically, we consider the damped wave equation (DWE) that results from adding a dissipation term to the original wave equation, the sponge boundary layers (SBL) that apply an exponentially decaying factor directly to the wavefields, and finally, a classical split formulation of the Perfectly Matched ~~Layers~~ Layer (PML). These three techniques belong to the same family of absorbing boundary layers (ABL), where outgoing waves and edge reflections are progressively damped across a grid zone of N_{ABL} consecutive layers. The ABLs used are compatible with a pure Fourier formulation of PSTD. We first characterize the three ABL with respect to multiple sets of N_{ABL} and their respective absorption parameter for homogeneous media. Next, we validate our findings in heterogeneous media of increasing complexity, starting with a layered medium and finishing with the SEG/EAGE 3-D Salt model. Finally, we algorithmically compare the three PSTD-ABL methods in terms of memory demands and computational cost. An interesting result is that PML, despite outperforming the absorption of the other two ABLs for a given N_{ABL} value, requires approximately double the computational time. The parameter configurations reported in this article, can be readily used for PSTD simulations in other test cases, and the ABL calibration methodology may be applied to other wave propagation schemes.

Copyright statement. No copyright statement and no credit

1 Introduction

The Fourier Pseudo-Spectral Time-Domain (PSTD) method has been applied to wave propagation problems in, e.g., electromagnetism Filoux et al. (2008), photonics Pernice (2008); Li et al. (2000), room acoustics Spa et al. (2011), or outdoor acoustics Hornikx et al. (2010), among others. It is based upon replacing the spatial derivatives with their equivalent in the Fourier domain. If computed on Cartesian grids, the spatial accuracy order of PSTD is proportional to the amount of grid nodes in each direction and wavefields can be accurately modelled with as few

as two points per minimum wavelength, i.e. only limited by the Nyquist-Shannon theorem. The frugal requirements of the method made it popular in early applications to seismic modeling in the 1980's, given the limited
25 computer memories available at the time. For example, we find Kosloff and Baysal (1982); Fornberg (1987, 1988);
Etgen and Dellinger (1989); Daudt et al. (1989). Recent applications have focused on complex Earth models and
parallel implementations, see for instance Klin et al. (2010); Peng and Cheng (2016); Xie et al. (2016, 2018). PSTD
30 applications in geophysics are typically defined on unbounded domains or half-spaces, thus requiring effective
numerical methods to avoid reflections from the computational boundaries of the domain under study. This is a
restriction that can be found in all other numerical methods for wave propagation, but is more relevant for PSTD
methods. The main reason is that Fourier transforms assume periodicity of wavefields at domain boundaries.
A decaying value of the variables towards zero at the boundaries is a possible solution that ensures periodicity.
However, if there are imperfections in such decay, strong numerical errors related with the Gibbs phenomenon
Fornberg (1998); Canuto et al. (1988) can manifest. Periodicity at artificial boundaries can be achieved, for ex-
35 ample, by means of absorbing boundary layers (ABL), where outgoing waves and edge reflections are gradually
attenuated along several grid layers until reaching the domain's boundary. Such ABL are characterized by the
balance between the number of absorbing layers used before each boundary and the parameters chosen to control
the rate of the absorption, i.e. how abruptly the absorption increases at each layer of the ABL. Too strong
an absorption profile will result in reflected energy within the absorbing layers and too weak ~~and an~~ absorption
40 profile will result in high-amplitude waves reaching the boundary and thus reflecting back into the domain.

It is worth considering that ABL are not the only techniques used to absorb waves in numerical simulations. For
example, Reynolds- or Higdon-type absorbing boundary conditions (ABC) Reynolds (1978); Higdon (1986, 1987)
impose values on the variables directly at the boundary, usually splitting the wave equation into one-sided ver-
sions locally. Nevertheless, such ABCs have not been adopted in PSTD methods, to our knowledge, and thus are
45 not part of this work.

The first ABL technique that we will consider in the present work is the damped wave equation (DWE) Israeli
and Orszag (1981) that follows a simple analytical formulation by adding a dissipative term directly to the acous-
tic wave equation. Remarkably, the physical connotation of the damping term facilitates the formal analysis of
reflection and transmission coefficients at the ABL region for acoustic waves, and also enables similar formula-
50 tions and analyses of DWE for alternative propagation models. Such formulations and studies were undertaken
in the pioneering work Kosloff and Kosloff (1986), that also presents an early DWE application to 2-D PSTD acous-
tic modeling. Recently, Spa et al. (2014) presented an analytical and numerical study on optimal damping pro-
files of DWE applied to PSTD acoustic wave propagation. Besides the aforementioned studies we have found no
literature analyzing DWE for PSTD. Additional studies using DWE for a variety of wave phenomena and finite
55 difference (FD) methods can be found in Israeli and Orszag (1981), Sochacki et al. (1987) and Bodony (2006).

The second ABL technique that will be analyzed is the sponge boundary layer (SBL) proposed in Cerjan et al.
(1985). Here, the amplitude of wavefields are progressively attenuated by directly applying to them a damping

factor of increasing value at the absorbing layers. This technique does not stem from a modified wave equation and its underlying principles are unclear. Nevertheless, Cerjan et al. (1985) provided with a recommendation regarding ABL size and damping factor and, due to its simplicity, SBL has been widely used for PSTD applications Reshef et al. (1988); Fornberg (1998). There exist several applications to FD schemes as well, such as Bording (2004); Dolenc (2006); Matsumoto et al. (2009). In particular, Bording (2004) proposes alternative optimal values for SBL size and damping.

The third and last ABL analyzed are the Perfectly Matched [Layers-Layer](#) (PML). PML were introduced in electromagnetism by Bérenger (1994, 1996) and rapidly became an absorbing method of choice in this field, see e.g. Chew and Weedon (1994); Kaufmann et al. (2008); Bérenger (2015). Following its success for electromagnetism, the method was successfully adapted to seismic modelling (e.g., Chew and Liu (1996); Komatitsch and Tromp (2003); Kristek et al. (2009)). The coupling of PML to PSTD methods starts with the pioneer work by Liu Liu (1998a) to simulate acoustic wave propagation in heterogeneous media, followed by studies in similar and more general rheologies Liu (1998b); Klin et al. (2010); Giroux (2012); Spa et al. (2014); Xie et al. (2016). The analytical, continuous, PML formulation results in a reflection-less interface between physical domain and ABL. However, upon discretization, the discrete damping profiles reflect energy back to the domain and, more importantly, instabilities arise. Therefore a problem-dependent optimization of PML parameters must be undertaken to find stable and efficient discrete implementations. In the case of FD methods, some examples include Lisitsa (2000); Komatitsch and Martin (2007); Kristek et al. (2009).

In this work, we compare the characteristics of all three ABL methods mentioned above combined with PSTD schemes. In Section 2, we present the mathematical formulation of the ABL methodologies under study, in the framework of PSTD methods, as well as theoretical aspects specific to each of them. In Section 3, we perform a calibration of ABL parameters in homogeneous media, by means of analyzing the energy absorbed and the accuracy of seismic experiments for a massive simulation set. In Section 4 we use results from the calibration and analyze their validity for two different heterogeneous test cases. Finally, in Section 5, we introduce an analysis regarding the memory footprint and computational time required by each ABL technique in a realistic application. Finally, in Section 6, we present our concluding remarks and future work.

2 The Fourier PSTD method and ABL types

The Fourier PSTD method can be considered a particular case of finite differences (FD) on Cartesian grids where spatial derivatives are substituted with differentiation in the spectral (Fourier) domain. This means that any spatial derivative requires a forward and inverse Fourier transform for the direction differentiated. By multiplying the variable in the spectral domain by $(\iota k)^n$ we obtain the n -th derivative of the variable, with ι the imaginary unit and k the wave number. In the particular case of the linear wave equation, or constant-density acoustic wave equation, two formulations are popular. On one hand the first-order velocity-pressure formulation, also known

as Euler formulation, in absence of forcing terms, reads

$$\frac{\partial p}{\partial t} = -\rho c^2 \nabla \cdot \mathbf{v} + s, \quad (1)$$

$$\rho \frac{\partial \mathbf{v}}{\partial t} = -\nabla p, \quad (2)$$

where p is pressure, \mathbf{v} the particle velocity, ρ the density (taken constant and homogeneous), c the wave speed and s a known source term. On the other hand the second-order equation where the only variable is pressure, which reads

$$\frac{\partial^2 p}{\partial t^2} = c^2 \Delta p + \frac{\partial s}{\partial t}, \quad (3)$$

where Δ is the Laplacian operator. The parameter $c = c(x, y, z)$ can vary spatially and the variables $p = p(x, y, z, t)$ and $\mathbf{v} = \mathbf{v}(x, y, z, t)$ can also evolve in time. The source term $s = s(x, y, z, t)$ will be omitted in the following. We restrict our analysis to sources that are finite-bounded in space and time and differentiable.

The Euler formulation tends to be less memory efficient than the second-order formulation, because it requires more spatial variables to be stored and differentiated, but is well suited to some numerical applications where first derivatives are relevant. This is the case, for example, of the classical split PML formulation that depends on directional derivatives of both the pressure and velocity fields. Other ABL such as DWE and SBL do not require additional differentiation and thus can be solved directly using the second-order formulation.

In the following we will use Cartesian regular grids, where all spatial differential operators employ forward and inverse 1-D Fast Fourier Transforms (FFT) along each Cartesian direction. We will consider constant time and spatial sampling, δ_t and δ , respectively. Hence we discretize space and time according to $(x, y, z, t) \sim (i\delta, j\delta, l\delta, n\delta_t)$ and will use the triplet (i, j, l) to describe any point in the spatial grid, while using the n index to describe the time step. Under the aforementioned discretization, the Laplacian operator applied to the variable p results in

$$\Delta p|_{i,j,l}^n \approx \mathcal{F}_x^{-1} [(\iota k_x)^2 \mathcal{F}_x[p|_{:,j,l}^n]] + \mathcal{F}_y^{-1} [(\iota k_y)^2 \mathcal{F}_y[p|_{i,:,l}^n]] + \mathcal{F}_z^{-1} [(\iota k_z)^2 \mathcal{F}_z[p|_{i,j,:}^n]] \quad , \quad (4)$$

where \mathcal{F} and \mathcal{F}^{-1} denote the 1-D discrete Fourier Transform and its inverse, respectively, and the subindex indicates the direction of transformation. Furthermore $\mathbf{k} = (k_x, k_y, k_z)$ is the wavenumber vector, $\iota = \sqrt{-1}$ and the $:$ symbol refers to the indexes affected by the transforms. Our computational domains may be either fully unbounded or a half space. In the former case ABLs apply to all six faces of the domain whereas in the latter five faces require ABLs and at the top face a free-surface condition is applied. In all examples in this work we will use second-order explicit time stepping based upon finite-differencing the time derivatives. Higher-order in time versions of PSTD can be found in Spa et al. (2020), which could be applied to the ABLs described here with some modifications.

2.1 Generalizations of the Absorbing Boundary Layers

All ABLs considered in the following will be presented using a unified representation of the grid. We will assume that the computational domain includes both grid points of the physical domain and grid nodes of the absorbing

layers. The grid of the physical domain has size (N_x, N_y, N_z) and we will consider N_{ABL} nodes added at each of the six faces of the domain as absorbing boundary layers. Furthermore, an additional node at the boundary of the computational domain is added, whose variable value is forced to zero at each time step. It is important to remark that these extra nodes are essential to avoid the Gibbs phenomenon at the edges of the spatial mesh. Note that spectral derivatives require imposing periodicity to the spatial distributions, therefore in this way, we ensure spatial periodicity in any direction of the mesh.

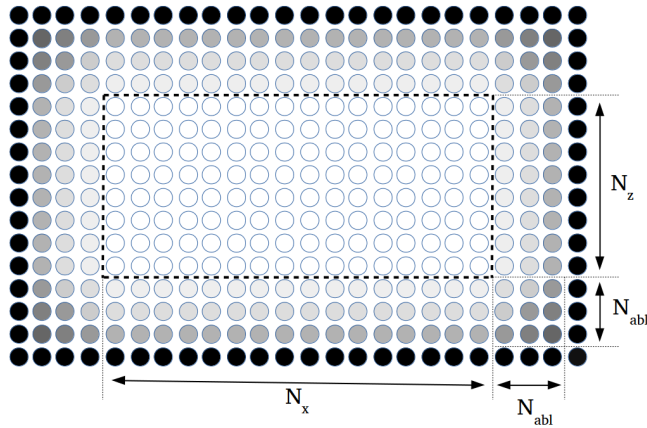


Figure 1. A vertical cross section of the computational mesh, along a y grid plane, where d is shown in a grey colored scale. Finally, black dots are nodes where pressure is forced to have a value 0.

Figure 1 illustrates a 2D slice of such a grid. The area inside the dashed line is the physical domain and the outside grid nodes belong to the absorbing layers and boundary. In the following we will consider that the extent of source terms is confined to the physical domain. Each grid node within the absorbing layers has a characteristic distance to the physical domain named d where $d_{i,j,l} = \sqrt{(d_{i,j,l}^x)^2 + (d_{i,j,l}^y)^2 + (d_{i,j,l}^z)^2}$ and $d_{i,j,l}^\beta$ is the distance in grid nodes from (i, j, l) to the closest node of the main grid in the $\beta \in \{x, y, z\}$ direction. In the figure, the gray scale represents the value of d at each point of the boundary layers. The definition of suitable absorption parameters for each ABL that depend explicitly on d , and become zero inside the main grid (i.e. when $d = 0$) allows all ABL formulations in the following to use a global updating scheme. In other words, the same scheme is applied equally to all grid points in the computational domain, regardless of them being part of the physical domain or the absorbing layers. There remains a last issue in order to solve the wave equation in the computational domain from parameters of the physical domain: The velocity $c(x, y, z)$ is only defined within the physical domain. However we need to assign a velocity value to each node in the computational domain in order to solve the wave equation. We choose in the following a direct continuation strategy where all absorbing-layer nodes take their

velocity value from the closest physical-domain grid-node velocity value. For a homogeneous model this result in the whole computational domain sharing the c value of the physical domain.

2.2 The damped wave equation (DWE)

145 The DWE is derived from the linear wave equation (3) by adding a dissipative term that depends on the first-order temporal derivative of the acoustic pressure, and reads

$$\frac{\partial^2 p}{\partial t^2} + \sigma \frac{\partial p}{\partial t} = c^2 \Delta p, \quad (5)$$

where $\sigma = \sigma(x, y, z)$ is the coefficient of the damping term.

We use the standard second-order and central FD approximations for both temporal derivatives in (5). Fur-
150 thermore, we split the discrete acoustic pressure into Cartesian projections, i.e.,

$$p|_{i,j,l}^{n+1} = p_x|_{i,j,l}^{n+1} + p_y|_{i,j,l}^{n+1} + p_z|_{i,j,l}^{n+1}, \quad (6)$$

where these acoustic projections $p_x|_{i,j,l}^{n+1}$, $p_y|_{i,j,l}^{n+1}$ and $p_z|_{i,j,l}^{n+1}$, are updated according to

$$\begin{aligned} p_x|_{i,j,l}^{n+1} &= \frac{\sigma_{i,j,l} \delta_t - 2}{\sigma_{i,j,l} \delta_t + 2} p_x|_{i,j,l}^{n-1} + \frac{4}{\sigma_{i,j,l} \delta_t + 2} p_x|_{i,j,l}^n + \frac{2(c_{i,j,l} \delta_t)^2}{\sigma_{i,j,l} \delta_t + 2} \mathcal{F}_x^{-1} \left[(\ell k_x)^2 \mathcal{F}_x [p|_{:,j,l}^n] \right], \\ p_y|_{i,j,l}^{n+1} &= \frac{\sigma_{i,j,l} \delta_t - 2}{\sigma_{i,j,l} \delta_t + 2} p_y|_{i,j,l}^{n-1} + \frac{4}{\sigma_{i,j,l} \delta_t + 2} p_y|_{i,j,l}^n + \frac{2(c_{i,j,l} \delta_t)^2}{\sigma_{i,j,l} \delta_t + 2} \mathcal{F}_y^{-1} \left[(\ell k_y)^2 \mathcal{F}_y [p|_{i,;,l}^n] \right], \\ 155 \quad p_z|_{i,j,l}^{n+1} &= \frac{\sigma_{i,j,l} \delta_t - 2}{\sigma_{i,j,l} \delta_t + 2} p_z|_{i,j,l}^{n-1} + \frac{4}{\sigma_{i,j,l} \delta_t + 2} p_z|_{i,j,l}^n + \frac{2(c_{i,j,l} \delta_t)^2}{\sigma_{i,j,l} \delta_t + 2} \mathcal{F}_z^{-1} \left[(\ell k_z)^2 \mathcal{F}_z [p|_{i,j,;}^n] \right]. \end{aligned} \quad (7)$$

We first update the acoustic projections by solving (7) and then compute the acoustic pressure at time t^{n+1} by means of (6), that results in an explicit time-marching method. Where $\sigma_{i,j,l} = 0$, the scheme reduces to a classical second-order in time explicit PSTD scheme for the second-order wave equation. In practical terms, DWE is applied to unbound wave propagation problems by assuming a zero σ inside the physical domain slowly increasing
160 its value as we approach the boundary. The larger the value of σ the higher the absorption, although too steep a spatial change in σ can lead to artificial reflections. Here, we consider a linear variation of σ with respect to distance to the main grid of physical simulation, namely

$$\sigma_{i,j,l} = \sigma_0 \frac{d_{i,j,l}}{N_{\text{ABL}}}, \quad (8)$$

We remark that we have found the dimensionless quantity $\sigma_0 \delta_t$ better for the characterization of DWL absorption
165 than σ_0 , hence when calibrating DWL we will use $(N_{\text{ABL}}, \sigma_0 \delta_t)$ tuples to characterize different experiments for a fixed physical domain. Finally, it is worth to mention that there exist other profiles that perform better, see for instance Spa et al. (2014) that they suggest order 3 and 4 polynomial absorbing profiles. However, in this analysis, we chose a linear profile because we prefer to focus on both, the calibration methodology and the design of the numerical experiments, rather on studying specific absorbing profiles of each method.

170 2.3 The sponge boundary layer (SBL)

Our second ABL under study is the SBL technique presented by Cerjan in Cerjan et al. (1985). The main formulation is based upon the second-order wave equation for pressure p , but also requires its temporal derivative \dot{p} as an auxiliary dependent variable. The reason for this requirement is that part of the damping is applied directly on \dot{p} . As a consequence, in PSTD we adopt a temporal staggered sampling of p and \dot{p} , so that both variables are
 175 computed with central differences of δ_t step. The time marching algorithm consists on a two-step scheme, where \dot{p} is computed at the temporal half step $n + 1/2$, for a subsequent computation of p at the full step $n + 1$. Similar to DWE, we also split both dependent variables into three Cartesian projections, and each projection is computed independently. The scheme starts with a first step

$$\begin{aligned}
 \dot{p}_x|_{i,j,l}^{n+\frac{1}{2}} &= \mu_{i,j,l} \cdot \dot{p}_x|_{i,j,l}^{n-\frac{1}{2}} + \mu_{i,j,l} \cdot c_{i,j,l}^2 \delta_t \cdot \mathcal{F}_x^{-1} \left[(\iota k_x)^2 \mathcal{F}_x [p|_{:,j,l}^n] \right], \\
 180 \quad \dot{p}_y|_{i,j,l}^{n+\frac{1}{2}} &= \mu_{i,j,l} \cdot \dot{p}_y|_{i,j,l}^{n-\frac{1}{2}} + \mu_{i,j,l} \cdot c_{i,j,l}^2 \delta_t \cdot \mathcal{F}_y^{-1} \left[(\iota k_y)^2 \mathcal{F}_y [p|_{i,:l}^n] \right], \\
 \dot{p}_z|_{i,j,l}^{n+\frac{1}{2}} &= \mu_{i,j,l} \cdot \dot{p}_z|_{i,j,l}^{n-\frac{1}{2}} + \mu_{i,j,l} \cdot c_{i,j,l}^2 \delta_t \cdot \mathcal{F}_z^{-1} \left[(\iota k_z)^2 \mathcal{F}_z [p|_{i,j,:}^n] \right], \tag{9}
 \end{aligned}$$

where $\mu_{i,j,l}$ is a space-dependent absorption parameter, defined below, whereas the second step reads

$$\begin{aligned}
 p_x|_{i,j,l}^{n+1} &= \mu_{i,j,l} \left[p_x|_{i,j,l}^n + \delta_t \cdot \dot{p}_x|_{i,j,l}^{n+\frac{1}{2}} \right], \\
 p_y|_{i,j,l}^{n+1} &= \mu_{i,j,l} \left[p_y|_{i,j,l}^n + \delta_t \cdot \dot{p}_y|_{i,j,l}^{n+\frac{1}{2}} \right], \\
 185 \quad p_z|_{i,j,l}^{n+1} &= \mu_{i,j,l} \left[p_z|_{i,j,l}^n + \delta_t \cdot \dot{p}_z|_{i,j,l}^{n+\frac{1}{2}} \right]. \tag{10}
 \end{aligned}$$

Equations (9) and (10), followed by the step given by Eq. (6), result in an explicit time-marching scheme. In the present work we follow Cerjan et al. (1985), to define values of $\mu_{i,j,l}$ as follows

$$\mu_{i,j,l} = e^{-(\mu_0 \cdot d_{i,j,l})^2}, \tag{11}$$

where μ_0 is SBL's dimensionless absorbing parameter. We will explore (N_{ABL}, μ_0) tuples for a fixed physical do-
 190 main in upcoming sections. It is important to mention that this profile is neither polynomial nor dependent on N_{ABL} . As we mentioned in the previous subsection, we do not focus our attention on particular profiles, but rather on a methodology to calibrate the main parameters. Definitely there should be a dependence between the parameter and N_{ABL} . However, as our methodology always analyzes tuples of N_{ABL} and the parameter, such dependence loses relevance, at least for our purposes.

195 2.4 The Perfectly Matched Layers Layer (PML)

The PML's formulation [Bérenger \(1994\)](#), [Bérenger \(1994\)](#), requires first derivatives of the absorbed variables, in our case: pressure p and velocity \mathbf{v} . The first-order Euler formulation of the wave equation (2) involves all direc-
 tional spatial derivatives required by the PML implementation, thus it is natural to adopt this formulation for

PML. The PSTD-PML method is a two-step time-staggered marching algorithm, that first updates the particle
200 velocity components,

$$\begin{aligned}
v_x|_{i+\frac{1}{2},j,l}^{n+\frac{1}{2}} &= \frac{1}{1 + \alpha_{i,j,l}^x \delta_t} \left(v_x|_{i+\frac{1}{2},j,l}^{n-\frac{1}{2}} - \frac{\delta_t}{\rho} \cdot \mathcal{F}_x^{-1} [\iota k_x \mathcal{F}_x [p|_{:,j,l}^n]] \right), \\
v_y|_{i,j+\frac{1}{2},l}^{n+\frac{1}{2}} &= \frac{1}{1 + \alpha_{i,j,l}^y \delta_t} \left(v_y|_{i,j+\frac{1}{2},l}^{n-\frac{1}{2}} - \frac{\delta_t}{\rho} \cdot \mathcal{F}_y^{-1} [\iota k_y \mathcal{F}_y [p|_{i,::l}^n]] \right), \\
v_z|_{i,j,l+\frac{1}{2}}^{n+\frac{1}{2}} &= \frac{1}{1 + \alpha_{i,j,l}^z \delta_t} \left(v_z|_{i,j,l+\frac{1}{2}}^{n-\frac{1}{2}} - \frac{\delta_t}{\rho} \cdot \mathcal{F}_z^{-1} [\iota k_z \mathcal{F}_z [p|_{i,j,:}^n]] \right),
\end{aligned} \tag{12}$$

to finally compute the values of each projection of the acoustic pressure,

$$\begin{aligned}
205 \quad p_x|_{i,j,l}^{n+1} &= (1 - \alpha_{i,j,l}^x \delta_t) \cdot p_x|_{i,j,l}^n - \rho c_{i,j,l}^2 \delta_t \cdot \mathcal{F}_x^{-1} [\iota k_x \mathcal{F}_x [v_x|_{:,j,l}^{n+\frac{1}{2}}]], \\
p_y|_{i,j,l}^{n+1} &= (1 - \alpha_{i,j,l}^y \delta_t) \cdot p_y|_{i,j,l}^n - \rho c_{i,j,l}^2 \delta_t \cdot \mathcal{F}_y^{-1} [\iota k_y \mathcal{F}_y [v_y|_{i,::l}^{n+\frac{1}{2}}]], \\
p_z|_{i,j,l}^{n+1} &= (1 - \alpha_{i,j,l}^z \delta_t) \cdot p_z|_{i,j,l}^n - \rho c_{i,j,l}^2 \delta_t \cdot \mathcal{F}_z^{-1} [\iota k_z \mathcal{F}_z [v_z|_{i,j,:}^{n+\frac{1}{2}}]].
\end{aligned} \tag{13}$$

Together with equation (6) we have a complete updating scheme. Above, the space-dependent parameter $\alpha =$
 $(\alpha^x, \alpha^y, \alpha^z)$ is the vector quantity that controls PML absorption. Contrary to DWE or SBL, whose absorption de-
210 pends, locally, only on the nodal distance to the main grid, in PML the outward direction from the physical do-
main is equally relevant. Similar to DWE (see eq. 8), we define a linear increase of α components up to a maximum
absorbing value α_0 , i.e.

$$\alpha_{i,j,l} = \alpha_0 \frac{d_{i,j,l}}{N_{ABL}} \hat{\mathbf{d}}_{i,j,l}, \tag{14}$$

where $\hat{\mathbf{d}}$ is the unit vector from (i, j, l) to the closest point in the physical domain's grid, namely

$$215 \quad \hat{\mathbf{d}}_{i,j,l} = \left(\frac{d^x}{d_{i,j,l}}, \frac{d^y}{d_{i,j,l}}, \frac{d^z}{d_{i,j,l}} \right). \tag{15}$$

Similar to DWL, we remark that we have found the dimensionless quantity $\alpha_0 \delta_t$ to be better at characterizing
PML absorption than α_0 , hence when calibrating PML we will use $(N_{ABL}, \alpha_0 \delta_t)$ tuples to characterize different
experiments for a fixed physical domain.

Finally, we would like to mention that the velocity-pressure scheme (12) and (13) is stated on a staggered spatial
220 mesh, where shifting the spectral derivatives is critical to eliminate artifacts produced by the source generation,
as previously reported in Ozdenvar and McMechan (1996).

2.5 Stability Bound and Dispersion Error

Before our application exercises, we briefly comment on the stability of PSTD and its dispersion properties. At
uniform grids and using second-order explicit time integration, a Von-Neumann analysis of PSTD in unbounded
225 acoustic media yields the following bound for conditional stability

$$S = \max\{c_{i,j,l}\} \frac{\delta_t}{\delta} \leq \frac{2}{\pi\sqrt{3}}, \tag{16}$$

In (16), S is the Courant-Friedrichs-Lewy (CFL) number. In the case of a homogeneous medium $c_{i,j,l} = c$, this theoretical analysis also leads to the following expression for dispersion errors

$$\frac{c_{\text{num}}}{c} = \frac{\pi \delta_t}{T \sin\left(\frac{\pi \delta_t}{T}\right)}. \quad (17)$$

230 Above, c_{num} is the numerical wave speed and T is the period of the given plane wave used in the Von-Neumann analysis. Thus, the spatial and temporal grid samplings must fulfill the inequality in (16) to guarantee stable simulations. However, the numerical accuracy of PSTD simulations is mainly driven by the dispersion errors quantified by (17), which only depend on the time step. As a consequence, in practical PSTD applications, the spatial step can be fixed to the largest value allowed by the Nyquist sampling limit, but the time step must be
 235 taken much smaller than the one allowed by the stability bound, in order to control dispersion anomalies. In other words, low-dispersive accurate PSTD simulations can be achieved using optimal S values, which are far below the limit established by Eq. (16). These Von-Neumann analytical results and suitable choices on space and time resolution are reported in the broad literature on PSTD methods (e.g., Gazdag (1981); Fornberg (1998, 1987), and also Spa et al. (2020) for a recent review).

240 The coupling of the ABL techniques presented above to a PSTD method does not alter the stability and dispersion properties of PSTD in lossless unbound acoustic media. The physical attenuation experienced by acoustic waves at any frequency along the ABL regions only reinforces the boundedness of the numerical solution and thus favors the damping of short period oscillations induced by dispersion.

3 Calibration of ABL Parameters

245 In the previous Section we have written the formulations of all three ABL and remarked that two main parameters control absorption in each of them. Namely, the size of the absorbing layer N_{ABL} , which is a parameter shared by all ABLs, and a specific parameter that depends on each ABL, namely σ_0 , μ_0 and α_0 for DWE, SBL and PML, respectively. In the case of DWL and PML the absorption parameters have dimension of inverse time, thus in order to analyze absorption in a dimensionless framework we will use the tuples $(N_{\text{ABL}}, \sigma_0 \delta_t)$, (N_{ABL}, μ_0)
 250 and $(N_{\text{ABL}}, \alpha_0 \delta_t)$ for DWE, SBL and PML, respectively. Our study aims at characterizing the absorption profiles, namely absorption as a function of the tuples described above, of all three ABLs by means of experimentation. [On For](#) homogeneous media, several authors have explored absorption parameter optimization through formal reflectivity and transmission analyses, for a particular ABL technique. For instance, Israeli and Orszag (1981); Kosloff and Kosloff (1986); Spa et al. (2014) formally study damping profiles in the case of DWE, while analyses on
 255 PML parameterization for elastodynamics can be found in Chew and Liu (1996); Collino and Tsogka (2001). For seismic wave propagation, ~~Gao et al.~~ Gao et al. (2017) compare the empirical performance of different absorbing techniques on acoustic heterogeneous test cases using Finite Difference methods.

3.1 Methodology

Our characterization effort involves 1) finding appropriate tests for which a reference exists, 2) finding suitable
 260 metrics that measure the absorption performance of the methods against the reference, 3) establishing absorption
 thresholds that classify the absorption and 4) for each classification and ABL, finding the parameter tuple
 that requires less the least absorption nodes or N_{ABL} . We will refer to such tuple, for each ABL, as the *optimal*
 tuple. In this sense optimality refers to reaching the desired absorption with the minimum possible number of
 grid points.

265 The first step to create an absorption measure is quantifying the total energy in the physical domain (not including the ABL) at any given time sample. Thus, we define the following quantity which is proportional to the (discrete) \mathcal{L}^2 norm,

$$E|^{n} = \sum_{i=1}^{N_x} \sum_{j=1}^{N_y} \sum_{l=1}^{N_z} (p|_{i,j,l}^n)^2, \quad (18)$$

and the corresponding dimensionless proxy,

$$270 \hat{E}|^n = \frac{E|^{n}}{\max_{n \in [0, N_t]} E|^{n}}, \quad (19)$$

where the energy $E|^{n}$ is normalized by the maximum energy value present in the problem. Another key ingredient to create an absorption measure consists on building a proper reference signal, i.e. namely \hat{E}_{REF} . Let us assume that this signal can be constructed whether numerical simulations or analytical expressions. In any case, the following quantity is defined,

$$275 \Delta \hat{E} = \sum_{n=n_0}^{N_t} \left| \hat{E}_{REF}|^n - \hat{E}|^n \right| \delta_t. \quad (20)$$

Note that n_0 can be any value within the discrete time interval and its value, as well as the computation of \hat{E}_{REF} , would be obtained depending on the specifications of the problem. For example, in problems where it is impossible to characterize the energy via analytical expressions, we will use numerical simulations to compute the reference solutions in the whole discrete time range, i.e. $n_0 = 0$. In these cases, when the scenarios and the source
 280 characterizations are complex, we will build reference solutions by considering simulations with large number of ABL compared to the original simulation carried out to obtain \hat{E} . This way, we ensure lower contributions due to boundary reflexions getting an idea about the sensibility on the ABL implementation with respect to the number of absorbing nodes, N_{ABL} . In other words, $\Delta \hat{E}$ provides information on the differences between two signals, the computed signal, \hat{E} and the reference signal, \hat{E}_{REF} . It means that low values of $\Delta \hat{E}$ represent strong similarities
 285 on both signals whereas high values of $\Delta \hat{E}$ exhibit differences between them.

On the other side, for problems where the domain has a constant propagation velocity, c , and the energy is injected by means of a source that is punctual and finite in time. If we know when the source stops injecting

energy and when the energy inside the physical domain must be zero (the time iteration n_0), we can assume that $\hat{E}_{REF}|^n = 0$ for $n \geq n_0$ and, therefore, we define,

$$290 \quad \epsilon = \log(\Delta \hat{E}) = \log\left(\sum_{n=n_0}^{N_t} \hat{E}|^n \delta_t\right). \quad (21)$$

Instead of Eq. (20) that would be a measure of similarity between two signals, ϵ represents the remanent energy obtained due to the ABL approximation. In fact, it is worth pointing out that, under these conditions, the energy inside the physical domain at $n \geq n_0$ should be null and, **consequently**, it means that Eq. (21) provides direct information about the absorbing features of the ABL implementation. Note that, in the next section, the calibration of the ABL approximations has been done by using the ϵ definition through Eq. (21). This way, we are able to measure the absorption performance of the three different methods under a same reference solution.

Moreover, It is important to highlight that the methodology for calibration of ABLs presented in this work is based upon three main components. Firstly, using representative models, secondly, establishing suitable metrics for absorption and finally, reducing the calibration to two parameters. We are not adding any assumptions regarding the underlying PDEs used (linear acoustic waves, in our case). Similarly there are no assumptions tied to the numerical method (pseudospectral time-domain, in our case). Nevertheless two modifications are foreseen for broadening the applicability of the method. On one hand, in the case of using other physical models, we would need to modify Eq. (21) with an alternate energy proxy. On the other hand, in the case of using other numerical methods, we may need to replace N_{ABL} with an alternative parameter that is a measure of the thickness of the ABL with respect to the minimum wavelength. The actual results of the calibration, of course, would be different for other PDEs and methods, but the calibration methodology is only expected to require the aforementioned, minor, modifications.

Finally mention that, for all scenarios in the following, the main grid remains identical and we modify only the size of the ABL zone and its associated absorption parameter. We will always exploit the spatial discretization characteristics of PSTD, thus using the coarsest grid possible at 2 points per minimum wavelength (ppw). All sources used will be point sources in space and Ricker wavelets in time. All numerical experiments that follow use our bespoke PSTD-ABL implementations using the g++ C compiler version 4.5.3.1-1, under -lm and -O3 optimization flags, and linking the FFTW3 library version 3.3.4-2. All simulations have been performed by an Intel Core i7-6820HK processor running at 2.70GHz under the Linux operating system.

315 **3.2 Calibration for a homogeneous cube**

We first consider a cube of size $500 \times 500 \times 500 \text{ m}^3$ with a constant wave velocity $c_{i,j,l} = 2000 \text{ m}\cdot\text{s}^{-1}$, and place a point source at the central location. The source time function is a Ricker wavelet with peak at 10 Hz, and hence a maximum frequency of $\approx 25 \text{ Hz}$, that excites a wavefield of minimum wavelength $\lambda_{\min} \approx 80 \text{ m}$. Note that we use a regularization of Dirac's delta function for the spatial component of point sources, which is a gaussian. In time

320 we chose a Ricker wavelet which is the second derivative of a gaussian. We attempt, with this process to avoid contributions beyond the Shannon-Nyquist sampling theorem.

We take a grid step of $\delta = 40$ m and a temporal step of $\delta_t = 0.002$ s, thus ensuring a stability number $S = 0.1$ that is less than 30% of the stability limit. For this example, the wavefields leave the main grid at $n_0 = 208$. This specific value of n_0 results from the maximum travel time from source to the corners of the domain (108 time steps) and the time needed to finish injecting 95% of the energy from the source wavelet (100 time steps). After n_0 the remaining energy in the domain comes from reflections at the ABL. As mentioned, we use Eq. (21) to measure the absorbing performance of the ABL implementations.

Next, we perform a numerical exploration of the N_{ABL} -absorption parameter pairs, using the samples in Table 1. For each ABL, we vary both N_{ABL} and their respective absorption parameter, thus resulting in 620 scenarios per ABL.

Table 1. Sampling of the absorption parameters and absorbing layer size used for parameter exploration, for each ABL

	N_{ABL}	$\sigma_0 \delta_t$ (DWE)	μ_0 (SBL)	$\alpha_0 \delta_t$ (PML)
min	4	0.001	0.001	0.001
max	34	0.31	0.0414	0.61
increment	1	0.0163	0.0021	0.032
samples	31	20	20	20

330

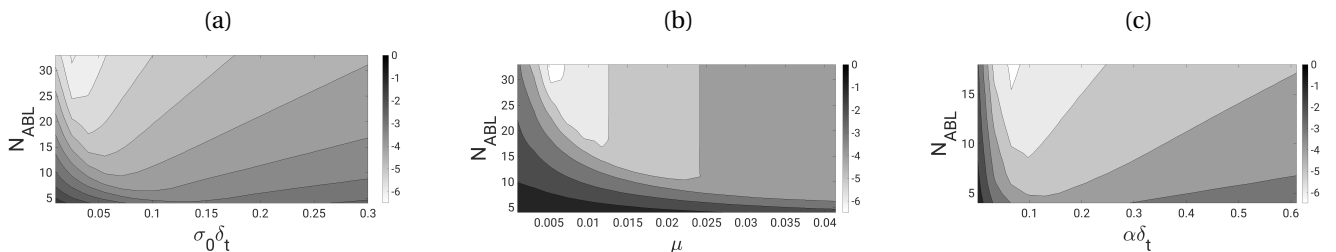


Figure 2. The grey scale depicts ϵ as a function of N_{ABL} and the absorbing parameters for (a) DWE, (b) SBL and (c) PML. Light greys indicate better absorption. Notice the smaller number of absorbing layers (vertical axis) used by PML.

Figure 2 depicts ϵ values for the parameter ranges considered in Table 1 that include results for DWE (a), SBL (b) and PML (c) techniques. In the case of PML we restrict the vertical axis to $N_{\text{ABL}} \leq 16$ as this results in already sufficient absorption of wavefields. For all cases there is an increase of absorption with N_{ABL} and we have a window of optimal absorption parameters which depends mildly on N_{ABL} . All ABL methods reach an absorption performance of $\epsilon < -6$ in the explored N_{ABL} range. PML is the most efficient technique because only requires $N_{\text{ABL}} = 16$ to achieve this ϵ threshold. Alternatively, DWE reaches the same absorption using $N_{\text{ABL}} = 32$, while

335

SBL employs $N_{\text{ABL}} = 30$. Both PML and DWE absorption improve consistently with N_{ABL} . Conversely, SBL seems less sensitive to increasing N_{ABL} and absorption seems to saturate after a given N_{ABL} value.

Table 2 shows, for several ϵ thresholds, which is the minimum N_{ABL} and coupled absorption parameter value. In the threshold range $-6 < \epsilon < -3.5$, DWE and PML deliver comparable accuracy, but the former needs at least twice the N_{ABL} value than the latter. Relative to DWE, SBL achieves same absorption for nearly similar N_{ABL} .

Finally, Figure 3 compares the time evolution of our energy proxy $\hat{E}|^n$ for each ABL technique, for three ϵ threshold values given in Table 2. For each ABL technique, significant differences on the \hat{E} magnitude among these three curves are early observed, soon after n_0 iterations. In the DWE and SBL cases, large differences of the absorption efficiency persist during all $N_t = 1000$ iterations, but slighter differences are observed in PML curves. In next section, these three reference parameter sets will be exercised and compared, in ABL applications to heterogeneous test cases.

Table 2. Optimal pairs of N_{ABL} and associated ABL parameter found for each ϵ threshold.

	DWE		SBL		PML	
Accuracy	N_{ABL}	$\sigma_0 \delta_t$	N_{ABL}	μ_0	N_{ABL}	$\alpha_0 \delta_t$
$\epsilon < -3$	5	0.086	7	0.031	4	0.065
$\epsilon < -3.5$	7	0.071	8	0.030	4	0.097
$\epsilon < -4$	10	0.056	11	0.020	5	0.097
$\epsilon < -4.5$	14	0.041	14	0.016	6	0.097
$\epsilon < -5$	18	0.041	17	0.012	9	0.097
$\epsilon < -5.5$	25	0.025	23	0.007	12	0.065
$\epsilon < -6$	32	0.025	30	0.005	16	0.065

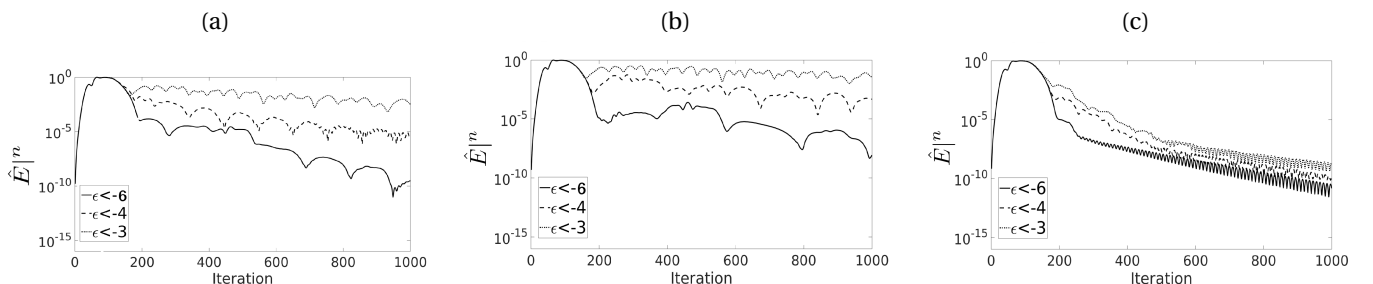


Figure 3. The time evolution of the energy proxy $\hat{E}|^n$ in logarithmic scale for the (a) DWE, (b) SBL and (c) PML techniques. ABL parameters are set as per Table 2.

3.3 Accuracy analysis for geophysical imaging

In addition to sheer energy absorption it is important to analyze the impact of our different ABL in practical
350 imaging applications. As a simple yet representative test, we analyze a reverse time migration (RTM) case in a ho-
mogeneous model with a single source and receiver. In reverse-time migration (see e.g., Claerbout et al. (1985))
an image, or reflectivity map, of the subsurface is obtained by means of two seismic simulations. A forward sim-
ulation propagates the source wavelet signal through the domain of interest, whereas a backward simulation
355 propagates the data recorded in the field for that same source, reverted in time. By correlating the wavefields
of forward and (time-reversed) backward simulations we generate the image of the subsurface, which indicates
regions of impedance in the subsurface that may have generated the observed data. RTM has the advantage over
other imaging modalities of supporting completely heterogeneous 3D velocity models, as well as incorporating
all finite-frequency phenomena associated with acoustic waves, such as multiple reflections or scattering. On
the other hand it is costly in terms of computation (it relies on simulations) and inherits all inaccuracies of the
360 wavefield simulation algorithms (e.g. imperfect boundaries) which may result in artifacts in the image. A calibra-
tion exercise frequent to imaging, and specifically to RTM, is known as impulse response image, [see for instance](#)
Claerbout et al. (1985); Ng (2007). In an impulse response a single-source image is generated by placing a single
hypothetical receiver at the same location as the source. The receiver may include several well known pulses,
which when *imaged* into the domain of interest, result in patterns that can be analyzed to assess how accurate
365 images can be obtained at different, e.g. depths or frequencies. For a homogeneous-model impulse response,
there is no preferred origin for the reflections, which are imaged as concentric half-spheres of finite width cen-
tered at the source/receiver locus. Furthermore, the amplitude of the resulting image is independent on energy
spread, and thus any disagreement between the expected and modelled image is due to modelling errors. In our
case, we choose to investigate the vertical image column of the impulse-response image that contains the source
370 (and receiver). For such simple configuration it is easy to obtain an exact solution to the problem, and hence
we can use a time-frequency analysis Kristekova et al. (2006) to check the quality of our image. Time-frequency
analysis typically refers to temporal signals. As in our case the image exists in the spatial domain, we can refer to
an analogous space-wavenumber analysis.

We use the same model, grid steps δ and δ_t , and wavelet as in Section 3.2 with the following exceptions: the do-
375 main size is enlarged to $4 \times 4 \times 4 \text{ km}^3$, and the source is placed at $(2, 2, 0) \text{ km}$. A receiver is located at the same point
as the source. The data signal, in this impulse response study, contains three pulses, equal in shape to the source
wavelet, but with peaks at 1, 2 and 3 seconds, respectively (see Figure 4 (a)). Given the homogeneous velocity
 $2000 \text{ m}\cdot\text{s}^{-1}$, the data is mapped in the image as three concentric half-spheres centered at the source/receivers
location and with radii 1, 2 and 3 km, respectively, see Figure 4. These particular radii are the distances compati-
380 ble with acoustic reflectors generating the data (i.e. three wiggles, at 1, 2 and 3 s). In order to assess the accuracy

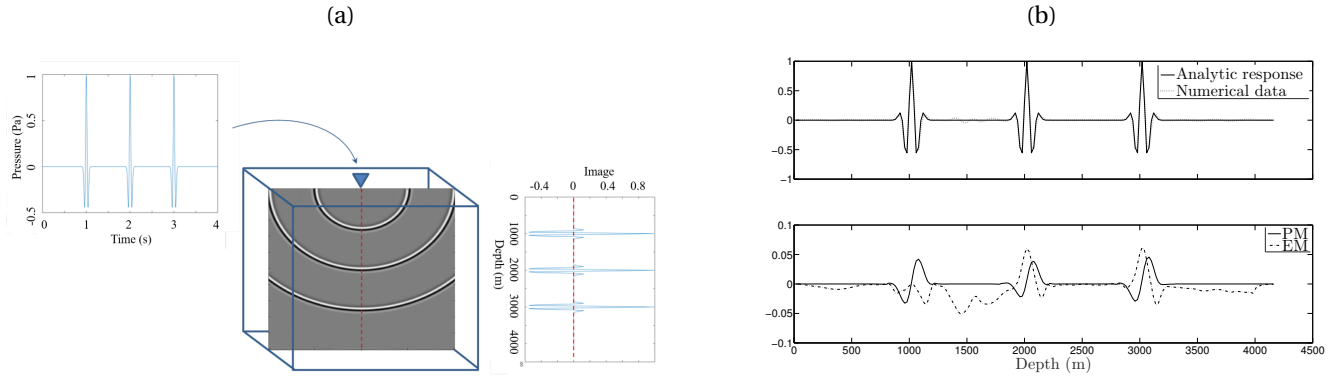


Figure 4. (a) Reflectivity image (in greyscale) from an impulse response in homogeneous media, with the receiver data in horizontal and a close-up of the exact image column in vertical. (b) Example of image column results compared to the exact reference (top) and the envelope and phase errors between them (bottom). The discrete sum of the error curves results in EM and PM respectively.

of the ABLs, we use the same ABL parameterizations obtained in Section 3.2 (see Table 2) and we measure both envelope (EM) and phase (PM) misfits with respect to the reference solution.

Table 3. Envelope Misfits (EM) and Phase Misfits (PM) obtained when using the three ABL techniques under different ϵ accuracy thresholds. Both EM and PM are dimensionless quantities.

DWE	EM	PM	SBL	EM	PM	PML	EM	PM
$\epsilon < -3$	0.2073	0.0930	$\epsilon < -3$	0.1622	0.0701	$\epsilon < -3$	0.1995	0.0727
$\epsilon < -3.5$	0.1599	0.0919	$\epsilon < -3.5$	0.1310	0.0498	$\epsilon < -3.5$	0.1443	0.0563
$\epsilon < -4$	0.1233	0.0705	$\epsilon < -4$	0.1180	0.0460	$\epsilon < -4$	0.1236	0.0494
$\epsilon < -4.5$	0.1190	0.0674	$\epsilon < -4.5$	0.1106	0.0444	$\epsilon < -4.5$	0.123	0.0478
$\epsilon < -5$	0.1184	0.0653	$\epsilon < -5$	0.1146	0.0448	$\epsilon < -5$	0.1175	0.0464
$\epsilon < -5.5$	0.1309	0.0672	$\epsilon < -5.5$	0.1147	0.0443	$\epsilon < -5.5$	0.1149	0.0454
$\epsilon < -6$	0.1234	0.0669	$\epsilon < -6$	0.1134	0.0448	$\epsilon < -6$	0.1146	0.0452

Table 3 presents the results in terms of EM and PM with respect to the absorption configurations found in Table 2. As expected, and further validating the findings of Section 3.2, for high ϵ thresholds the misfits EM and PM are small. Both errors decrease monotonically for PML, whereas misfits delivered by SBL and DWE show some oscillations in the range $-6 < \epsilon < -5$. In all cases, we find SBL performing slightly better than both DWE and PML, and in the case of highest absorption $\epsilon < -6$, its performance is comparable to PML for both PM and

EM metrics. We can thus conclude that the parameterization pairs obtained in the previous sections result in better image accuracy as the absorption of the ABLs increases, i.e., as the ϵ threshold decreases.

390 As an additional comparison, we compute the same impulse response exercise using an algorithm popular in geophysical imaging: finite-differences with 8th order in space, 2nd order in time and using $\delta = 20$ m and $\delta_t = 0.003454$ s. In this case we obtain $EM \sim 0.14$ and $PM \sim 0.07$ when using 2nd order Higdon paraxial ABCs. Both numbers can be matched, and improved, by using the algorithms presented here. Notice that the spatial grid of this alternative scheme is considerably larger than the one used with the PSTD method presented in this study,
395 due to the higher points per wavelength needed in finite-difference schemes.

4 Validation of ABL parameters in heterogeneous media

The Earth's subsurface is largely heterogeneous across many scales. In such environments wavefields become more complex, involving scattering, reflections and refractions, among other phenomena. As a consequence, a generalized calibration of ABLs is not possible, as all models are fundamentally different from each other. Our
400 goal when studying ABLs in heterogeneous media is assessing whether their fundamental behaviour remains, i.e. absorption increases steadily with N_{ABL} , and if our calibration results, which were obtained for homogeneous models, are also useful for heterogeneous models. We remark that we will use a direct continuation strategy to populate velocity values at the absorbing layers, as defined in the first subsection of Section 2.

4.1 Three-layered Medium

405 First, we consider a 3D cuboid physical domain involving three flat layers of wave speeds 2000, 4000 and 6000 $\text{m}\cdot\text{s}^{-1}$, respectively. The central layer is 1320 m thick, being the top and bottom layers both half-spaces. The source parameters and the size of the domain is the same as in Section 3.2. However, in this test case, the Ricker point source is located 1300 m above the first material interface, and therefore inside the top layer, but still central in the other two directions. We run simulations for $N_t = 5000$ iterations, for a total simulation time of 10 s.

410 In Figure 5, we show the evolution of our energy proxy $\hat{E}|^n$ during the simulation time. We observe $\hat{E}|^n$ diminishing for all cases after the first approximately 1000 iterations. The rate at which $\hat{E}|^n$ is reduced afterwards depends on the ABL and the threshold used. We remark that the ABLs are parameterized following Table 2. Consistent with previous observations in Figure 3 for homogeneous media, lower ϵ thresholds result in better absorption. In addition, if we focus on long-term absorption (i.e. at iteration 5000 or $\hat{E}|^{5000}$), DWE at $\epsilon < -6$ reaches the
415 smallest energy proxy values among all methods and configurations, whereas PML delivers small energy proxy values regardless of the parameter configuration chosen. DWE appears to be the most sensitive ABL to parameter changes, having the largest difference between best and worse absorption among all methods tested.

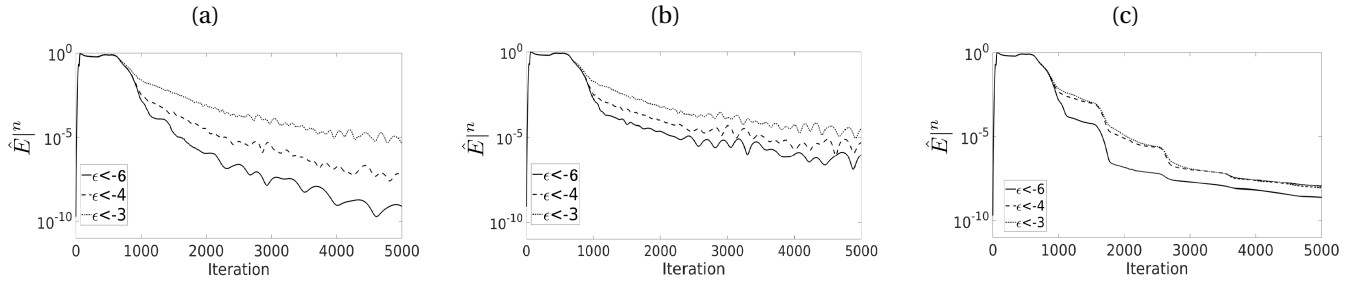


Figure 5. The time evolution of the energy proxy $\hat{E}|^n$ in logarithmic scale for the three-layered test using (a) DWE, (b) SBL and (c) PML. ABL parameters are set as per Table 2.

4.2 The SEG-EAGE Salt Model

As a final and more realistic scenario, we use the 3-D SEG/EAGE Salt 3D model (see, e.g., Yoon et al., 2003) and test
 420 our ABL for a modelling exercise. This model has been extensively used for benchmarking exercises in geophysics
 because it includes features typically observed in the subsurface. The model dimensions are (7.5, 7.5, 3.6) km, and
 we locate a point source at $(x_s, y_s, z_s) = (3.75, 3.75, 0)$ km. In this model, the wave speed varies from $1500 \text{ m}\cdot\text{s}^{-1}$
 at the top water layer, to $4200 \text{ m}\cdot\text{s}^{-1}$ inside the salt body (see Figure 6). We add an ABL to each boundary of the
 physical model resulting in an unbounded domain. We remark that we are not adding a free surface condition to
 425 be compatible with the calibration exercise of the previous sections which also were unbounded. As in previous
 experiments, we use a Ricker source wavelet with a maximum frequency of 25 Hz and adapt the grid spacing to
 $\delta = 30 \text{ m}$ to accomodate the model's minimum velocity. Similarly, the time discretization is $\delta_t = 0.002 \text{ s}$, which
 results in a maximum stability number $S = 0.28$. In this test case, PSTD simulations last for 4 s, i.e., they involve
 $N_t = 2000$ time iterations. In order to quantify the absorption for such a complex model we need [to](#) run several

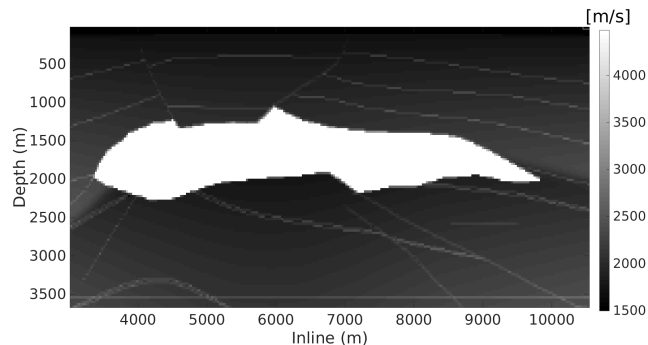


Figure 6. A vertical cross section, along the z-x plane located at $y = 6800 \text{ m}$, of the 3D SEG/EAGE Salt velocity model. The white (high-velocity) part is a salt body.

configuration of ABLs and compare to a reference. To construct such reference solution, we use the PSTD simulation that employs PML using the parameters associated with maximum absorption in Table 2 and $N_{ABL} = 120$. Absorption for each ABL is next quantified using this reference. As illustration, Figure 7 compares the wavefield at time step 430 ($t=0.86s$) obtained when using the best DWE configuration reported in Table 2 with the reference solution. Specifically, snapshot at the left side uses DWE with $\sigma_0\delta_t = 0.0025$ and $N_{ABL} = 32$, whereas snapshot at the right side uses the reference PML configuration. The central figure shows the difference between these two snapshots at this time step. Most differences appear from a reflected wavefront by the top ABL in simulations using DWE. As the PSTD algorithm and simulation parameters are identical, i.e., time and grid stepping, these differences arise from the less effective absorption achieved by DWE.

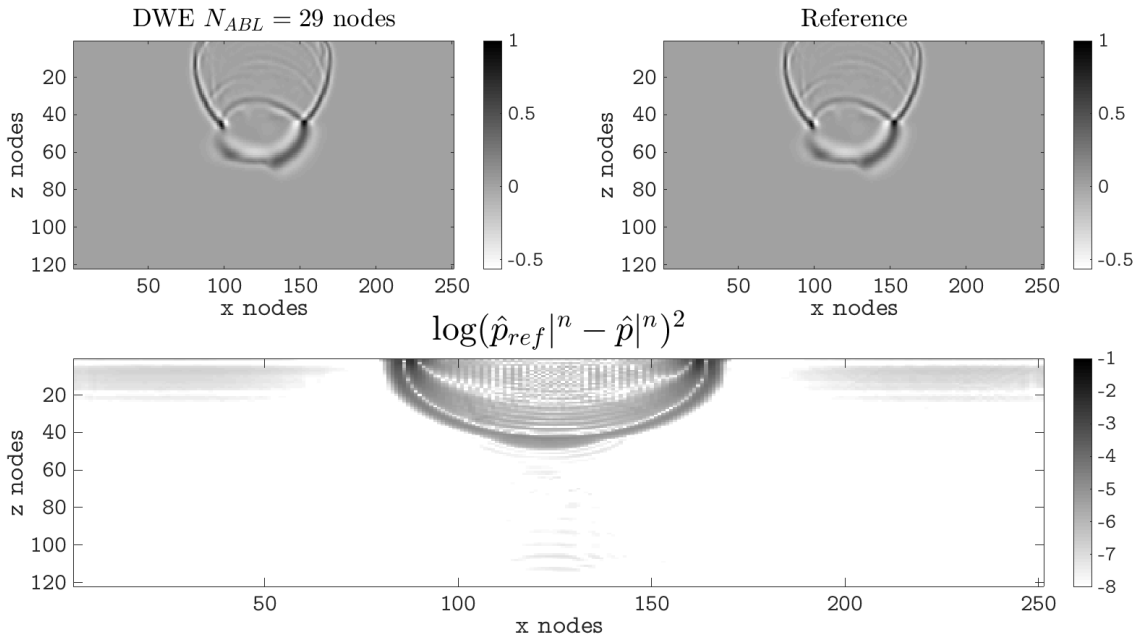


Figure 7. Snapshots of pressure at $t = 0.86$ seconds using DWE with $\sigma_0\delta_t = 0.0025$ and $N_{ABL} = 32$ at the top left and PML with $\alpha_0\delta_t = 0.065$ and $N_{ABL} = 120$ at the top right. The bottom image shows their difference $(\hat{p}_{ref}^n - \hat{p}^n)^2$ in logarithmic scale.

We run simulations using all 3 ABLs using all absorption parameter pairs reported in Table 2, and compute the corresponding errors using the metric defined in (20) for $n_0 = 0$ and the reference solution based on PML. The results are reported in Table 4 for all cases. For each ABL, errors steadily diminish with lower ϵ thresholds, i.e., as we sequentially employ the optimal parameters pairs given in Table 2. This is a remarkable result, as it confirms the results from Section 3.2, i.e., we can use the calibration parameters obtained from a homogeneous case and observe improvements in absorption in a complex heterogeneous case. Results in Table 4 are also consistent

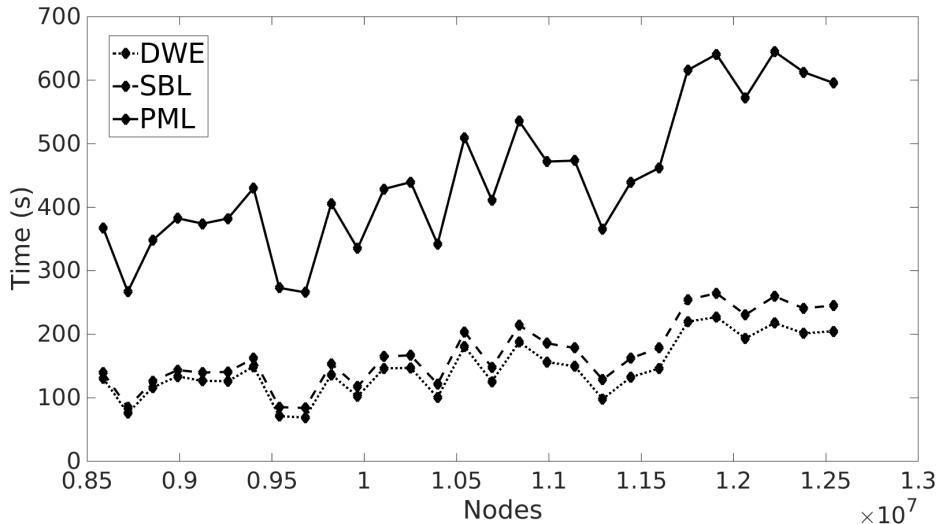


Figure 8. Computational time of all ABLs at different grids, characterized by their total number of nodes.

Table 5. Relative computing time τ with respect to the reference solution for the experiment 1 in Section 4.2. All ABL parameters follow ϵ thresholds in Table 2. Average, minimum and maximum times are included in the last three columns, respectively.

Method	$\epsilon < -3$	$\epsilon < -3.5$	$\epsilon < -4$	$\epsilon < -4.5$	$\epsilon < -5$	$\epsilon < -5.5$	$\epsilon < -6$	$\hat{\tau}$	τ_{min}	τ_{max}
DWE	0.0287	0.0549	0.0214	0.0627	0.0652	0.0961	0.0542	0.0547	0.0214	0.0961
SBL	0.0611	0.0557	0.0234	0.0399	0.0541	0.0821	0.0451	0.0516	0.0234	0.0821
PML	0.1329	0.1327	0.0778	0.1162	0.1285	0.0613	0.0906	0.1057	0.0613	0.1329

465 layers for all methods, we must recall that in Sections 3.2 and 4 we have consistently observed that PML requires about half the absorbing layers N_{ABL} than either DWE or SBL for the same absorption. Nevertheless, given the usual size of geophysical domains, which are much larger than the number of layers considered in ABLs (i.e. $N_x, N_y, N_z \gg N_{ABL}$) this aspect does not result in a substantial advantage for PML in terms of memory or computational time.

470 Following the theoretical discussion, we have measured computational times for our PSTD code using the three ABLs for different grid sizes. In Figure 8, we present the computational times of 28 different grids using the setup of the experiment 1 in Section 4. The total number of nodes in the grid is defined as $(N_x + 2N_{ABL})(N_y + 2N_{ABL})(N_z + 2N_{ABL})$ and N_{ABL} ranges from 4 to 31. Three different conclusions can be drawn from the figure: 1) computational cost increases, on average, with grid size, as expected; 2) PML is approximately **twice slower** than taking twice as long either SBL or DWE for the same grid size and 3) there is an important variability in

475

compute cost from the average trend, of about 15-20% with respect to the average value. The variability is very similar for all three ABLs at a single grid, hence stems from the node count and not other specific aspects of the different ABLs. This last result can be surprising when compared to other computational methods such as finite-differences or finite-elements, but stems from the complex heuristics of modern FFT and DFT implementations, as will be further discussed later in this section. We remark that we use the FFTW3 library version 3.3.4-2 in our study.

To further expand our cost analysis we present results for our experiments in Section 4 comparing computational times for several ABL configurations relative to those obtained at the reference domain. Such relative time metric is referred to as τ . In Table 5 we show relative times for all parametric cases, as well as their average $\hat{\tau}$ and both minimum and maximum, i.e. τ_{min} and τ_{max} , respectively, among all parameterizations used. In the Table, we observe that average times $\hat{\tau}$ for PML are about ~~double than~~ twice that of $\hat{\tau}$ for the other two ABL approaches, as expected from our previous analysis and consistent with Figure 8. For increasing absorption ranges in Table 5, we require N_{ABL} to be larger for all ABL. Although in other seismic modelling methods this would result in a consistent increase in compute time, this is not the case for PSTD. Compute times are rather spread and do not increase monotonically with respect to ϵ thresholds. The explanation for this result, consistently with what is observed in Figure 8, is the following: Novel FFT libraries rely on different factorizations and algorithms in order to optimize time to solution, for each node count. This results in FFTs that are very fast but also highly susceptible to significant variations as a function of the sample/node count. We rely on FFTW3 in our case, but similar behaviour is observed in other contemporary FFT libraries (see, e.g. Khokhriakov et al., 2018, for an example using Intel MKL) and should be considered normal for PSTD or other Fourier-based methods. As a final recommendation, given the small value of N_{ABL} with respect to the main grid dimensions in geophysical applications, it might be beneficial to test different N_{ABL} values to reduce computational cost while keeping similar absorption.

6 Conclusions

In this work, we have reviewed and compared the three main ABL methodologies available in the context of PSTD simulations for acoustic wave propagation. Specifically, the damped wave equation (DWE), the sponge boundary layer (SBL) proposed in Cerjan et al. (1985), and a classical split perfectly matched layer (PML) formulation, have been developed and their algorithms outlined. The three ABL are relevant because they allow us to keep a pure Fourier pseudospectral scheme, without hybrid approximations at the boundaries. Absorption of DWE, SBL and PML is controlled by the number of layers N_{ABL} and a single parameter specific to each formulation, i.e., $\sigma_0\delta_t$, μ_0 and $\alpha_0\delta_t$ for DWE, SBL and PML, respectively. We have performed a calibration study on a simple homogeneous medium, extracting optimal configurations (i.e., those with minimum boundary size N_{ABL}) for a series of energy absorption thresholds. To that goal, such configurations have been ~~put to the test~~ tested in a series of exercises of different heterogeneity distributions and complexity. We have established that configurations that resulted

in high absorption in our calibration, which involved a cube with homogeneous properties and just measured
510 reflected energy, allow us to: 1) obtain better quality in a seismic imaging exercise, both in terms of phase and
amplitude 2) achieve better absorption also in a three-layered model, despite the change in space/time sampling
required by the heterogeneity and the more complex wavefields involved such as reflections and refractions and
3) accomplish better absorption in a complex 3D heterogeneous case. Hence, we can conclude that the config-
urations obtained in our simple calibration study lead to increased quality of results for all cases tested. Such
515 configurations are meant to be guidelines for modelling or imaging practitioners which can then be specialized
to fit their accuracy needs.

Comparing the three ABLs with each other is a complex issue. On one hand, DWE and SBL have very similar
formulations and behave similarly in terms of N_{ABL} for a given absorption threshold and computational cost.
On the other hand, PML requires fewer boundary layers for the same absorption level at the price of a higher
520 overall computational cost, approximately double than DWE and SBL. Among these ABL methods, SBL presents
less sensitivity to the increment of N_{ABL} .

To assess absorption performance, we have introduced a dimensionless measure proportional to the total
acoustic energy in the seismic volume, and use its magnitude in the calibration of ABL parameters. This energy
proxy is consistent with the reflected energy that we qualitatively observe in all test scenarios, and therefore, we
525 recommend it for similar studies of absorbing methods. The methodology to calibrate ABLs in this work could be
applied to other wave equations such as the elastic wave equation or anisotropic wave equation. We do not ex-
pect the same calibration values to hold across all the equations, but the methodology should reveal the optimal
values for each case. This will be subject of future work.

We remark that compute times increase with grid size, but not in a steady or monotonic behaviour, as a result
530 of using modern FFT libraries. Therefore varying the absorption of ABLs by means of larger N_{ABL} values does,
unintuitively, not necessarily result in increased computational time. Therefore, compute times are not strictly
predictable other than PML being significantly more expensive in terms of compute time than either DWE or
SBL.

Code and data availability. Computer codes to run all three test cases are readily available at the Zenodo site [https://doi.org/](https://doi.org/10.5281/zenodo.8113480)
535 [10.5281/zenodo.8113480](https://doi.org/10.5281/zenodo.8113480) along with a README file to guide code compilation and execution. The input dataset for the EAGE
SEG-SALT test case is available at the Zenodo site <https://doi.org/10.5281/zenodo.7821703>.

Author contributions. CS and JP implemented computer codes and carried out simulations. CS, JP and OR developed the
mathematical formulation and designed test cases. CS and OR worked on the document editing.

Competing interests. The authors declare that they have no conflict of interest.

540 *Acknowledgements.* This project has received funding from the European Union's Horizon 2020 research and innovation programme under the Marie Skłodowska-Curie grant agreement No 777778 MATHROCKS. In addition, the research leading to these results has received funding from the QUSTom project with proposal number 101046475 under the call HORIZON-EIC-2021-PATHFINDEROPEN-01.

References

- 545 Bérenger, J.-P.: A perfectly matched layer for the absorption of electromagnetic waves, *Journal of Computational Physics*, 114, 185–200, 1994.
- Bérenger, J.-P.: Three-Dimensional Perfectly Matched Layer for the Absorption of Electromagnetic Waves., *Journal of Computational Physics*, 127, 363–379, 1996.
- Bérenger, J.-P.: A historical review of the absorbing boundary conditions for electromagnetics., *Forum for Electromagnetic Research Methods and Application Technologies*, 1, 1–28, 2015.
- 550 Bodony, D.-J.: Analysis of sponge zones for computational fluid mechanics, *Journal Computational Physics*, 212, 681–702, 2006.
- Bording, R.-P.: Finite difference modeling-nearly optimal sponge boundary conditions, in: *SEG Annual Meeting, Society of Exploration Geophysicists*, 2004.
- 555 Canuto, C., Hussaini, M. Y., Quarteroni, A., and Zang, T.: *Spectral Methods in Fluid Dynamics*, Springer, 1988.
- Cerjan, C., Kosloff, D., Kosloff, R., and Reshef, M.: A nonreflecting boundary condition for discrete acoustic and elastic wave equations, *Geophysics*, 50, 705–708, 1985.
- Chew, W. and Liu, Q.: Perfectly matched layers for elastodynamics: A new absorbing boundary condition, *Journal of Computational Acoustics*, 4, 341–359, 1996.
- 560 Chew, W. and Weedon, W.: A 3D perfectly matched medium from modified Maxwell's equations with stretched coordinates, *Microwave and optical technology letters*, 7, 599–604, 1994.
- Claerbout, J., Green, C., and Green, I.: *Imaging the earth's interior (Vol. 6)*, Oxford: Blackwell scientific publicationsSpringer, 1985.
- Collino, F. and Tsogka, C.: Application of the perfectly matched absorbing layer model to the linear elastodynamic problem in anisotropic heterogeneous media, *Geophysics*, 66, 294–307, 2001.
- 565 Daudt, C., Braile, L., Nowack, R., and Chiang, C.: A comparison of finite-difference and Fourier method calculations of synthetic seismograms, *Bulletin of the Seismological Society of America*, 79, 1210–1230, 1989.
- Dolenc, D.: *Results from Two Studies in Seismology: Seismic Observations and Modeling in the Santa Clara Valley, California ; Observations and Removal of the Long-period Noise at the Monterey Ocean Bottom Broadband Station (MOBB)*, University of California, Berkeley, 2006.
- 570 Etgen, J. and Dellinger, J.: Accurate wave equation modeling, *Technical Report, Stanford Exploration Project*, 60, 141–167, 1989.
- Filoux, E., Callé, S., Certon, D., Lethiecq, M., and Levassort, E.: Modeling of piezoelectric transducers with combined pseudospectral and finite-difference methods, *Journal of Acoustical Society of America*, 123, 4165–4173, 2008.
- 575 Fornberg, B.: The pseudospectral method: Comparisons with finite differences for the elastic wave equation, *Geophysics*, 52, 483–501, 1987.
- Fornberg, B.: The pseudospectral method: Accurate representation of interfaces in elastic wave calculations, *Geophysics*, 53, 625–637, 1988.
- Fornberg, B.: *A Practical Guide to Pseudospectral Methods*. Cambridge Monographs on Applied and Computational Mathematics, Cambridge University Press, Cambridge, 1998.
- 580

- Gao, Y., Song, H., Zhang, J., and Yao, Z.: Comparison of artificial absorbing boundaries for acoustic wave equation modelling, *Exploration Geophysics*, 48, 76–93, 2017.
- Gazdag, J.: Modeling of the acoustic wave equation with transform methods, *Geophysics*, 46, 854–859, 1981.
- 585 Giroux, B.: Performance of convolutional perfectly matched layers for pseudospectral time domain poroviscoelastic schemes, *Computers & Geosciences*, 45, 149–160, 2012.
- Higdon, R.: Absorbing boundary conditions for difference approximations to the multidimensional wave equation, *Mathematics of computation*, 47, 437–459, 1986.
- Higdon, R.: Numerical absorbing boundary conditions for the wave equation, *Mathematics of computation*, 49, 65–90, 1987.
- 590 Hornikx, M., Waxler, R., and Forssén, J.: The extended Fourier pseudospectral time-domain method for atmospheric sound propagation, *Journal of Acoustical Society of America*, 128, 1632–1646, 2010.
- Israeli, M. and Orszag, S.: Approximation of radiation boundary conditions, *Journal Computational Physics*, 41, 115–135, 1981.
- Kaufmann, T., Fumeaux, K. S. C., and Vahldieck, R.: A Review of Perfectly Matched Absorbers for the Finite-Volume Time-Domain Method, *Applied Computational Electromagnetics Society Journal*, 23, 2008.
- 595 Khokhriakov, S., Reddy, R., and Lastovetsky, A.: Novel Model-based Methods for Performance Optimization of Multithreaded 2D Discrete Fourier Transform on Multicore Processors, arXiv preprint arXiv:1808.05405, 2018.
- Klin, P., Priolo, E., and Seriani, G.: Numerical simulation of seismic wave propagation in realistic 3-D geo-models with a Fourier pseudo-spectral method, *Geophysical Journal International*, 183, 905–922, 2010.
- Komatitsch, D. and Martin, R.: An unsplit convolutional perfectly matched layer improved at grazing incidence for the seismic wave equation, *Geophysics*, 72, SM155–SM167, 2007.
- 600 Komatitsch, D. and Tromp, J.: A perfectly matched layer absorbing boundary condition for the second-order seismic wave equation, *Geophysical Journal International*, 154, 146–153, 2003.
- Kosloff, D. and Baysal, E.: Forward modeling by a Fourier method, *Geophysics*, 47, 1402–1412, 1982.
- Kosloff, R. and Kosloff, D.: Absorbing Boundaries for Wave Propagation Problems, *Journal of Computational Physics*, 63, 363–376, 1986.
- 605 Kristek, J., Moczo, P., and Galis, M.: A brief summary of some PML formulations and discretizations for the velocity-stress equation of seismic motion, *Studia Geophysica et Geodaetica*, 53, 459–474, 2009.
- Kristekova, M., Kristek, J., Moczo, P., and Day, S.: Misfit criteria for quantitative comparison of seismograms, *Bulletin of the Seismological Society of America*, 96, 1836–1850, 2006.
- Li, Q., Chen, Y., and Ge, D.: Comparison Study of the PSTD and FDTD Methods for Scattering Analysis, *Microwave and Optical*
- 610 *Technology Letters*, 25, 220–226, 2000.
- Lisitsa, V.: Optimal discretization of PML for elasticity problems, *Electronic Transactions on Numerical Analysis*, 30, 258–277, 2000.
- Liu, Q.: The pseudospectral time-domain (PSTD) algorithm for acoustic waves in absorptive media, *IEEE Transactions on Ultrasonics, Ferroelectrics, and Frequency Control*, 45, 1044–1055, 1998a.
- 615 Liu, Q.: Large-scale simulations of electromagnetic and acoustic measurements using the pseudospectral time-domain (PSTD) algorithm, *IEEE Transactions on Geoscience and Remote Sensing*, 37, 917–926, 1998b.

- Matsumoto, R., da Silva, A., Dias, T., Vidal, R., ao, A. B., and ao, G. C.: Optimization of Absorbing Boundary Methods for Acoustic Wave Modelling, in: 11th International Congress of the Brazilian Geophysical Society EXPOGEF 2009, pp. 1455–1457, Society of Exploration Geophysicists and Brazilian Geophysical Society, Salvador de Bahia, Brazil, 2009.
- 620 Ng, M.: Using time-shift imaging condition for seismic migration interpolation, in: Society of Exploration Geophysicists: In SEG Technical Program Expanded Abstracts, pp. 2378–2382, Society of Exploration Geophysicists, 2007.
- Ozdenvar, T. and McMechan, G.: Causes and reduction of numerical artefacts in pseudo-spectral wavefield extrapolation, *Geophysical Journal International*, 126, 819–828, 1996.
- Peng, Z. and Cheng, J.: Modified pseudo-spectral method for wave propagation modelling in arbitrary anisotropic media, 625 78th EAGE Conference and Exhibition 2016, 2016, 1–5, 2016.
- Pernice, W.: Pseudo-spectral time-domain simulation of the transmission and the group delay of photonic devices, *Optical and Quantum Electronics*, 40, 1–12, 2008.
- Reshef, M., Kosloff, D., Edwards, M., and Hsiung, C.: Three-dimensional elastic modeling by the Fourier method, *Geophysics*, 53, 1184–1193, 1988.
- 630 Reynolds, A.: Boundary conditions for the numerical solution of wave propagation problems, *Geophysics*, 43, 1099–1110, 1978.
- Sochacki, J., Kubichek, R., George, J., Fletcher, W., and Smithson, S.: Absorbing Boundary Conditions and Surface Waves, *Geophysics*, 52, 60–71, 1987.
- Spa, C., Escolano, J., and Garriga, A.: Semi-empirical Boundary Conditions for the Linearized Acoustic Euler Equations using 635 Pseudo-Spectral Time-Domain Methods, *Applied Acoustics*, 72, 226–230, 2011.
- Spa, C., Reche-López, P., and Hernández, E.: Numerical Absorbing Boundary Conditions Based on a Damped Wave Equation for Pseudospectral Time-Domain Acoustic Simulations, *The Scientific World Journal*, 2014, 2014.
- Spa, C., Rojas, O., and de la Puente, J.: Comparison of expansion-based explicit time-integration schemes for acoustic wave propagation, *Geophysics*, 85, T165–T178, 2020.
- 640 Xie, J., Guo, Z., Liu, H., and Liu, Q.: Reverse Time Migration Using the Pseudospectral Time-Domain Algorithm, *Journal of Computational Acoustics*, 24, 1650 005, 2016.
- Xie, J., Guo, Z., Liu, H., and Liu, Q.: GPU acceleration of time gating based reverse time migration using the pseudospectral time-domain algorithm, *Computers & Geosciences*, 117, 57–62, 2018.
- Yoon, K., Shin, C., Suh, S., Lines, L., and Hong, S.: 3D reverse-time migration using the acoustic wave equation: An experience 645 with the SEG/EAGE data set, *The Leading Edge*The Leading Edge, 22, 38–41, 2003.