

Modelling extensive green roof CO₂ exchanges in the TEB urban canopy model

Aurélien Mirebeau¹, Cécile de Munck¹, Bertrand Bonan¹, Christine Delire¹, Aude Lemonsu¹, Valéry Masson¹, and Stephan Weber²

¹Centre National de Recherches Météorologiques (CNRM), Université de Toulouse, Météo-France, CNRS, Toulouse, France

²Climatology and Environmental Meteorology, Institute of Geocology, Technische Universität Braunschweig (TUBS), Braunschweig, Germany

Correspondence: Aurélien Mirebeau (aurelien.mirebeau@meteo.fr)

Abstract. Green roofs are promoted to provide ecosystem services and to mitigate climate change in urban areas. This is largely due to their supposed benefits for biodiversity, rainwater management, evaporative cooling, and carbon sequestration. One scientific challenge is quantifying the various contributions of green roofs using reliable methods. In this context, the green roof module already running in the Town Energy Balance urban canopy model for water and energy exchanges was improved by implementing the CO₂ fluxes and the carbon sequestration potential. This parametrisation combines the ISBA (Interaction Between Soil Biosphere and Atmosphere) photosynthesis, biomass and soil respiration module with the green roof module in order to quantify the net CO₂ amount emitted or fixed by the green roof over a time period. Measurement data from an extensive non-irrigated Sedum green roof located at the Berlin-Brandenburg airport (BER) in Germany from 2016 to 2020 are used to calibrate and evaluate the parameterisation. Based on the five years of measurements, a sensitivity analysis is conducted to quantify the significance of selected parametrisation parameters on the photosynthesis process, followed by a calibration over the most important parameters and an evaluation. Results show a good agreement of the simulated leaf area index and CO₂ fluxes with *in situ* observations, with good diurnal, seasonal and inter-annual variability, although the model tends to be overly responsive on the day to day variability. The model reproduces well the Net Ecosystem Exchange which provides a reliable estimation of the annual carbon sequestration. Those results are encouraging in quantifying the potential of carbon sequestration of green roofs and open up the possibility of applying the new parametrisation on a city-wide scale to evaluate green roof scenarios.

1 Introduction

Green roofs refer to roofs with a vegetated surface on top of a growing layer. They are mainly divided into two categories: extensive green roofs, which are made with shallow substrate, low-profile plant species without necessarily irrigation, and the intensive green roofs which can support shrubs and trees and require irrigation and deeper substrate. Recent studies have investigated the various advantages of both green roofs types. Different types of impacts and interactions were studied: effects on building energy savings at building (Virk et al., 2015) and city scale (Wang et al., 2024) and under different climates (Ascione et al., 2013) ; effects on water runoff quantity (Zheng et al., 2021) and quality (Li and Babcock, 2014) ; interactions

with plants, animals, and abiotic environment (Cook-Patton and Bauerle, 2012) ; or benefits on air quality (Currie and Bass,
25 2008).

A further advantage is the reduction of carbon emissions, in two ways as pointed out by Tan et al. (2023). Firstly, an indirect reduction is due to less carbon being emitted as a result of building energy savings depending on the energy generation source. In addition, a direct reduction comes from the carbon sequestration by the soil and vegetation on the green roof. In this perceptive, recent studies, like the work of Seyedabadi et al. (2021), estimated the direct carbon sequestration in containers
30 with dry weight measurement for *Sedum acre*, *Frankenia thymifolia*, and *Vinca* major species at 38, 565, and 166 g C m⁻² yr⁻¹, respectively. In addition, the indirect carbon sequestration was quantified by modelling at 7680, 7222, and 6393 g C m⁻² yr⁻¹, respectively for the same species. Kuronuma et al. (2018) estimated, also with dry weight measurements, the direct carbon sequestration by an extensive green roof for irrigated *Cynodon dactylon*, *Festuca arundinacea*, *Zoysia matrella* irrigated *Sedum aizoon* and non irrigated *Sedum aizoon* at 690, 751, 671, 459, and 336 g C m⁻² yr⁻¹, respectively. They also evaluated
35 the payback of time for non irrigated extensive *Sedum aizoon* green roof ranging between 8.5 and 14.0 years, hinting that CO₂ sequestration could be a real positive effect of green roof. However, as highlighted by Shafique et al. (2020), most of the studies quantifying the potential carbon sequestration rely on short term observations.

In addition, in order to really determine the feasibility and interest of such installations, impact studies must be conducted considering all interactions on a city-wide scale and over long enough time periods to cover a variety of climatic conditions.
40 This illustrates the relevance of representing green roofs fluxes, including CO₂ exchanges, in appropriate urban land surface model, such as the Town Energy Balance (TEB, Masson, 2000) model, that can be run in various configurations: with or without a complex atmospheric coupling, from the street level to the neighborhood, the city or regional-scale, and for specific meteorological events or seasonal even multi-annual time periods.

The TEB model already includes an extensive green roof module for addressing heat, energy and water exchanges (De Munck
45 et al., 2013). The model has already been applied in the Paris region to quantify the benefits of green roofs in terms of urban cooling, improved thermal comfort, and energy savings (de Munck et al., 2018). Here we improve the existing model by adding the calculation of CO₂ fluxes for green roofs. The aim of this article is to provide a full description and evaluation of the added CO₂ fluxes in the TEB's extensive green roof module in order to have a model able to quantify the CO₂ sequestration of green roofs with its annual and inter annual variations. This is done by reusing the model called Interaction Soil-Biosphere-
50 Atmosphere (ISBA, Noilhan and Planton, 1989; Noilhan and Mahfouf, 1996) which represents CO₂ fluxes of the soil and vegetation. But in order to fit with the specificity of green roofs (shallow soil and Sedum vegetation), a new parametrisation of ISBA is achieved with calibration and evaluation on experimental data collected for several years over an extensive green roof with Sedum species on top of an airport car park in Berlin, Germany.

The experimental data are presented in Sect.2. Subsequently, the TEB model, the TEB-GREENROOF module, and the
55 implementation of CO₂ fluxes are developed in Sect.3, followed by the description of the model configuration and numerical setup for the study case in Sec. 4. Then, the sensitivity analysis, calibration and evaluation of the new TEB-GREENROOF version including CO₂ fluxes with the observational data are presented in Sect. 5. Finally, Sect. 6 is a discussion about the

behavior of the Sedum simulated with the new parametrisation, the diurnal cycle of CO₂ fluxes, and the quantification of the amount of carbon fixed by the green roof.

60 2 Instrumented green roof for model development and evaluation

The modelling is informed and evaluated by comparison with continuous observations collected on an green roof site for several years by the Technische Universität Braunschweig (Heusinger and Weber, 2017a, b; Konopka et al., 2021). The site is a non-irrigated extensive green roof of 8600 m² (see Appendix A) constructed in May 2012. It is located on the flat roof of a 18 m high car park at Berlin-Brandenburg airport in Germany (referred to as BER, 52.37°N, 13.51°E, altitude of 61
65 m above sea level). The green roof is composed of four layers: (1) a vegetation layer made up mainly of sedum (*Sedum floriferum* ‘Weihenstephaner Gold’, *Sedum album*) with herbaceous plants (*Allium schoenoprasum*, *Trifolium* sp), (2) a 0.09 m deep substrate layer composed of a mix of expanded shale, pumice and compost, (3) a 0.003 m thick protection mat, and (4) a 0.05 m thick insulation layer. It is supported on a 1.60 cm layer of ferroconcrete. Gardeners provide basic maintenance of the roof vegetation, approximately once a year.

70 The site is equipped with a 3D ultrasonic anemometer and an open-path infrared gas analyser at 1.15 m above roof level to determine the net CO₂ fluxes, and the turbulent latent (LE) and sensible (H) heat fluxes by the eddy-covariance technique. The site is also equipped with radiometers on top of the green roof horizontally to measure both downwelling (receive by the green roof) and upwelling (reflected and emitted by the green roof) components of long-wave (LW[↓], LW[↑]) and short-wave (SW[↓], SW[↑]) radiation. Air temperature and humidity are measured at 2 m above the green roof surface by an HMP155 probe
75 and precipitation data are gathered from the nearby German Weather Service station at Berlin Schönefeld airport (BSCH; ID: 00427). Probes are also placed in the substrate layer to measure the soil temperature and water content at different depths (0.025, 0.05, and 0.075 m). The fraction of vegetation cover (F_{veg}) and the leaf area index (LAI) are estimated occasionally ($\simeq 10$ times a year) through photograph analysis taken at 10 different locations randomly selected on the roof. For details the reader is referred to (Heusinger and Weber, 2017b).

80 The site has been in operation since mid-2014. This study focuses on the period 2016-2020, for which a very comprehensive dataset is available. According to the Köppen climate classification (Köppen, 1900), Berlin is located in a region of temperate oceanic climate (Cfb). Winters are cold and summers are warm and humid. The rainfall pattern indicates moderate rainfall throughout the year (annual average of 591 mm according to Lorenz et al., 2019), with climatological maxima in June and July. Snowfall is typical from December to March. Figure 1 presents the monthly values for the daily minimum and maximum
85 temperatures (TN and TX, respectively), and precipitation for the period of interest. The five years selected show contrasting meteorological conditions with a noticeable inter-annual variability in temperature and precipitation. 2018 was a particularly dry year, with total rainfall well below normal (only 66 mm recorded in summer, compared to 157 mm on summer average for all the period), and also slightly warmer (average summer TX of 26.0°C, compared to 25.0°C on average for all the period). 2019 is also slightly drier and, above all, warmer than average (120 mm of precipitation and average TX of 26.4°C in summer).
90 In contrast, 2017 is wetter and colder in summer (268 mm of precipitation and an average TX of 23.5°C).

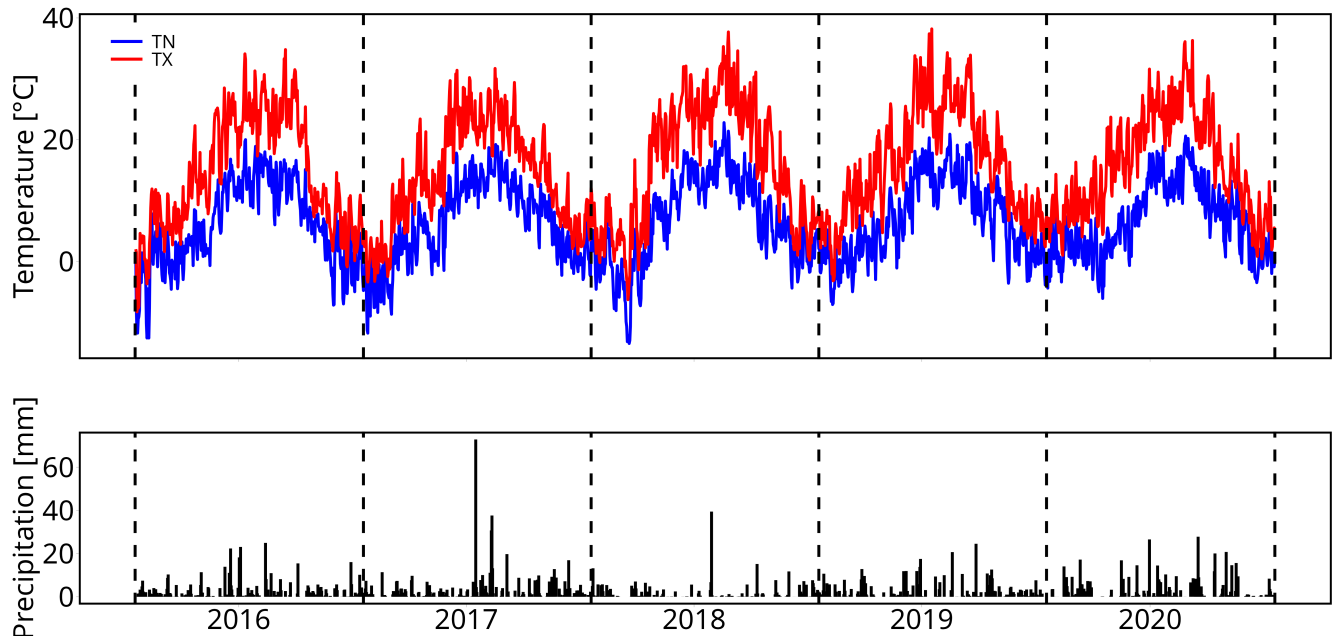


Figure 1. Evolution of meteorological conditions over the period 2016-2020: daily maximal temperature (TX, in °C), daily minimal temperature (TN, in °C), and daily cumulative precipitation (black bars, in mm). The data come from the German weather station at Berlin Schönefeld airport (BSCH; ID: 00427).

3 Model description and implementation

3.1 Overview of the TEB urban canopy model

The Town Energy Balance (TEB) model is integrated in the open-access SURFEX land surface modelling platform (Masson et al., 2013) together with other dedicated surface models such as ISBA for vegetation and natural soils (Noilhan and Planton, 1989; Noilhan and Mahfouf, 1996) and FLake for inland waters (Mironov et al., 2010).

The TEB model is a surface scheme developed by Masson (2000) to represent heat, water, and momentum exchanges between urban surfaces and the atmosphere, and to compute street-level microclimatic conditions. TEB can be run at street or city scale, with meteorological forcings or coupled to an atmospheric model due to its simplified geometry.

In TEB, the urban geometry is represented by the concept of street canyon (Oke, 1987). This hypothesis considers that urban areas can be roughly represented as a single road between two facing buildings of same height and infinite length, and with flat roofs. With this geometry, the model computes the radiation, energy and water balances on each surface of the street canyon (wall, road, and roof) and aggregates the fluxes to simulate the exchanges between the overall urban canopy layer and the atmosphere above. To better describe the heterogeneity of the urban environment in TEB, the interactions between urban vegetation (i.e. ground vegetation and street trees) and built up surfaces are now represented within the street canyon (Lemonsu

105 et al., 2012; Redon et al., 2017, 2020). To model the functioning of urban vegetation, TEB relies on ISBA model (Interaction Soil-Biosphere-Atmosphere) .

3.2 Initial version of the TEB-GREENROOF module

The TEB-GREENROOF module (De Munck et al., 2013) was developed in TEB to allow for the simulation of extensive green roofs. It is also based on the physics of ISBA in order to describe the soil and vegetation layers of the green roof and
 110 model its hydrological and thermal performances in interaction with the building on which it is installed, as well as exchanges with the atmosphere above. Figure 2 shows the different fluxes simulated by the original version of TEB-GREENROOF for the hydrological and thermal processes (panels a and b). At surface level, the thermal balance is estimated according to the equation:

$$c_s \frac{\partial T_s}{\partial t} = Q_* - H - LE - G_0 \quad (1)$$

115 Where Q_* is the net radiation (W m^{-2}), H is the sensible heat flux (W m^{-2}), LE is the latent heat flux (W m^{-2}), G_0 is the surface ground heat flux (W m^{-2}), c_s the surface soil heat capacity ($\text{J K}^{-1} \text{m}^{-3}$) and T_s is the surface temperature (K).

The thermal balance connects to the water balance through the latent heat flux (LE). The evaporation on the vegetated surface E is the sum of the evaporation of the soil (E_g) and the evaporation of the vegetation (E_{veg}), $E = E_g + E_{veg}$. The evaporation due to vegetation is also split into the direct evaporation E_V from the fraction δ of the foliage covered by intercepted water and
 120 the transpiration E_{tr} of the remaining part of the leaves ($E_{veg} = E_v + E_{tr}$). E_g , E_V and E_{tr} are calculated with the following ISBA parametrisation:

$$E_g = (1 - F_{veg}) \cdot \rho_a C_H V_a (\alpha q_{sat}(T_s) - q_a) \quad (2)$$

$$E_v = F_{veg} \cdot \rho_a \left(\frac{\delta}{R_a} \right) (q_{sat}(T_s) - q_a) \quad (3)$$

$$E_{tr} = F_{veg} \cdot \rho_a \left(\frac{1 - \delta}{R_a + R_s} \right) (q_{sat}(T_s) - q_a) \quad (4)$$

125 where F_{veg} is the fraction of vegetation, ρ_a the air density (kg m^{-3}), C_H the turbulent exchange coefficient ($\text{kg m}^{-1} \text{s}^{-1}$), V_a the wind speed (m s^{-1}), $q_{sat}(T_s)$ (kg kg^{-1}) the saturated specific humidity at the temperature T_s , q_a is the atmospheric specific humidity at the lowest atmospheric level (kg kg^{-1}) and α a coefficient that depends on soil moisture. $R_a = (C_H V_a)^{-1}$ is the aerodynamic resistance and R_s the canopy surface resistance that depend on atmospheric factors as well as soil water content and LAI which will be modelled later with the implementation of CO_2 fluxes.

130 The soil of the green roof is described using the multi-layer diffusion version ISBA-DF (Boone et al., 2000; Decharme et al., 2011), which discretizes the soil into different vertical layers. In each soil layer, the evolution equation of soil temperature

follows the expression:

$$c_g \frac{\partial T}{\partial t} = \frac{\partial G}{\partial z} + \phi \quad (5)$$

where T is the soil temperature (K), G is the vertical ground heat flux ($\text{J m}^{-2} \text{s}^{-1}$), c_g is the soil heat capacity ($\text{J K}^{-1} \text{m}^{-3}$),
 135 ϕ is a latent heat source/sink resulting from phase transformation of soil water ($\text{J m}^{-3} \text{s}^{-1}$), and z the soil depth (m).

For the evolution of soil liquid water and soil ice volumetric content ($\text{m}^3 \text{m}^{-3}$), the equations are:

$$\frac{\partial w_l}{\partial t} = -\frac{\partial F}{\partial z} - \frac{\phi}{L_f \rho_w} - \frac{S_l}{\rho_w} \quad (w_{min} \leq w_l \leq w_{sat}) \quad (6)$$

$$\frac{\partial w_i}{\partial t} = \frac{\phi}{L_f \rho_w} \quad (0 \leq w_i \leq w_{sat} - w_{min}) \quad (7)$$

140 where F is the vertical water flux (m s^{-1}), L_f is the latent heat of water fusion (J kg^{-1}), ρ_w is the liquid water density (kg m^{-3}), and S_l represents external sources/sinks for liquid water ($\text{kg m}^{-3} \text{s}^{-1}$).

In the soil, the hydrological and thermal balances are coupled through the effective thermal properties of each soil layer j , which change over time as a function of the soil water content. This is the case for both the layer-averaged soil heat capacity (c_{gj} , in $\text{J K}^{-1} \text{m}^{-3}$) and thermal conductivity (λ_j , in $\text{kg m s}^{-3} \text{K}^{-1}$) for layer j , according to:

$$145 \quad c_{gj} = (1 - w_{satj})c_{dryj} + w_{lj}c_l + w_{ij}c_i \quad (8)$$

$$\lambda_j = K_e \lambda_{satj} + (1 - K_e) \lambda_{dryj} \quad (9)$$

where w_{lj} and w_{ij} are the soil liquid water content and soil ice content in layer j ($\text{m}^3 \text{m}^{-3}$). c_{dryj} is the heat capacity of dry soil matrix for layer j , and c_l and c_i are the heat capacities of liquid water and ice, respectively. K_e is the Kersten number (that
 150 is a dimensionless parameter representing the normalized thermal conductivity as a function of the degree of saturation only), and λ_{satj} and λ_{dryj} are the saturated and dry soil thermal conductivities for layer j , respectively.

3.3 Implementation of CO₂ fluxes in TEB-GREENROOF

Similar to the formulation of radiative, thermal and hydrological exchanges, CO₂ fluxes in TEB-GREENROOF are adapted from an existing module in ISBA, the CO₂ fluxes are modelled in TEB-GREENROOF by activating, with some adaptations,
 155 an existing module of ISBA designed to represent C fluxes in vegetation and soils.

The main fluxes are plant photosynthesis (or gross primary production referred to as GPP , in $\text{g C m}^{-2} \text{yr}^{-1}$) and ecosystem respiration (R_{ECO} , in $\text{g C m}^{-2} \text{yr}^{-1}$) which combines leaf respiration (R_{leaf} , in $\text{g C m}^{-2} \text{yr}^{-1}$ from Eqs. B10-11)) and soil heterotrophic respiration (R_{soil} , in $\text{g C m}^{-2} \text{yr}^{-1}$) (see Fig. 2c). The difference between these two large fluxes is defined as the Net Ecosystem Exchange, $NEE = R_{ECO} - GPP$, (Bonan, 2016). Photosynthesis and leaf respiration are modelled

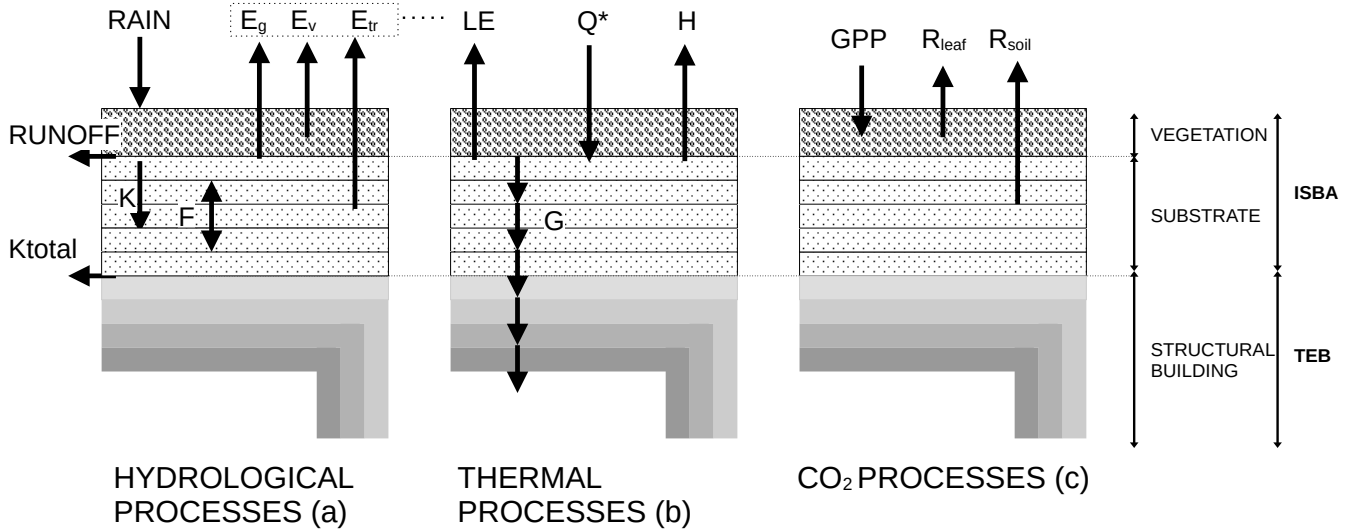


Figure 2. (a) TEB-GREENROOF hydrological processes: water gain from precipitation (RAIN), surface runoff(RUNOFF), drainage (K), total drainage (Ktotal), vertical water fluxes (F), ground evaporation E_g , evaporation of water intercepted by vegetation E_v , and vegetation transpiration E_{tr} , all in $\text{kg m}^{-2} \text{s}^{-1}$; (b) TEB-GREENROOF thermal processes : net radiation (Q^*), latent heat flux (LE), sensible heat flux (H) and ground heat flux (G), all in W m^{-2} .(c) TEB-GREENROOF CO₂ processes : growth primary production by photosynthesis (GPP), leaf respiration (R_{leaf}) and soil respiration (R_{soil})

160 with the A-gs parametrisation (Calvet et al., 1998, 2004), based on the assimilation scheme proposed by Jacobs (Jacobs, 1994; Goudriaan et al., 1985) (see Appendix B). This semi-empirical model has the advantage of being simple and suited for both C3 and C4 most prominent physiological plant groups based on different photosynthetic pathways. The approach chosen considers that light and CO₂ atmospheric concentration are the two limiting factors impacting the net photosynthetic rate.

The goal of this study is to adapt some aspects of the present parametrisation in order to model Berlin's airport extensive green roof by representing the behaviour of the dominant Sedum species (which is widely used for extensive green roofs). Sedum are facultative C3-CAM (Crassulacean acid metabolism) (Winter, 2019), meaning that they behave like a C3 plant when they are well watered and switch to a CAM photosynthesis pathway when they lack water. With a CAM behaviour, the stomata of the plant open only at night to fix CO₂. The photosynthesis takes place during the day, requiring light energy, but the leaf stomata remain closed to prevent water loss through evapotranspiration. Nonetheless, the flux measurements carried out on the green roof at Berlin airport did not reveal any periods with CAM behaviour, which would characterised by the

165
170

absorption of CO₂ during the night. Consequently, the question of modelling the photosynthesis mechanisms specific to this particular species in the ISBA model (which does not include CAM behaviour like most large-scale vegetation models) was not investigated further in this study. However, it still requires adaptation of the model with a specific parametrisation to match the behaviour of Sedum on a shallow substrate

175 First, the maximum net CO₂ assimilation ($A_{m,max}$, in g m⁻² s⁻¹) and the mesophyll conductance (g_{mes}^* , in m s⁻¹) use inhibition functions (see Appendix Eqs. A2-A3) with reference temperature adjusted to better represent optimum temperature. This was made to differentiate optimum assimilation between C3 and C4 plants. However an analysis of the observed CO₂ fluxes measured by eddy covariance did not show any high and low temperature inhibition of photosynthesis in the range of temperatures observed. Because we could not find data triggering high and low temperature inhibition for these species, we
180 decided to set the inhibition functions to 1, which modifies the equations for $A_{m,max}$ and g_{mes} :

$$A_{m,max}(T_s) = A_{m,max}(25) \cdot Q_{10}^{\frac{T_s-25}{10}} \quad (10)$$

$$g_{mes}^*(T_s) = g_{mes}^*(25) \cdot Q_{10}^{\frac{T_s-25}{10}} \quad (11)$$

where $A_{m,max}(25)$ is the maximum net CO₂ assimilation at 25 °C in mg m⁻² s⁻¹, T_s is the leaf skin temperature (K),
185 here considered as the first layer of soil temperature, and $g_{mes}^*(25)$ is the mesophyll conductance at 25 °C. Q_{10} are response function defined as proportional increase of a parameters for 10 degrees increase.

When soil moisture content drops, plants tend to close their stomata to limit water loss. This is described empirically by a soil water stress function ($F2$) that simply models the stomata closing and opening when the plant lacks water according to a regulation of the mesophyll conductance:

$$190 \quad g_{mes} = g_{mes}^*(T_s) \cdot F2 \quad (12)$$

with the normalized soil water stress factor estimated as:

$$F2 = \sum_{j=1}^N [\Upsilon_j \cdot (\frac{w_j - w_{wiltj}}{w_{fcj} - w_{wiltj}})] \quad (13)$$

where N is the number of soil layers, and Υ_k the root fraction in layer j . w_{wiltj} is the wilting point, w_{fcj} the field capacity, and w_j the soil water content in layer j . As the substrate of extensive green roof is shallow, thresholds $F2_{min}$ and $F2_{max}$ are
195 prescribed for $F2$ to prevent photosynthesis cut or too excessive variations.

The respiration of the soil (in kg m⁻² s⁻¹) is estimated with the simple Norman et al. (1992) respiration scheme:

$$R_{soil} = 4.4 \cdot 10^{-8} \cdot (13.5 + 5.4 \cdot LAI) \cdot w_{10} \cdot e^{0.069 \cdot (T_{s10} - 25)} \quad (14)$$

where LAI is the leaf area index (m² m⁻²), w_{10} is the weighted soil volumetric water content between 0-10 cm depth (%) and T_{s10} is weighted soil temperature between 0-10 cm depth (°C). Since the soil on green roof is very shallow, water content
200 thresholds w_{10min} and w_{10max} are prescribed during the calibration to prevent extreme values.

Furthermore, the A-gs CO₂ assimilation scheme can be either forced by a prescribed LAI or coupled to a biomass scheme making the LAI evolve over time. In the model, LAI is the variable that reflects the vegetation evolution (i.e. the CO₂ accumulation). Making the LAI evolve dynamically during the simulation, rather than prescribing LAI values imposed on the model, enables to represent the impact of meteorological conditions on vegetation over the long term, and thus to simulate more realistic CO₂ accumulation scenarios over longer periods."

We use the ISBA NIT (Calvet and Soussana, 2001) biomass scheme that only represents above-ground biomass, separated into three different reservoirs: the leaf biomass reservoir, the above ground stem biomass reservoir, and a residual reservoir.

Each biomass reservoir (B_i , expressed in kg of dry matter (DM) m⁻²) follows the same time evolution equation, the principle of which can be expressed as follows (Garisoain, 2023):

$$\frac{\Delta B_i}{\Delta t} = A_i - D_i - R_i \quad (15)$$

with A_i the biomass input, D_i and R_i respectively the biomass loss due to mortality, allocation to other reservoirs and respiration. The input flux for leaf biomass is the carbon assimilation due to photosynthesis (expressed in kg C m⁻² d⁻¹):

$$A_{leaf} = A_{n,day} \cdot \Delta t \quad (16)$$

After a daily biomass iteration, the LAI is calculated from the leaf biomass and the specific leaf area (SLA, in m² kg DM⁻¹) as follows:

$$LAI = SLA \cdot B_{leaf} \quad (17)$$

Except for crops, ISBA assumes a constant vegetation cover with time. But extensive green roof vegetation can be patchy and the vegetation cover may vary in time. To take this heterogeneity and variability into account, the fraction of vegetation cover is estimated by fitting the equation on estimation of LAI and vegetation cover:

$$F_{veg} = 1 - e^{a \cdot LAI} \quad (18)$$

where a is a coefficient set on the basis of observations.

All the vegetation parameters required for the CO₂ flux modelling are listed in Table 2. Standard values are available in ISBA for each of these parameters, for both C3 and C4 plants (Gibelin et al., 2006). Since it is challenging to find appropriate ecophysiological data to derive these parameter values for Sedum, we chose to calibrate some of them in Section 5.

4 Configuration of TEB simulation

4.1 Atmospheric conditions

In this study, TEB is run in an offline simulation configuration over five years, from 2016 to 2021. It is applied to a single grid point, i.e. for an average urban canyon whose characteristics are representative of the study site, in particular the properties

of the green roof. In offline mode, the time evolution of atmospheric conditions over the urban canyon must be provided to the TEB model at both given altitude and time step. The data required are the above urban canopy air temperature, humidity, pressure and CO₂ concentration, the wind speed and direction, precipitation and the short-wave (direct and scattered) and long-wave incoming radiations.

Here, the meteorological forcing is built with local observations described in Sect. 2 and provided to the model with a time resolution of 30 minutes. The specific humidity is calculated with the relative humidity, air pressure and the air temperature measurements. The partitioning of the incoming global short wave radiation into scattered and direct components is made based on the method of Erbs et al. (1982). Solid and liquid precipitation rates are determined by disaggregating the total precipitation, first according to the rain/snow precipitation classification directly provided from the nearby German Weather Service station at Berlin Schönefeld airport (BSCH; ID: 00427). When classification data are missing or indicate rain and snow during the same day, disaggregation is done using the air temperature recorded on the roof by applying a threshold of 273.15 K.

4.2 TEB model configuration

The TEB model is run on a 1D grid, with the urban canyon dimensions and properties defined as the average parameters of the measuring site. The height of building is set to 18 m consistently with the airport parking lot characteristics. The forcing height is determined according to the sensors location on the green roof, i.e. 19.15 m above ground level (agl) for wind speed and direction and 20 m agl for air temperature and humidity. TEB is running with a simplified surface-boundary-layer scheme (Hamdi and Masson, 2008; Masson and Seity, 2009) allowing for the vertical discretization of the atmosphere in the canyon (from the ground to the forcing height) into 6 layers of micro-climate variables. The fraction of building is set to 0.6 and fully covered by green roofs using the TEB-GREENROOF module, the fraction of road is 0.2, and the fraction of low vegetation is 0.2 with GARDEN module (Lemonsu et al., 2012). The road is discretized into 2 layers corresponding to a surface layer of artificial coating and a basement layer corresponding to natural soil. The parking lot is a concrete building with large openings on the facades. The walls are defined in the model with 2 layers of concrete, and the roof consists in a surface layer of concrete and a second layer of insulation.

Besides the photosynthesis parameters (described in Tab. 2), the input parameters of TEB-GREENROOF module, including the description of the green roof and the thermal and hydrological properties, are described in Table 1. The green roof soil is discretized into 6 layers with same composition for a total depth of 0.09 m. With regard to hydrological properties, the potential of the soil matrix at saturation is defined based on *ex situ* analysis. The empirical coefficient for water retention curve (B_{coef}) varies according to soil and connects the water potential to the water content in a soil matrix derived by Clapp and Hornberger (1978), it is set based on the results of a previous case study referenced in De Munck et al. (2013). The hydraulic conductivity at saturation is based on the soil manufacturer's documentation. The soil porosity profile, field capacity, and wilting point are set directly based on measurements of soil water content on the green roof. The definition of the thermal properties is based on the initial calibration proposed by De Munck et al. (2013) for an other instrumented extensive green roof: the same value of dry soil heat capacity is applied but the dry soil thermal conductivity is slightly increased to better modelled the heat conduction

Table 1. TEB-GREENROOF input parameters for green roof substrate and vegetation. Geometric parameters are defined according to the soil depth of the site, surface and thermal properties are based on the previous study of De Munck et al. (2013) with an adjustment in soil thermal conductivity. For hydrological properties, B_{coef} is set based on De Munck et al. (2013), wilting point, field capacity and porosity profile are derived from soil water content measurements, saturated soil matrix is defined on the basis of *ex situ* analysis and saturated hydraulic conductivity is based on soil manufacturer documentation.

Type	Parameter	Unit	Values
Geometry	Numbers of numerical soil layer	(-)	6
	Layer thickness (from top to bottom)	cm	(0.3, 1.9, 1.9, 1.9, 1.5, 1.5)
Surface	Albedo of bare soil	(-)	0.154
	Emissivity of bare soil	(-)	0.83
	Albedo of vegetation	(-)	0.2
	Emissivity of vegetation	(-)	0.83
	Roughness length for momentum	m	0.03
Thermal properties	Dry soil thermal conductivity	$\text{W m}^{-1} \text{K}^{-1}$	0.15
	Dry soil heat capacity	$\text{J m}^{-3} \text{K}^{-1}$	2000000
Hydrological properties	Wilting point	$\text{m}^3 \text{m}^{-3}$	0.001
	Field capacity	$\text{m}^3 \text{m}^{-3}$	0.20
	Porosity profile	$\text{m}^3 \text{m}^{-3}$	0.57
	Matrix potential at saturation	m	-0.1
	B_{coef} coefficient for water retention curve	(-)	4.0
	Hydraulic conductivity at saturation	m s^{-1}	$2.183 \cdot 10^{-3}$

in the soil according to measurements (not presented here). The vegetation albedo and emissivity are taken from the previous study of De Munck et al. (2013).

5 Definition of green roof CO₂ fluxes parameters

- 265
- Without information on on the specific characteristics of the current green roof to be simulated, the input parameters for the photosynthesis model must be defined. The initialisation of these parameters is done following three successive steps:
- (1) Sensitivity analysis on the main parameters of the A-gs photosynthesis model. This step is based on a stand-alone and very low computing time version of A-gs (detailed in Appendix C). Forced by predefined microclimate conditions, a very large number of simulations are carried out to test a wide range of parameter values and clarify which parameters are the most
- 270
- significant and have the greatest effect on the calculation of CO₂ fluxes.
- (2) Pre-calibration that consists in running additional simulations, again using the stand-alone version of A-gs, but with a focus

on the parameters selected in the previous step in order to narrow the range of plausible values (Appendix E).

(3) Calibration of the selected parameters and according to the values identified in the previous step. This time, several combinations of plausible parameter values are tested by running the full TEB configuration considering dynamic LAI. Based on
275 these simulations, the best configuration can be identified.

5.1 Sensitivity analysis of ISBA-A-gs parameters

5.1.1 Sobol index method

In order to assess which ISBA A-gs parameters are the most predominant in modelling the carbon uptake, a global sensitivity analysis is performed on the parameters listed in Table 2. The approach used is the Sobol method (Sobol, 1993, 2001) that
280 can be applied for either linear or non-linear models. Two indices are considered here. The first one S_i is the first-order global sensitivity of output Y to a sole selected input parameter X_i , i.e. the variance of Y when X_i is the only parameter to vary. S_i is normalized by the variance of Y to obtain a score between 0 (no sensitivity) and 1 (full sensitivity). The second index considered S_{T_i} also known as the total-order index, calculates the variance of output Y to X_i when X_i varies with the other parameters in every possible combination (X_i varies solely, then X_i varies with each parameter, then three parameters including
285 X_i vary together, ...). As for S_i , S_{T_i} is normalized by the variance of Y with the score between 0 (no sensitivity) and 1.

To compute those two indices for each A-gs parameter, we use a Monte Carlo approach developed by Saltelli et al. (2010). This involves working with samplings that span adequately the space of possible values for each parameter. In this study, the sampling is performed with a latin hypercube sampling (Stein, 1987) that is a stratified sampling method aiming to spread the sample points evenly across all possible values. This is done using the R package 'lhs' (Carnell, 2022) with the method
290 geneticLHS (Stocki, 2005) for a sampling with a genetic algorithm to maximize the mean distance from each point to all the other points. The complete sensitivity analysis process is summarized in Fig. 3.

5.1.2 Application to the photosynthesis A-gs model

To implement this sensitivity study on the input parameters of the A-gs photosynthesis model, a simplified modelling configuration is developed. The sensitivity analysis is carried out with the stand-alone A-gs model (Appendix C) on scores of simulated
295 CO₂ fluxes. Mean absolute error (MAE) and root-mean-square error (RMSE) are computed over the 5 years of observation selected at a temporal scale of 30 minutes. Among all input parameters of the A-gs model, eight parameters (Table 2) are not set on observation and are selected for the sensitivity analysis. This includes $g_{mes}^*(25)$ and $A_{m,max}(25)$ presented in Section 3.3, with in addition, the cuticular conductance (g_c), the maximum saturation deficit of atmosphere tolerated by vegetation (D_{max}), the maximum initial quantum use efficiency ϵ_0 , the CO₂ compensation concentration ($\Gamma(25)$), the value of the f factor when
300 there is no saturation deficit (f_0^*) and the maximum normalized soil water stress factor ($F2_{max}$). The range of values for part of the parameters is based on a previous sensitivity analysis from (Aouade et al., 2020) with reference values from the literature: $g_{mes}^*(25)$ from Calvet (2000), g_c from Gibelin et al. (2006), D_{max} from Calvet (2000). For the other parameters, the ranges are set according to the default values defined for types C3 and C4 in ISBA A-gs, with a $\pm 10\%$ margin: ϵ_0 , $\Gamma(25)$, $A_{m,max}(25)$

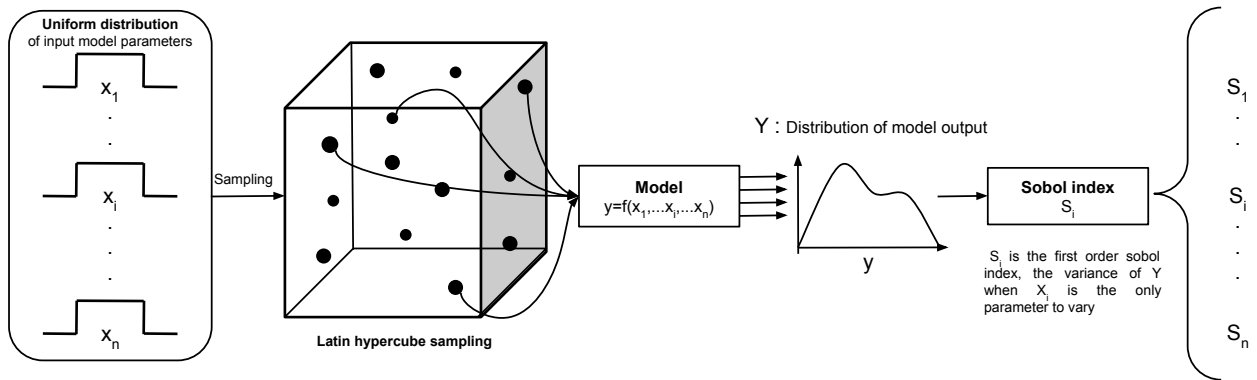


Figure 3. Flow chart for sensitivity analysis, this chart is for the first order only, the flow chart is the same for the total effect index except for the calculation of the sobol index box.

from Gibelin et al. (2006) and f_0^* from Jacobs (1994). The parameters and associated value ranges are listed in the Table 2.

305 The distribution within the fixed range of each parameter is defined according to a uniform distribution.

The size of each sampling matrix (the number of different values for one parameter) is set to 5000 which implies a total of 50000 simulations based on the Monte Carlo method. Here, the output variables of interest for which the Sobol indices are calculated are the mean absolute error (MAE) and the root-mean-square error (RMSE) of the net CO_2 fluxes simulated by A-gs compared with the net CO_2 flux measurements collected on the instrumented green roof.

310 5.1.3 Sensitivity analysis results

The results of the sensitivity analysis on the A-gs input parameters for its implementation in the TEB-GREENROOF model for CO_2 calculation are presented on Fig. 4 for both MAE and RMSE. The values obtained for the Sobol index make it possible to first identify the parameters with no influence on the net carbon fluxes scores, i.e. D_{max} and g_c . As the result, they are set to default values as listed in Table 2. All the other parameters are retained for the calibration with the same range for the pre-calibration. Among them, $g_{mes}^*(25)$ is the most sensitive one, followed by $\Gamma(25)$ and ϵ_0 , with similar results for MAE and RMSE. As a result, these three input parameters have the greatest influence on the performance of the A-gs model for calculating CO_2 fluxes, and thus require more meticulous calibration (that is presented in the next section). The parameters $A_{m,max}(25)$, f_0^* and $F2_{max}$ have a smaller impact but not negligible so that they also retained for the pre-calibration.

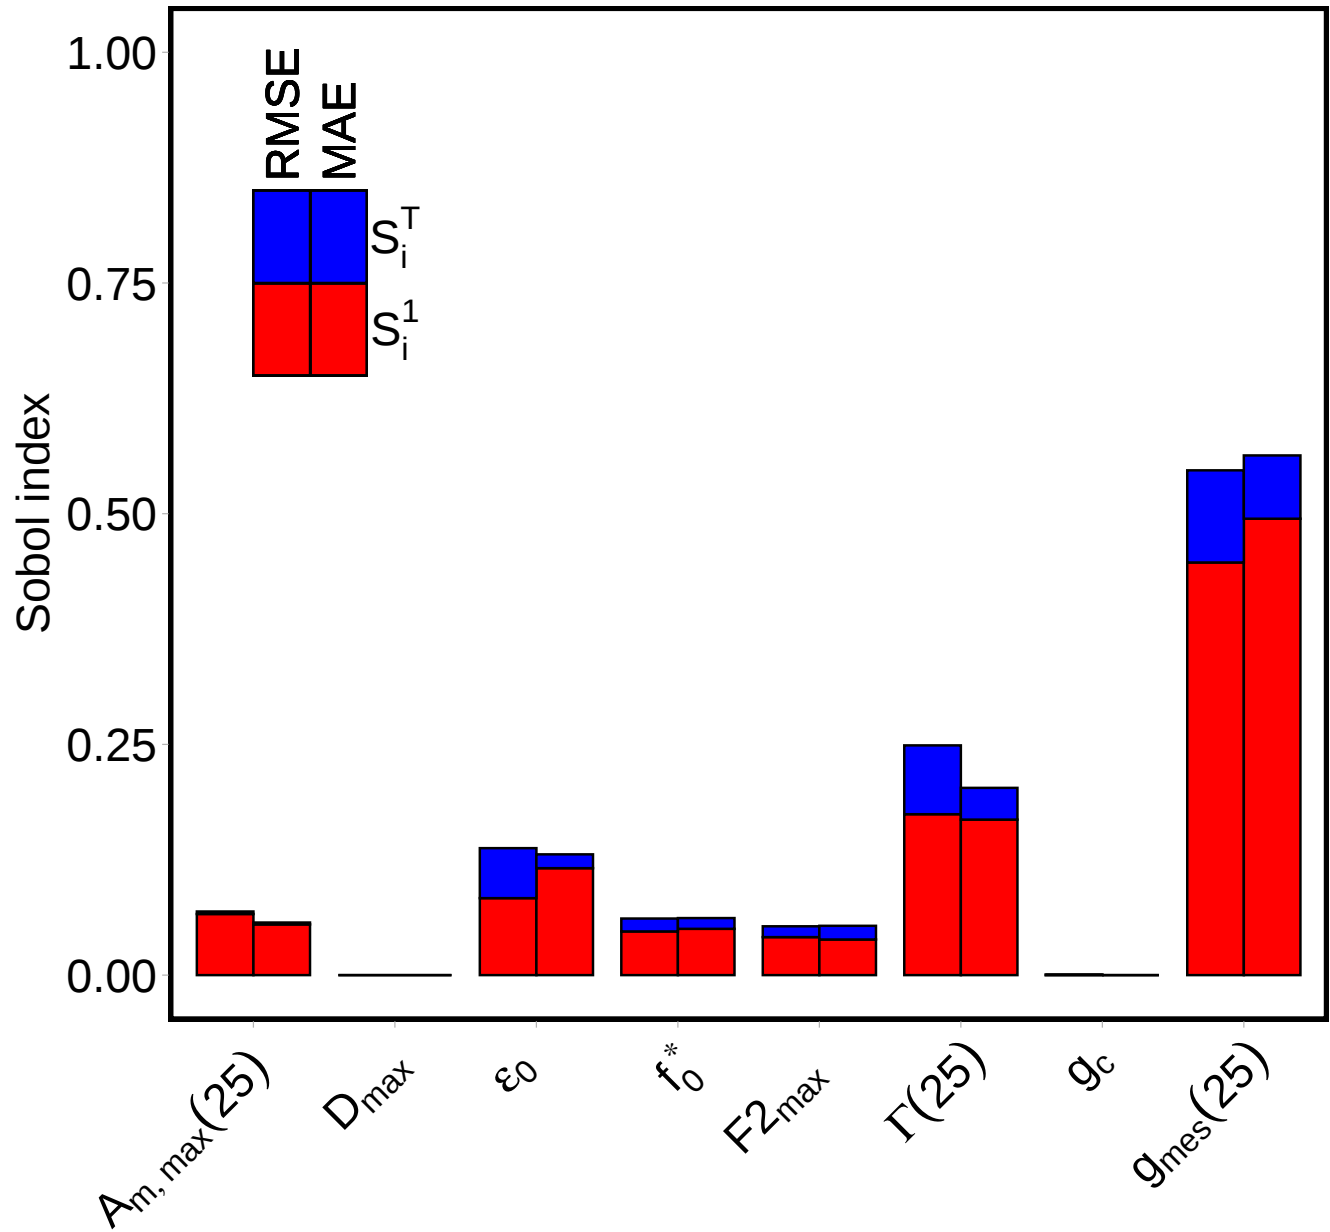


Figure 4. Comparison of the Sobol first order (red) and total order (blue) indexes calculated for the eight variables in the sensitivity analysis, for both RMSE (left bar) and MAE (right bar).

5.2 Calibration of A-gs parameters

5.2.1 Method

The model is calibrated, based on the observation dataset of net CO₂ fluxes divided into two distinct time periods: a four-year calibration period (from 2016 to 2019) and a one-year evaluation period (2020). A pre-calibration (Appendix E) is made to reduce the range of values for the six photosynthesis parameters to be calibrated ($g_{mes}^*(25)$, $\Gamma(25)$, ϵ_0 , $A_{m,max}(25)$, f_0^* and $F2_{max}$).

An ensemble of TEB-GREENROOF simulations is then run, according to the full configuration presented in Sect. 4.2 (and considering a dynamic LAI). Each simulation represents a different combination of parameter values. For each of the six photosynthesis parameters, two values are tested, based on the pre-calibration results (Table 2). Since TEB-GREENROOF simulations are performed with a dynamic LAI, additional parameters related to the biomass evolution need to be calibrated, i.e. the maximal lifespan of leaves (τ_M) and the specific leaf area (SLA). For *Sedum Album*, the value of SLA is set to 12.9 m² kg DM⁻¹ according to the TRY database (Kattge et al., 2020) that brings together the different plant trait databases worldwide (TRY last version contains more than million trait records for 6.24 million individual plants). The parameter τ_M is tested for the two values of 75 and 150 days, 150 being the default value in ISBA for C3 and C4 plants (Gibelin et al., 2006) and 75 the half of this value. In total, 128 combinations of parameters are simulated with TEB-GREENROOF. To identify the best configuration, the statistical scores of the 128 experiments calculated over 2016-2019 are compared, by crossing the mean absolute error (MAE) of net CO₂ fluxes and the root-mean square error (RMSE) of LAI.

5.2.2 Calibration results

Figures 5 illustrates the outcomes of all simulations in terms of MAE for the net CO₂ fluxes and RMSE for LAI, with details of the values of each parameter in all simulations. In accordance with the findings of the sensitivity analysis, the mesophyll conductance at 25 °C is identified as the most influential parameter. On Fig. 5 (c) nearly all simulations with $g_{mes}^*(25)=0.001$ m s⁻¹ demonstrate better performances than simulations with $g_{mes}^*(25)=0.002$ m s⁻¹ for both net CO₂ fluxes and LAI. The maximal lifespan of leaves (τ_M) is also found to have a significant impact. However, as evidenced by the two distinct curves (Fig. 5 (a)), this parameter primarily affects the representation of LAI, with systematic better RMSE for $\tau_M=75$ days than 150 days . For $\Gamma(25)$ and ϵ_0 (Fig. 5 (d,f)), the two values tested for each parameter give quite comparable performances. It is nonetheless possible to identify a single value, considered as the best, set to 55 ppmv for $\Gamma(25)$ and 1.4 kg CO₂ PAR for ϵ_0 . For the other parameters, namely $A_{m,max}(25)$, f_0^* , and $F2_{max}$ (Fig. 5 (b,e,g)), it is more difficult to conclude on the values leading to the best configuration. Indeed, the differences in performances between the simulations performed with the two values of $A_{m,max}(25)$ are very low, which corresponds well with the sensitivity analysis results. For f_0^* and $F2_{max}$, the simulations with the best RMSE for LAI do not correspond to the simulations with the best MAE for CO₂ fluxes. The best configuration is highlighted on Fig. 5 (a), with the corresponding parameter values listed in Table 2. It is selected because it gives the best simulation for LAI and still close to the best simulation for F_{CO_2} MAE.

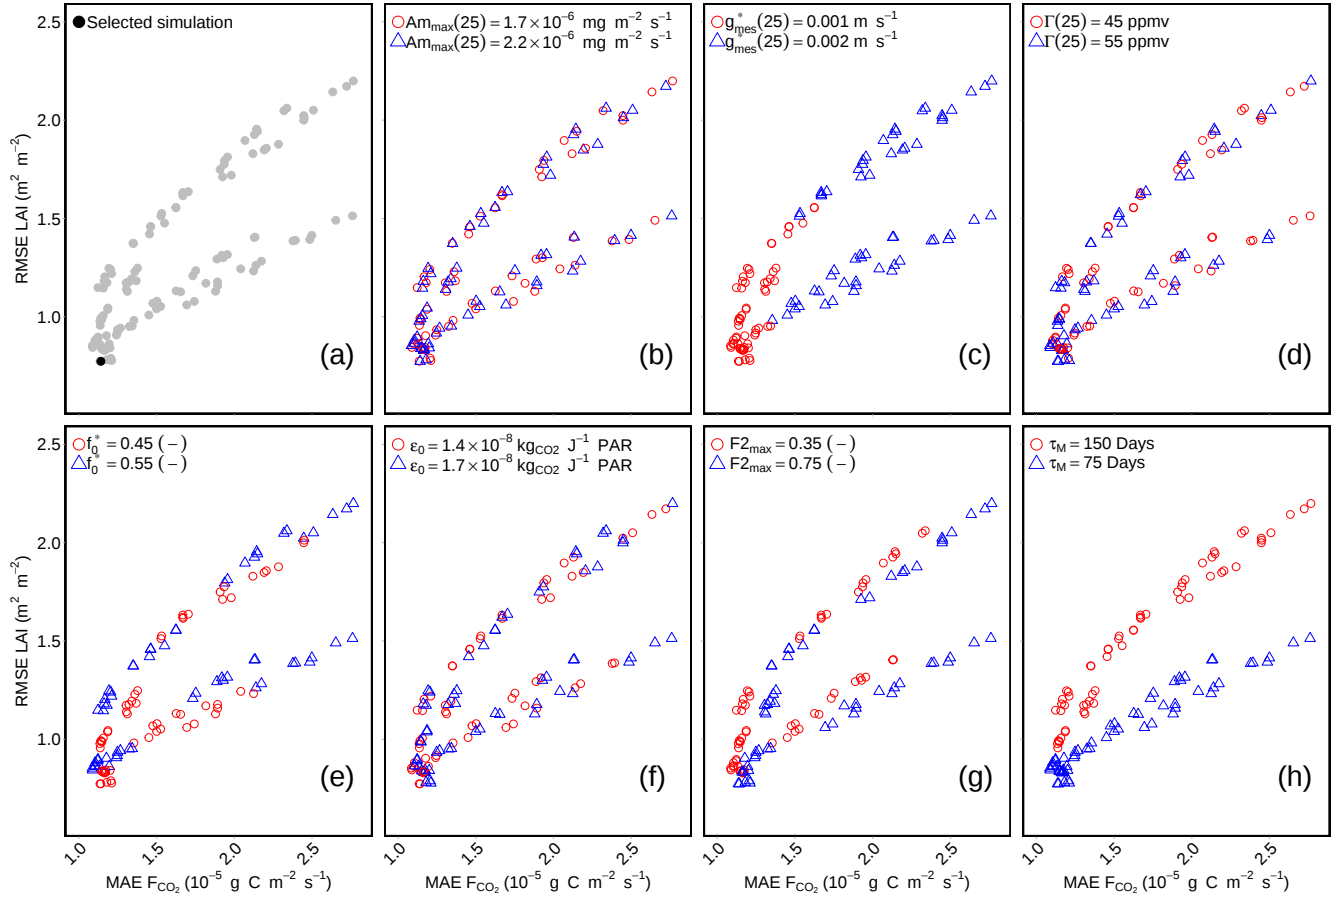


Figure 5. Comparison of the performances of the 128 simulations combining the RMSE of daily LAI (x-axis) and the MAE of 30-min average instantaneous net CO_2 fluxes (y-axis). Panel a highlights the simulation selected as the best (black dot) compared to the others (grey dots). For each other panel corresponding to one of the variables to be calibrated (b-h), the red/blue colour code distinguishes the performance of the two values tested for this variable.

5.3 Evaluation of the TEB-GREENROOF

The final simulation (i.e. the evaluation simulation) is based on the best configuration obtained from the calibration stage with all parameters listed in Table 2. It is analysed and evaluated here in relation to observations of LAI and CO₂ fluxes.

5.3.1 Dynamic LAI modelling

355 The modelling of the evolving LAI using the biomass model is presented in Fig. 6 and compared with the LAI retrieved from observations. The observed LAI was estimated by capturing the variation of the green chromatic information (green fraction) in the RGB space from photographs taken at 10 different randomly selected locations on the roof, approximately one a month (Heusinger and Weber, 2017b). Since observation-based LAI is estimated from the analysis of discontinuous photographs, it is difficult to assess the accuracy of the model in detail. Nevertheless, some interesting results stand out from the comparison.

360 The temporal evolution of the LAI reveals a good representation of the overall seasonal dynamics for the evaluation year 2020, with a clear identification of the growing period starting around April and ending in September. During this period, the annual maximum LAI is found in July, reaching $3.08 \text{ m}^2 \text{ m}^{-2}$ for modelling and $3.71 \text{ m}^2 \text{ m}^{-2}$ for estimation. For the calibration period, the modelled annual maximum LAI reaches 2.56, 1.84, and $2.61 \text{ m}^2 \text{ m}^{-2}$ for 2016, 2018, and 2019, respectively, which corresponds with the variation of annual maximum observed LAI at 2.55, 2.49 and, $3.11 \text{ m}^2 \text{ m}^{-2}$ for the same years.

365 Note that comparison cannot be done for year 2017 since there is no estimation of LAI after mid July. With regard to the senescence period, a minimum threshold of LAI is prescribed in the model at $0.5 \text{ m}^2 \text{ m}^{-2}$ based on the estimated LAI between 2016-2020 (in particular, according to winter values in 2018-2019, see Fig. 6), which still matches reasonably well with what is estimated in 2020. Finally, it is noteworthy that the model is able to simulate inter-annual variability in LAI. For the particularly dry year 2018, the average LAI simulated during the growing season (April-September) is much weaker ($0.9 \text{ m}^2 \text{ m}^{-2}$) than

370 that of other years ($1.6\text{-}1.7 \text{ m}^2 \text{ m}^{-2}$).

5.3.2 Net CO₂ fluxes modelling

The monthly evolution of the net CO₂ fluxes diurnal cycle simulated and observed over the year 2020 is represented on Fig. 7. The model provides a good representation of the amplitude of the net CO₂ fluxes for the evaluation period. Both the annual cycle and diurnal cycle are close to the observations. The model is able to capture the net CO₂ flux seasonal

375 variations, in response to variation of climatic forcing. In August and late April, both the model and the observations catch less photosynthesis due to a dryer period of stress for the vegetation. Conversely, the model also reproduces periods in July when photosynthesis is enhanced. However, the model remains excessively responsive to meteorological fluctuations, particularly following precipitation events, when soil water content is high, leading to an overestimation of the photosynthesis. This is illustrated after the rain of June 13, 2020, when the daily average (between 6 and 18 UTC) of the difference between the

380 observation and the model is 3.35, 4.17, 2.93 $2.42 \mu \text{ mol m}^{-2} \text{ s}^{-1}$ for the 14th, 15th, 16th and 17th respectively, leading to an overestimation of the flux for the 4 days after the rain event. Then this trend reverses, and the difference between observation and model is 0.89, -1.57, -2.35 $\mu \text{ mol m}^{-2}$ for the 18th, 19th and 20th respectively. Furthermore, outside the growing season,

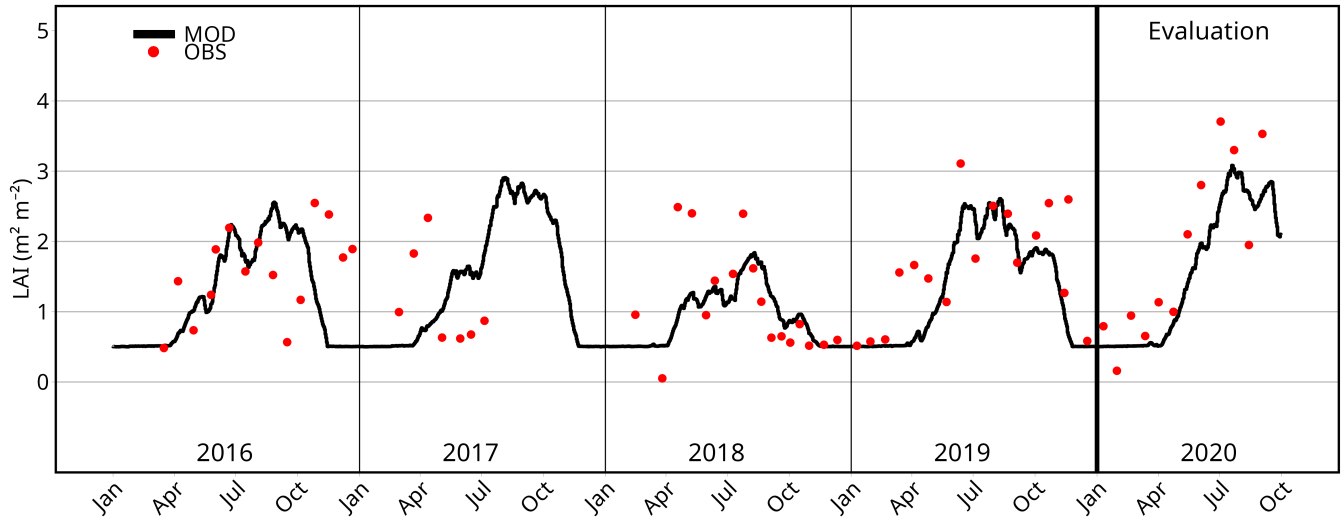


Figure 6. Daily evolution of the modelled LAI (black line) during the calibration (2016-2019) and evaluation (2020) periods, compared to the estimated on site LAI values (red dots), in $\text{m}^3 \text{m}^{-3}$.

the photosynthesis simulated by the model is close to zero, whereas observations indicate that photosynthesis continues even during winter. This can be seen by taking the average over the meteorological winter period of the daily minimum F_{CO_2} . The
385 observed value is $2.53 \mu \text{mol m}^{-2} \text{s}^{-1}$, while the modeled value is only $0.40 \mu \text{mol m}^{-2} \text{s}^{-1}$.

The diurnal cycle of the net CO_2 fluxes monthly averaged over the five-year period is illustrated in Fig. 8. Similarly to what was shown in Fig. 7, outside the growth period (between November and March), the model does not simulate the diurnal CO_2 cycle, which is still noticeable in the observations and reflects weak but still active photosynthesis. However, the amplitude of the net CO_2 fluxes is on average quite well represented during the growing period, especially between June and October. During
390 the day, the CO_2 fluxes are well represented, although the model tends to be overly responsive compared to the observations, resulting in a greater standard deviation for the modelling. The modelled respiration at night is in close agreement with the measurements as it can be seen between 8 pm and 6 am, and follows well the annual variation, being greater during the growing period and close to zero outside the growing period.

5.3.3 Net ecosystem exchanges

395 The net ecosystem exchange (NEE, see Section 3.3) quantifies the net sequestration of CO_2 if the NEE is negative, or the net CO_2 emissions if the NEE is positive. Figure 9 represents the observed and modelled daily NEE monthly averaged for the five successive years from 2015 to 2020. The modelled NEE is in close agreement with the measurements for all years. It follows the observed annual variation, with a slightly positive NEE from October to March, and negative NEE for the rest of the year.

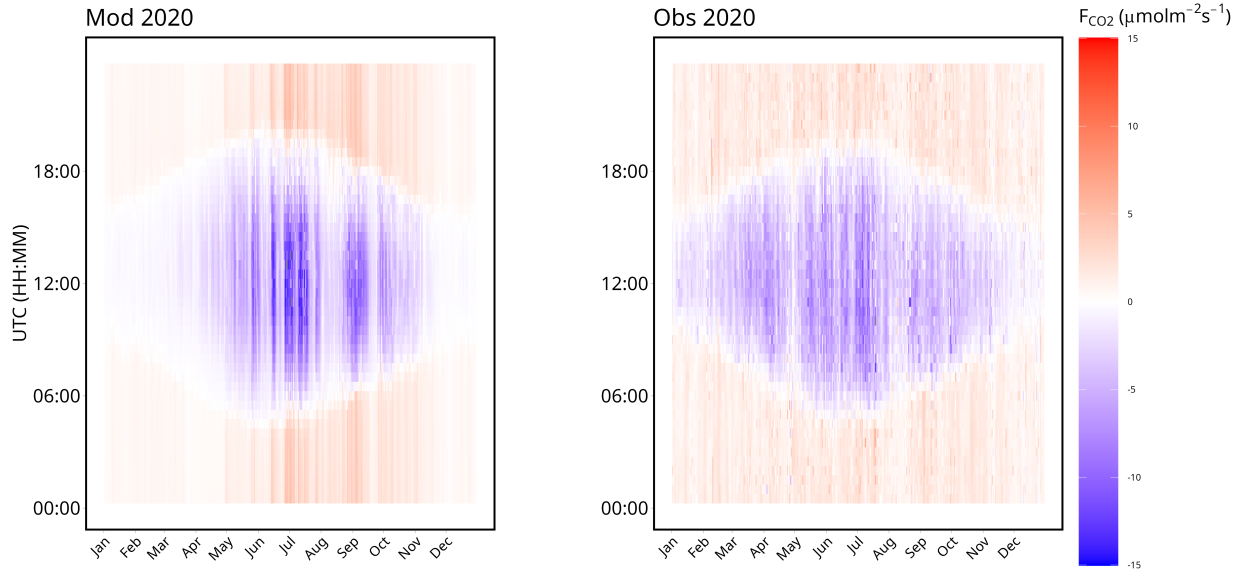


Figure 7. Monthly evolution of daily variation of modelled (left) and observed (right) CO₂ fluxes (F_{CO_2}) for the evaluation period 2020. The colour range varies from green for negative CO₂ fluxes (photosynthesis) to red for positive CO₂ fluxes (respiration).

This means that the green roof acts as a net carbon emitter in autumn and winter, but as a net carbon sink in spring and summer.

400 The partitioning on the modelling between GPP and R_{ECO} on Fig 9 demonstrates that both GPP and R_{ECO} follow similar inter-annual variations, being greater in summer than in winter. However since no partitioning are available between GPP and R_{ECO} on observations during this study, it is not possible to confirm the accuracy of the model processes. At the annual scale (Table 3), the model shows that the green roof is a net carbon sink in accordance with measurements, and quantifies fairly well the amount of carbon fixed by the green roof within the range of error of the measurement estimated at $16 \text{ g C m}^{-2} \text{ yr}^{-1}$.

405 Indeed, the observed and modelled annual NEE for the evaluation year 2020 is -168 and $-166 \text{ g C m}^{-2} \text{ yr}^{-1}$, respectively. The model is also able to capture the inter-annual variations in NEE, which are partly governed by changes in weather conditions: especially, the year 2018, which stands out as a dry year compared with normals, shows a lower annual NEE than the other years in both observations and simulation (-85 and $-51 \text{ g C m}^{-2} \text{ yr}^{-1}$, respectively). Inversely, the wetter year 2017 presents an observed NEE of $-178 \text{ g C m}^{-2} \text{ yr}^{-1}$ that is substantially greater than for all the other years. This is partly seen in the

410 modelling results, where the NEE is high and reaches $-163 \text{ g C m}^{-2} \text{ yr}^{-1}$ in 2017, but it is in the same range than for year 2020 ($-166 \text{ g C m}^{-2} \text{ yr}^{-1}$).

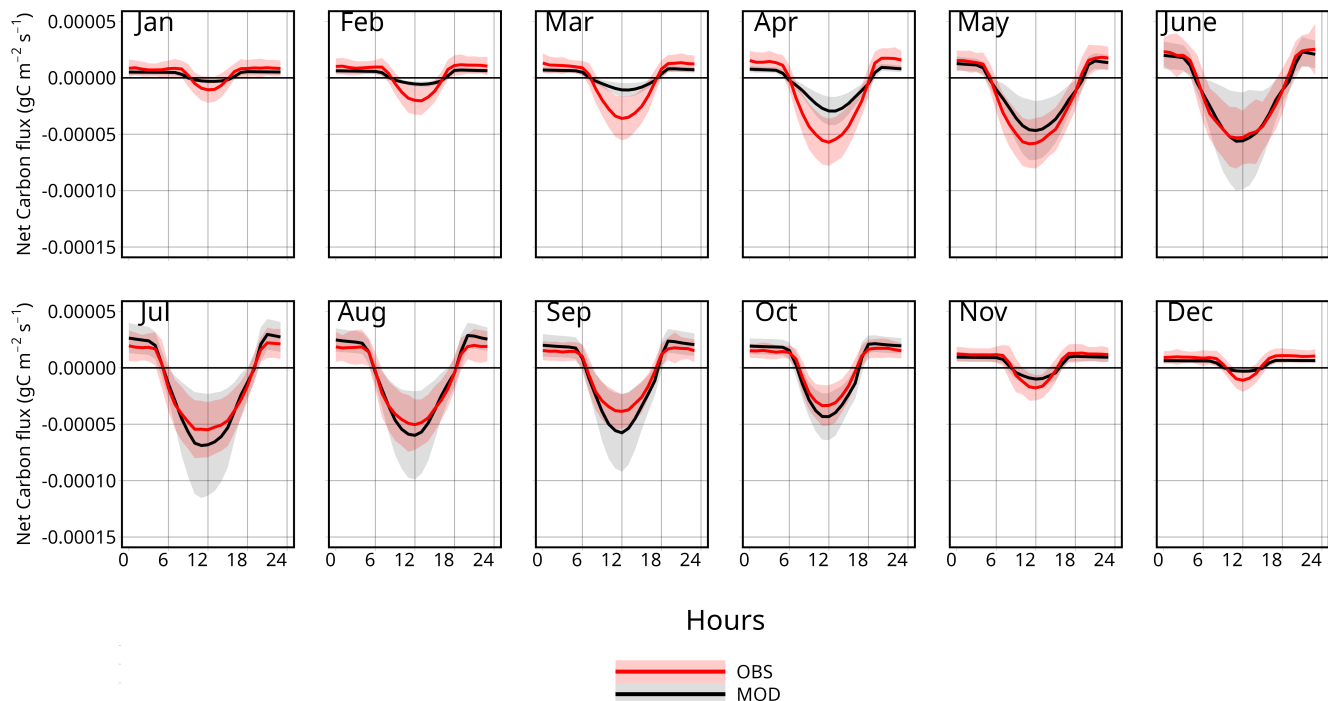


Figure 8. Comparison of the modelled (black line) and observed (red line) diurnal cycles of net CO_2 fluxes ($\text{g s}^{-1} \text{ m}^{-2}$) monthly averaged over the five-year period. The transparent ranges indicate one standard deviation.

6 Discussion

The work presented in the previous section has enabled us to characterize for the first time the parameters of the photosynthesis and vegetation growth model for Sedum in a Soil-Vegetation-Atmosphere-Transfer model. We now discuss in more detail the behaviour of the net CO_2 fluxes from green roofs in the TEB model and the perspectives that evolving vegetation opens up for the modelling of green roofs.

6.1 Sedum model response to micro-meteorological conditions

The calibration proposed in this study allows for the representation of Sedum behaviour when they do not use a CAM photosynthesis pathway. Here we investigate the response of the new Sedum parametrisation to the environmental variables driving photosynthesis (soil temperature, water content and radiation) compared to the standard C3 and C4 parametrisations. Figure 10 shows on each panel the response curves of GPP to the three environmental variables: T_s , PAR and VWC . For each response curve to one variable, the other environmental variables are fixed. For comparison, the observations are selected within the range of the most extreme values of the three curves (the dashed and dotted lines). The observed GPP displayed on the three figures is estimated from the observation of net CO_2 fluxes on the BER green roof site subtracted by the modelled R_{ECO}

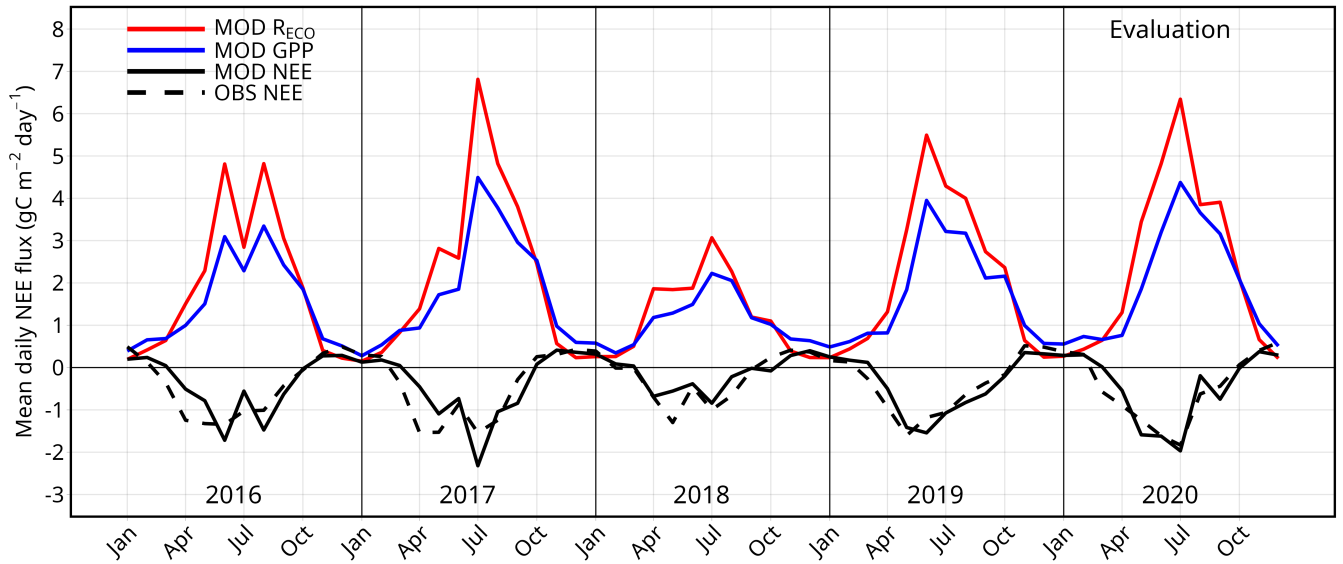


Figure 9. Comparison of the modelled (black line) and observed (black dashed line) monthly averaged daily NEE (in $\text{g C m}^{-2} \text{ day}^{-1}$) for the period 2016-2020. For simulation only, the monthly averaged of both daily ecosystem respiration (red line) and daily GPP (green) are also presented.

of the best simulation. All observations were conducted within the specified range of each figure, with variables influencing photosynthesis varying between the most and the least favourable values for photosynthesis. For the three curves, the Sedum parametrisation performs better than the ISBA C3 and ISBA C4 parametrisations with a significantly lower photosynthetic rate. The response to volumetric water content (Fig. 10a) demonstrates that the threshold values for the normalized water stress factor ($F2_{min}$ and $F2_{max}$) and the weighted soil volumetric water content between 0-10 cm depth for soil respiration ($w_{10_{min}}$ and $w_{10_{max}}$) were appropriately selected, this is visible on the plateau reached at a VWC of $0.056 \text{ m}^3 \text{ m}^{-3}$ on the average micro-meteorological conditions (straight line) which correspond well with the observations. With regard to the photosynthetically active radiation (Fig. 10b), the Sedum parametrisation models correctly represent the increase of GPP but also the threshold above which the GPP no longer increase with photosynthetically active radiation. This response is not noted with the ISBA C3 and ISBA C4 parametrisations. For the response to temperature (Fig. 10c), the range of temperatures observed does not make possible the determination of the maximum GPP achievable at higher temperatures, and beyond which the GPP decreases with temperature.

6.2 Dynamic vegetation

The use of a vegetation growth model makes it possible to simulate the explicit evolution of LAI. LAI is a key parameter for vegetation including green roofs, which drives and sizes physiological processes and water, energy and gas exchanges. For the

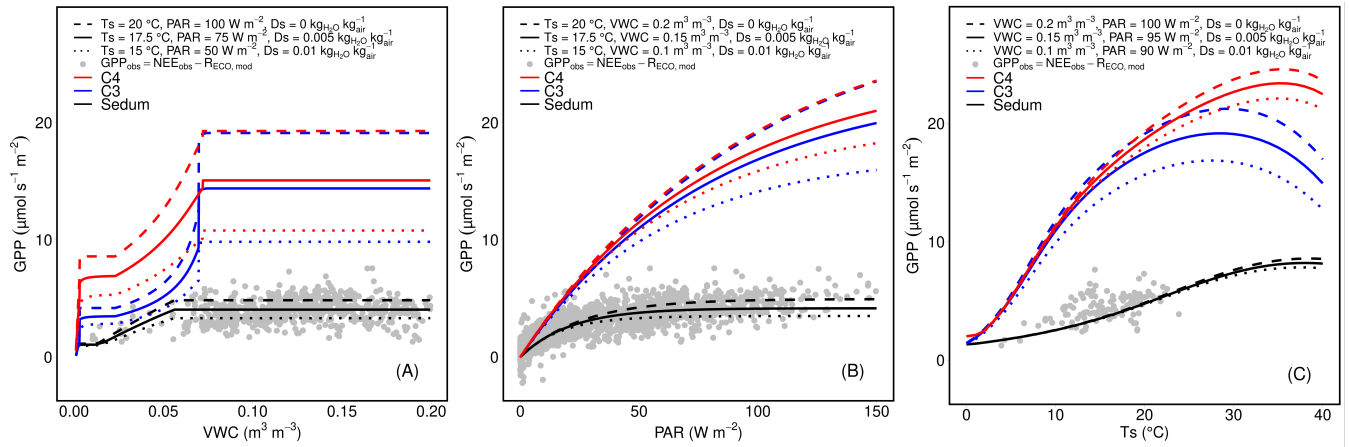


Figure 10. Evolution of the modelled (lines) GPP with (a) volumetric water content (VWC, $\text{m}^3 \text{m}^{-3}$), (b) photosynthetically active radiation (PAR, W m^{-2}), and (c) temperature (T_s , $^\circ\text{C}$), for the parametrisation of Sedum, ISBA C3, ISBA C4, and the comparison against selected observation (dots).

440 same micro-meteorological conditions, fluxes can vary considerably depending on LAI and its evolution over time. Therefore, LAI has a direct impact on the energy and water balance through the calculation of evapotranspiration, and on the carbon balance through the calculation of GPP. However, quantifying accurately LAI and its time evolution is a challenge, given that it can vary considerably over the course of the year, as well as from one year to the next, depending on the variability of climatic conditions. On the present study site in particular, LAI varies between 0.05 and $3.71 \text{ m}^2 \text{m}^{-2}$ with also significant inter-annual variations.

445

Most green roof models use LAI as an input prescribed variable. The first approach for short-term simulations of several days is to define a fixed LAI value for the duration of the simulation (e.g., Lazzarin et al., 2005) and compare simulations with different prescribed LAI to find the best configuration and quantify the sensitivity of green roof performance to LAI variation, as done by Del Barrio (1998) or Sailor (2008). Another approach is to use on site LAI measurement, as done in the works of

450 Ouldboukhitine et al. (2011) with direct measurement of LAI or with indirect estimation method as in Lazzarin et al. (2005) where the LAI is calculated with measurement of soil evapotranspiration. Zhou et al. (2018) show that taking into account the seasonal evolutive LAI during the simulation, rather than applying a fixed LAI, leads to significantly more relevant energy balance resulting in a better quantification of the reduction in building temperature and energy consumption, in particular for long term simulation. With this aim, they use a model to represent the vegetation seasonal changes, based on temperature

455 and fixed maximum and minimum LAI using modified Dickinson semi-empirical equation. The work presented here includes more climatic and environmental factors impacting vegetation growth that are the soil water content, atmospheric pressure, temperature and humidity, photoactive radiation, and CO_2 concentration. In this way, the model can represent and estimate the biomass accumulation or loss due to meteorological changes. In contrast to other works, it enables to more accurately represent long term changes in the performance of green roofs, due in particular to the development of the vegetation.

A new parametrisation for the net CO₂ fluxes calculation has been implemented in the model TEB-GREENROOF by using the ISBA-A-gs photosynthesis model with a biomass module and an empirical parametrisation of the ecosystem respiration. The modelling was informed by observations on an extensive non irrigated Sedum green roof located at the Berlin BER airport. The sensitivity analysis results showed that the main parameters driving the CO₂ fluxes on the green roofs are the mesophyll conductance at 25°C ($g_{mes}^*(25)$), the CO₂ compensation concentration at 25°C ($\Gamma(25)$), and the maximum initial quantum use efficiency (ϵ_0), which needed to be calibrated more carefully. The results after calibration showed that the model performed well in reproducing the diurnal cycle during the growing period and its dependence to the variations in meteorological conditions and soil water condition. Outside the growing period, the model struggles in simulating the weak photosynthesis process that seems to persist based on observations. Nonetheless, as CO₂ fluxes remain very low during this period, the impact on the overall quantification of carbon sequestration is limited, leading to a good estimation of the annual NEE and of its inter-annual variations. This work also ultimately allowed to characterise for the first time the photosynthesis and growth parameters appropriate for modelling Sedum with the ISBA SVAT model.

Future development will need to include comparison between the ecophysiological parameters calibrated here and on site measurements of green roof plants photosynthesis parameters. To study the full carbon cycle of the green roof, the management and maintenance of green roofs need to be addressed, especially by considering the biomass that can be removed by gardeners. Similarly, the carbon sequestered in the soil needs to be quantified with on site sampling. On the modelling side, the growth module needs to be improved, and a soil organic carbon module needs to be added in order to be able to perform longer term studies.

Along side thermal and hydrological effect, the short term carbon sequestration can be now added into impact studies in order to have a full picture of the impact of green roof on the fluxes at city scale and under different climate events and conditions. But the green roof effect should not be only looked in term of fluxes, other effect that cannot be modelled in model like SURFEX such as effect on individuals and biodiversity should also be taken into account, thus require to cross-reference the results of different approaches.

Code and data availability. TEB is part of the software SURFEX from the CNRM open source website: <https://opensource.umr-cnrm.fr> under the CeCILL Free Software License Agreement v1.0 license. The version with net CO₂ fluxes modelling for green roof is available on 10.5281/zenodo.14289462. The experimental data that are used for the calibration and evaluation were provided by Prof. Stephan Weber from the Technische Universität Braunschweig, it is necessary to contact Prof. Stephan Weber directly.

Appendix A:



Figure A1. Photograph of the green roof experimental plot located on top of the car park of the Berlin Brandenburg airport (Germany).

490 Appendix B:

A-gs equation: The following equations are use in the ISBA-A-gs in SURFEX V9. The model uses an empirical light response function of net assimilation (A_n) to combine the effects of light and CO₂ as limiting factors. When light is not limiting, A_m is limited by a maximum photosynthetic rate $A_{m,max}$:

$$A_m = A_{m,max} \left[1 - e^{-g_{mes}^* \frac{(C_i - \Gamma)}{A_{m,max}}} \right] \quad (B1)$$

495 where C_i is the internal leaf CO₂ concentration in kgCO₂ kgair⁻¹. $A_{m,max}$ is the maximum net CO₂ assimilation in mg m⁻² s⁻¹, g_{mes}^* the mesophyll conductance in m s⁻¹, and Γ the CO₂ concentration compensation point in ppmv, defined according

to the following equations:

$$A_{m,max}(T_s) = \frac{A_{m,max}(25) \cdot Q_{10}^{\frac{T_s-25}{10}}}{(1 + e^{0.3(T_1-T_s)}) \cdot (1 + e^{0.3(T_s-T_2)})} \quad (B2)$$

$$500 \quad g_{mes}^*(T_s) = \frac{g_{mes}^*(25) \cdot Q_{10}^{\frac{T_s-25}{10}}}{(1 + e^{0.3(T_1-T_s)}) \cdot (1 + e^{0.3(T_s-T_2)})} \quad (B3)$$

$$\Gamma(T_s) = \Gamma(25) \cdot Q_{10}^{\frac{T_s-25}{10}} \quad (B4)$$

where $A_{m,max}(25)$ is the maximum net CO₂ assimilation at 25 ° C in mg m⁻² s⁻¹, $g_{mes}^*(25)$ is the mesophyll conductance at 25 degree in m s⁻¹, T_s is the leaf skin temperature in ° C, T_1 and T_2 are reference temperatures in ° C.

505 The internal CO₂ concentration depends directly of the atmospheric CO₂ concentration (Eq. B5) and is controlled by the air humidity (Eq. B6).

$$C_i = f \cdot C_s + (1 - f)\Gamma \quad (B5)$$

where C_s is the atmospheric CO₂ concentration in kgCO₂ kgair⁻¹ and f a coupling factor estimated via:

$$f = f_0^* \cdot (1 - \frac{D_s}{D_{max}^*}) + f_{min} \cdot (\frac{D_s}{D_{max}^*}) \quad (B6)$$

510 where D_{max}^* is the maximum specific humidity deficit of the air tolerated by vegetation in kgH₂O kg_{air}⁻¹, D_s is the leaf to air saturation deficit in kgH₂O kg_{air}⁻¹ and f_0^* is the value of the f factor for $D_s=0$ g kg⁻¹ and f_{min} given by:

$$f_{min} = \frac{g_c}{g_c + g_{mes}^*} \quad (B7)$$

where g_c is the cuticular conductance in m s⁻¹.

Then the CO₂ assimilation is limited by the photosynthetically active radiation via:

$$515 \quad A_n = (A_m + R_d) \cdot (1 - e^{-\frac{\epsilon \cdot I_a}{A_m + R_d}}) - R_d \quad (B8)$$

where ϵ is the initial quantum use efficiency in kgCO₂ J⁻¹ PAR, I_a is the photosynthetically active radiation and R_d is the dark respiration ($R_d = \frac{A_m}{9}$). ϵ is estimated with the following Eq.(B9).

$$\epsilon = \epsilon_0 \cdot (\frac{C_i - \Gamma}{C_i + 2\Gamma}) \quad (B9)$$

where ϵ_0 is the maximum quantum use efficiency in kgCO₂ J⁻¹ PAR

520 **Plant respiration**

Depending on if the model on forced LAI or with interactive vegetation, the plant respiration is estimated in tow different way. First When the model is run with forced LAI the plant respiration R_{leaf} is calculated as :

$$R_{leaf} = \frac{A_m}{9} \cdot LAI \quad (B10)$$

When the model is run with interactive vegetation the plant respiration is estimated A term for the respiration of the of the
525 above ground stem biomass reservoir is added

$$R_{leaf} = \frac{A_m}{9} \cdot LAI + \eta_R B_s Q_{10}^{T_s - 25} \Delta t \quad (B11)$$

where B_s (expressed in kg of dry matter (DM) m^{-2}) is the above ground stem biomass reservoir, T_s is the leaf temperature in °C, η_R is a respiration rate fixed at 1 %day $^{-1}$ ($s - 1$) and $Q_{10} = 2.0$

Appendix C:

530 **TEB-GREENROOF input parameters :**

Appendix D:

Forced A-gs model

In order to reduce the cost of calculation, the A-gs component of the ISBA-A-gs model has been rewritten and implemented in R, allowing for the rapid execution of simulations without the necessity of computing each step individually. Indeed, the
535 separated A-gs model is forced with computed ISBA-A-gs input from a reference TEB-GREENROOF simulation with forced LAI. This approach enabled the simulation to run every time step simultaneously however, this approach removed the retroactive effect of the CO₂ fluxes. The LAI monthly evolution for the reference simulation was constructed using the monthly average of the spline interpolation of the punctual estimated values of LAI on the green roof case study site.

Appendix E

540 **Pre-calibration**

Before the calibration with the full TEB configuration, a pre-calibration is made in order to reduce the plausible range of values and combination of parameters for the calibration simulations. During the pre-calibration, the identified sensitive parameters ($g_{mes}^*(25)$, $\Gamma(25)$ ϵ_0 , $A_{m,max}(25)$, f_0^* and $F2_{max}$) are modified by conducting multiple simulations on the forced A-gs model, with the same parameter range and sampling method as that used in the sensitivity analysis but only on the sensitive
545 parameters. A total of 50000 simulations were conducted on the specified range of parameters. The intersection of the 0.1 % best simulation for the three scores of root-mean-square error (RMSE), mean absolute error (MAE), and (Coefficient of

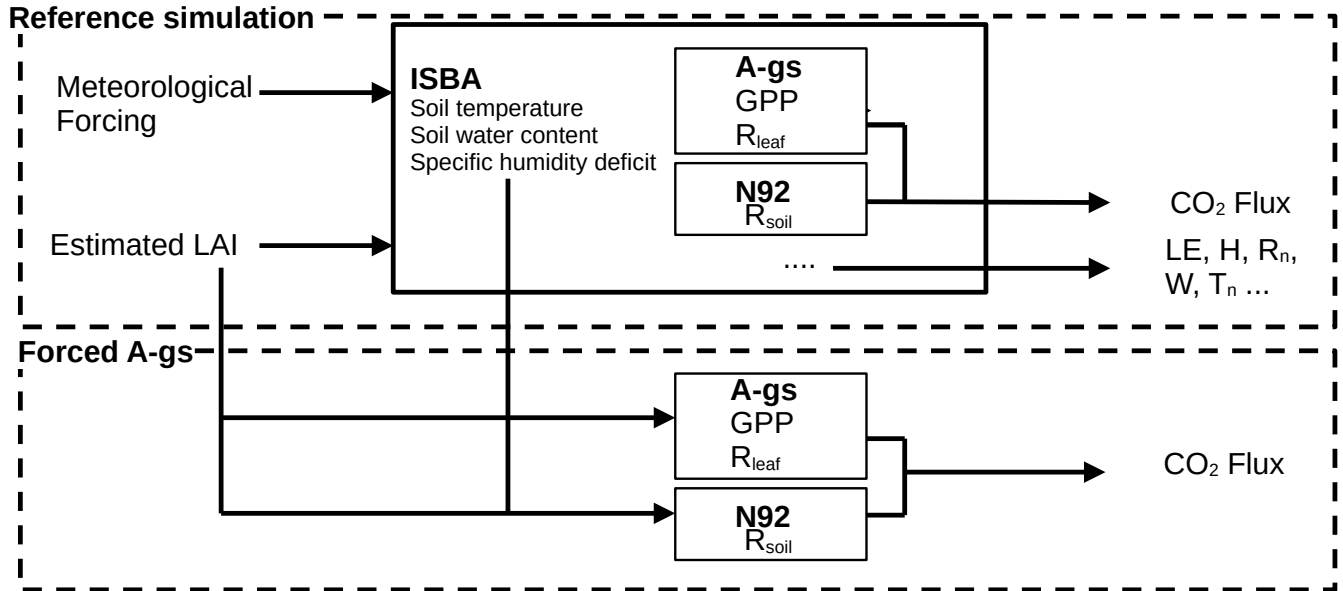


Figure D1. Description of the numerical setup implemented for running the A-gs photosynthesis model in a stand-alone configuration.

determination (r^2) were retained and are displayed on Fig. E1. The results showed that for the 0.1 % intersection for the three scores, the average value of $g_{mes}^*(25)$ for the simulations was 0.0019 m s^{-1} . Thus, it was decided to test for the two values 0.001 and 0.002 m s^{-1} . For f_0^* , the average was 0.56 but since the lower range was at 0.45, the values selected were 0.45 and 0.55. For $\Gamma(25)$, the average was 43.1 ppmv and the standard deviation was 8.86 ppmv but like for f_0^* the values reached the upper range set at 49.5 ppmv so the two values selected were set to 45 ppmv and 55 ppmv. For ϵ_0 , $A_{m,max}(25)$ and $F2_{max}$, there was no clearly highlighted values. Consequently, the pair of values defined for ϵ_0 and for $A_{m,max}(25)$ were chosen based on the ISBA-a-gs C3 and C4 values. For $F2_{max}$, the values selected were 0.35 and 0.75 .

E1

Author contributions. AM did the model development, calibration and validation and wrote the paper. CM, AL, BB, VM and AL supervised the project, gave their expertise on modelling and reviewed the paper. SW provided experimental data, gave it expertise on it and reviewed the paper.

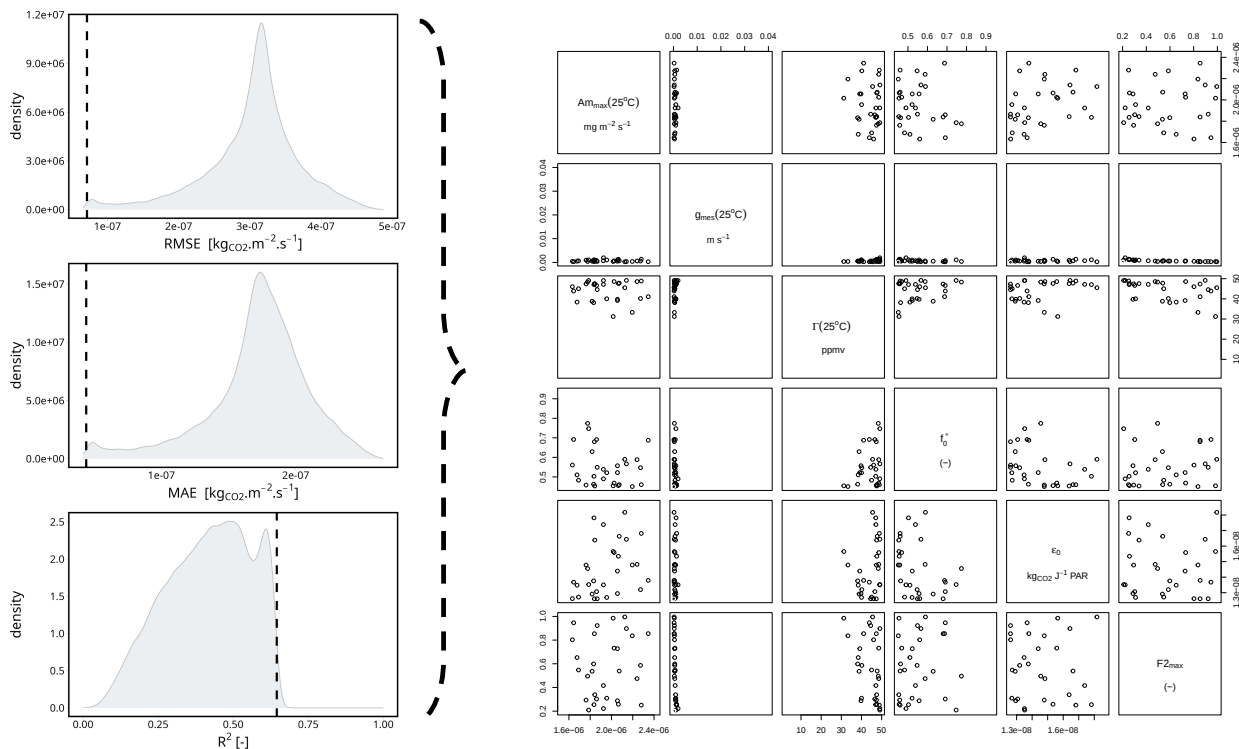


Figure E1. Pre-calibration results, on the left the distribution for RMSE, MAE, r^2

Competing interests. The contact author has declared that none of the authors has any competing interests

Acknowledgements. This research was funded by the Agence Nationale de la Recherche (ANR) under the "ANR-22-CE92-0001-01 GREEN-VELOPES" project and by the German Research Foundation (DFG) under project 505703010. The thesis work of A. Mirebeau under the supervision of C. de Munck and A. Lemonsu receives a doctoral research grant from the Occitanie Region (N°00087377/21012846) and from Météo France (N°2130C0013)

References

- Aouade, G., Jarlan, L., Ezzahar, J., Er-Raki, S., Napoly, A., Benkaddour, A., Khabba, S., Boulet, G., Garrigues, S., Chehbouni, A., and
565 Boone, A.: Evapotranspiration partition using the multiple energy balance version of the ISBA-A-g<sub>s<sub> land surface model over two irrigated crops in a semi-arid Mediterranean region (Marrakech, Morocco), *Hydrology and Earth System Sciences*, 24, 3789–3814, <https://doi.org/10.5194/hess-24-3789-2020>, 2020.
- Ascione, F., Bianco, N., De' Rossi, F., Turni, G., and Vanoli, G. P.: Green roofs in European climates. Are effective solutions for the energy savings in air-conditioning?, *Applied Energy*, 104, 845–859, <https://doi.org/10.1016/j.apenergy.2012.11.068>, 2013.
- 570 Bonan, G. B.: *Ecological climatology: concepts and applications*, Cambridge university press, New York, 3rd ed edn., ISBN 978-1-107-04377-0 978-1-107-61905-0, 2016.
- Boone, A., Masson, V., Meyers, T., and Noilhan, J.: The Influence of the Inclusion of Soil Freezing on Simulations by a Soil–Vegetation–Atmosphere Transfer Scheme, *Journal of Applied Meteorology*, 39, 1544–1569, [https://doi.org/10.1175/1520-0450\(2000\)039<1544:TIO>2.0.CO;2](https://doi.org/10.1175/1520-0450(2000)039<1544:TIO>2.0.CO;2), 2000.
- 575 Calvet, J.-C.: Investigating soil and atmospheric plant water stress using physiological and micrometeorological data, *Agricultural and Forest Meteorology*, 103, 229–247, [https://doi.org/10.1016/S0168-1923\(00\)00130-1](https://doi.org/10.1016/S0168-1923(00)00130-1), 2000.
- Calvet, J.-C. and Soussana, J.-F.: Modelling CO₂-enrichment effects using an interactive vegetation SVAT scheme, *Agricultural and Forest Meteorology*, 108, 129–152, [https://doi.org/10.1016/S0168-1923\(01\)00235-0](https://doi.org/10.1016/S0168-1923(01)00235-0), 2001.
- Calvet, J.-C., Noilhan, J., Roujean, J.-L., Bessemoulin, P., Cabelguenne, M., Olioso, A., and Wigneron, J.-P.: An interactive vegetation SVAT
580 model tested against data from six contrasting sites, *Agricultural and Forest Meteorology*, 92, 73–95, [https://doi.org/10.1016/S0168-1923\(98\)00091-4](https://doi.org/10.1016/S0168-1923(98)00091-4), 1998.
- Calvet, J.-C., Rivalland, V., Picon-Cochard, C., and Guehl, J.-M.: Modelling forest transpiration and CO₂ fluxes—response to soil moisture stress, *Agricultural and Forest Meteorology*, 124, 143–156, <https://doi.org/10.1016/j.agrformet.2004.01.007>, 2004.
- Carnell, R.: lhs: Latin Hypercube Samples, <https://cran.r-project.org/web/packages/lhs/index.html>, 2022.
- 585 Clapp, R. B. and Hornberger, G. M.: Empirical equations for some soil hydraulic properties, *Water Resources Research*, 14, 601–604, <https://doi.org/10.1029/WR014i004p00601>, 1978.
- Cook-Patton, S. C. and Bauerle, T. L.: Potential benefits of plant diversity on vegetated roofs: A literature review, *Journal of Environmental Management*, 106, 85–92, <https://doi.org/10.1016/j.jenvman.2012.04.003>, 2012.
- Currie, B. A. and Bass, B.: Estimates of air pollution mitigation with green plants and green roofs using the UFORE model, *Urban Ecosys-*
590 *tems*, 11, 409–422, <https://doi.org/10.1007/s11252-008-0054-y>, 2008.
- de Munck, C., Lemonsu, A., Masson, V., Le Bras, J., and Bonhomme, M.: Evaluating the impacts of greening scenarios on thermal comfort and energy and water consumptions for adapting Paris city to climate change, *Urban Climate*, 23, 260–286, <https://doi.org/10.1016/j.uclim.2017.01.003>, 2018.
- De Munck, C. S., Lemonsu, A., Bouzouidja, R., Masson, V., and Claverie, R.: The GREENROOF module (v7.3) for modelling green roof
595 hydrological and energetic performances within TEB, *Geoscientific Model Development*, 6, 1941–1960, <https://doi.org/10.5194/gmd-6-1941-2013>, 2013.
- Decharme, B., Boone, A., Delire, C., and Noilhan, J.: Local evaluation of the Interaction between Soil Biosphere Atmosphere soil multilayer diffusion scheme using four pedotransfer functions, *Journal of Geophysical Research: Atmospheres*, 116, <https://doi.org/10.1029/2011JD016002>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1029/2011JD016002>, 2011.

- 600 Del Barrio, E. P.: Analysis of the green roofs cooling potential in buildings, *Energy and Buildings*, 27, 179–193, 1998.
- Erbs, D. G., Klein, S. A., and Duffie, J. A.: Estimation of the diffuse radiation fraction for hourly, daily and monthly-average global radiation, *Solar Energy*, 28, 293–302, [https://doi.org/10.1016/0038-092X\(82\)90302-4](https://doi.org/10.1016/0038-092X(82)90302-4), 1982.
- Garisoain, R.: Évolution du cycle du carbone des tourbières pyrénéennes dans un contexte de changement climatique global : observation et modélisation, phdthesis, Institut National Polytechnique de Toulouse - INPT, <https://theses.hal.science/tel-05031426>, 2023.
- 605 Gibelin, A., Calvet, J., Roujean, J., Jarlan, L., and Los, S. O.: Ability of the land surface model ISBA-A-gs to simulate leaf area index at the global scale: Comparison with satellites products, *Journal of Geophysical Research: Atmospheres*, 111, 2005JD006691, <https://doi.org/10.1029/2005JD006691>, 2006.
- Goudriaan, J., van Laar, H. H., van Keulen, H., and Louwerse, W.: Photosynthesis, CO₂ and Plant Production, in: *Wheat Growth and Modelling*, edited by Day, W. and Atkin, R. K., pp. 107–122, Springer US, Boston, MA, ISBN 978-1-4899-3665-3, [https://doi.org/10.1007/978-](https://doi.org/10.1007/978-1-4899-3665-3_10)
- 610 1-4899-3665-3_10, 1985.
- Hamdi, R. and Masson, V.: Inclusion of a Drag Approach in the Town Energy Balance (TEB) Scheme: Offline 1D Evaluation in a Street Canyon, *Journal of Applied Meteorology and Climatology*, 47, 2627–2644, <https://doi.org/10.1175/2008JAMC1865.1>, 2008.
- Heusinger, J. and Weber, S.: Extensive green roof CO₂ exchange and its seasonal variation quantified by eddy covariance measurements, *Science of The Total Environment*, 607–608, 623–632, <https://doi.org/10.1016/j.scitotenv.2017.07.052>, 2017a.
- 615 Heusinger, J. and Weber, S.: Surface energy balance of an extensive green roof as quantified by full year eddy-covariance measurements, *Science of The Total Environment*, 577, 220–230, <https://doi.org/10.1016/j.scitotenv.2016.10.168>, 2017b.
- Jacobs, C. M. J.: Direct impact of atmospheric CO₂ enrichment on regional transpiration, ISBN 978-90-5485-250-6, 1994.
- Kattge, J., Bönsch, G., Díaz, S., Lavorel, S., Prentice, I. C., Leadley, P., Tautenhahn, S., and Werner, G. D. A.: TRY plant trait database – enhanced coverage and open access, *Global Change Biology*, 26, 119–188, <https://doi.org/10.1111/gcb.14904>, 2020.
- 620 Konopka, J., Heusinger, J., and Weber, S.: Extensive Urban Green Roof Shows Consistent Annual Net Uptake of Carbon as Documented by 5 Years of Eddy-Covariance Flux Measurements, *Journal of Geophysical Research: Biogeosciences*, 126, e2020JG005879, <https://doi.org/10.1029/2020JG005879>, 2021.
- Kurunuma, T., Watanabe, H., Ishihara, T., Kou, D., Toudou, K., Ando, M., and Shindo, S.: CO₂ Payoff of Extensive Green Roofs with Different Vegetation Species, *Sustainability*, 10, 2256, <https://doi.org/10.3390/su10072256>, 2018.
- 625 Köppen, W.: Versuch einer Klassifikation der Klimate, vorzugsweise nach ihren Beziehungen zur Pflanzenwelt., *Geographische Zeitschrift*, 6, 657–679, publisher: Franz Steiner Verlag, 1900.
- Lazzarin, R. M., Castellotti, F., and Busato, F.: Experimental measurements and numerical modelling of a green roof, *Energy and Buildings*, 37, 1260–1267, <https://doi.org/10.1016/j.enbuild.2005.02.001>, 2005.
- Lemonsu, A., Masson, V., Shashua-Bar, L., Erell, E., and Pearlmutter, D.: Inclusion of vegetation in the Town Energy Balance model for modelling urban green areas, *Geoscientific Model Development*, 5, 1377–1393, <https://doi.org/10.5194/gmd-5-1377-2012>, 2012.
- 630 Li, Y. and Babcock, R. W.: Green roofs against pollution and climate change. A review, *Agronomy for Sustainable Development*, 34, 695–705, <https://doi.org/10.1007/s13593-014-0230-9>, 2014.
- Lorenz, J. M., Kronenberg, R., Bernhofer, C., and Niyogi, D.: Urban Rainfall Modification: Observational Climatology Over Berlin, Germany, *Journal of Geophysical Research: Atmospheres*, 124, 731–746, <https://doi.org/10.1029/2018JD028858>, [_eprint: https://onlinelibrary.wiley.com/doi/pdf/10.1029/2018JD028858](https://onlinelibrary.wiley.com/doi/pdf/10.1029/2018JD028858), 2019.
- 635 Masson, V.: A Physically-Based Scheme For The Urban Energy Budget In Atmospheric Models, *Boundary-Layer Meteorology*, 94, 357–397, <https://doi.org/10.1023/A:1002463829265>, 2000.

- Masson, V. and Seity, Y.: Including Atmospheric Layers in Vegetation and Urban Offline Surface Schemes, *Journal of Applied Meteorology and Climatology*, 48, 1377–1397, <https://doi.org/10.1175/2009JAMC1866.1>, 2009.
- 640 Masson, V., Le Moigne, P., Martin, E., Faroux, S., Alias, A., Alkama, R., Belamari, S., Barbu, A., Boone, A., Bouysse, F., Brousseau, P., Brun, E., Calvet, J.-C., Carrer, D., Decharme, B., Delire, C., Donier, S., Essauini, K., Gibelin, A.-L., Giordani, H., Habets, F., Jidane, M., Kerdraon, G., Kourzeneva, E., Lafaysse, M., Lafont, S., Lebeaupin Brossier, C., Lemonsu, A., Mahfouf, J.-F., Marguinaud, P., Mokhtari, M., Morin, S., Pigeon, G., Salgado, R., Seity, Y., Taillefer, F., Tanguy, G., Tulet, P., Vincendon, B., Vionnet, V., and Voldoire, A.: The SURFEXv7.2 land and ocean surface platform for coupled or offline simulation of earth surface variables and fluxes, *Geoscientific Model Development*, 6, 929–960, <https://doi.org/10.5194/gmd-6-929-2013>, publisher: Copernicus GmbH, 2013.
- 645 Mironov, D., Heise, E., Kourzeneva, E., Ritter, B., Schneider, N., and Terzhevik, A.: Implementation of the lake parameterisation scheme flake into the numerical weather prediction model cosmo., *Boreal Env. Res*, 15, 218–230, 2010.
- Noilhan, J. and Mahfouf, J.-F.: The ISBA land surface parameterisation scheme, *Global and Planetary Change*, 13, 145–159, [https://doi.org/10.1016/0921-8181\(95\)00043-7](https://doi.org/10.1016/0921-8181(95)00043-7), 1996.
- 650 Noilhan, J. and Planton, S.: A Simple Parameterization of Land Surface Processes for Meteorological Models, *Monthly Weather Review*, 117, 536–549, [https://doi.org/10.1175/1520-0493\(1989\)117<0536:ASPOLS>2.0.CO;2](https://doi.org/10.1175/1520-0493(1989)117<0536:ASPOLS>2.0.CO;2), publisher: American Meteorological Society Section: Monthly Weather Review, 1989.
- Norman, J. M., Garcia, R., and Verma, S. B.: Soil surface CO₂ fluxes and the carbon budget of a grassland, *Journal of Geophysical Research: Atmospheres*, 97, 18 845–18 853, <https://doi.org/10.1029/92JD01348>, 1992.
- 655 Ouldboukhitine, S.-E., Belarbi, R., Jaffal, I., and Trabelsi, A.: Assessment of green roof thermal behavior: A coupled heat and mass transfer model, *Building and Environment*, 46, 2624–2631, <https://doi.org/10.1016/j.buildenv.2011.06.021>, 2011.
- Redon, E., Lemonsu, A., and Masson, V.: An urban trees parameterization for modeling microclimatic variables and thermal comfort conditions at street level with the Town Energy Balance model (TEB-SURFEX v8.0), *Geoscientific Model Development*, 13, 385–399, <https://doi.org/10.5194/gmd-13-385-2020>, 2020.
- 660 Redon, E. C., Lemonsu, A., Masson, V., Morille, B., and Musy, M.: Implementation of street trees within the solar radiative exchange parameterization of TEB in SURFEX v8.0, *Geoscientific Model Development*, 10, 385–411, <https://doi.org/10.5194/gmd-10-385-2017>, 2017.
- Sailor, D. J.: A green roof model for building energy simulation programs, *Energy and Buildings*, 40, 1466–1478, <https://doi.org/10.1016/j.enbuild.2008.02.001>, 2008.
- 665 Saltelli, A., Annoni, P., Azzini, I., Campolongo, F., Ratto, M., and Tarantola, S.: Variance based sensitivity analysis of model output. Design and estimator for the total sensitivity index, *Computer Physics Communications*, 181, 259–270, <https://doi.org/10.1016/j.cpc.2009.09.018>, 2010.
- Seyedabadi, M. R., Eicker, U., and Karimi, S.: Plant selection for green roofs and their impact on carbon sequestration and the building carbon footprint, *Environmental Challenges*, 4, 100 119, <https://doi.org/10.1016/j.envc.2021.100119>, 2021.
- 670 Shafique, M., Xue, X., and Luo, X.: An overview of carbon sequestration of green roofs in urba, areas, *Urban Forestry & Urban Greening*, 47, 126 515, <https://doi.org/10.1016/j.ufug.2019.126515>, 2020.
- Sobol, I. M.: Sensitivity Estimates for Nonlinear Mathematical Model, *Math. Modelling Comput. Exp.*, 1, 407–414, <http://www.andreasaltelli.eu/file/repository/sobol1993.pdf>, 1993.
- Sobol, I. M.: Global sensitivity indices for nonlinear mathematical models and their Monte Carlo estimates, *Mathematics and Computers in Simulation*, 55, 271–280, [https://doi.org/10.1016/S0378-4754\(00\)00270-6](https://doi.org/10.1016/S0378-4754(00)00270-6), 2001.
- 675

- Stein, M.: Large Sample Properties of Simulations Using Latin Hypercube Sampling, *Technometrics*, 29, 143–151, <https://doi.org/10.2307/1269769>, publisher: [Taylor & Francis, Ltd., American Statistical Association, American Society for Quality], 1987.
- Stocki, R.: A method to improve design reliability using optimal Latin hypercube sampling, *Computer Assisted Mechanics and Engineering Sciences*, 12, 393–411, 2005.
- Tan, T., Kong, F., Yin, H., Cook, L. M., Middel, A., and Yang, S.: Carbon dioxide reduction from green roofs: A comprehensive review of processes, factors, and quantitative methods, *Renewable and Sustainable Energy Reviews*, 182, 113412, <https://doi.org/10.1016/j.rser.2023.113412>, 2023.
- Virk, G., Jansz, A., Mavrogianni, A., Mylona, A., Stocker, J., and Davies, M.: Microclimatic effects of green and cool roofs in London and their impacts on energy use for a typical office building, *Energy and Buildings*, 88, 214–228, <https://doi.org/10.1016/j.enbuild.2014.11.039>, 2015.
- Wang, M., Yu, H., Liu, Y., Lin, J., Zhong, X., Tang, Y., Guo, H., and Jing, R.: Unlock city-scale energy saving and peak load shaving potential of green roofs by GIS-informed urban building energy modelling, *Applied Energy*, 366, 123315, <https://doi.org/10.1016/j.apenergy.2024.123315>, 2024.
- Winter, K.: Ecophysiology of constitutive and facultative CAM photosynthesis, *Journal of Experimental Botany*, 70, 6495–6508, <https://doi.org/10.1093/jxb/erz002>, 2019.
- Zheng, X., Zou, Y., Lounsbury, A. W., Wang, C., and Wang, R.: Green roofs for stormwater runoff retention: A global quantitative synthesis of the performance, *Resources, Conservation and Recycling*, 170, 105577, <https://doi.org/10.1016/j.resconrec.2021.105577>, 2021.
- Zhou, L. W., Wang, Q., Li, Y., Liu, M., and Wang, R. Z.: Green roof simulation with a seasonally variable leaf area index, *Energy and Buildings*, 174, 156–167, <https://doi.org/10.1016/j.enbuild.2018.06.020>, 2018.

Table 2. Description of the input parameters for the calculation of CO₂ fluxes in TEB-GREENROOF. All the parameter values tested for the sensitivity analysis, pre-calibration and final calibration stages are listed. The data in square brackets define the ranges of values tested, and the data in brackets define the pairs of values tested.

Parameter	Description	Unit	Sensitivity analysis / Pre-calibration	Calibration	Best config
A-gs photosynthesis parameters					
f_0^*	Value of f if there is no saturation deficit (with no soil water stress)	(-)	[0.45;0.935]	(0.45,0.55)	0.45
ϵ_0	Maximum initial quantum use efficiency	kgCO ₂ J ⁻¹ PAR	[12.6 · 10 ⁻⁹ ; 18.7 · 10 ⁻⁹]	(14 · 10 ⁻⁹ , 17 · 10 ⁻⁹)	14 · 10 ⁻⁹
$\Gamma(25)$	CO ₂ compensation concentration	ppmv	[2.52;49.5]	(2.8,55)	55
$A_{m,max}(25)$	Maximum net CO ₂ assimilation at 25°C	mg m ⁻² s ⁻¹	[1.53 · 10 ⁻⁶ ; 2.42 · 10 ⁻⁶]	(1.53 · 10 ⁻⁶ , 2.42 · 10 ⁻⁶)	2.2 · 10 ⁻⁶
$g_{mes}^*(25)$	Mesophyll conductance at 25°C	m s ⁻¹	[10 ⁻³ ; 4.0 · 10 ⁻²]	(0.001,0.002)	0.001
g_c	Cuticular conductance	m s ⁻¹	[0;0.0001] / 0.0001	0.0001	0.0001
$Dmax$	Maximum saturation deficit of atmosphere tolerated by vegetation	kgH ₂ O kg _{air} ⁻¹	[0.3;0.6] / 0.3	0.3	0.3
Response to drought parameters					
$F\mathcal{L}_{min}$	Minimum normalized soil water stress factor	(-)	0.15	0.15	0.15
$F\mathcal{L}_{max}$	Maximum normalized soil water stress factor	(-)	[0.2;1]	(0.35,0.75)	0.75
Biomass parameters					
τ_M	Maximal lifespan of leaves	days	/	(75, 150)	75
SLA	specific leaf area	m ² kg DM ⁻¹	/	12.9	12.9
Respiration parameters					
$w_{10,min}$	The weighted soil volumetric water content between 0-10cm depth for respiration	(-)	0.05	0.05	0.05
$w_{10,max}$	The weighted soil volumetric water content between 0-10cm depth for respiration	(-)	0.15	0.15	0.15
a	Coefficient for estimating vegetation coverage	(-)	/	-0.35	-0.35

Table 3. Comparison of modelled and observed annual NEE in $\text{g C m}^{-2} \text{ y}^{-1}$ for each year from 2016 to 2020. By definition, a negative NEE corresponds to a quantity of carbon fixed by the green roof

Simulations	Calibration				Evaluation
	2016	2017	2018	2019	2020
NEE observed ($\text{g C m}^{-2} \text{ y}^{-1}$)	-163	-178	-85	-151	-168
NEE modelling ($\text{g C m}^{-2} \text{ y}^{-1}$)	-142	-163	-51	-152	-166

Table C1. TEB-GREENROOF input parameters for road, wall and roof

Type	Parameter	Unit	Values
Street canyon geometry	Building fraction	(-)	0.6
	Road fraction	(-)	0.2
	Low vegetation fraction	(-)	0.2
	Building height	m	18
	Wall density	$\text{m}^2 \text{ wall m}^{-2} \text{ ground}$	0.75
	Low vegetation LAI	$\text{m}^2 ; \text{m}^{-2}$	2.0
Roof properties	Number of layers	(-)	2
	Layer thickness	m	0.05 (layer1: insulation)
			0.16 (layer2: concrete)
	Roof albedo	(-)	0.2
	Roof emissivity	(-)	0.8
	Thermal conductivity	$\text{W m}^{-1} \text{ K}^{-1}$	0.035 (layer1)
			2.3 (layer2)
	Heat capacity	$\text{kJ m}^{-3} \text{ K}^{-1}$	75 (layer1)
			2300 (layer2)
Wall properties	Number of layers	(-)	2
	Layer thickness	m	0.04 (layer1: concrete)
			0.15 (layer2: concrete)
	Wall albedo	(-)	0.4
	Wall emissivity	(-)	0.9
	Thermal conductivity	$\text{W m}^{-1} \text{ K}^{-1}$	2.3 (both layers)
	Heat capacity	$\text{kJ m}^{-3} \text{ K}^{-1}$	2300 (both layers)
Road properties	Number of layers	(-)	2
	Layer thickness	m	0.04 (layer1: artificial coating)
			0.15 (layer2: soil)
	Road albedo	(-)	0.08
	Road emissivity	(-)	0.94
	Thermal conductivity	$\text{W m}^{-1} \text{ K}^{-1}$	0.663 (layer1)
			2.1 (layer2)
	Heat capacity	$\text{kJ m}^{-3} \text{ K}^{-1}$	1825 (layer1)
			2000 (layer2)