

An enhanced emissions module for the PALM model system 23.10 with application on PM₁₀ emission from urban domestic heating

Edward C. Chan^{1,2}, Ilona J. Jäkel¹, Basit Khan^{3,4,5}, Martijn Schaap^{1,6}, Timothy M. Butler^{1,2}, Renate Forkel⁵, and Sabine Banzhaf¹

¹Institut für Meteorologie, Freie Universität Berlin, Germany

²Research Institute for Sustainability - Helmholtz Centre Potsdam (RIFS), Potsdam, Germany

³Mubadala Arabian Center for Climate and Environmental Sciences (ACCESS), New York University Abu Dhabi, United Arab Emirates

⁴(Formerly) Institut für Photogrammetrie und Fernerkundung (IPF), Karlsruher Institut für Technologie (KIT), Karlsruhe, Germany

⁵(Formerly) Institut für Meteorologie und Klimaforschung Atmosphärische Umweltforschung, Karlsruher Institut für Technologie (KIT), Garmisch-Partenkirchen, Germany

⁶Nederlandse Organisatie voor Toegepast-Natuurwetenschappelijk Onderzoek (TNO), Utrecht, The Netherlands

Correspondence: E.C. Chan (edward.chan@gfz-potsdam.de) and S. Banzhaf (sabine.banzhaf@met.fu-berlin.de)

Abstract. This article presents an enhanced emission module for the PALM model system, which collects discrete emission sources from different emission sectors and assigns them dynamically to the prognostic equations for specific pollutant species as volumetric source terms. Bidirectional lookup between each source location and cell index are maintained through using a hash key approach, while allowing all emission source modules to be conceived, developed and operated in a homogeneous and mutually independent manner. An additional generic emission mode has also been implemented to allow the use of external emission data in simulation runs. Results from benchmark runs indicate a high level of performance and scalability. Subsequently, a module for modelling parametrized emissions from domestic heating is implemented under this framework, using the approach of building energy usage and temperature deficit as a generalized form of heating degree days. An model run has been executed under idealized conditions by considering solely dispersion of PM₁₀ from domestic heating sources. The results demonstrate a strong overall dependence on the strength and clustering of individual sources, diurnal variation in domestic heat usage, as well as the temperature deficit between the ambient and the user-defined target temperature. Vertical transport contributes additionally to a rapid attenuation of daytime PM₁₀. Although urban topology plays a minor role on the pollutant concentrations at ground level, it has a relevant contribution to the vertical pollutant distribution.

Keywords. Urban scale modelling; Large-Eddy Simulation (LES); Domestic Emissions; Particulate Matter (PM); Algorithm

15 1 Introduction

Air pollution is one of the largest environmental and health risk factors in the European Union (EU; EEA, 2023). Despite ongoing efforts on improving general air quality, concentrations of airborne pollutants, such as particulate matter (PM₁₀), still frequently exceed EU standards across the EU-27 nations. It is particularly severe in urbanized areas, where 97% of the

population was exposed to PM at concentrations above guideline levels set forth by the World Health Organization in 2021 (EEA, 2023). Accordingly, a high population density also results in a larger variety of anthropogenic emission sources in urban agglomerations. In addition to sectors in road traffic as well as industry and energy production, heat generation through stationary combustion in residential and commercial buildings – collectively termed domestic heating – can be a significant source of pollutants (Baumbach et al., 2010), constituting about 10% of urban emissions for nitrogen oxides (NO_x) and PM₁₀ (Senatsverwaltung Berlin, 2019; Pültz et al., 2023). To this end, urban-scale models such as the PALM model system (Maronga et al., 2020) are indispensable tools for the evaluation of urban air quality. They can be deployed to assess the impact of different emission reduction strategies or urban planning exercises for improving air quality (Jeanjean et al., 2017; Piroozmand et al., 2020; Chan and Butler, 2021).

As emission data are often required as input to these models at high temporal and spatial resolutions (Guevara et al., 2020; Chan et al., 2023), a suitable methodology for generating and handling such emissions data is critical for obtaining reliable pollutant dispersion and transformation characteristics through numerical model runs at such scale. In the implementation of the PALM model system (Maronga et al., 2020), emissions can only be modelled as boundary conditions on surface-bound grid cells. Based in part on the existing surface module (Gehrke et al., 2021), time-varying emissions of a given pollutant species, for example, particulate matter (PM₁₀) from vehicle traffic and domestic heating, are to be aggregated across all source locations. They are then introduced into the solution domain as time-varying surface fluxes. This approach was used to provide hourly traffic emissions, in which three different levels of detail (LOD) are available (Khan et al., 2021). Typically, emissions sources are fully parametrized under LOD 0, through, for instance, redistribution of aggregate values according to rudimentary input information for characterizing surrogate activity data (Gruneu et al., 2017). On the other hand, the user has the option of supplying already processed input emission data under LOD 2, independent of any predetermined parametrization schemes. Partial parametrization, or LOD 1, is another available option where emissions are estimated from aggregated levels through corresponding user-defined surrogate activity data.

Emission sources are typically categorized into sectors, exemplified by definitions in the Nomenclature for Reporting (NFR). For conceptual generalization, different production mechanisms under each sector can be classified as such. However, additional flexibility should be provided to account for different emission source types (e.g., point, line, and area sources) as well as physical mechanisms in pollutant formation within each sector. For example, PM₁₀ emissions from road traffic can be originated from combustion products or from abrasion and resuspension sources, each requiring different physical parametric treatment (Chan et al., 2023). Moreover, biogenic emissions such as isoprene (Guenther et al., 1991, 1993, 1999) and pollen (Zink et al., 2012, 2013) contain different physical mechanisms and model treatments for emission release and replenishment. Thus, the architecture and application of the emission sources in this framework should be organized in a similar fashion found in prominent chemical transport models such as WRF-Chem (Grell et al., 2005) and LOTOS-EUROS (Manders et al., 2017). On the other hand, as they ultimately contribute to the source and sink terms of the prognostic equation for the corresponding species, the numerical construct of all emission sectors share certain common elements, in which abstractions can be drawn across all relevant sectors to afford systemic uniformity and code reusability, significantly simplifying design, development and deployment.

In addition, while the majority of emission sectors – such as traffic and domestic heating – are released as fluxes near the surface i.e., ground or roof, this is not always the case. In particular, depending on the grid resolution, large emissions sources – such as pollutant source terms from the European Pollutant Release and Transfer Register (E-PRTR) and point source information from the Gridding Emission Tool for ArcGIS (GRETA; Schneider et al., 2016) – could be introduced over a vertically distributed region about the respective industrial stack. Further, emissions from elevated sources – such as biogenic emissions from trees and exhaust emissions from aviation – cannot be always be represented as surface fluxes at urban scales, where grid resolution can be sufficiently high that they no longer take place on the first vertical layer alone. Conversely, at sufficiently low horizontal resolutions, it becomes more likely that a given cell location could contain contributions from multiple emission sectors. Although this could be partially addressed using the current surface flux based approach, in which emissions are to be assembled *a priori* as surface flux boundary conditions, a yet greater degree of flexibility and independence can be achieved if they could be introduced directly as volumetric source terms, where emission contributions could be specified independently from each other at different points of time, and at different LODs.

The objective of this article is to introduce an enhanced emission module for the PALM model system, available from version 23.10 onwards. This module offers a high level of flexibility, implementation modularity, ease of use, and computational performance. As an illustrative example, this new methodology is applied to parametrize emissions from domestic heating sources, based on the energy demand approach of Baumbach et al. (2010) and Struschka and Li (2019). The numerical performance of the enhanced emission module is evaluated using a synthetic test case executed at different levels of domain decomposition. This is concluded by a demonstration in a residential region in Berlin under idealized conditions.

2 Model description

2.1 Theoretical foundations

Consider the incompressible prognostic equation at the resolved scale for the concentration of a given pollutant species p , denoted as ξ_p , including net source term contributions:

$$\partial_t \xi_p + u_i \partial_i \xi_p - \Gamma_p \partial_j^2 \xi_p = \sum_r \sigma_p^r + \sum_m \epsilon_p^m \quad (1)$$

where Γ_p is the diffusivity of species p , σ_p^r is the corresponding net chemical conversion rate of species p from all relevant reactions r , and ϵ_p^m is the net emission rate of p originating all relevant emission sectors m . The treatment of the σ_p^r terms has been thoroughly discussed in Khan et al. (2021); the present work thus concerns the incorporation of the ϵ_p terms into Equation (1). While the chemical production terms σ are continuous in space and time, and are calculated everywhere in the computational domain by solving a set of ordinary differential equations for temporal integration specific to a predetermined chemical kinetic mechanism (Damian et al., 2002), ϵ are only defined at sparse, discrete regions and not always continuously active depending on the emission sector. This represents, for instance, emissions from domestic heating through chimneys or road traffic. Since emissions are typically supplied into the model as a mass or molar input rate (i.e., mol s⁻¹ or kg s⁻¹), provided either through inventories (Jähn et al., 2020; Murphy et al., 2021) or parametrization (Huszár et al., 2010; Mues et al., 2014;

Ge et al., 2020), converting these rates into concentration rates ϵ can be done by dividing the input rate with the corresponding mass or molar density at the computational cell where emissions take place. Therefore ϵ can be effectively regarded as a *volume source*. In terms of computer processing and storage, it is strongly preferred to consider ϵ_p only at discrete locations where the emission source is present. However, there are three challenges associated with this approach, and the emission module architecture must be so conceived to accommodate them in a sufficiently simple yet computationally robust and efficient manner:

1. As emissions sources are discrete, contiguity in the associated data structures (such as arrays) in the emission module no longer reflects to the spatial continuity in the computational domain,
2. The heterogeneity of emission sources from different sectors must be implicitly considered to enable different independent methods for parametrization and production mechanism specification, and
3. The interface between the prognostic equation solver and the emission module should be implemented to allow only localized data access to prevent propagation of data corruption into other emission sectors.

Traditionally, ~~the discrete emission sources could be presented~~ can be represented within a contiguous multidimensional array covering the horizontal domain up to a predetermined vertical level, as implemented in some regional scale models (Grell et al., 2005) (e.g., Grell et al., 2005). However, this approach requires a large amount of idle memory and storage, increasing with the number of grid cells, as most cell locations ~~residing~~ in this array do not contain emission sources, ~~this approach is highly inefficient in terms of memory and data storage, particularly in urban scale models.~~ For urban scales such as PALM, where ~~the horizontal and vertical grid dimensions~~ grid resolutions can be as low-high as 1 m. ~~This wastage can impose prohibitive runtime requirements in terms of memory and storage, as the number of cells required to cover the contiguous region for each emission species in the model increases exponentially with the grid dimensions, severely limiting the extent of the model domain, as well as the range of details the model can provide.~~

~~As an illustrative example, consider such 3D-array over a horizontal region 1000 m \times 1000 m, up to an elevation of 200 m, covering the highest building stack. As an additional, conservative simplification, it can be assumed that emissions source are found everywhere on the model surface layer, that is, over the ground and atop building roofs, although emission sources above the surface, such as pollen emitted from tree crowns and aircraft exhaust gas along known flight paths, should also be considered. At a cell resolution of 10 m, the array consists of 200, 000 cells, from which 10,000 are emission sources. When the resolution is increased to 1 m, however, 20 million cells will be needed to cover 1 million sources. The memory requirement for the idle cells at increasing spatial resolutions will drastically reduce this resource penalty can severely impede scalability and runtime performance.~~

To overcome this restriction, all ~~known~~ emission sources within an emission sector can be amalgamated into a one-dimensional data structure known as a hash map (Cormen et al., 2009), h^m , where the spatial association between the individual emission source location and the corresponding (i, j, k) grid index locations in the computational domain are maintained by assigning a hash key κ unique to each location. In the meantime, a global hash map, H , ~~collects the~~ accumulates all emission source

120 data ~~where sources for the same species and location are summed~~ across all relevant emission sectors ~~. The accumulated emission sources from H are then assigned for each location and assigns them as source terms (ϵ_p^m) to the corresponding prognostic equations through the hash key indicated by their hash keys κ . In this approach, ~~memory is allocated only for grid cells containing emission sources, thus the volume sources are stored in a simple and compact array, with one entry for each volume source. Memory is thus only allocated in proportion to the number of volume sources,~~ substantially reducing runtime resource consumption.~~

125 For a uniform Cartesian grid, as used in PALM, the hash map for each emission sector, h^m , containing the mapping between the (i, j, k) grid location of each emission source and the corresponding hash key κ can be represented in a one-dimensional array:

$$h^m = \{\kappa^m(i, j, k) : \kappa^m \in W^{N_\kappa^m}, \\ i \in W^{N_i^m}, j \in W^{N_j^m}, k \in W^{N_k^m}\}, \quad (2)$$

130 where W denotes a set of natural numbers, i.e., $W \in 0, 1, 2, \dots$ up to (but not including) the corresponding upper bound N representing the number of emission sources.

In a 3D Cartesian system, the hash key κ can be derived from a linear mapping of the cell indices:

$$\kappa = N_i(kN_j + j) + i, \quad (3)$$

135 where N_i and N_j are the cell counts along the two horizontal axes in the computational domain. Other methods for determining κ exist, such as using different cell index ordering in Equation (3), or by using bitwise operations (Jenkins, 1997; Teschner et al., 2003), which are more suitable for unstructured grid model systems such as Chan and Butler (2021). Where PALM is a Cartesian grid model system, a unique, bidirectional mapping between the grid cell indices and corresponding hash keys can be achieved with Equation (3) alone.

Thus the volumetric emission source term can be expressed as the product between the source function f_p^m for emission sector m at each emission source location defined in h^m :

$$140 \epsilon_p^m = h^m \cdot f_p^m(t, \kappa^m | \eta_p^m), \quad (4)$$

where f^m is a function of time (t), position (expressed succinctly in terms of κ), and additional sector-specific parameters (η^m) for pollutant species p that are defined, for instance, when parametrization is involved. In turn, the transference of the sectoral emission sources to the linear system of discretized prognostic equations for species p ($\sum_m \epsilon_p^m$) is the union of all emission sectors, in which values belonging to the same hash key for species p are summed across all hash maps containing it:

$$145 \sum_m \epsilon_p^m = \bigcup_m \epsilon_p^m, \quad (5)$$

where \bigcup is the union operator. In practice, the hash map belonging to each emission sector m is amalgamated into a global hash map H , where:

$$H = \bigcup_m h^m, \quad (6)$$

and the source terms for each pollutant species p under each sector m is added directly to the corresponding species prognostic equations as required at each source location by looking up its (i, j, k) cell indices from its hash key κ . This eliminates the need for intermediate data storage for source term accumulation.

2.2 Overall architecture

Figure 1 illustrates the overall architecture of the enhanced emissions module. Owing to different emission production mechanisms, emission source data (ϵ_p^m) for pertinent pollutant species (p) originating each emission sector (m) are encapsulated in dedicated Fortran modules. Access of emission source data are restricted to standardized interface subroutines to prevent direct or accidental interference from other modules. Each module under this framework also maintains a separate hash map (h^m) to indicate corresponding source locations represented by the hash key (κ). Beyond the physical mechanisms, all modules are similarly constructed, so that new emission sectors can be introduced easily.

The hash map for all emission sectors (h^m) will be merged to form a separate global hash map (H), which contains the (i, j, k) indices of all cells containing an emission volume source, as well as their respective hash keys (κ). The global hash map (H) and all associated subroutines and functions are contained in a separate module, whose interface is accessible by both the emission module and the prognostic equation solver. In this way, sector-specific emission sources (ϵ_p^m) can be accumulated into the prognostic equation source terms at the correct cell locations. The global hash map also serves as a barrier between the prognostic equation solver and the emission module under this architecture. As such, new emissions sectors can be developed without introducing code changes outside of the chemistry module in the PALM model system.

2.3 Implementation in the PALM model system

The enhanced emission module has been implemented and released for the PALM model system 23.10 (Maronga et al., 2020). This includes the parametrized domestic heating module described in Section 3. Both models are part of the chemistry module, and the interested reader is encouraged to refer to Khan et al. (2021) for further detail.

2.3.1 Program flow

Design decisions made on the overall architecture are based on user specifications on each LOD and active pollutant species. The LOD defines the extent of parametrization that takes place for an emission sector. Meanwhile, the emitting species relevant to the emission sector of interest can also be defined as input. Thus provisions should be given to render their treatment flexible. Each emission sector may operate in up to three levels of detail. Typically, LOD 0 indicates full parametrization, where all sector-specific parameters are defined solely in the namelist. On the other hand, in LOD 2, the user must provide all emission source data covering the duration of the model run. Partial parametrization is referred to as LOD 1, where it requires both user emission data and namelist parameters as inputs. These sector- and LOD-specific parameters are analogous to the η_p^m term in Equation (4). As input data, only user specified species that appear in the chemical mechanism will participate in the model

run. Any species not defined by the user, or defined by the user but does not appear in the chemical mechanism, will be ignored.
180 Species specification are to be performed independently for each emission sector.

Figure 2 shows the hierarchy of the new emission module within the PALM model system. The existing emission module is currently under the chemistry module (`chemistry_model_mod`). The new modules reside within the dotted line region, which include `chem_emis_vsrc_mod`, modules dedicated to each emission sector (`chem_emis_[sector]_mod`), as well as a module for the *generic mode* emission (`chem_emis_generic_mod`). Their roles in the enhanced emissions module
185 will be detailed in the paragraphs below. Other modules that directly interact with the chemistry module are collectively referred to as the *core*, and optional input data for each emission sector, that is, netCDF files required for user-defined emission data specification (otherwise known as level 2 of detail, or LOD 2), are not shown on Figure 2. Each computational domain maintains its own hash maps (h^m and H), as each domain is geographically distinctive, allowing emission sources to be assigned locally to the corresponding prognostic equations.

190 The module `chem_modules` contains definitions of all parameters that can be specified by the user in the namelist (`_p3d` file), and has been modified to contain activation and configuration options for individual emission sectors. Subroutine entry points for each emission sector are also introduced in the module `chemistry_model_mod` for initialization, as well as emission source updates at specified intervals during the model run. The new module `chem_emis_vsrc_mod` contains the global hash map (H), where accumulation of prognostic equation source terms takes place through linkage to the hash maps
195 of all activated emission sectors (h^m). The interface between `chemistry_model_mod` and the core modules in the PALM model system remains unchanged.

2.3.2 Emission module code structure

A structural overview of the Fortran modules for each emission sector (m) is presented in Figure 3. It comprises an interface to external modules and components; a data storage component for various sector-specific parameters such as LOD, active
200 pollutant species information and hash key linkage to the prognostic equations; as well as methods (i.e., subroutines and functions) for general and LOD-specific operations and data manipulation. Data storage for each emission sector are kept private and can only be accessed through the publicly defined interface subroutines. This ensures encapsulation of modular data and functionality. The interface serves as a wrapper to all internal functions and subroutines and are expected to be uniform for the emission module.

205 There are three subroutines defining the interface. First is initialization, which assigns user-defined data values specified in the namelist (`_p3d` file) as well as other optional external data sources. Throughout the model run, emission source values will be updated based on values at specific points of simulation time. This is done in the PALM model system core by calling the update subroutine defined in the interface, which, in turn, invokes internal sector and LOD-specific subroutines for emission source calculation. A corresponding clean up function is called upon termination of the emission sector module to release all
210 resources allocated during the model run.

The user can specify which sector(s) are to be activated for a model run and, if so, the corresponding LOD. The LOD-specific parameters, represented by the η_p^m term in Equation (4), are also internal within each emission sector. The user can

also specify the pollutant species (p) to be used in the model run, which will be linked to the chemical species in the active chemical mechanism. Meanwhile, the hash map (h^m) contains information on all cell locations of emission sources through their hash keys (κ). Access between the individual source locations and the corresponding prognostic equation is established through the linkage between h^m and the global hash map located in the module `chem_emis_vsrc_mod`, where all entries are sorted using an implementation of the `qsort` algorithm (Bentley and McIlroy, 1993) to facilitate the hash key lookup, such that the runtime scales only with the logarithm of the number of emission sources using bisection search.

As mentioned in Section 2.3.1, the manner with which the emission module can be initialized, and how its emission sources are to be updated, are subject to the LOD. These specific subroutines and functions can be declared and implemented based on development specifications and requirements. In addition, implementation of various physical mechanisms and numerical constructs specific to the emission sector can be further abstracted into auxiliary subroutines and functions, which can be introduced at initial design or at subsequent development iterations as needed.

2.3.3 Generic emission mode

An additional generic mode has been introduced to provide an alternate possibility to provide emission source data for which an explicit emission sector is not (yet) available in the PALM model system. The generic emission mode contains no parametrization. Thus it is available only under LOD 2, in which the temporal-spatial data set generic emissions sources can be introduced into the model in a separate file in netCDF format. As such, the preparation and generation of these generic mode emission data can be done outside of the PALM model system, thus maximizing user flexibility. Further, as LOD 2 data under various emission sectors are implemented in the same manner, the Fortran module for the generic emission mode also contains common functions and subroutines that can be used in other emission sectors. These include but are not limited to user-defined and mechanism pollutant species matching, update interval detection, and basic data structure initialization and manipulation.

3 Parametrized emissions from domestic heating

As an illustrative example, underlying theory for parametrized (LOD 0) domestic heating, as well as its implementation under the framework described in 2.1, will be discussed. In addition, the test runs outlined in Sections 3.3 and 4 will also be based on this emission sector, from which computational performance and model results will be presented and accordingly discussed.

3.1 Emission source parametrization

The theoretical foundations for parametric modelling of domestic heating emissions are derived from the works of Baumbach et al. (2010) and Struschka and Li (2019), which are based on a direct relationship between emissions and energy usage. Emissions are calculated using the so-called *emission factors*, which varies with the pollutant species and the furnace technology. On the other hand, daily energy consumption are functions of the size, geometry, age, and function of the individual buildings. These forms the two aspects of the discussion below. Typically, buildings with a footprint (i.e., projected ground area) of less than 10 m² and a mean height of less than 3 m are not considered in calculation.

The daily energy usage of a building (E_B) can be expressed as a ratio between its annual aggregate and the number of
 245 degrees of temperature below the target temperature. In addition, diurnal variations due to general anthropogenic activity (i.e.,
 heat tends to be turned up during early mornings and evenings, while turned down while sleeping) are also considered:

$$E_B(t) = \left(\frac{E_B}{\Delta T} \Big|_A \right) \zeta \Delta T(t), \quad (7)$$

where $E_B|_A$ is the annual energy consumption for heating of the building B , $\Delta T|_A$ is the annually accumulated temperature
 deficit, also known as heating degree, and $\Delta T(t)$ is the current temperature deficit, a generalized form of heating degree day
 250 (HDD) to diurnal variations, and ζ is the diurnal variation in domestic heat usage, such as that defined by the Copernicus
 Atmosphere Monitoring Service (CAMS) for domestic and commercial combustion, under Gridded NFR (GNFR) sector C for
 other stationary combustion (Kuenen et al., 2022).

The annual energy consumption for heating ($E_B|_A$) takes into account the volume, compactness, energy demand of the
 building type (β), defined in Table B1:

$$255 \quad E_B|_A = E_\beta|_A \Phi_\beta V_B, \quad (8)$$

where Φ_β is the compactness factor of the building type β belonging to building B , $E_\beta|_A$ is the annual energy demand of the
 building type β per unit footprint area, and V_B is the volume of the building B . Typically, $E_B|_A$ takes up 80 % of the total
 energy consumption of the building (Mues et al., 2014). This will be implemented in upcoming versions of the parametrized
 domestic emission model.

260 The compactness factor, in unit of m^{-1} , is a density indicator of the building. On the other hand, the annual energy demand,
 in units of J m^{-2} per annum, is the footprint-specific energy consumption. Tabulated values of these two quantities can be found
 in Table B2 for each building type (β).

In turn, the temperature deficit $\Delta T(t)$ is calculated by subtracting the target indoor temperature (T_0) from the outdoor
 ambient temperature (T_∞):

$$265 \quad \Delta T(t) = \max \{ 0, [T_0 - T_\infty(t)] \}. \quad (9)$$

When the ambient temperature (T_∞) is greater than the target temperature (T_0), there will be no temperature deficit (i.e.,
 $\Delta T = 0$) and it is assumed that no heating will be required.

The volumetric emission for each species p can then be calculated for each source location – represented by the correspond-
 ing hash key κ – using Equation (4). Here, the parameters, i.e. η in Equation (4), are represented in terms of the emission factor
 270 ψ_p and building energy usage E_B , as shown in the relation below:

$$f_p(t, \kappa | \psi_p, E_B) = \psi_p E_B, \quad (10)$$

where ψ_p is the emission factor for the emitting species, whose values are tabulated in Table B3, and E_B is the building energy
 usage determined in Equation (7). It should be noted that ψ_p is a constant normalized by the building energy consumption
 (E_B) which, in turn, is a function of diurnal anthropogenic activities (ζ) and temperature deficit ($\Delta T(t)$).

275 To reduce computational effort, PM_{10} is assumed to be an inert species. However, it is possible to integrate the PALM
chemistry module Khan et al. (2021) with other aerosol models, such as SALSA (Kurppa et al., 2019) and ISORROPIA
(Nenes et al., 1998; Fountoukis and Nenes, 2007). On the other hand, it is expected that bulk and turbulent flows are the
dominate modes of particulate transport. Gravitational effects, that is, settling and buoyancy, have not been considered in this
case. The interested reader can refer to Khan et al. (2021) on the overall treatment of gravitational effects for dry deposition in
280 the PALM chemistry module.

3.2 Module implementation

The domestic emissions module is implemented in the PALM model system under `chem_emis_domestic_mod`. In accordance with the overall architecture in Figures 2 and 3, interaction between the domestic emissions model and the PALM are made through the following interface subroutines:

```
285 - chem_emis_domestic_init( ),  
- chem_emis_domestic_update( ), and  
- chem_emis_domestic_cleanup( ),
```

which respectively handle LOD-specific module initialization, update of emission sources during the solver iterations, and relinquishing of allocated resources. The implementation of the fully parametrized (LOD 0) emission source term calculations
290 are based on the formulation outlined in Section 2.1, and the user-defined emission source terms makes use of interface functions and subroutines already defined in the generic emission mode described in Section 2.3.3. All options and parameters are defined in the module `chem_emission_mod`, and they can be specified by the user using the namelist (`_p3d` file).

The activation of the domestic emission parametrization can be specified by setting the namelist option `emis_domestic` to `.TRUE.`, while the corresponding LOD is specified using the option `emis_domestic_lod`. Currently, full parametrization
295 (LOD 0) and user-specification (LOD 2) are available. Under LOD 2, the time series of all emission volume sources (that is, their cell locations and the emission level) will be provided by the user explicitly through the input file with the suffix `_emis_domestic` in netCDF format, and no further namelist options are required. On the other hand, with LOD 0, additional parameters, presented in Table 1, can be specified by the user.

The emission source at each building stack location are updated at the start of the model run, and afterwards at every interval
300 specified by the option `emis_domestic_update_interval`, which is 300 seconds by default. A user-defined target temperature, with a default set to 15 °C (VDI, 2013), can be defined through the option `emis_domestic_base_temperature`, where domestic heating is assumed to be turned on when the ambient temperature falls below this target temperature. On the other hand, the option `emis_domestic_heating_degree` specifies the annual cumulative temperature (in degrees) to be heated above the ambient temperature to the target temperature, with a default value of 2100 K. The diurnal heat usage
305 profile can be defined on an hourly basis via the option `hourly_diurnal_profile`, where the user can specify an hourly weighting to represent aggregate anthropogenic activity for the region of interest. As default, the CAMS diurnal profile for

residential and commercial combustion, defined under the GNFR sector C (other stationary combustion) is used (Kuenen et al., 2022). The compact factors and energy demands for each building type (see Appendix B) can be provided with the options `emis_domestic_compact_factors` and `emis_domestic_energy_demands`. The default values for both are defined in Table B2.

Meanwhile, emissions factors are to be presented in a name-value pair, where the species names are defined with the option `emis_domestic_species_names`. The corresponding emission factors are provided on the basis of unit energy consumed with the option `emis_domestic_species_emission_factors`. The emission factors for airborne species are to be presented in the unit of mol TJ^{-1} , and those for particulate species (such as PM_{10}) and other inert species are to be presented in kg TJ^{-1} . As the definition of chemical species in the PALM model system is mechanism-specific, the user must supply the appropriate species names and emission factors, and is thus encouraged to refer to Table B3 for representative values of emission factors with different furnace technologies.

Further, for LOD 0, two additional variables defined in `_static` file are to be read as input. The first is `stack_building_volume`, which indicates the (i, j) cell location of each building stack, and their corresponding building volume (V_B), typically assigned to each building belonging to a unique building ID. The second is `building_type`, which contains type of the building (β) defined in Table B1, from which the compactness factor (Φ_β) and energy demand (E_β), in Table B2 for example, can be found. While the onus is on the user to ensure correctness of all parameter input values are sound, all user inputs will be inspected, in which invalid entries will be replaced with default values listed in Appendix B. In addition, a lower limit of zero is imposed on all emission values to ensure a seamless model run.

3.3 Performance benchmark

To provide an estimate of computational performance of the enhanced emission module, a synthetic test case a horizontal grid size of 400×400 cells has been created for evaluation. The test case domain contains 15 vertical layers with 129,600 uniformly distributed sources, representing 5.4% of the total cell count. Runs were conducted at three different levels of horizontal domain decomposition: 10×10 processors (40×40 cells per compute core), 20×20 processors (20×20 cells per core), and 40×40 processors (10×10 cells per core). A simulation period of 3600 s is set for all cases at a fixed time step of 200 ms so that performance comparison across all runs can be made at a per time step basis. Mass conservation in the solution domain is verified by comparing the total input emission rate of an inert pollutant species (e.g., PM_{10}) into the solution domain to its total mass contained within in a cyclic lateral boundary arrangement. All runs are performed on the supercomputer system hosted by the North German Association of High Performance Computing (Norddeutscher Verbund für Hoch- und Höchstleistungsrechnen; HLRN) using compute nodes comprising two Intel® Xeon® Platinum 9242 processors, totaling 96 cores, operating at a base frequency of 2.3 GHz, and 384 Gb of physical memory. The PALM model system has been compiled under `mpiiFORT` version 2018.6.288 with OpenMPI version 3.1.5.

At each domain decomposition level, control model runs are first conducted with the emission module deactivated, followed by corresponding runs using the emission module. Thus the run time for the processing and solving of emission sources, which takes place every time step, can be calculated by taking the difference in the prognostic equation solver times between the

domestic and reference runs. A set of 20 control and emission model runs are conducted for each domain decomposition level, and the runs with the two fastest and slowest prognostic equation solver time are discarded to attenuate outlier influence. Summary statistics are performed at both the aggregate level (i.e., all emission sources) and for a single emission source. Ultimately, the per time step run times for processing an emission source and prognostic equation are calculated, with corresponding serial performance data extrapolated from the three parallel runs, to evaluate the computational effort of the enhanced emission module.

Table 2 shows the run time required to complete one time step of the prognostic equations for the control and emission model runs at the three domain decomposition levels, along with results of statistical tests, based on results of $20 - 4 = 16$ samples for each model run. To establish statistical significance in the difference in run times between the domestic and control runs at each level of domain decomposition, inference in variance uniformity is first established by way of f -tests to determine whether the pooled (statistically similar variance) or unpooled (statistically different variance) t -tests should be used. A level of significance of 0.05 is used as guideline for all statistical tests.

The f -tests are performed using $16 - 1 = 15$ degrees of freedom (DOF). From the results of the f -test, the difference in run time are shown to be statistically significant for decomposition levels 10×10 (0.0159) and 40×40 (0.0167). On the other hand, the difference at level 20×20 (0.207) is statistically inconclusive. The decision is thus made to use the unpooled treatment for domestic and control run time distributions for the subsequent t -test, in which the effective DOF is calculated using the Welch-Satterthwaite equation:

$$\text{DOF}_{\text{effective}} = \frac{[(s^2/n)_{\text{domestic}} + (s^2/n)_{\text{control}}]^2}{\left[\frac{(s^2/n)^2}{n-1}\right]_{\text{domestic}} + \left[\frac{(s^2/n)^2}{n-1}\right]_{\text{control}}}, \quad (11)$$

where s^2 is the unbiased variance estimator of each sample group (i.e., emission and control runs), and n represents the corresponding sample size (16 in both cases). The results from the t -test show that the difference in distributions for the run times of the domestic and control runs are, indeed, statistically significant at all domain decomposition levels. This also means the corresponding difference can be interpreted as the run time for the emission module. The difference in run time for each decomposition setting were normalized by the total number of emission sources (129,600) to assess the numerical performance of the domestic emission module and the volume source emission processing on a per stack or volume source basis for each time step. This is presented in Figure 4, which can be linearized in a double logarithmic scale, from which the serial performance can be estimated by way of linear regression. This is determined to be $1.3249 \mu\text{s}$, representing the upper limit under the current computing software and hardware configurations, with a coefficient of determination of 0.9946. This corresponds to a 0.512% of serial processing time for all volume sources in the computational domain, where slight improvement under parallelization can be seen, to 0.198% with 40×40 processors. Therefore, the benchmark demonstrates the effectiveness and scalability of the present emission module, as well as other emission sectors utilizing the volume source based emissions processing framework.

4 Exemplary model run with parametrized emissions from domestic heating under idealized conditions

An idealized run case is conducted, following the performance benchmark, to assess the parametrized domestic emissions module as an isolated emission source. The domain of this case study is located in a $800 \times 800 \text{ m}^2$ cardinally aligned region at the border between the districts Gesundbrunnen and Prenzlauer Berg of Berlin, at a horizontal resolution of 2 m, as shown in Figure 5. The reference coordinate of the region is set to ($52^\circ 32' 32.6''$ N, $13^\circ 23' 46.5''$ E) and is affixed to the origin of the computational domain. An arbitrary reference elevation of 36.87 m above sea level is also introduced, determined internally by the PALM model to optimize the number of grid points above ground level, from which the vertical (z) dimension of the computational domain extends to another 800 m above. A uniform grid spacing of 2 m was used in the z direction, rendering the domain size of $400 \times 400 \times 400$ cells. The namelist settings for the chemistry parameters for the present run can be found in Appendix C.

In the parametrization of domestic heating emissions, 228 out of 283 building units have met the minimum height (3 m) and footprint (10 m^2) criteria for which stacks are assigned. Emissions of inert PM_{10} are parametrized for this idealized run. Reactive gas phase pollutants such as NO and NO_2 , are not considered as their computed concentrations also depend on contributions of other reactive species from the background and other emission sectors not considered in this model configuration. It is also assumed that the pollutants emitted from the stacks are immediately well-mixed with the surrounding air in the collocated grid cell. As such, the effects of micromixing resulting from segregation are not expected to be significant at such fine grid resolutions (Mastorakos, 2003; Gamory et al., 2009). The amount of pollutant species emitted from each domestic stack at any given time is calculated in accordance with the parametrization schemes set forth in Baumbach et al. (2010) and Struschka and Li (2019) described in Section 3.1. All buildings in the computational domain are assumed to be heated using a mixture of 50% centralized gas and 50 % oil furnaces (Table B3), according to the building technology data collected by the City of Berlin for the region (Senatsverwaltung Berlin, 2010). The CAMS diurnal profile for residential and commercial combustion under GNFR sector C (Kuenen et al., 2022) is used for the calculation of the weighted temperature deficit profile ($\zeta \Delta T(t)$).

To further simplify the model, static profiles for meteorology have been used for initialization. A horizontal wind of $(u, v) = (1.5, 0.5) \text{ m s}^{-1}$ is prescribed to provide constant bulk air movement. An initial temperature of 275 K with a vertical gradient of $-0.1 \text{ K} / 100 \text{ m}$ is also introduced on the lateral boundaries to maintain a positive temperature deficit, $\Delta T(t)$, throughout the run. A Dirichlet / Neumann boundary condition pair is applied for chemical species (i.e., PM_{10}) at each set of opposing lateral boundaries, while the Neumann boundary condition is applied to the top and bottom of boundaries of the solution domain. Furthermore, the following modules are also used to provide additional parametrization of relevant physical processes in the PALM model system under large-eddy simulation (LES) mode:

1. The land surface model (Gehrke et al., 2021) to solve energy balance of various surface types,
2. The plant canopy model (Maronga et al., 2020) for the parametrization of dynamic and thermodynamic processes of trees and vegetation,

3. The parametrized surface radiation scheme for calculating radiative energy budget under clear sky conditions (Maronga et al., 2020), and
- 405 4. The online chemistry module to model the dispersion of PM_{10} (Khan et al., 2021).

It is worth mentioning that with the use of the clear sky radiation scheme, vertical divergence of the radiation fluxes leading to heating or cooling of the air column were excluded. In addition, as the purpose of the idealized model is to inspect the influence of anthropogenic emissions from domestic heating alone, other sectors of emissions, such as those from traffic and industrial sources, have also been precluded in this study.

410 The simulation has been set up for 48 hours, starting on 00:00:00 UTC on January 5, 2022, preceded by a 6-hour spin-up period. Sampling takes place in the final 24 hours. The model run was performed on the HLRN supercomputer system described in Section 3.3 on 20×20 compute cores. Time-averaged 3D output data (over a five-minute window) for all relevant prognostic variables are written out at five minute intervals. Six sampling locations, representing various types of urban topology, have been selected from the domain. Sampling location A represents a typical street canyon, where two long rows of buildings are

415 separated by a narrow road segment. Location B is situated in an open courtyard, that is, an open area surrounded by buildings. The region immediately downwind of a large building is indicated in sampling location C, while a heavily built area but with an open downwind region is represented by location D. Sampling location E is an open space in the middle of a park. Finally, sampling location F is a completely closed courtyard. These locations are visually indicated in Figure 7 and tabulated in Table 4.

420 **4.1 Temperature deficit**

To evaluate the behavior of the domestic heating parametrization throughout the idealized model run, the hourly mean nominal domain temperature deficit $\Delta T(t)$ as well as the weighted deficit with the CAMS diurnal profile $\zeta \Delta T(t)$ are presented in Figure 6. The temperature deficit varies with the ambient temperature. It begins at 00:00 UTC at 15.55°C and increases monotonically, albeit slowly, to 15.78°C at 07:00 UTC. Rapid changes follow in which the $\Delta T(t)$ drops to 7.89°C at 12:00

425 UTC, then returning to 13.6°C at 16:00 UTC. Towards the end of the day sees a mild increase, where $\Delta T(t)$ returns to 15.50°C at the end. As $\Delta T(t)$ is positive throughout the day, the domestic stacks should be continuously operating and emitting PM_{10} , in accordance with Equation (9).

On the other hand, the weighted temperature deficit $\zeta \Delta T(t)$, which exhibits a different behavior than the nominal $\Delta T(t)$, which reflects the influence in meteorological conditions as well as anthropogenic activities on the expected energy usage and

430 the corresponding emission level, as indicated in Equation (7). Domestic heating is expected to be reduced substantially in the nocturnal period from 01:00 to 06:00 UTC, where the majority of residents are at rest, and the weighted temperature deficit hovers between 6.55°C (01:00 UTC) and 5.64°C (03:00 UTC). The morning peak takes place at 09:00 UTC, with an onset starting at 08:00 UTC where $\zeta \Delta T(t)$ equals 18.9°C , but quickly reduces to 9.82°C at 13:00 UTC due to the corresponding decrease in $\Delta T(t)$ in the daytime period. A steady recovery period follows, in which $\zeta \Delta T(t)$ rises to its evening peak value of

435 23.13°C , reflecting a generally high level anthropogenic activity, before dropping quickly to 15.50°C at 00:00 UTC. While it is

impractical to draw trends from inspecting the output of all stacks due to variability in energy demands and local meteorology, the weighted temperature deficit serves as a reasonable indicator on their overall level of operation, and by extension their emission characteristics.

4.2 Spatial distribution of PM₁₀ concentration fields

440 Figure 7 shows the spatial distribution of diurnal mean PM₁₀ concentration evaluated at 2 m above ground. As expected, higher PM₁₀ concentrations can be found in the wake of building clusters due to release of pollutants from the stacks. These can range from approximately 2 to above 4 $\mu\text{g m}^{-3}$, depending on the location. On the other hand, in open areas, where stack exhaust disperses into its surroundings, lower concentrations can be seen, to about 1 - 1.5 $\mu\text{g m}^{-3}$. This range of modelled concentration levels is in good agreement with the observed contributions of domestic heating of PM₁₀ concentrations found
445 in existing studies for Berlin (Senatsverwaltung Berlin, 2019; Pültz et al., 2023).

The magnitude of the concentration also corresponds to the energy consumption (E_B) of the individual buildings, which depends on their volume and footprint according to Equation (8). Thus it can be seen that concentrations of PM₁₀ are higher following the wake of larger buildings (e.g., at locations B, C, and D). On the other hand, pollutant accumulation can be seen at locations where pollutant transport between the urban canopy and the free stream is restricted through the turbulent shear
450 layer (Chan and Butler, 2021). Regions such as the street canyon (location A) as well as the closed courtyard (location F) are exemplary of such pollutant accumulation. Particularly, the vicinity of location F contains a large number of stacks (Figure 5), which results in a large amount of local PM₁₀ being trapped into individual courtyards. In other cases, pollutants are transported from nearby buildings, in addition to local emission production, as qualitatively evidenced in the street canyon at location A.

4.3 Concentrations at sampling locations

455 The diurnal time series for the PM₁₀ concentrations at 2 m above ground for each sampling location is illustrated in Figure 8, in which they follow a general trend. The concentrations reported from the idealized run are relatively low for all locations, with mean values between 1.65 and 3.11 $\mu\text{g m}^{-3}$ for each location. Higher concentrations can be observed towards the beginning and the end of the day, separated by a period during daytime, starting at 09:00 UTC, where the concentration is very low, averaging between 0.30 and 1.64 $\mu\text{g m}^{-3}$. As most locations (A to E) are positioned at some distance away from the emission
460 sources at rooftop levels, the low concentrations indicate dilution through daytime vertical transport. This is not surprising, considering that the prescribed wind for this idealized run is constant but low. Meanwhile, there is very weak dispersion during nighttime (from 00:00 to 08:00 UTC), which only causes the concentrations at all stations to decrease very slowly. The concentration recovers more quickly in the evening, coinciding an increase in $\zeta\Delta T(t)$. With the exception of locations C and F, where the recovery begins at 16:00 UTC.

465 Location C is downstream of an isolated large emission source. Therefore it maintains a higher peak concentration than the other stations, at 8.42 $\mu\text{g m}^{-3}$. On the other hand, without other emission sources in its proximity, the concentration at location C also takes longer to recover than at the other locations, at 19:00 UTC, but rises quickly to its evening peak (8.42 $\mu\text{g m}^{-3}$). By comparison, location F is in a closed courtyard in a large building complex. With numerous emission sources

in its surroundings, a relatively high amount of PM_{10} finds its way into the courtyard. However, pollutant exchange with the
470 free stream flow is restricted through the rooftop shear layer (Chan and Butler, 2021), effectively trapping the PM_{10} inside the
courtyard. This results in a steady increase of PM_{10} concentration in the evening, to a peak of $9.49 \mu\text{g m}^{-3}$. Following a sharp
decrease at 01:20, corresponding to a decrease in anthropogenic activities, the concentration maintains at relatively constant
level throughout the day, with a mean of $1.53 \mu\text{g m}^{-3}$ between 02:00 and 16:00 UTC.

Since domestic emissions are released from rooftops, further insights can be obtained by inspecting the vertical profiles of
475 PM_{10} concentrations at each sampling location, as illustrated in Figure 9. The profiles at four different points of time (08:00,
12:00, 16:00, and 20:00 UTC) are shown, representing the morning peak, daytime low, onset of recovery and evening peak
respectively. Due to the vertical positioning of the domestic stacks, PM_{10} must be transported downwards to the ground level,
which implies that lower concentrations are expected than those further up in the urban canopy, even in cases where the
distribution is seemingly uniform (i.e., location F).

480 The concentration profiles themselves are also indicative of the urban topology of the corresponding sampling locations.
Location A is a typical street canyon, and a relatively stable vertical concentration profile can be found at all times. The canyon
is well ventilated due to alignment of the road section with the wind flow. This results in a uniform vertical distribution of PM_{10}
concentration along and beyond the building height of 22 m on both sides of the canyon, with a mean of between $0.32 \mu\text{g m}^{-3}$
at 16:00 UTC and $1.80 \mu\text{g m}^{-3}$ at 20:00 UTC, to up to an elevation of 30 m above ground. As indicated in the diurnal mean
485 concentrations in Figure 4, such stable distribution can be brought about by the emissions from the cluster of buildings about
300 m upstream from location A, as well as stacks originated from nearby buildings.

In contrast, location B is located in a cluster of buildings, and as such the vertical PM_{10} concentration is dominated by
emissions of local sources. It is also more vertically stratified than location A. The higher uniformity at 08:00 UTC, averaging
 $2.62 \mu\text{g m}^{-3}$ up to the building height of 22 m, before diminishing near the rooftop. This indicates mixing of the PM_{10} that
490 remains from the previous evening, which is almost completely dissipated by 12:00 UTC. At the onset of recovery (16:00
UTC), a peak at $2.92 \mu\text{g m}^{-3}$ can be seen developing from the roof, and is being transported to ground level, as evidenced by
the profile at 20:00 UTC, where peak concentration reaches $5.57 \mu\text{g m}^{-3}$, while downward transport still takes place.

As previously mentioned, the concentration at location C is highly dependent on a single, large emission source located 185
m upstream. Therefore, while the concentrations could be significant, vertical mixing could be relatively weak, particularly
495 due to the absence of other urban structures along the way to provide turbulence mixing and additional emission sources. This
single source can thus provide a level of concentration comparable to the other locations, to $4.72 \mu\text{g m}^{-3}$ at the morning peak
(08:00 UTC) and $6.05 \mu\text{g m}^{-3}$ at the evening peak (20:00 UTC). However, for this reason it also is more vertically stratified.
Further, at periods of low daytime emissions – indicated by $\zeta\Delta T(t)$ in Figure 6) – the PM_{10} is seen to be totally dispersed
before reaching location C.

500 Location D is situated in a similar topology as location B, where it is an open area surrounded by many buildings, with the
exception of a cluster of nearby buildings upwind, which also serves as a rich source of PM_{10} , as shown in Figure 5, particularly
during the evening peak. Therefore, this contributes to the presence of uniform PM_{10} even at higher elevations, to up to 2.32
 $\mu\text{g m}^{-3}$ at 20:00 UTC. However, this uniformity is not maintained at the other points of time, suggesting the magnitude of

emission as the primary driver for vertical transport. A similar observation can also be made for locations E and F, in which
505 there are also numerous sources in their vicinity.

Despite being in a completely open area, the concentrations at location E is at a similar level as the other sampling locations, with maximum values of $2.51 \mu\text{g m}^{-3}$ at 08:00 UTC and $3.71 \mu\text{g m}^{-3}$ at 20:00 UTC. There is a strong dependence on contributions from nearby sources found in the building clusters at some distance upwind, as with location C. However, the PM_{10} also diminishes quickly during periods of relative low emission levels (12:00 and 16:00 UTC) through dispersion.

510 The restriction of pollutant exchange at location F, compared to the other locations, has been prominently discussed the previous paragraphs. The direct consequence of this is the accumulation of PM_{10} , which results in a highly uniform vertical distribution at relatively high concentrations, with mean values ranging from $0.640 \mu\text{g m}^{-3}$ at 16:00 UTC to $6.40 \mu\text{g m}^{-3}$ at 20:00 UTC, up to the building height of 30 m. Mixing in higher altitudes is also evident, indicative of the contributions from numerous nearby emission sources upstream, as pointed out previously for locations D and E.

515 A qualitative representation of PM_{10} dispersion can be seen in Figure 10. It shows the vertical distribution of PM_{10} concentrations at each sampling location, indicated with triangular markers, from 08:00 to 20:00 UTC at four hour intervals. The sampling plane is taken at the north-south position of the corresponding location, spanning a width of 200 m in the east-west direction and covering an elevation of 100 m from the reference height. The higher concentration during peak periods have been discussed in Figure 9. Vertical transport is also evident in each of the regions, albeit heavily attenuated during off peak
520 times (12:00 and 16:00 UTC). The uniformity of PM_{10} concentration inside the urban canopy can be seen in location B at 08:00 UTC, as well as location F at 20:00 UTC. The distribution plots provide a visual confirmation of the conclusions drawn from the previous figures. For instance, the much higher concentrations at the stack upstream of location C, which has been discussed previously, are clearly seen at 08:00 and 20:00. Moreover, contributions from nearby emissions can be observed at locations D and E, where relatively high levels of PM_{10} reaches the sampling location from above, especially at 08:00 UTC.
525 It is worth noting that the urban structures are not necessarily contained with the corresponding sampling planes. As such the figures may capture emission from nearby sources that do not appear on the figures. As such the figures show local concentration maxima originating from nearby sources, which are located outside the area of the figures.

5 Concluding remarks

An enhanced emission module has been developed for the PALM model system to provide a homogeneous operating frame-
530 work for modelling emission contributions from various emission sectors at different levels of detail (LODs) and parametrizations. The hash key approach allows references from individual emission sectors to be made directly to the prognostic equation source terms in a highly effective and independent manner. In the mean time, modular interface functions and subroutines are provided to ascertain operational uniformity across all emission sectors with the PALM model system core, while encapsulating internal data and methods for each emission module and the framework itself. A benchmark run demonstrated excellent
535 performance and scalability.

A module for domestic heating emission parametrization, based on the work of Baumbach et al. (2010) and Struschka and Li (2019) is implemented using the enhanced emission framework. The parametrization relates emissions to energy demand of each individual building, which is driven by the building topology and the deficit between the ambient temperature and the target indoor temperature, weighted by the diurnal variation in domestic heat usage. In addition, the stack emissions output
540 are influenced by predetermined tabulated factors for different building types and age, as well as emission factors for different pollutants and furnace technologies, which are used in the parametrized module as default values.

Subsequently, a test case under idealized conditions is conducted for the parametrization module is conducted over a $800 \times 800 \text{ m}^2$ residential region in Berlin. The model run covers a 24-hour sampling period following spin-up under constant wind and surface temperature. The diurnal time series for nominal ($\Delta T(t)$) and weighted ($\zeta \Delta T(t)$) temperature deficit reflects
545 continuous furnace operation with highly varying energy usage and emission output throughout the day, showing a short day time peak and a longer evening peak. Near surface PM_{10} concentrations at different sampling locations show similar trends, showing very low levels during daytime due to low levels of heating and dispersion through vertical transport. Meanwhile, values are persistently moderate during nighttime following the evening peak. Vertical concentration distributions vary depending on topology of each sampling location. It is shown that a large number of nearby emission sources heavily influences
550 vertical distribution at elevations beyond building height, while the uniformity of the vertical column is dependent on the level of ventilation of the area surrounding each location.

The performance and functionalities of the new approach in the PALM model system have been fully demonstrated in the present work through the benchmark (Section 3.3) and the idealized run (Section 4). This approach to emission source treatment enables emission models for the PALM model system to be designed and developed in a highly intuitive, flexible and
555 independent manner. For the end user, the modularization of different emission sectors offers a higher degree of control over execution options and details, allowing studies to be conducted with improved organization and precision. The parametrization assumes uniform heating technology for all buildings in the computational domain, however. The emissions are further considered isothermal and well-mixed in the cell directly above the building stack. These limitations can be partially addressed either using the LOD 2 specification, or the built-in generic emission mode, which gives the user the ability to import third-party
560 emission data.

In addition to the domestic emission parametrization module featured in this work, implementation of additional modules for the parametrization of biogenic VOC emissions, pollen dispersion, and E-PRTR or GRETA (Schneider et al., 2016) point sources are available from the most recent release (23.10) of the PALM model system at the time of writing. Further enhancements have been planned for the parametrized domestic emission module itself. These include building heat loss estimation
565 and thermal effects on stack exhaust dispersion. Finally, a simplified characterization of ground-based emission sources (such as road traffic) can be represented as surface fluxes (Khan et al., 2021; Gehrke et al., 2021) within the present emission module framework.

Appendix A: Nomenclature

A1 Roman Symbols

A	Annual aggregate (subscript)
B	Building index (subscript)
E_B	Building energy consumption [kW h]
E_β	Per footprint energy demand for building type β [kW h m ⁻² p.a.]
f	Parametrized emission source function in Eqns. (4) and (10)
H	Amalgamated global hash map
h^m	Hash map for emission sector m
i, j, k	Cell indices
m	Emission sector index (superscript)
n	Sample size in Eq (11) []
N	Array (vector) size
p	Index for pollutant species (subscript)
r	Index for chemical reaction (superscript)
s^2	Unbiased sample variance estimator [· ²]
T	Temperature [K]
T_0	Base building temperature [K]
T_∞	Ambient temperature [K]
ΔT	Temperature deficit [°C]
ΔT_A	Annual heating degrees [°C]
t	Time [s]
u	Wind velocity [m s ⁻¹]
V	Building volume [m ³]
W	Natural number ($\in 0, 1, 2, \dots$)

570 A2 Greek symbols

β	Building type index (subscript)
ϵ	Volumetric emission rate [m ⁻³ s ⁻¹]
ζ	Diurnal weight factor for anthropogenic activity []
η	Generalized parameter in Equation (4)
Γ	Species diffusivity [m ² s ⁻¹]
κ	Hash key
ξ	Pollutant concentration [· m ⁻³]

σ	Chemical production rate [$\text{m}^{-3} \text{s}^{-1}$]
Φ	Building compactness factor [m^{-1}]
Ψ	Emission factor [mol TJ^{-1} or kg TJ^{-1}]

A3 Acronyms and abbreviations

CAMS	Copernicus atmosphere monitoring service
DOF	Degree(s) of freedom
E-PRTR	European pollutant release and transfer register
(G)NFR	(Gridded) nomenclature for reporting
GRETA	Gridding emission tool for ArcGIS
HDD	Heating degree day
HLRN	(Norddeutscher Verbund für) Hoch- und Höchstleistungsrechnen
KPP	Kinetic PreProcessor (Damian et al., 2002)
LES	Large eddy simulation
LOD	Level of detail
PM ₁₀	Particulate matter with mean diameter of up to 10 μm
VOC	Volatile organic compound

Appendix B: Building-Specific Parameters for Domestic Heating Emissions

Six building types are supported in the current implementation of parametrized domestic heating emission sector, based on their function and construction period, to represent their energy consumption characteristics, as presented in Table B1.

575 Each building type (β) is further defined by its compactness factor (Φ_β) and annual energy demand (E_β). The following results are taken from Struschka and Li (2019) and are presented in Table B2 below.

Further, Struschka and Li (2019) has also proposed emission factors for carbon monoxide (CO), oxides of nitrogen (NO_x and NO₂), particulate matter (PM_{10/10}) and volatile organic compounds (VOC). These values have been tabulated in the table below according to each domestic furnace technology (Table B3). Please note that the emissions factors used for the idealized
580 run in Section 4 are taken as the arithmetic mean between centralized oil and centralized gas to reflect the furnace technology composition of the region of interest (Senatsverwaltung Berlin, 2010).

Appendix C: Namelist parameters for exemplary model run

The following namelist options are used the chemistry parameters in the idealized domestic model run described in section 4. Settings relevant to the parametrized domestic emissions module are presented in boldface and further explained. The reader may refer to Khan et al. (2021) on the remaining options pertaining to the PALM chemistry module. Instructions for obtaining the complete namelist and all associated input data can be found in the *Code and data availability* section.

```
585 &chemistry_parameters
    chem_gasphase_on      = .TRUE.,
    call_chem_at_all_substeps = .FALSE.,
590 chem_mechanism         = "phstatp",
    photolysis_scheme    = 'simple',
    surface_csflux_name   = 'PM10',
    surface_csflux        = 0,
    cs_name               = 'PM10',
595 cs_surface            = 0,
    cs_heights(1,:)      = 0,50,100,200,400,800,
    cs_profile(1,:)      = 0, 0, 0, 0, 0, 0,
    bc_cs_l               = 'dirichlet',
    bc_cs_r               = 'neumann',
600 bc_cs_s               = 'dirichlet',
    bc_cs_n               = 'neumann',
    bc_cs_b               = 'neumann',
    bc_cs_t               = 'neumann',
    emis_domestic         = .TRUE.,
605 emis_domestic_lod     = 0,
    emis_domestic_species_names(:) = 'PM10',
    emis_domestic_species_emission_factors(:) = 0.173,
/
```

The domestic emission module is activated by setting the flag `emis_domestic` to `.TRUE.`. By specifying the value of `emis_domestic_lod` to 0, the module utilizes the full parametrization option described in 3. All modelled emitted species, as well as their corresponding emission factors, can be specified using the namelist parameters `emis_domestic_species_names` and `emis_domestic_species_emission_factors` respectively. For this run, the emission factor for PM₁₀ is 0.173 kg TJ⁻¹, representing an equal contribution of centralized oil and centralized gas for all buildings shown in Table B3. Any species not present in the active mechanism will be ignored.

615 The following parameters are absent from the namelist, where default values are assumed:

```
620 emis_domestic_update_interval = 300,
    emis_domestic_heating_degree = 2100,
    emis_base_temperature        = 15,
    emis_domestic_compact_factors = 0.23,0.28,0.28,0.26,0.29,0.29,
    emis_domestic_energy_demands = 130, 100, 100, 110, 89, 89,
```

The parametrization is updated every 300 seconds of simulation time, as indicated by `emis_domestic_update_interval`. The values of `emis_domestic_heating_degree` and `emis_domestic_base_temperature` represent the corresponding the annual heating degree and the target outdoor temperature (both in °C) of each building. The parameters

emis_domestic_compact_factors and emis_domestic_energy_demands, when unmodified, adopt respective
625 values and units listed in Table B2 in the order of the building types presented in Table B1.

In addition, the parametrized domestic emissions model requires data on type (Table B1) and volume of each building in the computation domain, as well as the corresponding stack location. This information are located in the model_static file (Section 3.2). The variable stack_building_volume contains the volume of each building at the building stack location, while building_type, as its name suggests, defines the type of each building.

630 *Code and data availability.* The exact version of the source code for the PALM model system containing the featured emission module is licensed under the terms of the GNU General License version 3.0 or later and can be obtained using the digital object identifier 10.5281/zenodo.10890465. A user guide on building the featured module from source, as well as executing the accompanied test cases, are located in the supplement indicated below. Additional information on available input options for the parametrized domestic emissions module and their applicable nominal values can be found in Section 3.2 and Appendix B.

635 *Supplement.* The supplement related to this article can be obtained using the digital object identifier [DOI].

Author contributions. Initial conception was carried out by ECC, SB, BK, and RF. Theoretical foundations for domestic emissions were laid out by IJJ, SB, and ECC. ECC assumed lead design and development with contributions from IJJ and RF. ECC and BK assembled and executed all model runs. The manuscript and all supporting data were prepared by ECC, IJJ, BK, and SB. TMB and MS provided technical and logistic guidance at all stages of the study.

640 *Competing interests.* The contact author has declared that none of the authors has any competing interests.

Acknowledgements. Approaches on module architecture and integration with the PALM model system, particularly its LES dynamic core and chemistry solver, were put forward following thorough discussions with Tobias Gronemeier (iMA Richter & Röckle GmbH, Freiburg im Breisgau, Germany) and Matthias Sühring (Leibniz Universität Hannover). Theoretical foundations concerning parametrization of domestic heating emissions were clarified in detail by Michael Struschka. Aurelia Lupaşcu (ECMWF, Bonn, Germany) and Konstantinos Michos (Winterthur Gas & Diesel Ltd., Switzerland) provided valuable input on language-specific implementation. Siegfried Raasch (Leibniz Universität Hannover) was responsible for the overall project leadership and coordination, as well as the maintenance and technical support of the PALM model system repository. All computations have been performed on high performance clusters maintained by the HLRN.

Financial support. The work outlined in this article is supported in part by the funding instrument “Urban Climate Under Change” (Grant ID: 01LP19111) from the German Federal Ministry of Education and Research (Bundesministerium für Bildung und Forschung; BMBF).

650 References

- Baumbach, G., Struschka, M., Juschka, W., Carrasco, M., Ang, K. B., and Hu, L.: Modellrechnungen zu den Immissions-belastungen bei einer verstärkten Verfeuerung von Biomasse in Feuerungsanlagen der 1. BImSchV, Umweltbundesamt 205 43 263, Bessau-Roßlau, <https://www.umweltbundesamt.de/publikationen/modellrechnungen-zu-den-immissionsbelastungen-bei/>, 2010.
- Bentley, J. L. and McIlroy, M. D.: Engineering a sort function, *Software: Practice and Experience*, 23(11), <https://doi.org/10.1002/spe.4380231105>, 1993.
- 655 Chan, E. C. and Butler, T. M.: urbanChemFoam 1.0: Large-Eddy Simulation of Non-Stationary Chemical Transport of Traffic Emissions in an Idealized Street Canyon, *Geoscientific Model Development*, 14(7), 4555–4572, <https://doi.org/10.5194/gmd-14-4555-2021>, 2021.
- Chan, E. C., Leitão, J., Kerschbaumer, A., and Butler, T. M.: Yeti 1.0: a generalized framework for constructing bottom-up emission inventory from traffic sources, *Geoscientific Model Development*, 16(4), 1427–1444, <https://doi.org/10.5194/gmd-16-1427-2023>, 2023.
- 660 Cormen, T. H., Leiserson, C. E., Rivest, R. L., and Stein, C. S.: *Introduction to Algorithms* (3rd Ed.), pp. 253–280, MIT Press, Cambridge MA, 2009.
- Damian, V., Sandu, A., Damian, M., Potra, F., and Carmichael, G. R.: The Kinetic PreProcessor KPP - A Software Environment for Solving Chemical Kinetics, *Computers and Chemical Engineering*, 26(11), 1567–1579, [https://doi.org/10.1016/S0098-1354\(02\)00128-X](https://doi.org/10.1016/S0098-1354(02)00128-X), 2002.
- EEA: Europe’s air quality status 2023, Tech. rep., European Environment Agency, <https://www.eea.europa.eu/publications/europes-air-quality-status-2023>, 2023.
- 665 Fountoukis, C. and Nenes, A.: ISORROPIA II: a computationally efficient thermodynamic equilibrium model for K^+ - Ca^{2+} - Mg^{2+} - NH_4^+ - Na^+ - SO_4^{2-} - NO_3^- - Cl - H_2O aerosols, *Atmospheric Chemistry and Physics*, 7, 4639–4659, <https://doi.org/10.5194/acp-7-4639-2007>, 2007.
- Gamory, A., Kim, I. S., Britter, R. E., and Mastarakos, E.: Simulations of the dispersion of reactive pollutants in a street canyon, considering different chemical mechanisms and micromixing, *Atmospheric Environment*, 43(31), 4670–4680, <https://doi.org/10.1016/j.atmosenv.2008.07.033>, 2009.
- 670 Ge, X., Schaap, M., Kranenburg, R., Segers, A., Reinds, G. J., Kros, H., and de Vries, W.: Modeling atmospheric ammonia using agricultural emissions with improved spatial variability and temporal dynamics, *Atmos. Chem. Phys.*, 20, <https://doi.org/10.5194/acp-20-16055-2020>, 2020.
- Gehrke, K. F., Sühling, M., and Maronga, B.: Modeling of land–surface interactions in the PALM model system 6.0: land surface model description, first evaluation, and sensitivity to model parameters, *Geoscientific Model Development*, 14(8), 5307–5329, <https://doi.org/10.5194/gmd-14-5307-2021>, 2021.
- 675 Grell, G. A., Peckham, S. E., Schmitz, R., McKeen, S. A., Frost, G., Skmarock, W. C., and Eder, B.: Fully coupled ‘online’ chemistry within the WRF model, *Atmospheric Environment*, 39(37), 6957–6975, <https://doi.org/10.1016/j.atmosenv.2005.04.027>, 2005.
- Gruney, K. R., Liang, J., Patarasuk, R., o’Keeffe, D., Huang, J., Hutchins, M., Laucaux, T., Turnbull, J. C., and Shepson, P. B.: Reconciling the differences between a bottom-up and inverse-estimated FF_{CO2} emissions estimates in a large US urban area, *Elementa Science of the Anthropocene*, 5(44), <https://doi.org/10.1525/elementa.137>, 2017.
- 680 Guenther, A. B., Monson, R. K., and Fall, R.: Isoprene and monoterpene emission rate variability: Observations with eucalyptus and emission rate algorithm development, *Journal of Geophysical Research: Atmospheres*, 96(D6), 10 799–10 808, <https://doi.org/10.1029/91jd00960>, 1991.
- 685 Guenther, A. B., Zimmerman, P. R., Harley, P. C., Monson, R. K., and Fall, R.: Isoprene and monoterpene emission rate variability: model evaluations and sensitivity analyses, *Journal of Geophysical Research: Atmospheres*, 98(D7), <https://doi.org/10.1029/93jd00527>, 1993.

- Guenther, A. B., Baugh, B., Brasseur, G., Greenberg, J., Harley, P., Klinger, L., Serça, D., and Vierling, L.: Isoprene emission estimates and uncertainties for the Central African EXPRESSO study domain, *Journal of Geophysical Research: Atmospheres*, 104(D23), 30625–30639, <https://doi.org/10.1029/1999JD900391>, 1999.
- 690 Guevara, M., Tena, C., Porquet, M., Jorba, O., and Pérez García-Pando, C.: HERMESv3, a stand-alone multi-scale atmospheric emission modelling framework – Part 2: The bottom-up module, *Geoscientific Model Development*, 13(3), 873–903, <https://doi.org/10.5194/gmd-13-873-2020>, 2020.
- Huszár, P., Cariolle, D., Paoli, R., Halenka, T., Belda, M., Schlager, H., Miksovsky, J., and Pisoft, P.: Modeling the regional impact of ship emissions on NO_x and ozone levels over the Eastern Atlantic and Western Europe using ship plume parameterization, *Atmospheric Chemistry and Physics*, 10(14), 6645–6660, <https://doi.org/10.5194/acp-10-6645-2010>, 2010.
- 695 Jeanjean, A. P. R., Buccolieri, R., Eddy, J., Monks, P. S., and Leigh, R. J.: Air quality affected by trees in real street canyons: the case of Marylebone neighbourhood in Central London, *Urban Forestry and Urban Greening*, 22, 41–53, <https://doi.org/10.1016/j.ufug.2017.01.009>, 2017.
- Jenkins, R. J.: Hash Functions for Hash Table Lookup, *Dr. Dobb's Journal*, 22(9), 107, 1997.
- 700 Jähn, M., Kuhlmann, G., Mu, Q., Haussaire, J. M., Ochsner, D., Osterried, K., Clément, V., and Brunner, D.: An online emission module for atmospheric chemistry transport models: implementation in COSMO-GHG v5. 6a and COSMO-ART v5. 1-3.1, *Geoscientific Model Development*, 13(5), 2379–2392, <https://doi.org/10.5194/gmd-13-2379-2020>, 2020.
- Khan, B. A., Banzhaf, S., Chan, E. C., Forkel, R., Kanani-Sühring, F., Ketelsen, K., Kurppa, M., Maronga, B., Mauder, M., Raasch, S., Russo, E., Schaap, M., and Sühring, M.: Development of an atmospheric chemistry model coupled to the PALM model system 6.0: impelementation and first applications, *Geoscientific Model Development*, 14(2), 1171–1193, <https://doi.org/10.5194/gmd-14-1171-2021>, 2021.
- 705 Kuenen, J., Dellaert, S., Visschedijk, A., Jalkanen, J. P., Super, I., and Denier van der Gon, H. A. C.: CAMS-REG-v4: a state-of-the-art high-resolution European emission inventory for air quality modelling, *Earth System Science Data*, 14(2), 491–515, <https://doi.org/10.5194/essd-14-491-2022>, 2022.
- 710 Kurppa, M., Hellsten, A., Roldin, P., Kokkola, H., Tonttila, J., Auvinen, M., Kent, C., Kumar, P., Maronga, B., and Järvi, L.: Implementation of the sectional aerosol module SALSA2.0 into the PALM model system 6.0: model development and first evaluation, *Geoscientific Model Development*, 12, 1403–1422, <https://doi.org/10.5194/gmd-12-1403-2019>, 2019.
- Manders, A. M. M., Builtjes, P. J. H., Curier, L., Danier van der Gon, H. A. C., Hendriks, C., Jonkers, S., Kranenburg, R., Kuenen, J. J. P., Segers, A. J., Timmermans, R. M. A., Visschedijk, A. J. H., Kruit, R. J. W., van Pul, W. A. J., Sauter, F. J., van der Swaluw, E., Swart, D., Douros, J., Eskes, H., van Meijgaard, E., van Ulft, B., van Velthoven, P., Banzhaf, S., Mues, A. C., Stern, R., Fu, G., Lu, S., Heemink, A., van Velzen, N., and Schaap, M.: Curriculum vitae of the LOTOS–EUROS (v2.0) chemistry transport model, *Geoscientific Model Development*, 10(11), 4145–4173, <https://doi.org/10.5194/gmd-10-4145-2017>, 2017.
- 715 Maronga, B., Banzhaf, S., Burmeister, C., Esch, T., Forkel, R., Fröhlich, D., Fuka, V., Gehrke, K. F., Geletič, J., Giersch, S., Gronemeier, T., Groß, G., Heldens, W., Hellsten, A., Hoffmann, F., Inagaki, A., Kadasch, E., Kanani-Sühring, F., Ketelsen, K., Khan, B. A., Knigge, C., Knoop, H., Krč, P., Kurppa, M., Maamari, H., Matzarakis, A., Mauder, M., Pallasch, M., Pavlik, D., Pfafferott, J., Resler, J., Rissmann, S., Russo, E., Salim, M., Schrempf, M., Schwenkel, J., Seckmeyer, G., Schubert, S., Sühring, M., von Tils, R., Vollmer, L., Ward, S., Witha, B., Wurps, H., Zeidler, J., and Raasch, S.: Overview of the PALM model system 6.0, *Geoscientific Model Development*, 13(3), 335–1372, <https://doi.org/10.5194/gmd-13-1335-2020>, 2020.
- 720

- Mastorakos, E.: The conditional moment closure approach for atmospheric pollution problems, *WIT Transactions on Ecology and the Environment: Air Pollution XI*, 66(10), 125–134, <https://doi.org/10.2495/AIR030131>, 2003.
- 725 Mues, A., Kuenen, J., Hendriks, C., Manders, A., Segers, A., Scholz, Y., Hueglin, C., Bultjes, P., and Schaap: Sensitivity of air pollution simulations with LOTOS-EUROS to the temporal distribution of anthropogenic emissions, *Atmos. Chem. Phys.*, 14, <https://doi.org/10.5194/acp-14-939-2014>, 2014.
- Murphy, B. N., Nolte, C. G., Sidi, F., Bash, J. O., Appel, K. W., Jang, C., Kang, D., Kelly, J., Mathur, R., Napelenok, S., G, P., and Pye, H. O. T.: The Detailed Emissions Scaling, Isolation, and Diagnostic (DESID) module in the Community Multiscale Air Quality (CMAQ) modeling system version 5.3.2, *Geoscientific Model Development*, 14(6), 3407–3420, <https://doi.org/10.5194/gmd-14-3407-2021>, 2021.
- 730 Nenes, A., Pandis, S. N., and Pilinis, C.: ISORROPIA: A new thermodynamic equilibrium model for multiphase multicomponent inorganic aerosols, *Aquatic Geochemistry*, 4, 123–152, <https://doi.org/10.1023/A:1009604003981>, 1998.
- Piroozmand, P., Mussetti, G., Allegrini, J., Mohammadi, M. H., Akrimi, E., and Carmeliet, J.: Coupled CFD framework with mesoscale urban climate model, *Journal of Wind Engineering and Industrial Aerodynamics*, 197, 104 059, <https://doi.org/10.1016/j.jweia.2019.104059>, 2020.
- 735 Pültz, J., Banzhaf, S., Thürkow, M., Kranenburg, R., and Schaap, M.: Source attribution of particulate matter in Berlin, *Atmospheric Environment*, 292, 119 416, <https://doi.org/10.1016/j.atmosenv.2022.119416>, 2023.
- Schneider, C., Pelzerand, M., Toenges-Schuller, N., Nacken, M., and Niederau, A.: ArcGIS basierte Lösung zur detaillierten, deutschlandweiten Verteilung (Gridding) nationaler Emissionsjahreswerte auf Basis des Inventars zur Emissionsberichterstattung, Tech. rep., Umweltbundesamt, https://www.umweltbundesamt.de/sites/default/files/medien/1968/publikationen/2016-11-09_griddingtool_greta_langfassung_final.pdf, 2016.
- 740 Senatsverwaltung Berlin: Überwiegende Heizungsarten, Tech. rep., Senatsverwaltung für Stadtentwicklung, https://www.berlin.de/umweltatlas/_assets/energie/gebaeudewaerme/de-texte/kb801.pdf, 2010.
- 745 Senatsverwaltung Berlin: Luftreinhalteplan für Berlin: 2. Fortschreibung, Tech. rep., Senatsverwaltung für Umwelt, Verkehr und Klimaschutz, https://www.berlin.de/sen/uvk/_assets/umwelt/luft/luftreinhaltung/luftreinhalteplan-2-fortschreibung/luftreinhalteplan_berlin_2019.pdf, 2019.
- Struschka, M. and Li, L.: Temperaturabhängige zeitliche Disaggregation von Emissionen aus Feuerungsanlagen der Haushalte und Industrie für Berlin im Rahmen des MOSAIK-Projektes, Tech. rep., Universität Stuttgart, 2019.
- 750 Teschner, M., Heidelberger, B., Müller, M., Pomeranets, D., and Gross, M.: Optimized Spatial Hashing for Collision Detection of Deformable Objects, in: *Proceedings of the 8th International Fall Workshop on Vision, Modeling, and Visualization*, vol. 3, pp. 47–54, Munich, Germany, <https://matthias-research.github.io/pages/publications/tetraederCollision.pdf>, 2003.
- VDI: Meteorologische Grundlagen für die Technische Gebäudeausrüstung, Tech. Rep. VDI 4710 Blatt 1, Verein Deutscher Ingenieure, 2013.
- 755 Zink, K., Vogel, H., Vogel, B., Magyar, D., and Kottmeier, C.: Modeling the dispersion of *Ambrosia artemisiifolia* L. pollen with the model system COSMO-ART, *International journal of biometeorology*, 56(4), 669–680, <https://doi.org/10.1007/s00484-011-0468-8>, 2012.
- Zink, K., Pauling, A., Rotach, M. W., Vogel, H., Kaufmann, P., and Clot, B.: EMPOL 1.0: a new parameterization of pollen emission in numerical weather prediction models, *Geoscientific Model Development*, 6(6), 1961–1975, <https://doi.org/10.5194/gmd-6-1961-2013>, 2013.

Table 1. Namelist options for domestic emissions parametrization (LOD 0).

Option (emis_domestic_...)	Term	Units
update_interval	--	s
base_temperature	T_0	$^{\circ}\text{C}$
heating_degree	ΔT_A	K
hourly_diurnal_profile	ζ	--
compact_factors	Φ_{β}	m^{-1}
energy_demands	E_{β}	kW h m^{-2} p.a.
species_names	p	--
species_emission_factors	Ψ_p	(mol or kg) TJ^{-1}

Table 2. Per time step mean [ms] and variance [ms^2] for prognostic solver run time for control runs and emission module runs at each domain decomposition level, along with effective DOF [] from Eq. (11), statistical significance [] for variance uniformity (f -test) and sample difference (t -test). The number of samples is 16 for all runs, and the level of significance is set to 0.05.

Domain	Control runs		Emission runs		Difference		Statistical significance		
	Mean	Variance	Mean	Variance	Mean	Variance	DOF	f -Test	t -Test
10 \times 10	221.77	6.4071E-2	222.37	2.0139E-2	0.60126	5.2631E-3	23.582	1.5863E-2	2.3265E-8
20 \times 20	42.596	3.0809E-4	42.734	4.7399E-4	0.13887	4.8880E-5	28.708	2.0687E-1	4.8546E-18
40 \times 40	10.531	2.0162E-4	10.552	6.4157E-5	0.02086	1.6611E-5	23.668	1.6744E-2	3.4813E-5

Table 3. Stack processing time and total solver run time per time step for each emission volume source.

Domain	Serial	10 \times 10	20 \times 20	40 \times 40
Stack [μs]	1.3249	4.6394E-3	1.0716E-3	1.6096E-4
Solver [μs]	258.94	1.7112	0.32867	8.1257E-2
Performance [%]	0.51167	0.27112	0.32603	0.19808

Table 4. Sampling locations in the computational domain (Figure 5). Easting and northing coordinate values are relative to the domain origin (52°32'32.6" N, 13°23'46.5" E).

	Coordinates [m]	Description
A	(460, 680)	Street canyon
B	(90, 230)	Open courtyard
C	(740, 300)	Behind large building
D	(700, 610)	Semi open space
E	(300, 450)	Park
F	(488, 514)	Closed courtyard

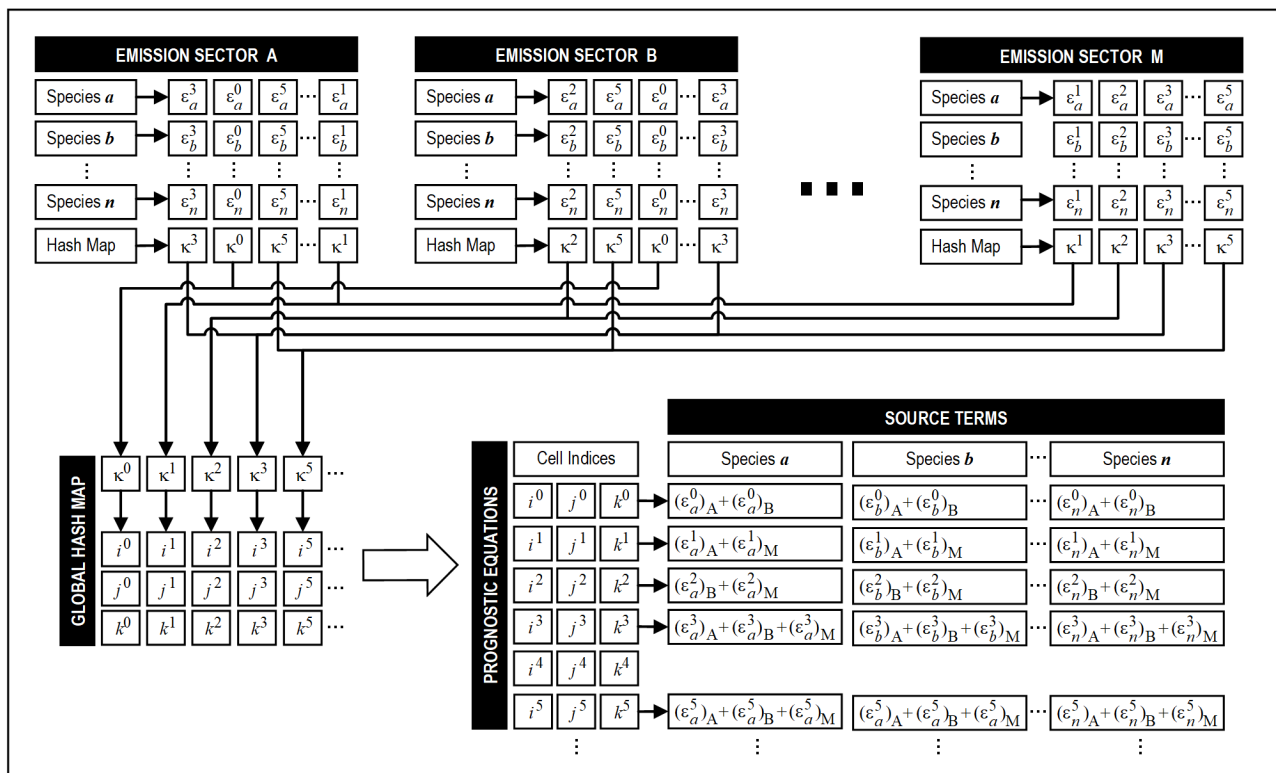


Figure 1. Overall architecture of the enhanced emission module in the PALM model system. Chemical species are indicated in lower case letters (*a, b, c, ...*) and emission sectors are in upper case letters (*A, B, C, ...*). Both *n* and *M* respectively denote an arbitrary number of species and emission sectors. Hash keys (κ) and corresponding cell indices (*i, j, k*) are distinguished by superscript numerals.

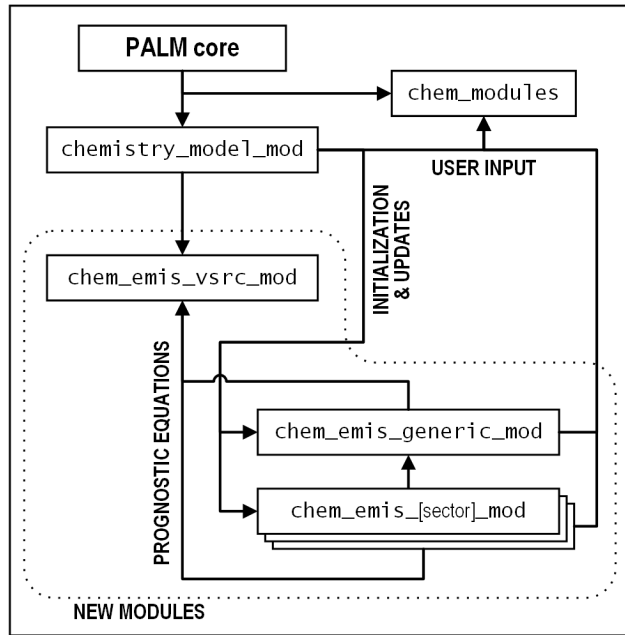


Figure 2. Hierarchy of the new source files (inside the dotted line region) introduced for the enhanced emission module of the the PALM model system. Arrows indicate direction of module access.

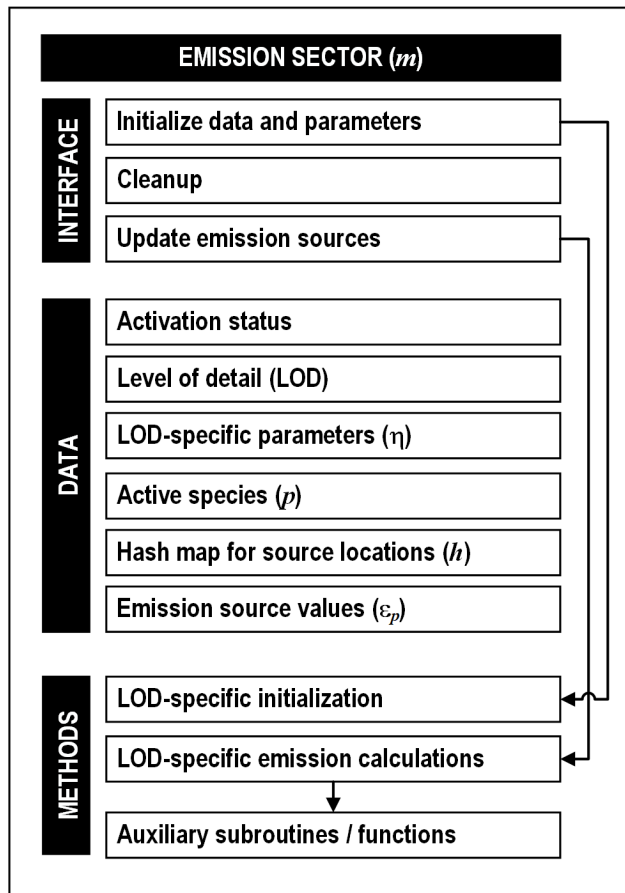


Figure 3. Overall structure of a module for an emission sector under the enhanced emission framework. Module data and methods are encapsulated, to be accessed externally through the use interface subroutines.

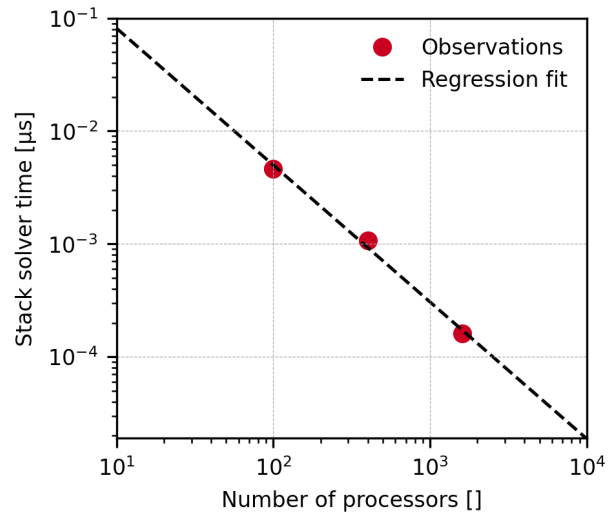


Figure 4. Per time step stack solver run time at different domain decomposition levels.

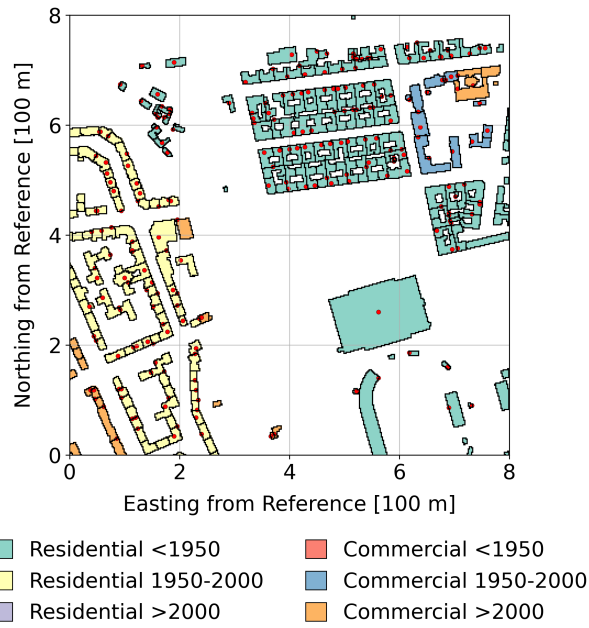


Figure 5. Horizontal distribution of urban structures residing in the region of interest for the idealized model run. Color indicates the building type (Table B1). The locations of chimney stacks are shown in red circular markers. The domain origin is set to (52°32'32.6" N, 13°23'46.5" E).

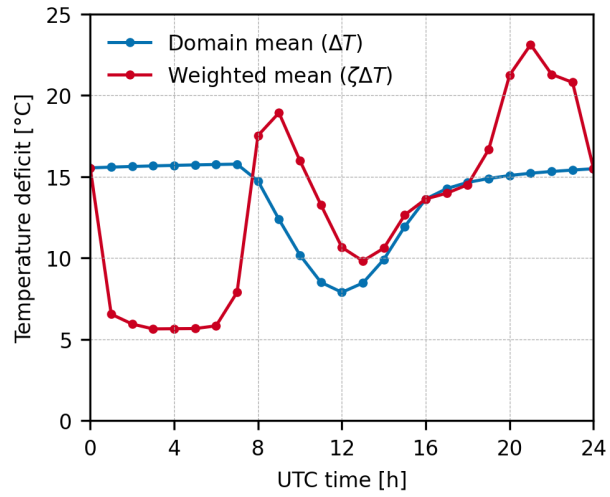


Figure 6. Domain hourly mean for temperature deficit (blue) and hourly temperature deficit weighted by CAMS diurnal profile (red) for residential and commercial combustion obtained (under GNFR sector C).

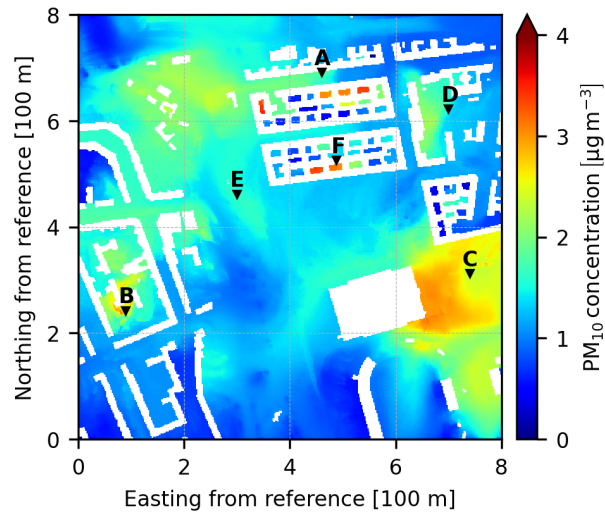


Figure 7. Horizontal spatial distribution of diurnal mean PM_{10} concentration evaluated at 2 m above ground, with markers indicating positions of sampling locations listed in Table 4.

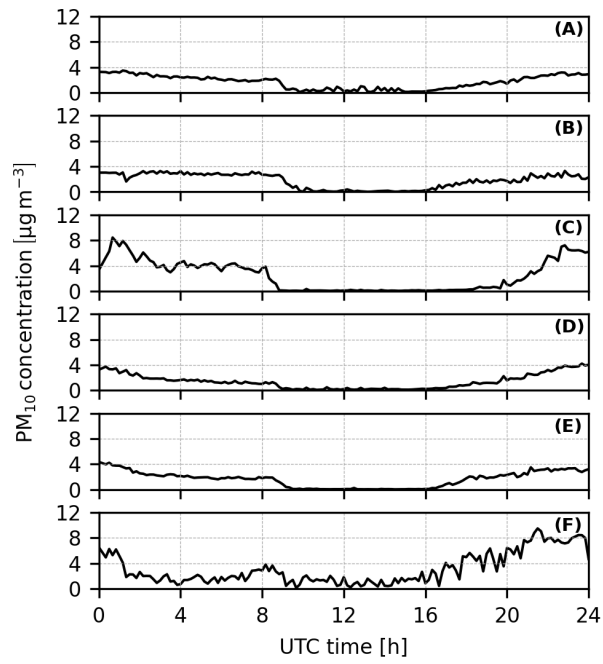


Figure 8. Diurnal time series for PM₁₀ concentrations at 2 m above ground for each sampling location.

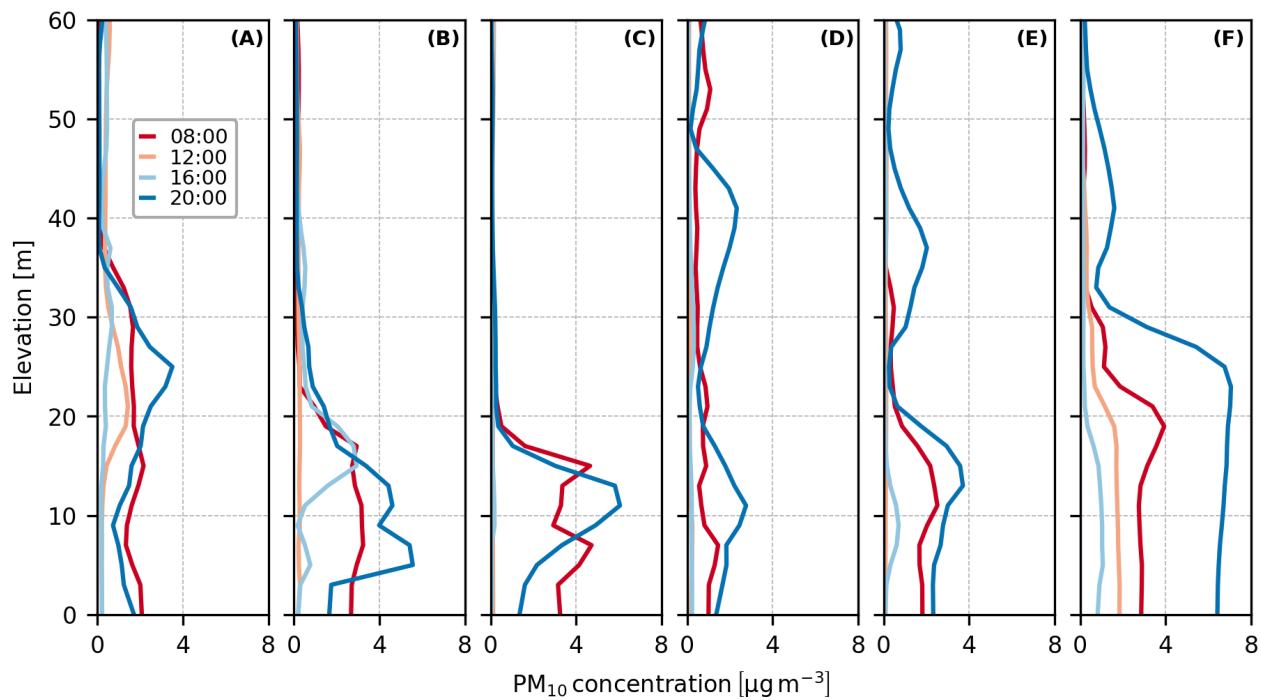


Figure 9. Diurnal mean vertical profiles for PM₁₀ concentrations above ground level for each monitoring location.

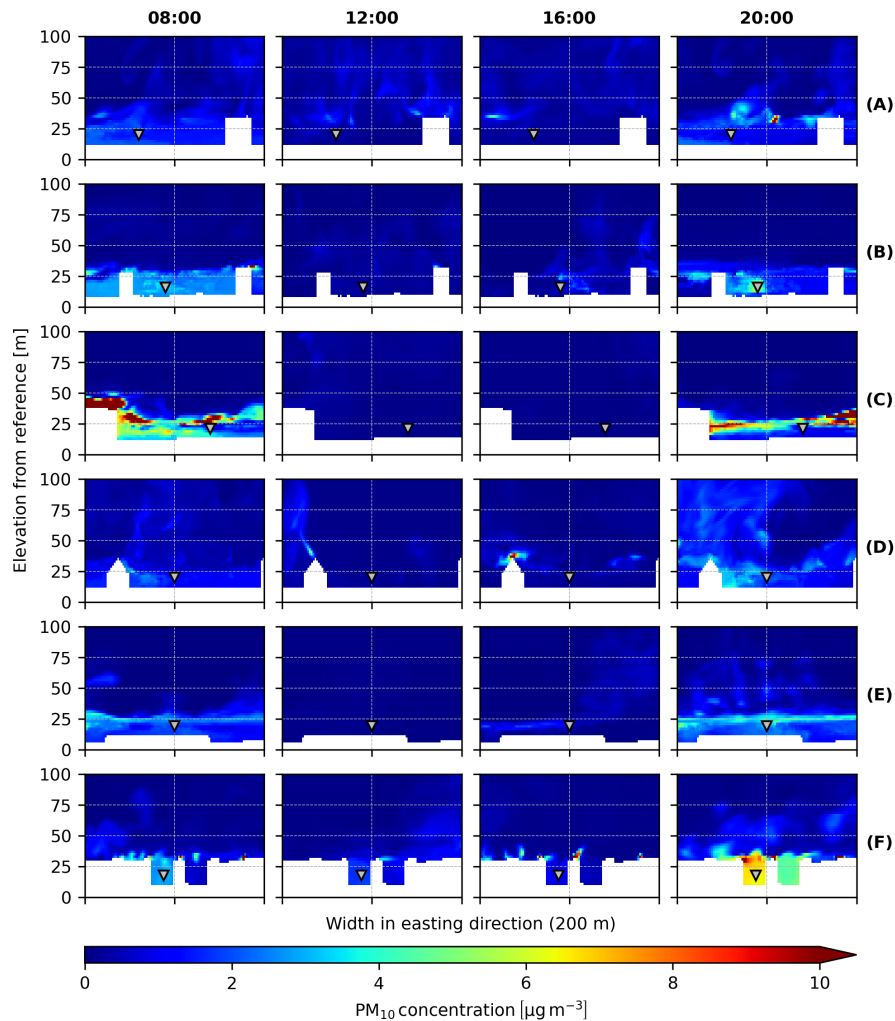


Figure 10. Vertical cross sections of PM_{10} concentration in the vicinity of each sampling location at 08:00, 12:00, 16:00, and 20:00 UTC. The sampling plane is taken at the north-south position of each location. The east-west direction of each figure covers a distance 200 m. Triangular markers indicate positions of the sampling locations. Elevations are relative to a reference value of 36.87 m above sea level. [NOTE TO REVIEWERS AND EDITORIAL STAFF - The width of this figure has been reduced from 17cm to 12cm so that its contents fit the page in manuscript mode.]

Table B1. Building type (β) definitions.

β	Function	Construction period
1	Residential	Pre-1950
2	Residential	1950-2000
3	Residential	Post-2000
4	Commercial	Pre-1950
5	Commercial	1950-2000
6	Commercial	Post-2000

Table B2. Compactness factor (Φ_β) and annual energy demand (E_β) for each building type (β). Φ_β is in the unit of m^{-1} , while E_β is in kW h m^{-2} per annum.

β	1	2	3	4	5	6
Φ_β	0.23	0.28	0.28	0.26	0.29	0.29
E_β	130	100	100	110	89	89

Table B3. Emission factors for major pollutant species for different domestic furnace technologies. CO and NO₂ are in the unit of mol TJ⁻¹, while PM₁₀, NO_x, and VOC are in kg TJ⁻¹.

Technology	CO	NO ₂	PM ₁₀	NO _x	VOC
Centralized oil	0.1	2.1	0.34	45	0.5
Centralized gas	0.14	0.78	0.006	17	0.7
Centralized wood pellets	1.7	3.4	18	73	3.2
Centralized woodchips	1.6	4.2	27	91	1.8
Centralized log	8.3	3.9	40	84	22
Wood stoves / fireplaces	28	3.9	48	84	29