



The PFLOTRAN Reaction Sandbox

Glenn E. Hammond¹

¹Environmental Subsurface Science Group, Pacific Northwest National Laboratory, Richland, WA 99352

Correspondence: Glenn Hammond (glenn.hammond@pnnl.gov)

Abstract. As modern reactive transport simulators evolve to accommodate the demands of a user community, researchers need a platform for prototyping new biogeochemical processes, many of which are niche and specific to laboratory or field experiments. The PFLOTRAN Reaction Sandbox leverages modern, object oriented Fortran in an attempt to provide such an environment within an existing reactive transport simulator. This work describes the PFLOTRAN Reaction Sandbox concept and implementation through several illustrative examples. Reaction Sandbox Biodegradation Hill customizes the existing microbially-mediated biodegradation reaction formulation within PFLOTRAN to better match empirical data. Reaction Sandbox Simple provides an isolated environment for testing numerous preconfigured kinetic rate expressions and developing user intuition. Reaction Sandbox Example serves as a template for creating new sandboxes within PFLOTRAN.

1 Introduction

Modern reactive transport simulators incorporate sophisticated networks of reactions to simulate complex biogeochemical processes within the Earth's subsurface environment in support of scientific research in climate change, fate and transport of contaminants, and water resources management (Steeffel et al., 2005). As these simulators mature and evolve over time, they can accumulate a large number of chemical reactions with a wide range of implementations. Many reactions are somewhat common among reactive transport codes [e.g. aqueous complexation, mineral precipitation-dissolution, radioactive decay and sorption (Steeffel et al., 2015)], while others are niche, prototypical or problem dependent.

There is a multitude of possible reactions to include within a simulator, and the approach to implementing these reactions often varies among simulators. For instance, sorption processes includes absorption, adsorption and ion exchange. Surface complexation is an adsorptive process that can be simulated using a constant capacitance, (diffuse) double layer, triple layer, or non-electrostatic model (Bethke, 2007). Depending on the reaction timescales, surface complexation may be simulated assuming local equilibrium or driven by a kinetic rate expression, and kinetic approaches may include single and multi-rate models, the latter utilizing a distribution of rate constants associated with size fractions of sediment material (Liu et al., 2008).

It is also common for researchers to develop one-off implementations of reactions when existing capabilities cannot replicate biogeochemical phenomenon observed in field or laboratory experiments. For example, Tutolo et al. (2018) demonstrated that the brucite silicification is a serpentinization rate-limiting reaction that is exponentially dependent upon aqueous silica activity. Their brucite silicification reaction required the implementation of a custom rate law that was exponentially dependent upon the activity of aqueous silica. These one-off implementations quick increase the diversity of reactions supported by a simulator.



As the number of reactions implemented within a simulator grows, and the reactions become increasingly diverse, adding new reactions can challenge ongoing simulator development and maintenance, especially within an open source community where code development is often crowdsourced.

- 30 Due to time and funding limitations, it is difficult for code developers to satisfy the needs of the user community by implementing all variants of a reactive process. Nor does it make sense when reactions are problem-specific and may never be used in the future. Meanwhile, the end users who are requesting customization are often non-computational domain scientists with less interest in or limited understanding of numerical methods, programming paradigms, code abstractions, and data layout. Their focus is more on improving predictive accuracy through the refinement of reaction conceptual models, not code development.
- 35 This raises the question as to what steps can be taken in the design and implementation of a reactive transport simulator to facilitate code development and long-term maintenance while flattening the (often) steep learning curve for new developers.

The PFLOTRAN Reaction Sandbox is an attempt to provide such an environment within an existing reactive transport simulator. The purpose of the Reaction Sandbox is to provide a means for testing alternative implementations for kinetically formulated rate expressions or networks of these reactions in conjunction with the existing reactive transport capability within

40 PFLOTRAN. Within computer science, the term *sandbox* often refers to an environment for implementing and vetting new, untested algorithms in isolation. The purpose of a sandbox is to limit the impact on the remainder of the code.

The following sections document the implementation of the PFLOTRAN Reaction Sandbox and demonstrate its application on several problem scenarios. Section 2 provides an overview of PFLOTRAN by presenting the governing equations for reactive transport and the numerical methods employed to solve the resulting discrete nonlinear systems of equations. The

45 section also presents PFLOTRAN's conventional reactive transport capability and discusses the code's modular object oriented-design that facilitates the implementation of the Reaction Sandbox. Section 3 describes the foundational (Fortran) Reaction Sandbox class upon which all Reaction Sandbox classes are coded and the high-level programming interface through which the remainder of the code accesses sandbox reactions. Section 4 documents several example sandboxes from which a researcher may derive their own implementation. Finally, Section 5 summarizes the approach.

50 2 Background

PFLOTRAN is an massively parallel, reactive multiphase flow and transport simulator for modeling subsurface earth system processes (Hammond et al., 2014). The code has been developed under open source GNU LGPL licensing since 2009 and contains contributions from an international group of developers. PFLOTRAN is written in Fortran 2003/2008 which facilitates object oriented design through the use of nested derived types, classes (extensible derived types with member procedures) and

55 procedures pointers. The code is designed as a nested hierarchy of objects. The top-level simulation object contains pointers to all process models, solvers and supporting data (state variables, parameters, etc.) needed to run a simulation.

PFLOTRAN simulates biogeochemical transport through its reactive transport process model. Supported biogeochemical reaction capabilities include aqueous speciation with ion activity models, general N^{th} -order forward (and reversible) kinetic reactions, microbially-mediated reactions, mineral precipitation-dissolution, radioactive decay and ingrowth and sorption (An-



60 dre et al., 2021). These reactions are referred to as *conventional* reactive transport capability as the implementations are based on commonly accepted and well-documented in the literature.

2.1 Governing Equations

PFLOTRAN's governing mass conservation equation for reactive transport of aqueous species j is

$$\frac{\partial}{\partial t}(\phi s \Psi_j) + \nabla \cdot (\mathbf{q} - \phi s \mathbf{D} \nabla) \Psi_j = Q_j - \sum_r \nu_{jr} I_r, \quad (1)$$

65 with porosity ϕ , liquid saturation s , total aqueous component concentration Ψ_j , Darcy fluid flux \mathbf{q} , diagonal hydrodynamic dispersion tensor \mathbf{D} and source term Q_j . ν_{jr} represents the stoichiometry of species j in kinetic reaction I_r . Following the continuum formulation for reactive transport (Lichtner, 1985) and assuming local equilibrium (Rubin, 1983), the total aqueous component concentration of species j is the sum of the free ion concentration c_j and its stoichiometric contribution ν_{ji} to each secondary aqueous complex X_i ,

$$70 \quad \Psi_j = c_j + \sum_i \nu_{ji} X_i. \quad (2)$$

Aqueous complex X_i is calculated through mass action as

$$X_i = \frac{K_i}{\gamma_i} \prod_{j'} (\gamma_{j'} c_{j'})^{\nu_{j'i}} \quad (3)$$

with equilibrium constant K_i , activity coefficients γ_i and $\gamma_{j'}$, stoichiometry $\nu_{j'i}$, and primary aqueous species free ion concentration $c_{j'}$. The governing mass conservation equation for the j^{th} primary immobile species Φ is

$$75 \quad \frac{\partial}{\partial t}(\Phi_j) = - \sum_r \nu_{jr} I_r. \quad (4)$$

Ignoring the advection, hydrodynamic dispersion and source terms and assuming constant porosity and saturation, the discrete (finite volume) forms of Eqs. (1) and (4) are

$$\frac{\phi s V}{\Delta t} (\Psi_j^{k+1} - \Psi_j^k) \dots = \dots - V \sum_r \nu_{jr} I_r \quad (5)$$

and

$$80 \quad \frac{V}{\Delta t} (\Phi_j^{k+1} - \Phi_j^k) = -V \sum_r \nu_{jr} I_r, \quad (6)$$

respectively. Units for these equations are [mole/second]. Rate expression I_r represents the primary species mass consumed or produced by each kinetic reaction and has units of [mole/m_{bulk}³-second].

2.2 Numerical Solution Technique

PFLOTRAN employs the finite volume method for spatial discretization, backward Euler time integration and Newton's
 85 method for solving the resulting nonlinear system of equations. Newton's method converges to a solution for the primary



species concentrations x by iteratively evaluating the residual function

$$f(x^p) = 0 \quad (7)$$

and Jacobian J , and solving the linear system

$$J\delta x = -f(x^p) \quad (8)$$

90 for the concentration update δx

$$x^{p+1} = x^p + \delta x. \quad (9)$$

p is iteration number.

The residual function f is evaluated by rearranging Eqs. (5) and (6) and setting them equal to zero. For example, the residual for aqueous degree of freedom c_n is

$$95 \quad f(c_n^p) = \frac{\phi s V}{\Delta t} (\Psi_n^{k+1} - \Psi_n^k) \dots + V \sum_r \nu_{nr} I_r = 0, \quad (10)$$

while for immobile degree of freedom Φ_n , it is

$$f(\Phi_n^p) = \frac{V}{\Delta t} (\Phi_n^{k+1} - \Phi_n^k) + V \sum_r \nu_{nr} I_r = 0. \quad (11)$$

Since the focus of this research is chemical reaction, the advection, dispersion and source terms (represented by ellipses ...) are ignored. The Jacobian contains derivatives of the residual with respect to the primary unknowns, i.e.

$$100 \quad J_{n,m} = \frac{\partial f(x_n^p)}{\partial x_m^p}. \quad (12)$$

Units for internal PFLOTRAN variables are documented in Table 1. These units must be considered in the development of a Reaction Sandbox.

2.3 Object-Oriented Fortran

Modern programming paradigms facilitate the modularity, extensibility and overall longevity of a software product. One common feature among most modern programming paradigms is support for object-oriented design, where objects contain the data structures and procedures necessary to provide functionality, and interfaces are set up for interaction between objects. One major benefit of object oriented design is that when programmed correctly, modifications to an object's data structures and procedures have little to no impact on other portions of the code. This modularity greatly facilitates the initial development and long-term maintenance of a code.

110 Modern Fortran facilitates object-oriented design through the use of derived types and classes. A Fortran derived type is a container that encapsulates other Fortran data types (e.g. logicals, integers, reals, other derived types, or pointers to data types). A Fortran class is an extensible version of the derived type that supports inheritance of (type-bound) member variables and



Table 1. Units for PFLOTRAN internal variables.

Variables	Symbol	Units
Porosity	ϕ	m ³ pore / m ³ bulk volume
Liquid saturation	s	m ³ liquid / m ³ pore
Volume	V	m ³ bulk volume
Time	t	seconds
Aqueous free ion concentration	c	mole / kg water (or molality)
Total aqueous component concentration	Ψ	mole / L water (or molarity)
Immobile concentration	Φ	mole / m ³ bulk volume
Stoichiometry	ν	-
Kinetic rate	I_r	mole / m ³ bulk volume - second
Residual function	$f(x^p)$	mole / second
Derivative of residual wrt free ion concentration	$\frac{\partial f(x_n^p)}{\partial c_m^p}$	kg water / second
Derivative of residual wrt immobile concentration	$\frac{\partial f(x_n^p)}{\partial \Phi_m^p}$	m ³ bulk volume / second

procedures. A child class, created by extending the parent derived type, inherits all parent class variables and procedures. New member variables may be added to child classes and member procedures may be overridden. By default, a member procedure receives the class object as the first entry in function or subroutine argument lists. (A *class object* is simply an instantiation of the class.) The procedure uses the object's member variables and the remaining arguments to perform calculations. Chapman (2018) describes Fortran classes in greater detail.

PFLOTRAN is designed as a nested hierarchy of dynamically allocated objects from the highest-level simulation object down to low level, cell-centric auxiliary objects that store all state variables for each grid cell. Given a pointer to the top-level simulation object, the developer has access to all underlying data structures or objects. This hierarchy engenders modularity and structure within the code. PFLOTRAN employs modern Fortran 2003/2008 where all objects are instantiations of Fortran derived types or classes. It also leverages pointers to procedures and common procedure interfaces to allow users to choose from a suite of constitutive relations, equations of state, flux algorithms, etc., in support of run time options. The modularity afforded through object-oriented Fortran has greatly facilitated the incorporation of new algorithms within PFLOTRAN, as will be shown through the implementation of the Reaction Sandbox.

3 Reaction Sandbox Approach

The PFLOTRAN Reaction Sandbox provides a simplified interface for implementing new kinetically formulated reactions (rate expressions) within PFLOTRAN that are tailored to specific user needs. The term I_r on the right side of Eqs. (1) and (4) represents these kinetic reactions in the governing equations. The Reaction Sandbox isolates one-off or application-specific reactions from the remainder of the PFLOTRAN code base and facilitates code development and long-term maintenance. For the domain scientist desiring to implement a new reaction, the Reaction Sandbox reduces complexity by exposing only the



limited set of variables that are necessary to calculate rate expressions. Thus, the researcher is better shielded from the intricate details of code development. For kinetic reactions that have the potential for wider acceptance, the Reaction Sandbox provides a venue for vetting reactions in isolation prior to adoption within the main code base. This section describes the Reaction
135 Sandbox concept and defines the underlying data structures and user interface.

3.1 Concept

Figure 1 illustrates the hierarchical structure of (hypothetical) Reaction Sandboxes within PFLOTRAN where reaction classes are derived as descendants of the Reaction Sandbox Base Class. Each Reaction Sandbox class is implemented as a separate

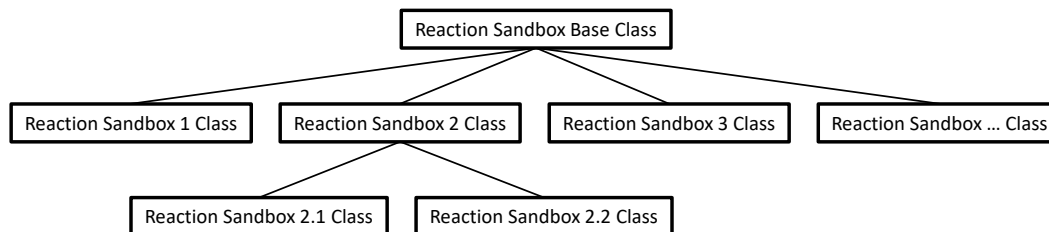


Figure 1. Schematic of a hypothetical Reaction Sandbox class hierarchy.

module within the PFLOTRAN source code. The end-user specifies the reaction sandboxes to be employed within the PFLOTRAN input file, and a linked list of sandbox reactions is constructed during simulation initialization. Figure 2 illustrates a

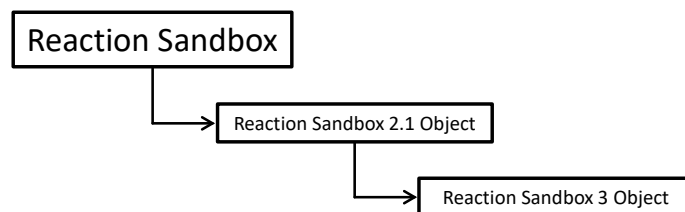


Figure 2. Schematic of a linked list of Reaction Sandboxes composed of two reaction objects instantiated from the class hierarchy shown in Fig. 1.

140

representative linked list of sandboxes composed of two reaction objects from Fig. 1. The outer Reaction Sandbox module loops over the linked list to perform all operations (e.g. setup, evaluation, destruction, etc.) as illustrated later in Code Block 2. Linked lists provide great flexibility for the code developer as all reactions may be inserted or appended in any order. Newly developed reaction classes are added to the source code as daughter classes in new modules, and instantiated objects are added
145 to the list during simulation initialization.



3.2 Implementation

The Reaction Sandbox is founded upon two files within the PFLOTRAN source code: `reaction_sandbox_base.F90` and `reaction_sandbox.F90`.

3.2.1 `reaction_sandbox_base.F90`

150 `reaction_sandbox_base.F90` defines the base (or parent) Fortran class `reaction_sandbox_base_type` that the developer extends to create new (child) Reaction Sandbox classes. Code Block 1 illustrates the member variables and procedures within the `reaction_sandbox_base_type` class.

Code Block 1. `reaction_sandbox_base_type` in `reaction_sandbox_base.F90`.

```
155 type, abstract, public :: reaction_sandbox_base_type  
    class(reaction_sandbox_base_type), pointer :: next  
contains  
    procedure, public :: ReadInput => BaseReadInput  
    procedure, public :: Setup => BaseSetup  
    procedure, public :: Evaluate => BaseEvaluate  
160 procedure, public :: UpdateKineticState => BaseUpdateKineticState  
    procedure, public :: AuxiliaryPlotVariables => BaseAuxiliaryPlotVariables  
    procedure, public :: Destroy => BaseDestroy  
end type reaction_sandbox_base_type
```

165 This class contains a single member variable `next`, a pointer to the next class of the same `reaction_sandbox_base_type` type that enables the creation of an abstract linked list of Reaction Sandbox objects. The class also contains empty member procedures with prescribed subroutine interfaces (or argument lists) that the developer overrides in child classes. With the exception of `BaseEvaluate`, these procedures are empty and return immediately if not overridden by the child class. `BaseEvaluate` must be extended, and error messaging is incorporated within `BaseEvaluate` to ensure correct implementation. The other
170 member procedures are optional and do not require implementation in the child classes. Appendix A documents the member procedure interfaces describing the subroutine argument lists.

3.2.2 `reaction_sandbox.F90`

`reaction_sandbox.F90` serves as the main driver interface for the Reaction Sandbox, providing subroutines that manage the creation, reading, setup, execution and destruction of all Reaction Sandbox objects. For example, the subroutine `RSand-`
175 `boxRead` instantiates Reaction Sandbox objects based on the keywords parsed from the `REACTION_SANDBOX` block in the input file. `RSandboxEvaluate` calculates reaction rates by traversing the linked list of Reaction Sandboxes evaluating individual rates as shown in Code Block 2 (subroutine argument lists have been omitted for simplicity).



Code Block 2. Abbreviated version of subroutine `RSandboxEvaluate` in `reaction_sandbox.F90`.

```
180  subroutine RSandboxEvaluate (...)
    ...
    class(reaction_sandbox_base_type), pointer :: cur_reaction

    cur_reaction => rxn_sandbox_list
do
185   if (.not. associated(cur_reaction)) exit
    call cur_reaction%Evaluate(...)
    cur_reaction => cur_reaction%next
enddo

190 end subroutine RSandboxEvaluate
```

With the exception of `RSandboxRead`, all member procedures are executed from within a linked list loop similar to that shown in Code Block 2. Thus, subroutines within `reaction_sandbox.F90` serve as interfaces to the linked lists of Reaction Sandbox objects, and all information is exchanged through these routines. The outer `RSandboxXXX` subroutines defined in `reaction_sandbox.F90` may be called from other PFLOTRAN modules (e.g. see the call to `RSandboxEvaluate` within `RReaction` within `reaction.F90`), but member procedures within the Reaction Sandbox classes may not.

The following section describes several example Reaction Sandboxes. These examples are implemented within the PFLOTRAN source code and may serve as templates for future sandboxes.

4 Example Reaction Sandboxes

200 This section illustrates the implementation of a few Reaction Sandboxes within PFLOTRAN. Reaction Sandbox Biodegradation Hill and Reaction Sandbox Flexible Biodegradation Hill were developed to demonstrate the implementation of a microbially-mediated biodegradation reaction. Reaction Sandbox Simple provides a set of preconfigured reactions that may be uncommented, compiled and run to better understand kinetic rate expressions. Reaction Sandbox Example implements a first-order decay reaction. The comments within `reaction_sandbox_example.F90` detail the steps necessary to implement
205 a new Reaction Sandbox class.



4.1 Biodegradation

4.1.1 Biodegradation Conceptual Model

Consider a microbially-mediated biodegradation reaction with biomass growth and decay over time. The reaction could be expressed as



with electron donor A_{aq} and acceptor B_{aq} and products C_{aq} and D_{aq} [M]. The reaction is mediated by the immobile biomass species X_{im} [mole biomass/m³ bulk] and inhibited above a C_{aq} concentration of 10⁻⁴. The reaction rate I_r [mole/m³ bulk/sec] can be calculated using Michaelis-Menten kinetics as

$$I_r = k_{\max} X_{im} \frac{A_{aq}}{K_{A_{aq}} + A_{aq}} \times \frac{B_{aq}}{K_{B_{aq}} + B_{aq}} \times \frac{I_{C_{aq}}}{I_{C_{aq}} + C_{aq}} \quad (13)$$

215 with maximum specific utilization rate constant k_{\max} [mole/sec-mole biomass], half saturation constants $K_{A_{aq}}$ and $K_{B_{aq}}$ [M], and inhibitor concentration $I_{C_{aq}}$ [M]. The rate of biomass growth and decay can be modeled as

$$\frac{dX}{dt} = yield_{X_{im}} I_r - k_{\text{decay}} X \quad (14)$$

with yield $yield_{X_{im}}$ [mole biomass/mole] and decay rate constant k_{decay} [1/sec]. These rate expressions are implemented as microbial and biomass decay reactions within PFLOTRAN and enabled through the MICROBIAL_REACTION and IMMO-
220 BILE_DECAY_REACTION keywords in CHEMISTRY block of the input file.

Figure 3 shows PFLOTRAN simulation results for an example batch experiment run over seven days employing the reactions in Eqs. (13) and (14), reaction parameters in Table 2, stoichiometries in Reaction (R1), and initial conditions in Table 3. Results plotted in the figure may be replicated through the following commands:

```
cd $PFLOTRAN_DIR/regression_tests/default/reaction_sandbox  
225 $PFLOTRAN_DIR/src/pflotran/pflotran -input_prefix biodegradation  
python biodegradation_vs_data.py biodegradation-obs-0.pft
```

The plot shows the time evolution of aqueous and immobile species concentrations as the week-long simulation runs with a maximum time step size of one hour. The results demonstrate that electron donor A_{aq} is the limiting substrate, as the concentrations for acceptor B_{aq} and the reaction products C_{aq} and D_{aq} plateau when A_{aq} is nearly depleted at approximately
230 four days. Biomass concentration increases through 2.25 days at which time the first-order decay rate exceeds the growth rate, and the population begins to fade. Superimposed on the figure are hypothetical experimental results for species A_{aq} (shown as circles) that deviate from the (blue) simulated curve in the log scale plot. In this hypothetical case, Eq. (13) is somewhat inaccurate in predicting the tailing behavior of species A_{aq} at late times.

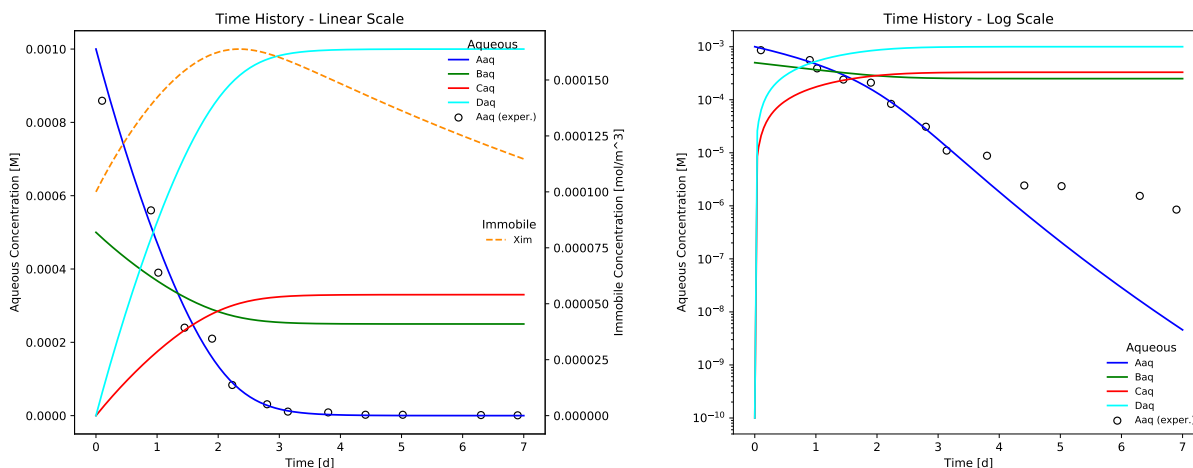


Figure 3. Time evolution of aqueous and immobile biomass species in a week-long example batch biodegradation experiment.

Table 2. Microbially-mediated reaction parameters for the example batch biodegradation experiment. n only applies to the reaction incorporating the Hill function (i.e. Eq. (15)). M signifies molarity or mole per liter of water.

Parameter	Value	Units
k_{\max}	9.e-2	mole/mole biomass-sec
$K_{A_{aq}}$	2.e-4	M
$K_{B_{aq}}$	1.25e-5	M
$I_{C_{aq}}$	2.5e-4	M
$yield_{X_{im}}$	1.e-4	mole biomass/mole
k_{decay}	1.e-6	1/sec
n	1.2	-

Table 3. Initial concentrations for the example batch biodegradation experiment.

Species	Concentration	Units
A_{aq}	1.e-3	M
B_{aq}	5.e-4	M
C_{aq}	1.e-10	M
D_{aq}	1.e-10	M
X_{im}	1.e-4	mole/m ³ bulk volume

The discrepancy in A_{aq} concentration can be resolved by employing a Hill function (Hill, 1910) within the monod expression for A_{aq} . Here, the A_{aq} concentration and corresponding half saturation constant are raised to the power n .

$$I_r = k_{\max} X_{im} \frac{A_{aq}^n}{K_{A_{aq}}^n + A_{aq}^n} \times \frac{B_{aq}}{K_{B_{aq}} + B_{aq}} \times \frac{I_{C_{aq}}}{I_{C_{aq}} + C_{aq}} \quad (15)$$



However, the Hill function is not an option in PFLOTRAN; the code must be altered to accommodate this new feature. To further complicate matters, the researcher cannot modify the existing Monod expression within PFLOTRAN since in doing so, the Hill function would be applied to both the A_{aq} and B_{aq} Monod expressions. One possible solution is to implement Eq. (15) as a new reaction, and the Reaction Sandbox is designed to facilitate this process.

4.1.2 Reaction Sandbox Biodegradation Hill

Reaction Sandbox Biodegradation Hill implements the enhanced biodegradation reaction that incorporates the Hill function in Eq. (15) and the biomass growth and decay reaction in Eq. (14). The reactions are encoded in `reaction_sandbox_biohill.F90`. The `reaction_sandbox_biohill_type` class is presented in Code Block 3 where integer IDs for each species are stored as class variables and the Setup and Evaluate procedures are redirected to local BioHillXXX implementations.

Code Block 3. `reaction_sandbox_biohill_type` in `reaction_sandbox_biohill.F90`.

```
type , public , &  
  extends (reaction_sandbox_base_type) :: reaction_sandbox_biohill_type  
  ! Aqueous species  
250  PetscInt :: species_Aaq_id  
  PetscInt :: species_Baq_id  
  PetscInt :: species_Caq_id  
  PetscInt :: species_Daq_id  
  ! Immobile species (e.g. biomass)  
255  PetscInt :: species_Xim_id  
  
contains  
  procedure , public :: Setup => BioHillSetup  
  procedure , public :: Evaluate => BioHillEvaluate  
260 end type reaction_sandbox_bio_type
```

Code Block 4 illustrates the assignment of species IDs in an abbreviated version of `BioHillSetup` based on keywords for aqueous species `Aaq`, `Baq`, `Caq` and `Daq` and immobile species `Xim` specified in the input file. `BioHillEvaluate` utilizes these IDs to access species concentrations and entries in the residual vector.

Code Block 4. Subroutine `BioHillSetup` in `reaction_sandbox_biohill.F90`.

```
265 subroutine BioHillSetup (this , reaction , option)  
  ...  
  ! Aqueous species  
  word = 'Aaq'  
  this%species_Aaq_id = &  
270   GetPrimarySpeciesIDFromName (word , reaction , option)
```



```
...  
! Immobile species  
word = 'Xim'  
this%species_Xim_id = &  
275   GetImmobileSpeciesIDFromName( word , reaction%immobile , option )  
  
end subroutine BioHillSetup
```

Code Block 5 presents an abbreviated version of the implementation of `BioHillEvaluate` where the naming convention
280 for local variables corresponds closely to reaction parameters and state variables defined in Eqs. (14) and (15). Note that in the
calculation of rate I_r , the concentration of A_{aq} and half saturation constant K_{Aaq} are raised to the power of n .

Code Block 5. Subroutine `BioHillEvaluate` in `reaction_sandbox_biohill.F90`.

```
subroutine BioHillEvaluate( this , Residual , Jacobian , compute_derivative , &  
                           rt_auxvar , global_auxvar , material_auxvar , reaction , &  
285                           option )  
  
...  
k_max = 9.d-2  
k_decay = 1.d-6  
K_Aaq = 2.d-4  
290 K_Baq = 1.25d-5  
I_Caq = 2.5d-4  
  
yield = 1.d-4  
n = 1.2d0  
295  
  
stoichA = -1.d0  
stoichB = -0.25d0  
stoichC = 0.33d0  
stoichD = 1.d0  
300  
  
I_r = k_max * Xim * Aaq**n / ( K_Aaq**n + Aaq**n ) * &  
      Baq / ( K_Baq + Baq ) * &  
      I_Caq / ( I_Caq + Caq )  
  
305 I = I_r * volume
```



310

```

RateA = stoichA * I
...
RateX = yield * I - k_decay * Xim * volume
...
end subroutine BioHillEvaluate
    
```

Figure 4 illustrates a more accurate the simulation result for the example batch reaction where the Hill function exponent n is set to 1.2 in the Monod expression for A_{aq} . It is clear that the addition of the Hill function improves the model's ability to capture the tailing of species A_{aq} at low concentrations.

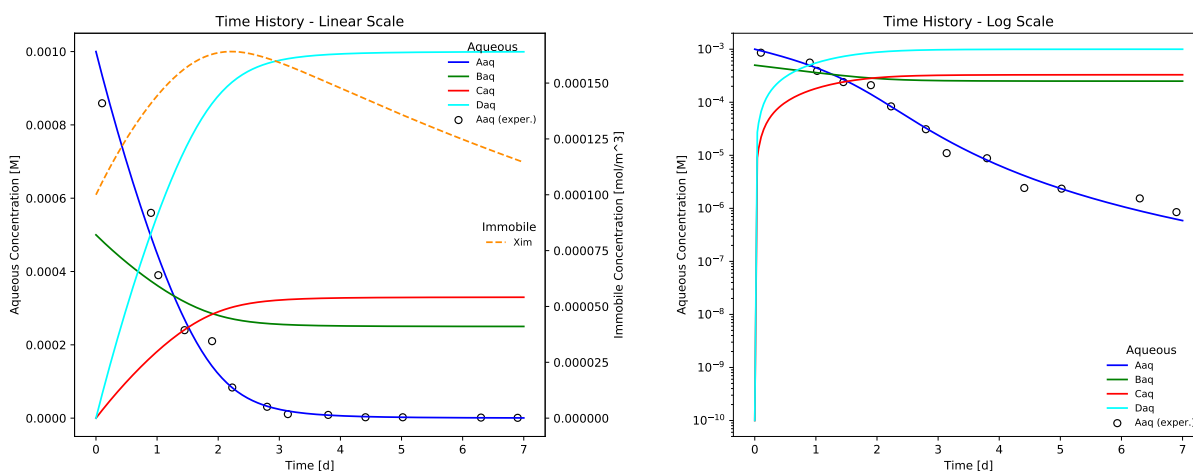


Figure 4. Improved match to hypothetical experimental results for species A_{aq} after incorporating the Hill function in Eq. (15). Compare log-scale plot to the solution without the Hill function in Fig. 3.

315 Results plotted in Fig. 4 may be replicated through the following commands:

```

cd $PFLOTRAN_DIR/regression_tests/default/reaction_sandbox
$PFLOTRAN_DIR/src/pflotran/pflotran -input_prefix biodegradation_hill
python biodegradation_vs_data.py biodegradation_hill-obs-0.pft
    
```

320 The implementation of the enhanced biodegradation reaction in Reaction Sandbox Biodegradation Hill is somewhat rigid. All reaction parameters (rate constants, half saturation constants, stoichiometries, etc.) are hardcoded within the source code as shown in Code Block 5 and may not be changed without code modifications. The implementation may be generalized, and this is demonstrated in Reaction Sandbox Flexible Biodegradation Hill.



4.1.3 Reaction Sandbox Flexible Biodegradation Hill

Reaction Sandbox Flexible Biodegradation Hill employs the same biodegradation, growth and decays reactions as Reaction
325 Sandbox Biodegradation Hill with the added flexibility of specifying reaction parameters at run time through the input file,
eliminating the need to re-compile PFLOTRAN every time a parameter changes. The new class is implemented in `reaction_sandbox_flexbiohill.F90`. The `reaction_sandbox_flexbiohill_type` class extends `reaction_sandbox_biohill_type`
as presented in Code Block 6. The child class inherits the species integer IDs from the parent and adds member variables for
storing all reaction parameters and a logical flag for specifying the units of half saturation constants K_{Aaq} and K_{Baq} and
330 inhibitor concentration I_{Caq} (molality versus molarity). The dynamic `stoich` array enables the use of do loops in the
`Evaluate` routine. The class redirects the `ReadInput`, `Setup`, `Evaluate` and `Destroy` procedures to local implementations,
though only the implementation of `FlexBioHillEvaluate` will be described below.

Code Block 6. `reaction_sandbox_flexbiohill_type` in `reaction_sandbox_flexbiohill.F90`.

```
type , public , &  
335   extends( reaction_sandbox_biohill_type ) :: reaction_sandbox_flexbiohill_type  
      PetscReal :: k_max  
      PetscReal :: K_Aaq_n  
      PetscReal :: K_Baq  
      PetscReal :: I_Caq  
340   PetscReal :: yield  
      PetscReal :: k_decay  
      PetscReal :: n  
      PetscBool :: molarity_units  
      PetscReal , pointer :: stoich ( : )  
345   contains  
      procedure , public :: ReadInput => FlexBioHillReadInput  
      procedure , public :: Setup => FlexBioHillSetup  
      procedure , public :: Evaluate => FlexBioHillEvaluate  
      procedure , public :: Destroy => FlexBioHillDestroy  
350 end type reaction_sandbox_flexbiohill_type
```

The `FlexBioHillEvaluate` routine shown in Code Block 7 is more succinct than `BioHillEvaluate` (Code Block 5).
Reaction parameters are no longer hardwired, but read from the input file in `FlexBioHillReadInput` and stored as
class member variables. The use of the class member `stoich` array within the do loops eliminates the need to hardwire
355 Residual array indexing and reduces the number of lines of code. In addition, the full implementation within the source code
demonstrates the ability to choose between molality versus molarity for aqueous concentrations and half saturation constants, a



useful option since laboratory data is often available in either format. There is also support for calculating analytical derivatives (for the Jacobian), which can be programmed much more concisely with the `stoich` array and do loops.

Code Block 7. FlexBioHillEvaluate in `reaction_sandbox_flexbiohill.F90`.

```
360 subroutine FlexBioHillEvaluate( this , Residual , Jacobian , compute_derivative , &
      rt_auxvar , global_auxvar , material_auxvar , &
      reaction , option )
  ...
  I_r = this%k_max * Xim * Aaq**this%n / ( this%K_Aaq_n + Aaq**this%n ) * &
365      Baq / ( this%K_Baq + Baq ) * &
      this%I_Caq / ( this%I_Caq + Caq )

  I = I_r * volume
  ...
  do icomp = 1, reaction%ncomp
370      Residual(icomp) = Residual(icomp) - this%stoich(icomp) * I
  enddo
  Residual(Xim_offset) = Residual(Xim_offset) + this%k_decay * Xim * volume
  ...
375 end subroutine FlexBioHillEvaluate
```

Flexible Biodegradation Hill produces results identical to Biodegradation Hill when given identical initial conditions and Biodegradation Hill's reaction parameters. These results may be compared by running the script `compare_biodegradation_results` after completing both simulations, i.e.

```
380 cd $PFLOTRAN_DIR/regression_tests/default/reaction_sandbox
    $PFLOTRAN_DIR/src/pflotran/pflotran -input_prefix biodegradation_hill
    $PFLOTRAN_DIR/src/pflotran/pflotran -input_prefix flexible_biodegradation_hill
    python compare_biodegradation_results.py
```

4.2 Reaction Sandbox Simple

Reaction Sandbox Simple provides a framework for evaluating reactive transport in 1D using common kinetic rate expressions
385 with a preconfigured set of six aqueous (A_{aq} , B_{aq} , C_{aq} , D_{aq} , E_{aq} , F_{aq}) and two immobile species (X_{aq} , Y_{aq}). The conceptual model consists of a 100 meter, liquid-saturated column with a Dirichlet boundary condition at the inlet ($x=0$) and a zero-gradient boundary condition at the outlet ($x=100$). Grid spacing is set to 1 m resolution. The prescribed Darcy velocity is 1 m/y with a pore water velocity of 4 m/y (porosity = 0.25). Throughout the simulation, solutes enter at the inlet and react within the domain. Simulation results are stored in two formats: (1) snapshots of the entire domain at select times and (2) continuous



390 observation at a mid-column observation point at $x=49.5$ m. Table 4 summarizes simulation parameters, while Table 5 describes the initial and boundary concentrations.

Table 4. Reaction Sandbox Simple conceptual model.

Parameter	Value
Column length	100 m
Cross-sectional area	1 m ²
Grid resolution	1 m
Prescribed Darcy velocity	1 m/y
Pore water velocity	4 m/y
Porosity	0.25
Tortuosity	1.0
Water density	1000 kg/m ³
Aqueous diffusion coefficient	10 ⁻⁹ m ²
Observation point location	49.5 m
Initial timestep size	1 h
Maximum timestep size	0.25 y
Final simulation time	25 y
Observation output frequency	Every timestep
Snapshot file output times	0, 6.25, 12.5, 18.75, 25 y

Table 5. Initial and boundary concentrations in the Reaction Sandbox Simple input file.

Species	Initial Concentration	Boundary Concentration	Units
A_{aq}	1.e-10	1.e-3	M
B_{aq}	1.e-10	1.e-3	M
C_{aq}	1.e-10	1.e-10	M
D_{aq}	1.e-10	1.e-10	M
E_{aq}	1.e-10	1.e-10	M
F_{aq}	1.e-10	1.e-10	M
X_{im}	1.e-4	N/A	mole/m ³ bulk volume
Y_{im}	1.e-10	N/A	mole/m ³ bulk volume

The implementation of the `reaction_sandbox_simple_type` class is nearly identical to that of `reaction_sandbox_biohill_type` in Code Block 3 with the addition of member variables `species_Eaq_id`, `species_Faq_id` and `species_Yim_id`. Member procedure `SimpleSetup` links these integer IDs to their respective names from the input file. The user may evaluate

395 reactions in this sandbox with the following steps:



1. Uncomment a rate expression block within subroutine SimpleEvaluate.

```
cd $PFLOTRAN_DIR/src/pflotran  
[emacs,gedit,nano,vi] reaction_sandbox_simple.F90
```

Remove “!uncomment:” prefixes from lines within chosen rate expression in subroutine SimpleEvaluate.

400 Save the file.

2. Compile the PFLOTRAN executable.

```
make pflotran
```

3. Navigate to \$PFLOTRAN_DIR/regression_tests/default/reaction_sandbox

```
cd $PFLOTRAN_DIR/regression_tests/default/reaction_sandbox
```

405 4. Change the x-direction grid resolution in reaction_sandbox_simple.in to 100.

```
[emacs,gedit,nano,vi] reaction_sandbox_simple.in
```

```
NXYZ 10 1 1 → NXYZ 100 1 1
```

Save the file.

5. Run the simulation.

410 \$PFLOTRAN_DIR/src/pflotran/pflotran -input_prefix reaction_sandbox_simple

6. Plot the results with reaction_sandbox_simple.py.

```
python reaction_sandbox_simple.py
```

Code Block 8 illustrates a *commented* rate expression block for calculating the first order decay of species Aaq to daughter product Caq.

415 **Code Block 8.** Commented first-order rate expression block in SimpleEvaluate within reaction_sandbox_simple.F90.

```
415 subroutine SimpleEvaluate (...)
    ...
    ! first-order (A -> C)
    ...
420 !uncomment: k = 1.26839d-9 ! [1/sec]
    !uncomment: stoichA = -1.d0
    !uncomment: stoichC = 1.d0
    !uncomment: Rate = k * Aaq * L_water ! [mol/sec]
```



```
425  !uncomment: RateA = stoichA * Rate  
      !uncomment: RateC = stoichC * Rate  
      ...  
end subroutine SimpleEvaluate
```

The user deletes all “!uncomment:” prefixes in the codeblock as shown in Code Block 9, compiles PFLOTRAN, navigates to the reaction_sandbox folder, and runs the code.

Code Block 9. Uncommented first-order rate expression block in SimpleEvaluate within reaction_sandbox_simple.F90.

```
435  subroutine SimpleEvaluate (...)
      ...
      ! first-order (A -> C)
      ...
      k = 1.26839d-9  ! [1/sec]
      stoichA = -1.d0
      stoichC = 1.d0
      Rate = k * Aaq * L_water  ! [mol/sec]
440  RateA = stoichA * Rate
      RateC = stoichC * Rate
      ...
end subroutine SimpleEvaluate
```

445 Figure 5 illustrates the simulation results. Plotted to the left is concentration breakthrough at the observation point, and to the right is a snapshot of concentration profiles at 12.5 years. Species A_{aq} clearly decays into C_{aq} while the other species are transported without reaction. The user may evaluate the other reaction rate expressions in the subroutine with the same approach.

4.3 Reaction Sandbox Example

450 PFLOTRAN’s reaction_sandbox_example.F90 serves as a template for implementing new Reaction Sandboxes. The sandbox implements the first-order decay of A_{aq} without daughter products, and the developer modifies the templated source code to incorporate new reactions. Comments within the source code enumerate steps for implementing new reactions beginning with the renaming of subroutines and variables and ending with the implementation of subroutine ExampleDestroy at the bottom of the file. In between, source code is modified to implement the new reaction(s).

455 Code Block 10 illustrates the first two steps embedded within comments in the source code near the top of the file.

Code Block 10. Source code with embedded comments from the top of reaction_sandbox_example.F90.

```
module Reaction_Sandbox_Example_class
```



Reaction Sandbox Simple

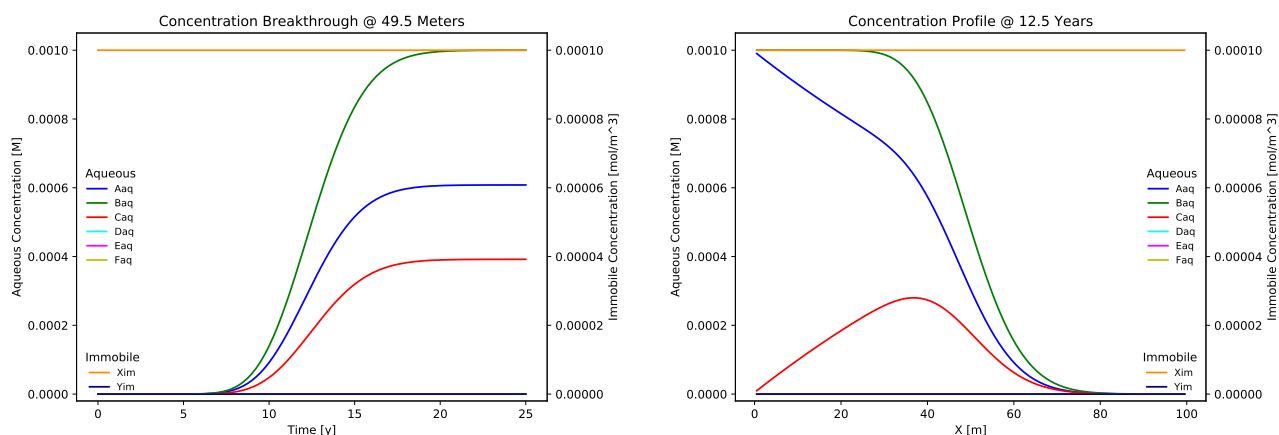


Figure 5. Results from Reaction Sandbox Simple with the first-order $A \rightarrow C$ rate expression uncommented.

```

#include "petsc/finclude/petscsys.h"
460 use petscsys

! 1. Change all references to "Example" as desired to rename the module and
!    subroutines within the module.

465 use Reaction_Sandbox_Base_class

use Global_Aux_module
use Reactive_Transport_Aux_module

470 use PFLOTRAN_Constants_module

implicit none

private

475

! 2. Add module variables here. Note that one must use the PETSc data types
!    PetscInt, PetscReal, PetscBool to declare variables of type integer
    
```



```
! float/real*8, and logical respectively. E.g.  
!  
480 ! PetscReal, parameter :: formula_weight_of_water = 18.01534d0  
...
```

Comments within `ExampleEvaluate` provide a detailed description of the subroutine's arguments and local variables, including members of the reaction and reactive transport auxiliary variable classes (i.e. `reaction_rt_type` and `reactive_transport_auxvar_type`, respectively) which may be used in rate expression calculations. The units of all variables and the Residual and Jacobian arrays are also provided. Code Block 11 shows several of these detailed comment blocks.

Code Block 11. Representative comments from subroutine `ExampleEvaluate`.

```
...  
490 ! rt_auxvar - Object holding chemistry information (e.g. concentrations,  
! activity coefficients, mineral volume fractions, etc.). See  
! reactive_transport_aux.F90.  
!  
! Useful variables:  
495 ! rt_auxvar%total(:,iphase) - total component concentrations  
! [mol/L water] for phase  
! rt_auxvar%pri_molal(:) - free ion concentrations [mol/kg water]  
! rt_auxvar%pri_act_coef(:) - activity coefficients for primary species  
! rt_auxvar%aqueous%dttotal(:,iphase) - derivative of total component  
500 ! concentration with respect to free ion [kg water/L water]  
...  
! 10. Add code for residual evaluation  
  
! Unit of the residual must be in moles/second  
505 ! global_auxvar%sat(iphase) = saturation of cell  
! 1.d3 converts m^3 water -> L water  
L_water = material_auxvar%porosity*global_auxvar%sat(iphase)* &  
material_auxvar%volume*1.d3  
! always subtract contribution from residual  
510 Residual(this%species_id) = Residual(this%species_id) - &  
(-1.d0) * & ! negative stoichiometry  
this%rate_constant * & ! 1/sec
```



515

```
L_water * & ! L water  
! rt_auxvar%total(this%species_id , iphase) = species total component  
! concentration  
rt_auxvar%total(this%species_id , iphase) ! mol/L water  
...
```

520 Once refactoring is complete, the developer must modify the corresponding class and subroutine names within `reaction_sandbox.F90` to match those in the newly refactored `reaction_sandbox_example.F90`. The source code may then be compiled without changing the `reaction_sandbox_example.F90` filename. Should this filename be revised, the developer must update the corresponding filenames within the `pflotran_object_files.txt` and `pflotran_dependencies.txt` files referenced by the makefile.

525 The best approach to compiling the code is to perform a `make clean` to remove all previously built modules and object files and the `pflotran` executable, and then, `make pflotran` to compile the code. `reaction_sandbox_example.in` located in `$PFLOTRAN_DIR/regression_tests/default/reaction_sandbox` provides a representative input deck for this example. Note that the card `EXAMPLE` in the `REACTION_SANDBOX` block of this input file must be updated to match the corresponding keyword added to `reaction_sandbox.F90`.

5 Conclusions

530 Customization of biogeochemical reaction networks is often necessary in the development of reactive transport simulators employed to simulate problem-specific scenarios in the real world. For researchers in the natural sciences who are focused more on the biology, chemistry, and physics than computational science, modifying these codes to incorporate new scientific processes can be challenging. The PFLOTRAN Reaction Sandbox may help remedy this issue.

535 The Reaction Sandbox provides a modular environment for prototyping new kinetic rate expressions that do not exist within PFLOTRAN. Within the Reaction Sandbox, novel reaction networks can evolve and mature over time; natural selection can run its course. Once vetted, these reactions may be incorporated more efficiently elsewhere within the permanent code base.

540 This work demonstrates the implementation of reactions within the Reaction Sandbox. Several new Reaction Sandbox classes are conceptualized and implemented based on existing rate expressions within PFLOTRAN for microbially-mediated biodegradation to improve the code's ability to match a hypothetical, empirical data and provide greater flexibility from the end user perspective. Reaction Sandbox Simple is presented as a means of prototyping numerous common kinetic rate expressions within a preconfigured column experiment context. Reaction Sandbox Example provides a template for implementing and incorporating new reactions within PFLOTRAN.

Code availability. The source code, input files and results presented in this manuscript are based on commit `70beb16` of the PFLOTRAN Git repository. A snapshot of this commit is available at <https://doi.org/10.5281/zenodo.5507599>. The corresponding version of PETSc



545 is v3.13 and was configured on Ubuntu 20.04 with GCC 9.3 using the following config script: `./configure -CFLAGS='-O3' -`
`CXXFLAGS='-O3' -FFLAGS='-O3' -with-debugging=no -download-mpich=yes -download-hdf5=yes -download-`
`fblaslapack=yes -download-metis=yes -download-parmetis=yes.`

Appendix A: Reaction Sandbox Member Procedure Interfaces

This section documents Fortran class `reaction_sandbox_base_type` member procedure interfaces not covered in Section 3.2.1
550 (see `reaction_sandbox_base.F90`).

A1 `ReadInput => BaseReadInput`

`ReadInput` provides a customizable interface for reading parameters associated with the reaction sandbox from a block in the input file. The input block is opened by a unique keyword associated with the child `Reaction Sandbox` class.

Code Block 12. `BaseReadInput` argument list.

```
555  subroutine BaseReadInput( this , input , option )  
    ...  
    class( reaction_sandbox_base_type ) :: this  
    type( input_type ), pointer :: input  
560  type( option_type ) :: option
```

`this` : the `reaction_sandbox_base_type` object

`input` : an object storing the input file object pointer and line buffers

`option` : an object storing run time options including process rank and an error messaging buffer

A2 `Setup => BaseSetup`

565 `Setup` initializes the `Reaction Sandbox` class by allocating dynamic memory, mapping species IDs, assigning stoichiometries and rate constants, etc. The degree to which a `Reaction Sandbox` class settings are customizable at run time is up to the developer and his or her creativity in implementing `ReadInput` and `Setup`.

Code Block 13. `BaseSetup` argument list.

```
570  subroutine BaseSetup( this , reaction , option )  
    ...  
    class( reaction_sandbox_base_type ) :: this  
    class( reaction_rt_type ) :: reaction  
    type( option_type ) :: option
```



575 this : the reaction_sandbox_base_type object

 reaction : an object storing chemical species and general reaction information

 option : an object storing run time options including process rank and an error messaging buffer

A3 Evaluate => BaseEvaluate

Evaluate calculates kinetic rates for all reactions in the Reaction Sandbox class and adds the (kinetic rate) contributions to
580 the residual and Jacobian arrays. This is the only subroutine that must be extended in child Reaction Sandbox classes.

Code Block 14. BaseEvaluate argument list.

```
585     subroutine BaseEvaluate( this , Residual , Jacobian , compute_derivative , &  
                              rt_auxvar , global_auxvar , material_auxvar , &  
                              reaction , option )  
  
   ...  
   class(reaction_sandbox_base_type) :: this  
   class(reaction_rt_type) :: reaction  
   ! the following arrays must be declared after reaction  
   PetscReal :: Residual(reaction%ncomp)  
590     PetscReal :: Jacobian(reaction%ncomp, reaction%ncomp)  
   PetscBool :: compute_derivative  
   type(reactive_transport_auxvar_type) :: rt_auxvar  
   type(global_auxvar_type) :: global_auxvar  
   class(material_auxvar_type) :: material_auxvar  
595     type(option_type) :: option
```

 this : the reaction_sandbox_base_type object

 Residual : a 1D array of double precision numbers holding contributions to the residual equations at each grid cell

 Jacobian : a 2D array of double precision numbers holding contributions to the Jacobian matrix at each grid cell

600 compute_derivative : a logical flag toggling on the calculation of analytical derivatives for the Jacobian matrix
 when true

 rt_auxvar : an object storing reactive transport state variables (e.g. concentrations, rates, etc.) at each grid cell

 global_auxvar : an object storing flow state variables (e.g. density, saturation, etc.) at each grid cell

 material_auxvar : an object storing material and cell properties (e.g. porosity, volume, etc.) at each grid cell



605 `reaction` : an object storing chemical species and general reaction information

 `option` : an object storing run time options including process rank and an error messaging buffer

A4 `UpdateKineticState => BaseUpdateKineticState`

`UpdateKineticState` updates state variables associated with the Reaction Sandbox class that are stored in `rt_auxvar` and updated at the end of a time step based on rates calculated in the Reaction Sandbox (e.g. for mass balance calculations,
610 updates to mineral volume fractions, etc.).

Code Block 15. `BaseUpdateKineticState` argument list.

```
615     subroutine BaseUpdateKineticState( this , rt_auxvar , global_auxvar , &  
                                          material_auxvar , reaction , option )  
  
       ...  
  
       class( reaction_sandbox_base_type ) :: this  
       type( reactive_transport_auxvar_type ) :: rt_auxvar  
       type( global_auxvar_type ) :: global_auxvar  
       class( material_auxvar_type ) :: material_auxvar  
       class( reaction_rt_type ) :: reaction  
620     type( option_type ) :: option
```

`this` : the `reaction_sandbox_base_type` object

`rt_auxvar` : an object storing reactive transport state variables (e.g. concentrations, rates, etc.) at each grid cell

`global_auxvar` : an object storing flow state variables (e.g. density, saturation, etc.) at each grid cell
625 `material_auxvar` : an object storing material and cell properties (e.g. porosity, volume, etc.) at each grid cell

`reaction` : an object storing chemical species and general reaction information

`option` : an object storing run time options including process rank and an error messaging buffer

A5 `AuxiliaryPlotVariables => BaseAuxiliaryPlotVariables`

`AuxiliaryPlotVariables` appends Reaction Sandbox-specific state variables stored in `rt_auxvar` to the list of output
630 variables to be printed to observation and snapshot files.

Code Block 16. `BaseAuxiliaryPlotVariables` argument list.

```
       subroutine BaseAuxiliaryPlotVariables( this , list , reaction , option )  
  
       ...
```




```
635  class (reaction_sandbox_base_type) :: this  
      type (output_variable_list_type), pointer :: list  
      class (reaction_rt_type) :: reaction  
      type (option_type) :: option
```

this : the reaction_sandbox_base_type object

640 output_variable_list_type : a linked list of output variables to which new sandbox-specific output_variable_type
objects will be added

reaction : an object storing chemical species and general reaction information

option : an object storing run time options including process rank and an error messaging buffer

A6 Destroy => BaseDestroy

645 Destroy deallocates all dynamic memory in the Reaction Sandbox class at the end of a simulation.

Code Block 17. BaseDestroy argument list.

```
650  subroutine BaseDestroy ( this )  
      ...  
      class (reaction_sandbox_base_type) :: this
```

this : the reaction_sandbox_base_type object

Author contributions. GH implemented the Reaction Sandbox in PFLOTRAN, designed and implemented the example sandboxes, and prepared the manuscript.

Competing interests. The author declares that he has no conflicts of interest.

655 *Acknowledgements.* This research was supported by the U.S. Department of Energy (DOE), Office of Biological and Environmental Research (BER), as part of BER's Environmental System Science Program (ESS). This contribution originates from the River Corridor Scientific Focus Area (SFA) at the Pacific Northwest National Laboratory (PNNL) and was supported by the partnership with the IDEAS-Watersheds. This research used resources of the National Energy Research Scientific Computing Center, a DOE Office of Science User Facility supported by the Office of Science of the U.S. Department of Energy. PNNL is operated for the DOE by Battelle Memorial Institute under contract DE-660 AC05-76RL01830. This paper describes objective technical results and analysis. Any subjective views or opinions that might be expressed in the paper do not necessarily represent the views of the U.S. Department of Energy or the United States Government.



References

- Andre, B., Bisht, G., Collier, N., Frederick, J., Hammond, G., Jaysaval, P., Karra, S., Kumar, J., Leone, R., Lichtner, P., Mills, R., Nole, M., Orsini, P., Park, H., and Rousseau, M.: PFLOTRAN Theory Guide, <http://documentation.pflotran.org>, 2021.
- 665 Bethke, C. M.: Geochemical and Biogeochemical Reaction Modeling, Cambridge University Press, 2 edn., <https://doi.org/10.1017/CBO9780511619670>, 2007.
- Chapman, S.: Fortran for Scientists & Engineers, McGraw-Hill Higher Education, 4th edn., 2018.
- Hammond, G. E., Lichtner, P. C., and Mills, R. T.: Evaluating the performance of parallel subsurface simulators: An illustrative example with PFLOTRAN, *Water Resources Research*, 50, 208–228, <https://doi.org/10.1002/2012WR013483>, 2014.
- 670 Hill, A. V.: The possible effects of the aggregation of the molecules of hæmoglobin on its dissociation curves, *The Journal of Physiology*, 40, i–vii, 1910.
- Lichtner, P. C.: Continuum model for simultaneous chemical reactions and mass transport in hydrothermal systems, [https://doi.org/10.1016/0016-7037\(85\)90172-3](https://doi.org/10.1016/0016-7037(85)90172-3), 1985.
- Liu, C., Zachara, J. M., Qafoku, N. P., and Wang, Z.: Scale-dependent desorption of uranium from contaminated subsurface sediments, *Water*
675 *Resources Research*, 44, <https://doi.org/10.1029/2007WR006478>, 2008.
- Rubin, J.: Transport of reacting solutes in porous media: Relation between mathematical nature of problem formulation and chemical nature of reactions, *Water Resources Research*, 19, 1231–1252, <https://doi.org/10.1029/WR019i005p01231>, 1983.
- Steeffel, C., Appelo, C., Arora, B., Jacques, D., Kalbacher, T., Kolditz, O., Lagneau, V., Lichtner, P. C., Mayer, K. U., Meeussen, J. C. L., Molins, S., Moulton, D., Shao, H., Simunek, J., Spycher, N., Yabusaki, S. B., and Yeh, G. T.: Reactive transport codes for subsurface
680 environmental simulation, p. 445–478, <https://doi.org/10.1007/s10596-014-9443-x>, 2015.
- Steeffel, C. I., DePaolo, D. J., and Lichtner, P. C.: Reactive transport modeling: An essential tool and a new research approach for the Earth sciences, *Earth and Planetary Science Letters*, 240, 539 – 558, <https://doi.org/10.1016/j.epsl.2005.09.017>, 2005.
- Tutolo, B. M., Luhmann, A. J., Tosca, N. J., and Seyfried Jr., W. E.: Serpentinization as a reactive transport process: The brucite silicification reaction, 484, 385–395, <https://doi.org/10.1016/j.epsl.2017.12.029>, 2018.